

New Energy Technologies

Published by Faraday Laboratories Ltd.

Issue #3 (6) 2002

Research on advanced propulsion systems and new energy sources

Time Control experiments



Also in this issue:

- * *New experiments: magnet monopole beam cures cancer*
- * *Electrogravity experiments*
- * *High efficiency ceramic heater*
- * *New aether experiments*
- * *Instantaneous telecommunication*



Editorial



Dr. Chernobrov and NET editor Olga Leontyeva.

The head of the Moscow research group "Kosmopoisk" Dr. Vadim A. Chernobrov (our readers certainly remember his articles on experiments with time) has recently visited the editorial office of New Energy Technologies in Saint-Petersburg, Russia. His visit was caused by discussion on the Time Machine project (investigation of active properties of time), started under agreement with Faraday Labs Ltd. Our magazine will inform readers on the topic in later issues.

NEW ENERGY TECHNOLOGIES New Book

Publisher Faraday Lab Ltd

Editor-in-Chief Alexander V. Frolov
Editor Olga O. Leontyeva
Designer Ekaterina F. Yakovleva
Translator Antonina V. Nikolaeva

Scientific Advisory Board
Kyrill P. Butusov
Ivan M. Shakhparonov

New Energy Technologies Magazine
is published by Faraday Lab Ltd
six times a year

Correspondence Address:
POBox 37, St.Petersburg,
193024, Russia
Phone/fax: 7-812-380-6564
net@faraday.ru
www.faraday.ru

Subscription: \$90 any foreign
Air mail delivery included

PRINTED IN RUSSIA
Copyright © 2002 by Faraday Lab Ltd.
All rights reserved.

Dear Reader!

All articles of the previous 6 NET issues will soon be published as a new book in English (400 pages, more than 100 photos, figures and drawings, format A4).


You can order by e-mail: book2001@faraday.ru
or fax 7-812-3806564

Price with airmail delivery is 83 USD.

NEW ENERGY TECHNOLOGIES ANALYSIS

Where do NET subscribers come from?

Mainly the USA, Germany, France, Australia and Norway

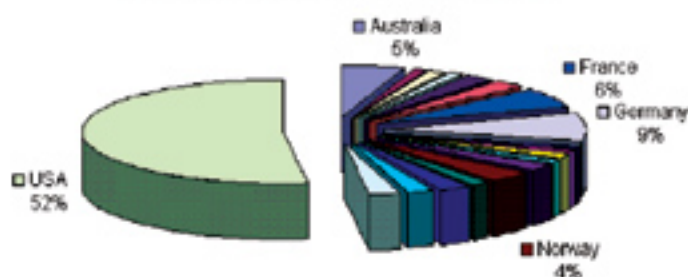

LUTEC 1000

News from Australia

Magnet motor-generator

www.lutec.com.au




"There are a couple of other major factors that we won't go into here, suffice it to say that our current prototype demonstrates 1500% more "out" than "in"... "

"The Lutec 1000 will be sold throughout Australia within three years. The majority of buyers are expected to be the home owners, although there is strong support for our product throughout the entire strata of society and business. Market leadership should be maintained for the next five years. The product is sold through commission only sales agents and our staff at the plant, mainly to anyone who needs or uses electricity."





John Christie (left) is the co-founder, CEO and chairman of Lutec (Aust.) Pty Ltd.

Ludwig (Lou) Brits (right, above) is the co-founder, managing director and head of development of Lutec (Aust.) Pty Ltd. He is Chairman and director of TTI Pty Ltd. TTI Pty Ltd is a state government recognised R.A.P. (remote area power) system provider.

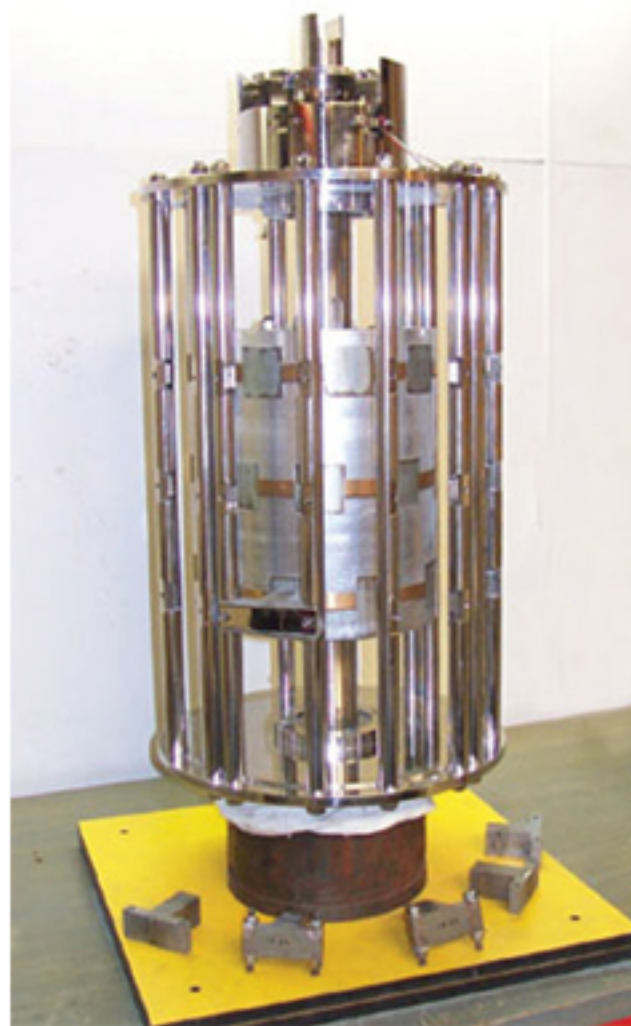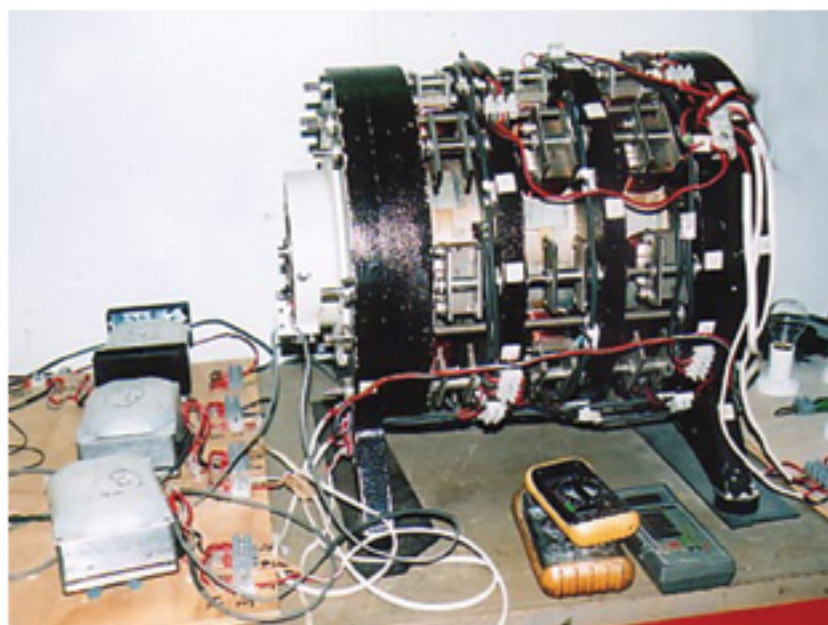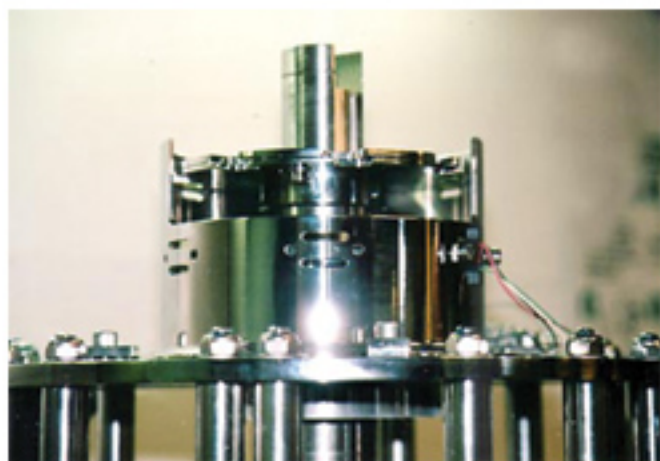

Electrogravity

*by Tim Ventura
tventura@attbi.com*

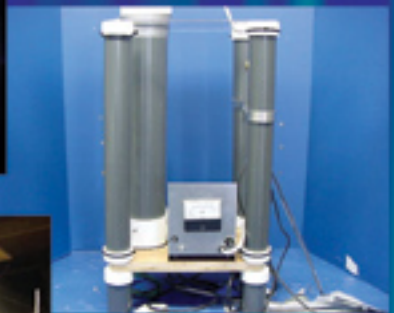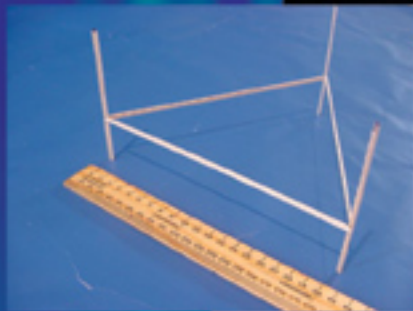

*In this issue a report by Tim Ventura, USA on experimenting with asymmetrical capacitors.
www.americanantigravity.com*

NEW ENERGY TECHNOLOGIES #6

1. Large-Scale Shakharov condition, **David Noever and Christopher Bremner**
2. Matter as a resonance longitudinal wave process, **Alexander V. Frolov**
3. Physical Principles of The Time Machine, **Alexander V. Frolov**
4. Time Machine Project by **Alexander V. Frolov**
5. Kozyrev-Dirak radiation, **Ivan M. Shakhparonov**
6. The Electrical Vortex Non-Solenoidal Fields, **S. Alemanov**
7. Physical Mechanism of Nuclear Reactions at Low Energies, **V.Oleinik, Yu. Arepjev**
8. The Evolution of Lifter Technology, **T. Ventura**
9. Reality and consciousness in education and activity, **A.Smirnov**
10. Old new energy, **Y. Andreev, A. Smirnov**
11. On the influence of time on matter, **A. Belyaeva**
12. Life without diseases and ageing-preventive electrical bio-heater features, **A. Belyaeva**
13. Technical report, on Belyaeva's high efficient ceramic heater, **Sh. Mavlyandekov**
14. Fundamental properties of aether, **A. Mishin**
15. Effect of Magnetic Blow Wave Field on Wine Systems, **I. Shakhparanov and others**
16. Nikola Tesla and Instantaneous Electric Communication, **V. Korobeynikov**
17. The United Gravitation theory, **I. Kuldoshin**
18. New Sources of Energy from the Point of View of Unitary Quantum Theory, **L.G. Sapogin, Yu.A. Ryabov, V.V. Graboshnikov**
19. Antigravitation Force and antigravitation of matter. Methods of its creation, **A. K. Gaponov**
20. The capacitor, which has energy of atomic bomb (Review of A. Gaponov's research)

consequence of many commonly accepted concepts and dogmas of the modern “scientific perspective of natural phenomena”. This crisis situation in modern physics is a direct consequence of many conservative scientific viewpoints, unfortunately supported and protected by modern official academic science. The evolution of our consciousness has been influenced by many undoubtedly well known experts and has been evolving for a long time in the environment of specific scientific vacuum and requires immediate revival. Even methods used for dissemination of new knowledge should be improved, if one actually wishes to accelerate the progress of Humankind.

The perspective for practical applications of new previously unknown scientific phenomena and effects looks very attractive, and they may be achieved by cooperative efforts of the human intellect. New breakthrough technologies of the 21st Century will require serious changes of many commonly accepted concepts and dogmas in fundamental physics. This process of progressive development cannot be stopped.

REFERENCES

1. Richard P. Feynman, Robert B. Leighton, Matthew Sands. The Feynman Lectures on Physics, Addison-Wesley, 1964, Vol. 2, Ch. 1. Paragraph 6 “Electromagnetism in Science and Technology” (the very end of paragraph)
2. J. Maxwell, Selected Works on the Electromagnetic Field Theory, Gostekhizdat, Moscow (1954).
3. G. V. Nikolaev, Non-contradictory Electrodynamics. Theories, Experiments, and Paradoxes, Publishing House of the Tomsk State University, Tomsk (1997).
4. A. S. Kompaniets, in: Theoretical Physics, State Technical and Theoretical Press, Moscow (1957), pp. 126-128.
5. R. T. Sigalov, T. I. Shapovalova, Kh. Kh. Karimov, and N. I. Samsonov, New Research of Forces of the Magnetic Field, FAN Press of the Uzbekskaia SSR, Tashkent (1975).
6. Ya. I. Frenkel, Electrodynamics. Vol. 1, United Scientific and Technical Presses, Leningrad/Moscow (1934).
7. G. V. Nikolaev and B. V. Okulov, Inertial Properties of Electrons, deposited at VINITI, No. 4399-77, Moscow (1978).
8. Observations of the Aharanov-Bohm Effect, Nature, No. 7, 106 (1983).
9. G. V. Nikolaev, Scientific Vacuum. Crisis in Basic Physics. Is There Any Way Out?! Publishing House Kursiv, Tomsk (1999).

Large-Scale Sakharov Condition

David Noever and Christopher Bremner

NASA Marshall Space Flight Center,
Space Sciences Laboratory
Mail Code: ES76, Huntsville AL 35812

Editor's note: This article was presented by the authors for publication in New Energy Technologies. For the first time it was published in 1999 by the American Institute of Aeronautics and Astronautics, Inc. All copyrights belong to the authors.

Abstract

Recent far reaching theoretical results have used the quantum vacuum noise as a fundamental electromagnetic radiation field to derive a frequency (ω) dependent version of Newton's gravitational coupling term, $G(\omega)$. This paper reconciles the cut-off frequency with the observed cosmological constant, and then briefly puts forward a realizable laboratory test case in the 10 - 100 MHz frequency range. One analogy is drawn between the classical vacuum energy experiments with attraction between two closely spaced plates (Casimir cavity) and the arbitrarily dense material boundaries possible in Bose condensates, such as irradiation at MHz frequencies of superfluid helium or superconductors.

Theoretical Background

Zel'dovich [1] first suggested that gravitational interactions could lead to a small disturbance in the (non zero) quantum fluctuations of the vacuum and thus give rise to a finite value of Einstein's cosmological constant in agreement with astrophysical data. Using dimensional analysis and the suggestion by Zel'dovich, Sakharov [2] derived a value for Newton's gravitational constant, G , in only one free parameter, frequency, ω :

$$G \sim c^5 / h \int \omega d\omega \sim 1 / \int \omega d\omega$$

where c is the speed of light and h is the Planck constant. The free parameter in frequency when integrated over all values from zero to high frequencies must contain the usual integration cutoff value (Planck frequency on observable electromagnetic phenomenon).

Puthoff [3] and others [4 5] have extended Sakharov's condition in a relativistically consistent model to determine constants of proportionality. His model derives an acceleration term in first order expansion (in flat space time), then equates inertial and gravitational mass (by the equivalence principle) to make contact with the gravitational constant, G , directly as:

$$G = (\pi c^5 / h \omega_c^2) \sim 1 / \int \omega d\omega$$

which is the Sakharov condition [2,3]. This paper revisits the meaning of the cutoff frequency, ω_c , for radiation interactions, of which the quantum vacuum [6-10] and

Planck frequency are only the leading terms, and for which linear combinations of forces can introduce other plausible frequencies. One purpose of this reexamination is whether the resulting gravitational coupling constant, G , can be reconciled with the anticipated energy density of the universe [11] without resorting to extreme space time curvature and thus yield enough critical density to contain the expansion of the universe. Finally we particularize the case to the high-density fluctuations possible in Bose condensates [12], a potential experimental test case for how the effects of vacuum noise might manifest observably.

One far-reaching consequence of the vacuum energy model is the attractive force of gravity becomes reducible to the radiative interaction between oscillating charges, e.g. the zero point field (ZPF) applied to subatomic charges. Mass and inertia arise from the fundamentally electromagnetic ZPF oscillations.

This random background gives the usual quantum mechanical energy spectrum from particle field effects:

$$\rho(\omega)d\omega \sim \omega^3 d\omega$$

a very important dimensional relationship, since the third power in frequency avoids anomalous Doppler shifts from velocity boosts, or stated alternatively is the correct spectra for a Lorentzian (non accelerated) invariant radiation field [13].

More specifically, the energy spectrum [3] can be written as:

$$\begin{aligned} \rho(\omega)d\omega &= [\omega^2 / \pi^2 c^3] [h\omega / 2] d\omega = \\ &= h\omega^3 / 2\pi^2 c^3 d\omega \sim \omega^3 d\omega \end{aligned}$$

which is an expression in the first parenthesis of the density of the normal modes and in the second parenthesis of the average energy per mode. When this energy density is integrated over all frequencies, the ω^3 divergence produces well known infinities in the integration limit of high frequencies, thus an assumed cutoff frequency (appropriate to experimental observation limits at the Planck frequency), is usually introduced:

$$\omega_p = (c^5 / hG)^{1/2}$$

For mass, m , moving in an accelerated reference frame $g = -a = Gm/r^2$, the resulting energy spectrum includes a gravitational spectral shift [3],

$$\Delta\rho'(\omega)d\omega = h\omega / 2\pi^2 c^5 [Gm / r^2]^2 d\omega \sim 1/r^4 d\omega$$

a kind of short range ($1/r^4$) gravitational energy shift, but electromagnetic in origin when zero point

fluctuations are included. (N.B. To account for equal gravitational mass effects in neutrons and protons, the ZPF oscillations must involve subatomic charges, or 'parton' effects. The assumption derives from high frequency interactions of ZPF wherein these subatomic particles are asymptotically free to oscillate as independent or free particles as quantum noise).

A further far reaching consequence [3] is mass itself becomes interpretable as a dependent quantity derived from a damped (with decay constant Γ) oscillation driven by random ZPF:

$$m = \Gamma c^3 / G = 2h\Gamma / \pi^2 c^3 \int \omega d\omega$$

with the only two free parameters, the damping factor Γ , and again the frequency, ω . The internal kinetic energy of the system contributes to the effective mass.

This leads to an overall average spectral density, written in terms of mass as:

$$\Delta\rho'(\omega) = m^2 c^5 \omega / 2h\omega_c^4 r^4$$

for the electromagnetic field distribution near ($1/r^4$) to the mass, m , which in detail is half electric and half magnetic.

One additionally attractive feature is the correspondence between this derivation and the view of gravity as a dynamical scaleinvariance breaking model (e.g. symmetry breaking near the Planck mass energy [14]). A final result includes the force calculation between two ZPF radiation oscillators of the correct form yielding Newton's average force law

$$\langle F \rangle = -Gm^2 / r^2$$

Thus, for a Newtonian force to first order in a flat space time, Sakharov [2] could be credited for proposing gravity as not a fundamentally separate force and Puthoff [3] and co workers [4-5] applied the vacuum electromagnetic field to equate gravity to a long-range radiation force (e.g. van der Waals like force). Higher order oscillatory gravity modes vary as $(\sin[\omega_o / \omega_c])^2$.

To first order, a weak G coupling constant, $G = (\pi c^5 / h\omega_c^2)$, appears for high frequency cutoff at the Planck scale. A corollary in analogy to electromagnetic shielding by ordinary matter can be rationalized as the problem of frequency mismatch at high Planck frequencies, e.g. ZPF cannot be fundamentally shielded. In other words, frequency mismatch precludes gravity shielding by matter.

The purpose here is to revisit the only free parameter, the frequency cutoff, more in the spirit of a mass resonant frequency. The motivation for this approach

can be summarized as: 1) the generality of other complementary radiation effects without relying on ZPF alone (e.g. other isotropic, homogeneous radiation sources); 2) the weak coupling constant, G , yields a vastly smaller than observed size of the universe (e.g. too small cosmological constant) when the Planck frequency is used as a cutoff value; and (3) the particle mass, $m = \Gamma c^3 / G$, can be viewed as a renormalized or 'dressed' mass with a resonant interaction potential that is frequency dependent in its coupling constant, G , and with 'bare' mass that is large, $m_o \sim (m_p^2 / m)$, where the experimentally unobservable, $m_p = (hc / G)^{1/2}$ is the Planck mass.

In particular, why this large 'bare' mass does not generate a large gravitational field is not a unique anomaly in the Sakharov derivation, since similarly large vacuum point energies are common to field theories. The important point is that the derivation $G(\omega)$ is general however to any isotropic radiation field with the Lorentz invariant energy spectra $[\rho(\omega) \sim \omega^3]$, thus the candidates for the cutoff frequency of the particular radiation source can be interpreted as a Planck scale only if the rest mass, m_o , is not composed of many terms, rather than just the ZPF leading term. Since the ZPF is akin to a van der Waals force [3 5], polarizability (in charge and mass) must be considered, but without also excluding any number of linear combinations that might have alternative cutoff frequencies, ω_c , or damping terms, Γ , 'ala particle physics interpretations for resonant masses during renormalization. In other words, once a gravitational energy spectrum, $\rho(\omega)$ is postulated that is Lorentzian invariant, many fundamental sizes (or corresponding frequency values) are smeared (or dressed) by any number of characteristic frequencies between zero and the high frequency electromagnetic (Planck) cutoff ω_p . Quite simply, is the expression, $\omega_c = \omega_p$, a requirement for all radiation sources?

Many types of particle oscillations may satisfy the general requirements of a Sakharov condition, each having a characteristic mass (and energy) as in calculating the mass of any fundamental particle at its resonant frequency (including underlying partial charges or dense bosons). This brings the calculation to a consideration of the high density fluctuations characteristic of a Bose condensate [15 19]. While the high density variation may intrinsically be of interest, the exploration has more to do with reconciling the ZPF interpretation of the Sakharov condition with the observed cosmological constant [14].

A "top down" view of calculating the cutoff frequency imposes the self consistency test for the cosmological constant, Λ , from the outset. To calculate, the total frequency integrated energy density of the universe must be included:

$$\rho(E) = \int \rho(E) dE = h\omega_c^4 / 8\pi^2 c^3$$

which must have a mass equivalent, contribute to the universe's curvature, and thus have a fundamental relation to the critical density to contain the expansion of the universe [14 15]. The mass - equivalent ZPF to reach the universe's critical density [15],

$\rho \sim 10^{-29} \text{ g cm}^{-3}$ would necessarily limit the cutoff frequency for gravity to the value, $\omega_c < 7 \cdot 10^7 \text{ s}^{-1}$, or between 10 -100 MHz.

A higher frequency greatly overshoots the cosmological constant, Λ , and induces extreme curvature in the universe. This problem has been cited frequently and stated most bluntly, as either ZPF or the cosmological constant requires revision. The relevance here arises from similarly large positive coupling terms in quantum gravity [15], which also generate a local gravitational Instability for typical upper limits on the cosmological constant, $\Lambda/8\pi G < 10^{12} \text{ cm}^{-4}$.

Rather than to dwell on the inconsistencies that plague attempts to reconcile quantum gravity, we particularize the problem to a case where the restriction to Planck scale becomes less clew, namely the high density fluctuations and universal scaling introduced in a Bose condensate. A Bose condensate, such as superfluid helium or superconductors [15 19], becomes of potential interest, mainly because of its arbitrarily dense boundaries and the classic Casimir experiment [20 22] which allows such dense material boundaries (two closely spaced conducting plates), if available, to modulate the background quantum fluctuation of ZPF. In other words, the matter-ZPF interaction becomes measurable by the observed attraction between two material boundaries. What dense boundaries might generate in Bose condensates remains a subject of great interest.

The significant case to investigate is whether Casimir-like interactions [20 22] will not only couple to ZPF radiation at a scale comparable to the quantum noise (or other radiation field), but also alter the value imposed by the Sakharov condition for G . It remains an open question whether this potential coupling interaction shares, as in ordinary critical phenomenon, the density correlation function, Φ , that is both independent of the coupling strength (or universal in renormalization) and consistent with the observed average energy density of the visible universe.

Thus the purpose here has bow to restate the Sakharov condition in the gravitational coupling constant, G , based on its only free parameter, a frequency cutoff, ω_c . Any potential relevance arises from similarly large values for the positive coupling term in quantum gravity, which generate conditions for a local gravitational instability for typical upper limits on the constant, $\Lambda/8\pi G < 10^{12} \text{ cm}^{-4}$.

To restate the Sakharov condition, matter in the vacuum provides boundaries for reduced 'Casimir like' modes available for otherwise isotropic radiation from quantum fluctuations (broad spectral noise). That this view reproduces Einstein gravity has been examined, including the full relativistic derivation [4-5]. The details of the appropriate mass, however, remain buried in the kinetic energy of general internal particle ('parton') motion [3]. Any appeal to a specific parton representation is limited only by essentially free particles with high frequency interactions, including underlying partial charges or dense bosons. The basis of considering arbitrarily high-density fluctuations in Bose condensate in analogy to the ZPF-Casimir experiment remains both an empirical and theoretical case to examine. There exist laboratory scale cases [15-19] where resonant radiation in the required 10-100 MHz range appear to produce anomalous effect for such Bose condensates as superconductors, but further work to confirm these results would be needed. In other contexts, these effects have been discussed as the Schiff-Barnhill effect for superconductors interacting with a gravitational field [23], but for the static rest mass rather than an effective mass in a conduction band.

Experimental Propositions

J. Weber [24,25] proposed the use of a superconducting Bose condensate for gravity wave detection, principally because of its potentially higher signal to noise ratio in carrying electrical signals upon length dilations in a relativistic framework for gravity waves travelling near the speed of light. W. Weber and Hickman [26] derived an experimentally testable relation based on torquing of a charged capacitor parallel to a gravity field, with

$$\tau = 2E_g / \pi[\alpha/(1-\alpha)^{1/2}]$$

where the capacitor will rotate relative to the gravity vector, for $\alpha = 2GM / rc^2$, is Schwarzschild radial coordinate [$dR = dr(1-\alpha)^{1/2}$], E_g is dependent on the capacitor charge and geometry of the plates,

$E_g = [Q^2 d / 2\epsilon WL(1-\alpha)^{1/2}]$, for a plate separation, and radial dimensions, W and L , charge Q , and ϵ the permittivity of free space. For plate separations of 2 mm on Earth, the maximum torque is approximately

$\tau = 10^{-12}$ Nm, when charged to 2/3 dielectric breakdown. While not entirely promising for detection of such low torques, the large separation (2 mm) distance between capacitive plates naturally prompts generalization to the classic Casimir force [21] experiments only recently confirmed experimentally [20]. In particular, we rewrite the torque values to include the frequency terms derived with the Sakharov condition

$$[G = (\pi c^5 / h \omega_c^2)]:$$

$$\alpha = 2M\pi c^3 / h \omega_c^2 r$$

The appeal of this formulation is that a frequency dependent torque is derived, which further makes

contact with proposals to modulate the Casimir capacitive plates for continuous extraction of energy [27]. This result requires further investigation experimentally, particularly to compare with previous reports for anomalies in AC-tuned electrical capacitors [28].

References

1. Zel'dovich Ya. B. JETP Letters, 6, 345, 1967.
2. Sakharov A. Vacuum quantum fluctuations in Curved Space and the Theory of Gravitation, Sov. Phys. Reports, 12,1968,1040 1041.
3. Puthoff H. E. (1989) Gravity as a zero-point fluctuation force, Physical Review A, 39(5): 2333 2342, March 1, 1989.
4. Haisch B., Rueda A., Puthoff H.E., (1994) Inertia as a Zero Point Field Lorentz Force, Physical Review A, 49:678 694.
5. Haisch B., Rueda A., Puthoff H.E., "Inertia as a Zero Point Field Force" Physical Review A 49, N 2, 678 (1994).
6. Ambjorn J. and Wolfram S. (1983) Properties of the Vacuum, 1. Mechanical and Thermodynamic, and Properties of the Vacuum, 2. Electrodynamics, Annals of Physics
7. Ambjorn J. and Wolfram S. (1983) Properties of the Vacuum. 1. Mechanical and Thermodynamic, Annals of Physics, 147:1 32.
8. Fulcher et al., "The Decay of the Vacuum," Sci. Am., vol. 241, p. 150, Dec. 1979
9. Puthoff, H.E. "Source of Vacuum Electromagnetic Zero Point Energy" Physical Review A 40, 4857 Nov 1 (1989); Errata and Comments, Physical Review A 41, March 1(1990); Physical Review A44 4, 3382, 3385 (1991)
10. Senitzky I.P., "Radiation Reaction and Vacuum Field Effects in Heisenberg Picture Quantum Electrodynamics", Phys. Rev. Lett. 31(15), 955 (1973). As pointed out by Puthoff [3] the relativistic results for the Sakharov condition have so far been encouraging, while the consequences for nuclear interactions in all coordinate frames have not been fully explored.
11. da Costa L. N., Freudling W., Wegner G., Giovanelli R., Haynes M. P., and Salzer J. J. (1996) The Mass Distribution in the Nearby Universe, Astrophysical Journal Letters, 468: L8 L8 and Plate L 1
12. Modanese G. (1996) Theoretical analysis of a reported weak gravitational shielding effect, Europhy. Lett., 35(6):413 418.
13. Shupe M.A. The Lorentz invariant vacuum media, Am. J. Phys. 53, 122 (1985). A cautionary note is that lower frequency cutoffs can violate Lorentzian invariance, thus allowing a moving detector to reveal absolute motion by recording Doppler sifted frequencies. Standard methods might treat such effects like the cancellation of terms that remove anomalous ZPF infinities from field theories, but these topics remain to be explored.
14. Zee, A. Phys. Rev. Lett, 42,417 (1979); Phys. Rev. D. 23, 858, (1981).
15. Torr D. G. and Li. N. (1993) Gravitoelectric Electric Coupling vVia Superconductivity, Foundations of Physics Letters, 6(4): 371 383.
16. Unnikrishnan C. S. (1996) Does a superconductor shield gravity? Physics C, 266:133 137.
17. Podkletnov E. and Nieminen R (1992) A Possibility of Gravitational Force Shielding by Bulk YBa₂ Cu₃ O_{7-x} Superconductor, Physics pp.203: 441 444.
18. Li N, and Torr D. G. (1992) Gravitational effects on the magnetic attenuation of superconductors, Physical Review B, 46(9): 5489 5494. A simple consequence of the Sakharov condition $G = (\pi c^5 / h \omega_c^2) \sim 1/\int \omega d\omega$, can be written for the gravitomagnetic permeability as: $\mu_g = 4\pi G / c^2 = 4\pi^2 c^3 / (h \int_0^\infty \omega d\omega) \sim 1/\int \omega d\omega$ which suggest that the same frequency resonance implied by the ZPF derivation will share similar consequences for vector gravity

- effects. See also, DeWitt, B. S. Superconductors and Gravitational Drag, Phys. Rev. Lett. 16, 102(1966).
19. Li N., Noever D., Robertson T., Koczor R., and Brantley, W. (1997) Static Test for a Gravitational Force Coupled to Type II YBCO Superconductors, Physics p., 55, 287.
 20. Lamoreaux S. K. (1997) Demonstration of the Casimir Force in the 0.6 to 6 mm Range, Phys. Rev. Letters, 78:5 8.
 21. Milonni P.W. et al., "Radiation pressure from the vacuum: Physical interpretation of the Casimir force", Phys. Rev. A, Vol. 38, No. 3, 1621 August 1988.
 22. Milonni P. W. (1994) The Quantum Vacuum, Academic Press, San Diego, CA.
 23. Schiff L.I. and Barnhill M.V. Bull. Am. Phys. Soc. 11, 96, (1966) and refn. 18.
 24. Weber J. (1960), Detection and Generation of Gravitational Waves, Physical Review, 117(1)306 313.
 25. Weber J. (1966) Gravitational Shielding and Absorption, The Physical Review (The American Physical Society), 146(4): 935 937.
 26. Weber W. and Hickman H. (1997) A possible interaction between gravity and the electric field, Spec. Science Tech. 20, 133 136
 27. Forward R.L. "Extracting electrical energy from the vacuum by cohesion of charged foliated conductors" Phys. Rev. B, Vol. 30, No. 4, 1700 August 1994
 28. Woodward, J. F. (1992) A Stationary Apparent Weight Shift From a Transient Machian Mass Fluctuation, Foundations of Physics Letters, 5:425 442.

The Problem of Electron and Physical Properties of Time: To the Electron Technologies of the 21st Century

V.P. Oleinik

Department of General and Theoretical Physics,
National Technical University of Ukraine
"Kiev Polytechnic Institute",
Prospect Pobedy 37, Kiev, 03056, Ukraine "Institute of
Semiconductor Physics, National Academy of Sciences,
Prospect Nauky 45, Kiev, 03028, Ukraine;
e-mail: yuri@arepiev.relc.com

*"...it is necessary to periodically subject to the
deepest revision the principles, which were
recognized as final and were no longer discussed".
Louis de Broglie*

Abstract

The results of an approach based on the synthesis of standard quantum electrodynamics and of the ideas of self-organization in physical systems are briefly outlined. The quantum model of electron as an open self-organizing system is constructed, with the physical mechanism of self-organization consisting in the back influence of the own field created by electron on the same electron. The own field is considered as a physical property of electron, intrinsically inherent in electrically charged matter, which is included in the definition of the particle from the very beginning. The own field of electron endows the particle with wave properties and represents a bearer of superluminal signals, which can be used for the creation of qualitatively new communication systems. Because of the inseparable link between space and time, the force in relativistic mechanics is the cause of change not only of the velocity of particle, but also of the course of time along the particle's trajectory. For this reason the flow of time in some area of space depends on the character of physical processes, occurring in it, and, therefore, time can be controlled by slowing down or accelerating its course with the help of material processes. The conclusions of the paper are not in conflict with the special theory of relativity (STR); they are a direct consequence of relativistic equations of motion and represent an

essential development of the generally accepted notions about space and time. At present all the necessary prerequisites are available, both theoretical and technical, for the practical mastering of the own fields of particles and of the physical properties of time.

1. Introduction. The Problem of Electron and Future Outlook

Electrodynamics, what is this? What is its value for man? Electrodynamics is the theory of electromagnetic interaction, one of four interactions existing in nature. Its role in the life of society is seen from the fact that the most part of natural phenomena, which we encounter at every step, is of electromagnetic origin: it is due to the interaction of electromagnetic field with electrically charged particles entering into atoms and molecules. It is fair to say that electromagnetism plays a crucial role in the life of mankind as it determines the ways of technical advance of society [1].

The key problem of quantum electrodynamics is the problem of electron, which can be formulated as follows: to construct from the first principles a non-contradictory model of electron, which takes into account experimental facts, i.e. to find the dynamical equation capable of describing the unique physical properties of electron, its internal structure, its behaviour when it interacts with electromagnetic field.

Electron was discovered a little more than 100 years ago, in 1897. With discovering the electron the revolution in physics began, which has resulted in unprecedented technical advance of society. The summit of development was reached in the middle of the 1950s and then the long period of evolutionary development followed, when new physical principles were used to describe various physical processes and phenomena. The violent development of physics became slower in the 1970s and was replaced by stagnation in the subsequent years. The stagnation in electrodynamics continuing already over a period of several decades is gradually giving place now to a new ascent. The new scientific revolution is starting, which is associated with electron again, much as it happened hundred years ago. The reason is that electron is the most unique particle storing in itself the deepest mysteries of nature and the degree, to which they are disclosed, determines the

wants to stay anonymous, until his patent application is done and university verification tests will be done). The claims are: 1200 Watts coil out with about 1076.4 Watts in into the driving motor at 3450 RPM. 8 amps 117volts at no load 9.2 amps 117 volts at full load. The output of about 1200 Watts is already a total overunity operation! As they just increase the input power by about 140 Watts only between idle and load state and they get 1200-Watts output it seems indeed a case, where Lenz law is violated! This generator also has NO motor effect! If you supply current to the coil, the permanent magnet in the center will not rotate; cause the flux just stays inside the toroid core! There you can see, that the back drag does not influence the mechanical rotation of the magnet!" Stefan used very good criterion to prove high efficiency of the design: **There is no back-torque effect! It is most important aspect of Gramm's generator.** You can contact directly Stefan Hartmann: Keplerstr. 11 B, 10589 Berlin, Germany. Tel: +49 30 345 00 497, FAX: +49 30 345 00 498 email: harti@harti.com info@ccard.net (Please, note: Dr. Harman referred to my old web site www.time-machine.spb.ru which is closed now).

So, basic principles of MEG and Φ -machines are the same. It was patented more than 100 years ago. Primary magnetic flux is topologically separated in two (or more) fluxes, which are mutually compensated in the ring core. Advantages of MEG are absence of moving parts since special input coils produce changes of primary flux. Also level of saturation in ferromagnetic material obviously should be corresponding to intensity of primary magnetic field, which is created by the permanent magnet, Fig.4.1.

Besides MEG the same principle can be (and already was!) realized in many other systems. So, there is no any news in the USA patent #6,362,718 granted for "The Motionless Magnetic Generator". What did they claim? You can find it in the patent: "The first input coil and the first output coil **extend around portions of the first**

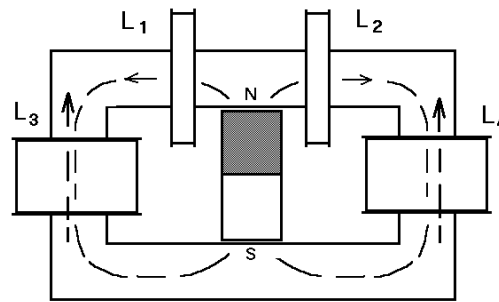


Fig.4.1

magnetic path, while the second input coil and the second output coil **extend around portions of the second magnetic path.**" Yes, it is the same bi-directional principle we discussed above: two parts of the magnetic flux and each coil produce effect to reduce flux due to this superposition.

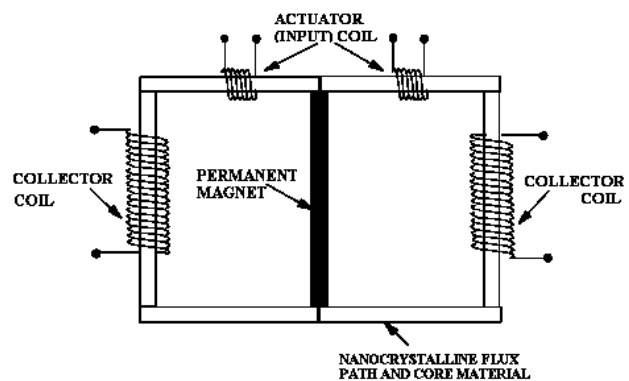


Fig.4.2

Diagram of prototype by Bearden.

In conclusion I'd like to confirm our sincere interest to develop joint work with all new energy research teams if they are not trying to obscure the issue of the technology by means of complex theoretical constructions and common words about zero point energy.

Matter as a Resonance Longitudinal Wave Process

Alexander V. Frolov

Abstracts

There is experimental data on gravitation anomalies for cases of resonance irradiation of the Bose condensates (superfluid helium or superconductor) at 10-100 MHz frequencies. It is developed by the author in frames of his aether theory that can be used for practical applications in aerospace and new energetics.

ZPF or aether fluctuations

The fundamental electromagnetic radiation field (Zero Point Field) ZPF or the quantum vacuum noise is a

recently accepted physical notion. In the article [1] David Noever and Christopher Bremner used it to derive a frequency – dependent version of Newton's gravitational coupling term G. On the other hand we can consider the quantum vacuum noise as aether fluctuations. Dr. Alexander Mishin [2] described experiments on registration of these processes by means of special equipment. Both approaches (ZPF and aether fluctuation) allow to conclude that mass and inertia arise from these oscillations. However if we are considering the oscillation as some aether process then we can assume and describe some physical mechanism of this process.

One of consequence of the vacuum energy model, which is described in [1] is that "the attractive force of gravity becomes reducible to the radiative interaction between oscillating charges..." Let's clarify which kind of radiation can be created by oscillating electric charges.

There are many different sources to find the answer on this question and one of them is the article by Prof. Kirill P. Butusov [3] on symmetrization of Maxwell's equations and practical methods of generation of longitudinal waves in vacuum. So, ZPF model has a direct relation with the aether model since indirectly it leads to the question of longitudinal waves in vacuum. Physically they are waves of density of energy and in the aether model the waves are areas of more dense and more rarefied aether. Let's note that there are standing waves besides moving waves.

To consider the interaction of some mass particles and the fundamental field the notion of subatomic charges "partons" was introduced [1]. So, the mass itself "becomes interpretable as a dependent quantity derived from a damped oscillation driven by random ZPF" [1]. The authors wrote about "internal kinetic energy" of the mass particle and it can be considered as a function of ZPF oscillation frequency. In the aether theory of mass there is a similar notion of "aether vortex", which represents some cyclical process of some frequency and it is possible to calculate its kinetic energy. This aether vortex model of matter elements allows to assume real methods to change parameters of vortex and to get changes in parameters of existence of the matter. On the other hand we can discuss the possibility to change some physical parameters of aether in areas of the vortex to get the same result. This possibility follows from the well-known N. Kozyrev's experiments, which were named "investigation of active properties of time". N. Kozyrev used choral (temporal) approach in his theory. We have to change his notion "the density of time" to "the density of aether" to get a direct link between his experiments and the aether theory of mass.

N. Kozyrev and others have [4,5,6] experimentally demonstrated that irreversible processes in matter produced changes of aether density in the area of the experiment. Detectors of different type can register this change. It is obviously that any matter element (i.e. the aether vortex) in this area of changed aether density should get more inner (kinetic) energy or slow the inner motion. From the choral point of view these are changes of inner time of this matter element.

Gravity shield

One more interesting point that is discussed in the article by Noever and Bremner [1] is a problem of gravity shield. The authors show that resonance interaction with ZPF produces "the particle mass" and it can be viewed as "a renormalized or "dressed" mass with a resonant interaction potential. Similar resonance approach is used in the conception of de Broglie's matter waves. Also the authors [1] mentioned the existence of an experimentally unobservable mass. In this case ZPF cannot be fundamentally shielded by matter since "frequency mismatch precludes gravity shielding by matter" [1]. The only way to get screening of ZPF fluctuations seems to be very complex: it is necessary to provide frequency matching for whole wavelength band of the oscillations.

I think some specialization is necessary here to explain experimental gravity anomalies with Bose condensates experiments (superfluid helium or superconductors): **special process in matter can be used as the gravity screen and this approach does not involve the frequency-matching problem.**

We have concluded above that any matter element is a resonance process and its energy is derived from ZPF. It is useful to note that these are longitudinal wave oscillations of energy density in aether. In this case, the gravity shield problem can be solved in frames of the aether vortex conception of matter.

The longitudinal wave is a moving (or standing) areas of rarified and thickened aether. Let's consider the moving wave, which is responsible for gravitation attraction effect. How can we stop, re-direct or reflect longitudinal wave in aether by means of aether vortexes (matter elements)? **We can produce interaction with this wave only by means of other longitudinal waves.**

In macro-level this idea can be realized as longitudinal wave generator. Electromagnetic processes, which can be used as sources of directed longitudinal waves, are known and some of them are described in [3]. In other way the gravity shield can be produced as longitudinal waves generated by natural aether vortexes (i.e. by matter elements) if the matter exist in a special excited state, for example for cases of resonance irradiation of superfluid helium or superconductor at 10-100 MHz frequencies.

Matter element as resonance process

In [1] the authors wrote that it is possible to calculate "the mass of any fundamental particle at its resonant frequency." There is the question: what is the general basis of whole spectrum of stable elements masses?

In 1996 the author published the article "The concept of mass process" [7]. At first in this work physical sense and notion of 3-dimensional curvature was introduced. By analogy with known mathematical notion of linear

curvature $\rho_1 = \frac{1}{r}$ (where r is radius) and uniform

surface curvature $\rho_2 = \frac{2}{r}$ it was proposed to calculate curvature of a 3-dimensional space as

$$\rho_3 = \frac{3}{r} \quad (1)$$

The radius r in this case means that in a 3-space there is some periodical process. In other words, 3-dimensional matter is a resonance process.

Further, de Broglie used formulations $E=hf$ and $E=pc$ (where p is momentum, h is Planck constant, f is frequency and c is velocity of light) to derive the following:

$$hf=pc \quad (2)$$

that allows us to get the well-known formulation

$$\lambda = \frac{h}{p} \quad (3)$$

There is another logical branch of this idea that leads to the understanding of the mass properties of matter as a resonance process. Instead of $E=pc$ in [7] it was proposed to use $E=mc^2$. In strength of the wave-particle duality we can write the equation

$$mc^2 = hf \quad (4)$$

and from this equation the mass can be presented as resonance electromagnetic oscillations

$$m = \frac{h}{c^2} f \quad (5)$$

Let's note that $f=1/T$, where T is some period of oscillation. So, we can write the following

$$m = \frac{h}{c^2} \frac{1}{T} \quad (6)$$

where $\frac{h}{c^2}$ is new constant between mass and period of time.

There is an important conclusion: any mass is a process and there is some period of time, which corresponds to this mass. In other words, there is no physical sense of time separate from some process of existence of mass. Product mass and period is a constant value, which was named as a chronal constant

$$mT = \frac{h}{c^2} = const \quad (7)$$

The chronal constant is a parameter of some real space and it is equal to $0.73725 \cdot 10^{-50} [Js^2 / m^2]$

Also in this work [7] there was a demonstration of several examples of newly discovered physical law: spatial curvature of some natural objects (proton, planet, DNA molecule) is a whole number. There is some analogy with the nuclear physics notion of wave number. From this fact we can assume that main natural matter elements exist in main resonance states. For example, if Bohr radius is 0.52917 Angstrom, then we can find the wave-length $l = \pi d$ and the linear curvature is $\rho = 1/l = 3.0075 \cdot 10^9 (m)$ and 3-dimensional curvature of this object is $\rho = 3/l = 1.0025 \cdot 10^9 (m)$ that is unit of mater, corresponding to simplest atom, i.e. unit matter engine. Let's note that it is near the unit and some distortion of 0.0025 means non-ideal resonance state of the system.

Calculations for planet Earth in [7] were based on the known period of orbital rotation $T=31557600$ sec that corresponds to frequency of electromagnetic oscillations

$$f = 1/T = 3.168861 \cdot 10^{-8} (1/s) \quad (8)$$

and wave-length

$$\lambda = c / f = 9.46... \cdot 10^{16} (m) \quad (9)$$

The curvature (if this wave-length is considered as radius of the resonator) is following wave number

$$\rho = 1057.00 \cdot 10^{-20} (1/m) \quad (10)$$

Also we can use other known data about the planet. Daily rotation period of our planet is known $T=86400$ sec and we can calculate its wavelength $\lambda = 3469,82(m)$ and corresponding curvature (wave-number). Sure, it is also a whole number with a good accuracy:

$$\rho = 2882 \cdot 10^{-7} (1/m) \quad (11)$$

The laws of physics in macro cosmos and micro cosmos are similar. From these calculations it was assumed that whole formation of mass spectrum of stable chemical elements of matter is determined by similar physical mechanism.

Creation of mass

In short we can summarize that technology of longitudinal waves in aether is a real basis for creation of matter with mass and inertia properties. N. Tesla used this method to produce different objects: from ball lightning up to electrons. Velimir Abramovic says in his article [8]: "The principle of resonance and harmonic oscillation of aether seems to be so clear that all problems of modern physics, especially a problem of energy conversion, will be solved with its development. By means of his vacuum tube Tesla got protons, electrons and neutrons directly from aether and reproduced them at any distance. Instead of giving a possibility to the bundle of protons to move through space to some place, he created conditions for momentary appearance of arbitrary quantity of particles in the given place."

Any objects can be classified as aether vortex and parameters of this vortex determine its mass, electric charge and other properties of matter.

The "parton" as element of matter in [1] is a useful tool for description of physical properties of aether.

Longitudinal waves in Woodward's experiment

In [1] the authors state that resonant radiation in the required 10-100 MHz range appears to produce

anomalous effects for such Bose condensates as superconductors. In my opinion it is a particular case of discussed above technology of longitudinal waves in aether due to possibility of transformation of transverse electromagnetic waves in longitudinal waves in the superconductors. This transformation in plasma is a well known physical mechanism.

More facts to prove this idea: by Woodward [9] there is a special requirement, i.e. the frequency of mechanical vibrations should be twice the frequency of electrical oscillations in the capacitor, which demonstrates the weight anomalies. But from the other hand it is a common rule for creation of longitudinal waves in plasma! Also it is a necessary condition for generation of parametrical oscillations! So, we can assume that basis of the effects in [1] and [9] is a generation of longitudinal wave in aether.

Conclusion

Any element of matter can be considered as resonance process of aether oscillations, which are longitudinal waves. There is an analogy with description of these longitudinal waves and well-known matter waves by de Broighl. Experimenting on the longitudinal waves generation and especially experiments on standing waves to get gradient of aether pressure allows to develop gravity control technology.

References

1. D. Noever and C. Bremner, NASA Marshall Space Flight Center, Large Scale Sakharov Condition, 35th AIAA/ASME/SAE/ASEE joint Propulsion Conference and Exhibit, 1999, Los Angeles, Ca, USA.
2. Alexander M. Mishin, The physical system of artificial biofield (experimental research of ether), New Energy Technologies, #1, 2001, p.45.
3. Kirill P.Butusov, Symmetrization of Maxwell-Lorenz equations, New energy Technologies, #2(5), 2002, p.14.
4. Kozyrev N.A. Selected Works, 1991, Leningrad, publ. by Leningrad State University.
5. L. Shikhobalov, N. Kozyrev's ideas today, New Energy Technologies #2 (5), 2002, p. 20.
6. Alexander V. Frolov, Kozyrev on possibility of decrease of mass and weight of the body, New Energy Technologies #2 (5), 2002, p. 35.
7. The Concept of Mass Process, Frolov A.V., Proceedings of the congress "New Ideas in Natural Sciences", 1996, St.Petersburg, published by PiK Co., p.123-134.
8. Tesla, Velimir Abramovic, New Energy technologies, #1(4) 2002, p.17.
9. Woodward, J.F A Stationary Apparent Weight Shift From a Transient Machian Mass Fluctuation, Foundations of Physics Letters, 5, p.425-442, 1992.

Gerlovin's Theory of Activation

Alexander V. Frolov

It is a review of the famous book by Ilia L. Gerlovin "Basis of unified theory of all interactions in matter" published in 1990, St.Petersburg, Russia. We hope this article let you discover some new aspects of physical vacuum structure to develop more new experimental methods. Comments made by Alexander V. Frolov, Editor.

In [1] the author wrote about different methods to activate water solutions: mechanical, thermal, acoustic, magnetic and electrical. One of the known methods is an activation by means of electrohydraulic method. There is also some information about activation of other mediums, mainly liquids, but also some gases and solid bodies.

There are no theoretical explanations of these facts to explain all aspects of these phenomena. Furthermore, complexity of interpretation of these phenomena in frames of common physical notions induced some scientists to announce these phenomena as non-existing and "illegal".

Ilia L. Gerlovin formulated the physical principles of theory of activation of mediums on the basis of new physical theory, the Theory of Fundamental Field (TFF).

These principles are based on his two important conclusions from the TFF:

- a) "Space around us is not empty, physical vacuum consists of material physical objects, i.e. elementary particles of vacuum (EPV). These particles are responsible for main activation processes;
- b) Force interactions between atoms in molecule, between molecules in crystals has not spherical symmetry in the crystals of solid bodies, but an axial symmetry and the interactions are changing in time with very high frequency of about 10^{18} Hz. This feature of force interactions also makes its own contribution to the activation of mediums." [1, p. 314]

So, it was assumed that the phenomenon of activation of mediums can be defined as anisotropy of force interactions, which leads to **"meta-stable state, which can be called *structurally activated state of the given structure*"**.

Here is some difference in principle between chemical term "activation", which characterizes a transformation of molecule or atom in some active state with an increased energy, which is sufficient to provide a chemical reaction. It is **energy activation**. Gerlovin described new notion, a **structural activation**: **"This phenomenon can be classified as some change of structure of activation object. With this, energy of molecule can have no changes, and active properties**

Coupled with aetherodynamics time conception, which was suggested by Alexander V. Frolov, the works on the control of space-time parameters gain the possibility for development and commercial application. As a theoretical basis there are those N. Kozyrev works where his conception of "time density" are replaced by that of "aether density" according to Frolov.

In September 2002, Faraday Labs Ltd Company plans to complete testing of the first experimental system, and to start the patenting and research of applied aspects, first of all in medicine.

Physical Principles of the Time Machine

Alexander V. Frolov

Experimental success of research team headed by Dr. Vadim A. Chernobrov, Moscow was reported in [1]. The time course can be controlled as rate of any process in local space-time (inner space of the Time Machine). It can be decelerated or accelerated by means of special "converging electromagnetic waves". Ordinary waves move from the source whereas special "converging waves" move to some central point, i.e. into the focus of the system. In Chernobrov's design of the Time Machine this process is organized by means of several spherical envelops, which consist of several electromagnets. Electronic control unit controls the processes in this design. Dr. Chernobrov reported about 3% change of the time course in 4th version of the system, which was tested with a human inside. The goal of Dr. Chernobrov's work is to research the medical aspects and experimental investigation of the principles. Several important conclusions were obtained from the project: the time course can be controlled and character of the changes is different for acceleration and deceleration mode.

Other known publication and research projects on the same topic seem to be very far from any commercial and practically useful application. Obviously the topic is very new and fantastic for most of scientific community and at first we have to clarify the physical principles of the time control project, which is started by Faraday Labs Ltd.

In this project we believe that notion of time is one of possible description of real physical properties of our Universe. So, it is not mathematical abstraction but some aspect of physical reality and we can discover some physical properties of time. Russian astrophysicist N. A. Kozyrev [2] developed a theory of active properties of time and according to his point of view there are two properties: time course and time density. Prof. Kozyrev demonstrated experimentally that time density in area of some process (changes of matter) is dependent on entropy parameters of the processes. In [3] it was demonstrated that Kozyrev's experiments could be interpreted in aether theory and it has led to simple physical conclusions and clear experimental perspectives: **time course and its density can be explained and controlled as parameters of aether.** Directions of aether flow and density of aether are

subjects of experimenting with non-reversible changes in matter, for example, in crystallization or melting processes. Also it is possible to use special electromagnetic processes, for example, Chernobrov's "converging waves" or other longitudinal waves as methods of aether compression or rarefaction. If we assume that process of existence of elements of matter physically can be explained as aether vortex processes then its rate is a parameter of **aether income/outcome balance** (aether inflow in element of matter and aether outflow from the element of matter). It was also described in Time Rate Control (TRC) theory [3]. To control this balance it is necessary to develop technology of longitudinal waves generation, its focusing and resonance effects. The previous research and experimenting on the topic has been made by N. Tesla.

Let's assume that we have some technology to change parameters of time course. How should we organize this local space-time (what is spatial topology of the design)? There is a very interesting experiment to get the answer: rotation of a heavy cone (for example, lead cone) entrains surrounding aether, so a vortex appears, which is a toroidal formation of aether (rings). The rings can exist in space for a long period. The further question is: Why does the beam of light (laser beam) directed to the cone by tangent create a luminous ring? We can assume that due to natural properties of photons (light propagates along the geodesic line in space) some autonomous closed toroidal space should be created in such experiment. The next thought is: since space and any matter exist in time then we can speak about some autonomous time. The general conclusion is to be the following: autonomous 4-dimensional space-time can be created as toroidal aether vortex.

Here is point to note some aspects of research project by Prof. Robert Mallett, Connecticut University, USA. In fact, sometime next year, he hopes to produce the first piece of technology that eventually will allow him to build a time machine. By Mallett it will be a device that employs lasers "to twist space". Why is he going to close the beam of light? His theoretical background is knowledge about black holes, i.e. understanding of the connection between gravity and curvature of space-time. In Einstein's theory both matter and energy can bend space and time. So Prof. Mallett assumes that curvature of space-time can be changed not only by mass (like a black hole) but it can be affected by energy of photons. This has led Prof. Mallett to consider the possibility of using a circulating beam of light to twist space and to create closed loops in time. It is predicted that a spinning neutral particle, when placed in the ring, is dragged around by the resulting gravitational field [4]. From the

first view it is the same approach we have considered above (experiment with aether toroidal rings). But proposals by Prof. Mallett differ in principle from the aether conception.

The main aspect of this technology is a creation of autonomous (self-closed) toroidal space-time. Autonomous geodesic world line of this space-time is self-closed. Any photon should be circulating in this system due to its properties: photon is always moving along the straight line of the space.

More deep understanding of this technology follows from the explanation of photon as oscillation of aether. Any photon can be considered as result of relative motion of the matter (observer) in absolute space (immovable aether). Usually a photon is considered as moving object in space. But we can assume that observer is in the motion and the photon is oscillations of the absolute space (immovable aether). Which approach is more real one? Sure, it is more easy to consider a photon as moving object but let's remember fact of our real motion in the Universe and fact of the Universe expansion.

So, ideas by Prof. Mallett are very far from the **aether nature of the time phenomenon**. He follows the black holes theory and general understanding of space-time distortion due to mass or energy presence. Also he knows that a light beam should be closed in a ring. However Prof. Mallett is very far from physical basis of the effects. **The key of time rate control is technology of artificial aether flow, creation of aether vortex systems (AVS), management on density and direction of aether flow.** There are several technical methods to produce it. Any light beam should be curved in self-closed "light ring" if it is placed in a toroidal aether vortex and we can say that this system has own space-time.

What does "some changes of time course" mean? We can measure it as some changes of standard rate of oscillation process, for example, some stable wavelength of laser beam or quartz oscillations. There is a well-known experiment with two atomic clocks (one of the clocks is placed on the roof of some building and another one is placed on surface of planet). Due to vertical component of gravity the time course should be different and it can be measured. How can we organize difference in these measurements if both atomic clocks are placed in the same altitude?

It is necessary to consider gravity nature in frames of the aether conception. Two atomic clocks demonstrate difference in measurements due to difference in aether flow density. Hence, by means of aetherodynamics methods it is possible to control the rate of oscillation processes in the atomic clocks and in any matter (i.e. time course itself).

The aetherodynamics methods have a clear analogy with electrodynamics: **motion of charge produce field and there is the induction law**. Really, classical electrodynamics can be considered as particular case of the aetherodynamics. So, physical sense of any field

is stress or deformation (it is some static field) or oscillations of aether.

Let's introduce the notion of chronal (temporal) charge to consider some technical aspects. In electrodynamics we assume an electric charge as element of matter with positive or negative electric properties and we have to compare it with some reference (zero charge or test charge). Let's note that in any case we have to consider "charge of some particle" but not an "abstract charge". So, we can postulate that any element of matter has **zero chronal charge** if it is moving from Past in Future with standard (usual for measurements of surface of our planet) time course. If the time course (i.e. existence of some element of matter) is decelerated then it can be measured as decrease of standard oscillation frequency of the matter. Time course acceleration means some increase of standard oscillation frequency of the matter. Let's determine that in the first case it is negative chronal charge and in the second case it is some positive chronal charge. Atomic clock is one of possible methods to measure zero chronal charge or to find some relative positive or negative difference.

It is predicted here that motion of chronal charge should produce a chronal field. Some provisional data was received by Frolov from simple experiments on the rotation of a heat source. Accelerated motion of chronal charge (changes of density of chronal current) should produce aethero-induction effect that is an analogy (or more general case) of Faraday's induction effect. This effect can be detected as secondary (induced) deceleration of time course in nearest area of accelerated time matter. Another case is a secondary (induced) acceleration of time course in the nearest area of decelerated time matter.

Technical realization of aethero-induction method seems to be very close to idea, which is described in classical epic "Back to the Future". At first, it is necessary to create or to collect some chronal charge in a "flux condenser" and then to accelerate it in space up to some velocity. According to the aether conception, this creation of the chronal charge is a real technical process.

It is assumed that estimated chronal effects are demonstrated as some threshold field, i.e. space-time has some stable discrete energy levels and changes of its curvature should have discrete threshold mode. All new aspects disclosed in this paper are the subject of a patent process. Faraday Labs Ltd organizes experimental program on the topic. Practical application of this technology is new energy systems and propulsion methods.

References

1. Chernobrov V.A. Experiments with a man in the Time Machine, New Energy Technologies, #3 November-December 2001, p.6.
2. Kozyrev N.A. Selected works, Publ. by Leningrad State University, 1991.
3. Frolov A.V. Practical application of the Time Rate Control theory, New Energy Technologies, #3 November-December 2001, p. 15.
4. Mallett, R.L., Weak gravitational field of the electromagnetic radiation in a ring laser, Phys. Lett. A, 2000.

investigated completely yet. It was found also that harmful effect on biological systems is not related to the process of movement in Time itself but is a result of the difference of the Time rate value in various parts of a body (a biological system).

Inside of the laboratory setup it was also discovered that Time could be changed with some inertia. Areas of space having different Time rates have vague borders. With sufficient difference in Time rate the human can see an area with a different Time rate as some white mist. Higher the difference – the mist is denser, that can be used as an alarm signal for biological systems. It is possible to consider Time-travel as possible and (after experiments with mice) there are reasons to suppose it will be safe for travelers if they follow certain rules. It is especially necessary to emphasize: the trips through Time (due to new discovered properties of Time) can't affect the Past and they can't change our past history. All the so-called paradoxes for the traveler in Time (for example when "he meets himself in the Past" or "he kills his grandfather in his childhood" have clear solutions in 3-dimensional Time.

It is possible to consider as a proven fact that Time has more than one dimension, i.e. O. Bartini's theoretical calculations are confirmed by these experiments: Time has 3 dimensions. Hence our Earth world can be considered as a 6-dimensional object: length, width, height, age or date of Time, variant of a History or erosion of Time, density or rate of Time. The concept of "the Arrow of Time" as fourth dimension (moment of Time) is a particular case of the concept of sixth dimension (rate of Time) that leads to the physical concepts of gravitation and energy and they are simultaneously connected. Concepts of the "Einstein-Rosen bridges" known since 1916 or "worm-holes"



introduced into science by John Willer in the 50's, are travels in 5th and 6th dimensions, i.e. the "classical" Time travels, which were described by H. Wells.

Editor's: As the reader could note, the author does not disclosure the secrets of the TM design. From the photo you can see the electromagnets, which form the regular stereometrical construction as well as the cables from the TM to the control unit. Dr. Chernobrov mentioned the converging electromagnetic waves only. So, to understand how it works, it is necessary to get a clear notion of the converging electromagnetic waves. Let's imagine the ripple effect created by a stone in the water. The waves move from a central point to periphery. The converging waves are just an opposite process: the waves move from periphery to the central point. Is it possible in Nature? Yes, sure. Dr. Chernobrov wrote: "Let's throw a hoop on the water and inside of the hoop we'll see converging waves." The Time Machine technology by Dr. Chernobrov is based on the similar principle.

Time Machine Project

Alexander V. Frolov

Scientific Expert of the Russian Physical Society,
General Director, Faraday Lab Ltd
Tel/fax: 7-812-380-6564 Tel: 7-921-993-2501
Email: director@faraday.ru alex@frolov.spb.ru

May 29, 2002

Faraday Labs Ltd and Dr. Vadim Chernobrov have signed the agreement on scientific-research work on investigation of active properties of time.

In the course of the previous experimental works, carried out by Dr. Chernobrov's research team during the period from 1984-2002, four versions of Time Machine had been made and tested. At these devices (the biggest system is about 1 meter in diameter) the effects of deceleration and acceleration of time course were created and measured. The principles of control of time course velocity were based on the



Alexander V. Frolov, General Director Faraday Labs Ltd and Ph. Dr. Vadim A. Chernobrov have just signed the Contract

interconnection of electromagnetic processes and physical properties of space-time. Special electromagnets, operating in pulse mode, are placed at the spherical frame. They create the so-called "converging wave", which by Alexander Frolov is a longitudinal wave in nature.

Coupled with aetherodynamics time conception, which was suggested by Alexander V. Frolov, the works on the control of space-time parameters gain the possibility for development and commercial application. As a theoretical basis there are those N. Kozyrev works where his conception of "time density" are replaced by that of "aether density" according to Frolov.

In September 2002, Faraday Labs Ltd Company plans to complete testing of the first experimental system, and to start the patenting and research of applied aspects, first of all in medicine.

Physical Principles of the Time Machine

Alexander V. Frolov

Experimental success of research team headed by Dr. Vadim A. Chernobrov, Moscow was reported in [1]. The time course can be controlled as rate of any process in local space-time (inner space of the Time Machine). It can be decelerated or accelerated by means of special "converging electromagnetic waves". Ordinary waves move from the source whereas special "converging waves" move to some central point, i.e. into the focus of the system. In Chernobrov's design of the Time Machine this process is organized by means of several spherical envelops, which consist of several electromagnets. Electronic control unit controls the processes in this design. Dr. Chernobrov reported about 3% change of the time course in 4th version of the system, which was tested with a human inside. The goal of Dr. Chernobrov's work is to research the medical aspects and experimental investigation of the principles. Several important conclusions were obtained from the project: the time course can be controlled and character of the changes is different for acceleration and deceleration mode.

Other known publication and research projects on the same topic seem to be very far from any commercial and practically useful application. Obviously the topic is very new and fantastic for most of scientific community and at first we have to clarify the physical principles of the time control project, which is started by Faraday Labs Ltd.

In this project we believe that notion of time is one of possible description of real physical properties of our Universe. So, it is not mathematical abstraction but some aspect of physical reality and we can discover some physical properties of time. Russian astrophysicist N. A. Kozyrev [2] developed a theory of active properties of time and according to his point of view there are two properties: time course and time density. Prof. Kozyrev demonstrated experimentally that time density in area of some process (changes of matter) is dependent on entropy parameters of the processes. In [3] it was demonstrated that Kozyrev's experiments could be interpreted in aether theory and it has led to simple physical conclusions and clear experimental perspectives: **time course and its density can be explained and controlled as parameters of aether.** Directions of aether flow and density of aether are

subjects of experimenting with non-reversible changes in matter, for example, in crystallization or melting processes. Also it is possible to use special electromagnetic processes, for example, Chernobrov's "converging waves" or other longitudinal waves as methods of aether compression or rarefaction. If we assume that process of existence of elements of matter physically can be explained as aether vortex processes then its rate is a parameter of **aether income/outcome balance** (aether inflow in element of matter and aether outflow from the element of matter). It was also described in Time Rate Control (TRC) theory [3]. To control this balance it is necessary to develop technology of longitudinal waves generation, its focusing and resonance effects. The previous research and experimenting on the topic has been made by N. Tesla.

Let's assume that we have some technology to change parameters of time course. How should we organize this local space-time (what is spatial topology of the design)? There is a very interesting experiment to get the answer: rotation of a heavy cone (for example, lead cone) entrains surrounding aether, so a vortex appears, which is a toroidal formation of aether (rings). The rings can exist in space for a long period. The further question is: Why does the beam of light (laser beam) directed to the cone by tangent create a luminous ring? We can assume that due to natural properties of photons (light propagates along the geodesic line in space) some autonomous closed toroidal space should be created in such experiment. The next thought is: since space and any matter exist in time then we can speak about some autonomous time. The general conclusion is to be the following: autonomous 4-dimensional space-time can be created as toroidal aether vortex.

Here is point to note some aspects of research project by Prof. Robert Mallett, Connecticut University, USA. In fact, sometime next year, he hopes to produce the first piece of technology that eventually will allow him to build a time machine. By Mallett it will be a device that employs lasers "to twist space". Why is he going to close the beam of light? His theoretical background is knowledge about black holes, i.e. understanding of the connection between gravity and curvature of space-time. In Einstein's theory both matter and energy can bend space and time. So Prof. Mallett assumes that curvature of space-time can be changed not only by mass (like a black hole) but it can be affected by energy of photons. This has led Prof. Mallett to consider the possibility of using a circulating beam of light to twist space and to create closed loops in time. It is predicted that a spinning neutral particle, when placed in the ring, is dragged around by the resulting gravitational field [4]. From the

Kozyrev-Dirak Radiation

Its influence on animals

Dr. Ivan M. Shakhparonov

*International Academy of Energy-Informational
Sciences*

In the experiment with animals, that were made in the Center of Oncology Researches (COR) at the Russian Academy of Medical Sciences (RAMS), on the applying of Kozyrev-Dirak's Focused Radiation (KDFR), it has been found that KDFR decreases the quantity of glucose in the blood, reduces its tenacity, promotes the strengthening of immunity and the rise of the quantity of marrow cells.

Introduction

This time researchers in Russia and abroad experiment on ball lightnings by means of nonoriented circuits, which are similar to the electric analogues of Mobius band, also by means of Klein bottle and their combinations. Non-oriented fields are investigated very intensively now. Accordingly, organisms of the researchers, who observe the interactions of such fields with a matter, are also changed, thus they should take it into account on making such experiments. The aim of the article is to show in which way the fields of nonoriented circuits influence on animal and human organism. Besides the article has for its object the prevention of negative consequences, which can appear for experimenters through the research process.

Experiments with animals that were carried out in 1992-1993 in Russian Academy of Medical Sciences (RAMS) had not been published in proper time because there were no quantitative methods of radiation detection. Later, in 1996 they were developed [1] and KDFR parameters were measured in that geometry, which were applied in RAMS. In 1998 powerful and super-powerful KDRF sources were obtained. These sources were applied (and are applied now) in the researches at the controlled radioactive decay [2]. Kozyrev and Nasonov [3] and later also Lavrentyev with the collaborators [4,5] have proved experimentally that the Sun and some stars generate the radiation, which has early unknown properties. We suggest that the radiation, discovered by Kozyrev [3], and the radiation, which is researched by us and by other experimenters with nonoriented circuits, are of the same phenomenon. At first, it should be noted that on interaction between Kozyrev-Dirak radiation (KDR) and a matter made it colder. As it was demonstrated above [1], cooling effect can be explained by matter re-magnetization under the influence of KDFR beam (adiabatic demagnetization). According to the still unpublished data, KDFR bunch destroys matter lattice by the way of it's moving. However, after a couple of week matter reconstructs it to the almost tabulated points, without defects, blockness and other damages, which are peculiar to

other natural crystal structures. **In the definite sense nature demonstrates the way to rejuvenate compound structures.** As it is well known, vital functions of biological systems on the Earth depend on the structure and composition of water. Therefore, we have a right to expect considerable changes in the vital functions of biological organisms under the influence of KDFR.

Experimental Devices

In experiments with animals there were applied the devices, which concentrated KDR (KDCR) and had 50 Wtt aggregate electrical power. The description is presented in [2].

KDFR indication was obtained by calorimetric method [1], along the way of movement of the main bunch (with 10 cm across diameter) and at angle of 45° from the geometrical axis of a device.

Researches of Bleeding Duration

Let us consider KDFR influence on the blood composition of animals. At the experiment 24-28 gram weighting, pelletized fed male mice were used. In the process of the experiment it was discovered that 3 and 4 hour processing of mice with KDFR at the distance 2.5 m and at the presence of animals in the sphere of maximum radiating power, caused some changes of fibrillation system. The bleeding duration was determined according to Duke method. Two groups of animals were used at the experiments: a group with 4-hour duration of KDRF processing and a group with 6-hour duration. Time of bleeding was considered in dynamics at 1, 2, 7, 14, 21, 28 and 35 day (Fig. 1). The bleeding duration of the intact animals was determined by the value 128 ± 11 sec. After the applying of KDFR there was noticed some increase of bleeding duration to 261 ± 15 sec and 223 ± 21 sec on the first day after the stopping of the influence. In the subsequent periods bleeding duration gradually decreases up to the level of physiological norm. The whole normalization of the index is observed at the animals, which were processed by KDFR during 4 and 6 hours, on 28-35 day up to 115 ± 12 and 133 ± 18 sec correspondingly. In the process of observations at the animals, the correlation between time of fibrillation and periods of KDRF processing of the animals has not been revealed (Fig. 1).

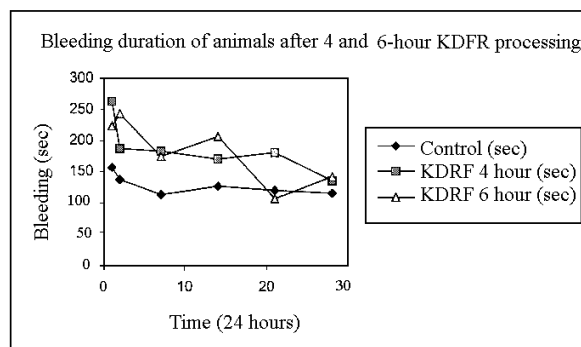


Fig.1

In the course of the experiment the strongly marked chronometric hypocoagulation was discovered due to the extension of the parameter "K" or, probably, because of the change of aggregation properties of platelets (Table 1).

For the determination of biochemical indexes serum was obtained from 5-8 ml of rats' venous blood. Beforehand

(24 hours before the slaughter), forage was taken away from the animals. The determination of biochemical indexes was provided by means of biochemical analyzer HITACHI. As a result of the experiment it was determined that at the first day after influence of KDRF there was a tendency of decrease of the glucose content (Table 2). Other indexes varied in the limit of physiological norm.

Table 1 Parameters of thromboflexogramm after KDRF, 4 hours

Animal #	Parameters of thromboflexogramm			Fibrio gene	Fibrinal activity
	R (sec)	K (sec)	Ma (mm)		
1	72	∞	10	-	-
2	102	∞	18	-	-
1	90	∞	10	275	75
2	180	150	52	315	90
1	180	∞	5	-	100

Table 2 KDRF influence on the glucose content in blood of the rats

Time (days) after the experiment	KDRF 4 hours (mmole/l)	Test (mmole/l)	KDRF 6 hours (mmole/l)	Test (mmole/l)
1	3.14	6.12	6.39	7.27
10	7.59	9.35	8.90	6.69
30	6.05	6.69		

Research of haemopoiesis system

Several criteria were considered: the dependence of biological effect on the distance, on the power flux density, on the duration of processing. Besides, KDRF influence on mice survival was considered.

At the experiment 24-28 gram weighting, pelletized fed male mice were used. The marrow was examined in the dynamic at 1, 3 and 7 day after KDRF influence. Six animals were taken on each point. After the decapitation of the mouse their thighbones were taken out and after that the absolute number of myelokaryocytes was calculated by the standard method in Goryaev chamber.

Dependence of the biological effect on the distance

In all experiments the maximum flux density along the geometrical axis of KDCR device was a constant. There were used four temporal modes of the influence (1, 2, 3, 4 hours) and three points of long distance between KDSR and the biological object (0.5; 1.5; and 2.5 m). At 0.5 m distance there were no differences in the number of marrow cells in comparison with the control cells. With the increase of distance between KDCR and the object from 0.5 to 1.5 m some tendency to the increase of the number of marrow cells up to the 7th day was observed. Four-hour KDRF processing caused the increase of the number of karyocytes up to $29.99 \pm 1.25 \times 10^6$ ($P < 0,001$).

Thus, any dependence of the biological effect on the exposition has not been revealed. For instance, at the 7th day after one hour of the exposition the number of karyocytes was equal to $28.45 \pm 1.87 \times 10^6$ at the same time after 3-hour processing it came to $27.65 \pm 0.74 \times 10^6$. Alongside with the change of the distance to the biological object from 1.5 to 2.5 m the tendency towards the increase of the number of marrow cells has kept within the same limits $28.27 \pm 1.32 \times 10^6$ and $29.57 \pm 0.88 \times 10^6$.

Dependence of the biological effect on the power flux density

The comparative investigation of KDRF influence on the biological object in the coverage of KDCR (along its geometric axis) and outside the coverage has demonstrated that alongside with the increase of the radiation intensity there was a tendency towards the decrease of stimulative influence of KDRF on haemopoiesis.

Dependence of the biological effect on the duration of processing

On processing the animals at distances up to 2.5 m from KDCR and on increase of exposition to 3-4 hours it is possible to obtain reliably significant difference in the number of marrow cells from the physiological norm to the 7th day.

KDRF influence on the survival of mice

The experiments, determining the survival reaction of animals, were made by means of gamma radiation.

30-day survival is the criterion of determination. Conditions for the experiments are the following: in the coverage of KDCR and aside the coverage, (the distance between the KDCR and the object is 2.5 m in the coverage of KDCR and 0.5m outside the coverage). Time of influence is 4 hours. Animals of both sex were used. Two groups of animals were used. The test group was put to the gamma radiation in the diapason of doses, which caused marrowy syndrome, i.e. from 7.5 to 8.5 Gr. The second group of animals after the irradiation in the same diapason of doses was repeatedly processed with KDFR. Time of the influence is 4 hours at 7.5 Gr gamma radiation on 15 mice in one bath and 8.5 Gr on 15 mice in another bath. Total gamma radiation of the animals was made by means of the source ^{137}Cs with the dosage rate of 5.2 Gr/min. Gamma radiation in this dose diapason causes death of the animals during the development of the marrowy syndrome, i.e. from the 6th to the 20th day along with the aplasia of haematogenic tissue. Combination of gamma radiation and KDFR sometimes leads to the slight increase of the number of survived animals. If the animals are irradiated by gamma rays at first and then by KDFR, the death control at 7.5 Gr radiation is equal to 5.5% from the total number of the animals and at the following KDFR processing 16% of the irradiated animals die. However, 67% of the animals in the tested group have died after KDFR processing and after the coming next gamma radiation with 8.5 Gr total dose. And in the group, which was processed with KDFR, only 46% of the animals died.

Immunity strengthening

For the investigation of KDFR influence the following tests were chosen: activity of natural killers and T-killers, which had been obtained by the immunization in vitro in the unidirectional mixed culture of lymphocytes and also in the reaction of blast transformation on the specific mitogen [6, 7]. All tests were made on the 7th day after a single KDFR influence. Unfortunately, data have been obtained with the applying of radioisotope preparations. Though the experiments of this kind were successful and though they have demonstrated the increase of some immune reactions' level, there is a certain doubt in the relevancy of radioisotopes application [2]. Thus the series of experiments was made. These experiments were aimed at the investigation of KDFR influence on the development of the swelling process. The aim of the experiment is the investigation of KDFR influence on the development of Ehrlich cancer and sarcoma-37, which were repeatedly inoculated to mice. At the first stage of the experiment there was a single KDFR influence on the mice repeatedly inoculated with sarcoma-37, on the 2nd day after the repeated inoculation of the swelling cells to the animals. The repeated inoculation was made intramuscularly in a right thigh, in a dose 10^6 of cells per a mouse. Time of KDFR influence for the first group of animals was equal to 1 hour; for the second one it

came to 2 hours; and for the third one it came to 4 hours. Each group consisted of 6 animals. The test group consisted of six mice with repeatedly inoculated sarcoma-37 and which had not been processed with KDFR. As a result, the average lifetime of tested animals was equal to 9 days. The average lifetime of animals of KDFR groups came to 48 days (for 1-hour KDFR influenced group); to 12 days (for 2-hour group); and to 31 days (for 4-hour group). Thus, the average lifetime of the experimental group came to 29 days. Besides, in the group, which has been processing with KDFR during 1 hour, **the half of mice had survived (three of six mice)**.

At the second stage of the experiment the repeated (5 times during 2 hours) KDFR influence on the mice was applied. These mice have been inoculated with sarcoma-37 at seven days before the beginning of the influence. As a result, the average lifetime of the animals was equal to 27 days, and for the mice, which were processed with fivefold KDFR influence, the average lifetime was equal to 76 days. The obtained results are the evidence of inhibition of swelling development for the animals, which were processed with KDFR influence. This leads to the increase of lifetime of such animals in comparison with the test. **Thereby, at a great extent the results of the previous experiments on the strengthening of immune status after KDFR influence were confirmed.**

Results and discussion

Let us make a conclusion. At the KDFR influence on animals' organism the following effects were observed: decrease of blood viscosity; strongly pronounced hypocoagulation; decrease of contents of glucose. Increase in the number of karyocytes and the extended lifetime of the animals, infected with Ehrlich cancer and sarcoma-37 were also observed.

As for human being, the researches in this area have not been carried out yet and they are still confined to the single observations. It is possible to give an example from the author's practice. In 1975 nonoriented circuit of 3kWtt power was examined. Field strength was measured. The author of the article had been working in the field for about 8 hours. And after five hours after the experiment I had felt bad. That time it was nothing known about the influence of the new radiation on human organism. The arrived ambulance has quickly diagnosed that I was close to hypoglycemic coma. On several hours after the intravenous glucose injection, my state has become normal. **Now we know that before the experiments with powerful KDFR bunches it is necessary to eat sugar.** Thus we believe that the data, which were obtained after the experiments with animals, can be applied to a human being. We can suggest that the manifestation of the symptoms of the KDFR influence on human organism depends on the power of the applied source, on the total mass of the organism and on the time of it in the coverage of the irradiation. From aforesaid it is clear that the experiment with powerful KDFR sources is far from being harmless

and it is better to make it distant after exclusion of man presence near experimental stands and devices. At the same time it is quite obvious that on applying of small capacity and fixed time of irradiation it is possible to develop methods for curing of human diseases, which are considered now as incurable (for instance of diabetes, some diseases of haematogenic system, of cancer and possibly of AIDS).

References

1. Proceeding of the International Scientific Conference "New Ideas in Natural Sciences" Problems of Modern Physics, p. 176-187
2. Journal of new energy, Vol. 3, #4, 1999, I.M. Shakhparonov "Interaction between Kozyrev – Dirak radiation and radionuclides", p. 85-89
3. Kozyrev N.A. Selected works, Leningrad State University, 1991, part 3
4. Lavrentyev M.M. Eganova I.A. Luzet M.L., Fominykh S.F. / Reports by AS USSR. – 1990, Vol. 314, #2, p. 352-355
5. Lavrentyev M.M., Gusev V.A., Eganova I.A., Luzet M.L., Fominykh S.F. // Reports by AS USSR. – 1990, Vol. 315, #2, p. 368-370
6. Methodological materials on experimental pharmacological and clinical trials of immune modulating effect of pharmacological remedies. - Ministry of Health USSR, M., 1984
7. Talmadge J.E. and Chiragos M.A. Comparison of immunomodulatory and immunotherapeutic properties of biologic response modifiers. Springer Seminar Immunopathol., 1985, 8, 429-443

Effect of Magnetic Blow Wave Field on Wine Systems

I.M. Shakhparonov (Corresponding author), S.A. Grin, S.R. Tsimbalaev, L.N. Kreindel, V.N. Kocheshkova, A.I. Podlesny, S. Yu. Gelfand

AGD Firm, Peschanyi pereulok, House No.20P korpus No.1, Lfl. 33 125252, Moscow, A- 252, Russian Federation

Russian Institute of Canning Industry, Shkolnaya Street. 78. 142703 Vidnoe 3. Moscow Region, Russian Federation

Introduction

Authors communicate the data on influence of Magnetic Blow Wave (MBW) field on several wineproducts. It was found, that MBW did not lead to significant changes in the major components of the wineproduct (sugar, organic acids, minerals). At the same time the taste and aroma of treated wine become more pleasant; content of heavy alcohols and wine stone in the treated samples was less than in non treated ones. A mechanism of transformations was also discussed.

Keywords: *Magnetic Blow Wave (MBW), Wineproduct, GLC of aroma compounds and ethanol, HPLC of sugars, Atomic Absorption Spectrometry (AAS) of minerals, Heavy alcohols and aldehydes, Wine stone, Turbidity tendency, Organoleptic evaluation*

Magnetic Blow Wave (MBW) was obtained for the first time during the investigations on ball lighting generation under the laboratory conditions (Shakhparonov 1994). MBW as a physical object is interesting because of some facts, which suggest that MBW is a magnetic monopole. The MBW can also interact with the matter and transforms it in a definite way. Typical example is an elementary carbon in the form of graphite, which is transformed by such magnetic treatment into ferromagnetic substance (ibid).

The graphite, which is initially diamagnetic, transforms to paramagnetic one with general radiation dose of about $7 \cdot 10^{19}$ neutrons/cm². Other types of radiations could not affect this way (Svoistva 1975). So one unit of MBW can be considered as $1 \cdot 10^5$ of neutron masses. This fact may be regarded as an indirect evidence for assuming that MBW and magnetic monopole are the same things. In the absence of excited radioactivity a slow MBW [$v/c < 1 \cdot 10^4$] occurs, which does not ionize atoms (Devons, 1963). Therefore, their interaction with the matter can be observed only indirectly. No data exist on the interaction of MBW with organic substances. The experiments and results reported in the present communication may be a starting point for development of technology and to formulate the methods for vintage wine and best quality spirit production.

Materials and Methods

Assuming that MBW and magnetic monopole are the same things, a number of conditions were selected for all experiments. The MBW source and the samples were placed in the same axis and the axis was oriented according to magnetic meridian direction. Such magnetic orientation is appropriate, as the energy of magnetic monopole theoretically increases in a magnetic field (Devons, 1963). All of samples were placed at 250 cm distance from MBW source, in hermetically closed glasses. It should be noticed that MBW could penetrate through many other barriers, for example into cast iron reservoir with wall thickness of 5 cm (Amaldi, 1970).

The quality investigations were made by using of standard equipment. HPLC, equipped with refractometric detector was used for sugars estimation. Separation of organic acids in forms of their ethyl esters and acid esters was carried out chromatographically using a column packed with polyethyleneglycol succinate and the following temperature option: initial temperature is 120°C, final temperature is 220°C, temperature growth rate: 8°/min. GLC was also employed for determination of ethanol. Minerals content

conclusion: in order to obtain complete information about any system, it should be destroyed. However, destruction of tissues of the man in order to get information about their state is a too high price to pay for the information about his health.

However, the above Van Hoven's criterion can be satisfied with the minimum influence, when the cells are not destroyed and the atoms of these cells, being primary sources of torsion spectrums to be registered, are bring into the non-equilibrium state by means of outer disturbing influence.

In order to choose the frequency of the disturbing torsion influence correctly, it is necessary to take into account the role of water in physical and biochemical organization of tissues of the human organism.

At the same time, it is necessary to take into account the resonance torsion frequencies of various human organs. Finally, it turns out that the signal of torsion disturbance should be rather sophisticated considering both these factors. The TORDI system is a ready-to-use production device. Nevertheless, it is important to understand that the model is not the limit of scientific and technical potential incorporated in it and that enhanced variants of the system will appear with the course of time.

Summing up, I would like to draw your attention once more to the fact that work on torsion technologies is not limited by the directions that were discussed here. Actually, as it was pointed out in the beginning, on-going development includes all branches of economy, industry, agriculture and medicine, as well as all problems of everyday life. Technologies that we mentioned are the forerunner of the fact that the mankind is on the threshold of the age of torsion

technologies, which, we believe, will change our life in the 21st century more than all the scientific and technical revolutions of the 20th century.

Reference

1. Cartan E. *Compates Rendus. Akad.Sci., Paris*, 1922, v.174.
2. V.Melnikov, P.Pronin. Problem of gravitation constant stability and additional interactions. *Itogi Nauki I Tekniki, ser. Astronomy*, v.41, Gravitation and Astronomy, Moscow, VINTI, 1991.
3. G.I.Shipov *Theory of the Physical Vacuum*. Nauka, Moscow 1997.
4. I.Ternov, V.Bordovitsin. On the modern interpretation of classical spin theory of Ya.Frenkel. *UFN*, 1980, v.132, No.2.
5. V.Bagrov, V.Bordovitsin. Classical spin theory. *Izvestiya VUZ, Phys.Series*, 1980, No.2.
6. F.I.Belinfante. On the spin angular momentum of mesons. *Physica VI*, 1939, v-6, No.9.
7. M.Markov. The very early universe. *Proc of the Nuttfield Workshop*, Eds. G.V.Gibson, S.W.Hawking, S.T.Siklov, Cambridge, 1988.
8. Hideo Uchida. A method apparatus for detecting a fluid. Patent England, No 511662, May 24, 1978.
9. Anatoly Akimov. Heuristic discussion of the problem of finding long-range interactions. *EGS-concepts. CISE VENT*, preprint N7A, Moscow, 1992.
10. IITAP RANS, TORTECH USA, *Horizons of the Science and Technology XXI age Proc*, Editor A.E.Akimov, Folium, Moscow, 2000, vol.1 (in Russian).
11. N.Kozyrev, Astronomical observations by means of the physical properties of time. In "Flarestars" International Symposium in Byurakan, 1976, Armenian Academy of Sciences Publ., Yerevan, 1977 (in Russian)
12. Bouwmecster D. et.al. *Nature*, v.390, 11 dec, 1997.
13. G.I.Shipov. Theoretical and Experimental Research of Inertial Mass of Four-Dimensional Gyroscope. *IITAP RANS*, preprint N10, Moscow, 2001, (in Russia).
14. The way of correction of metal alloy microstructure. Patent Russian, RU 2107105, 1998.
15. A.Dolgov, Yu.Zel'dovich, M.Sazshin. *Cosmology of the Early Universe*. MGU Publ., Moscow, 1988.
16. I.A.Wheeler. *Einstein's vision*. Springer Verlag, 1968.
17. *Convegno Internazionale:Quale Fisica per 2000*, Proc. Bologna, 1991. see: *The Manual of Energy Devices and Systems*. Complied D.A.Kelly, D.A.K. WLFUB, Burband, California, 1986, Publ. N1269/F-289.
18. Daytlov V.L. Polarization Model of the Heterogeneous Physic Vacuum. Institute Mathematical, Sibirians Academic Science, 1998 (in Russian).

The Electrical Vortex Non-Solenoidal Fields

Sergey B. Alemanov

E-mail: alemanov@inbox.ru Phone 7 (095) 323-6848

A mistake was found in the electrodynamics: it is detected that all electrodynamics' postulates corresponds to the experimental facts, but vortex electric fields has unclosed inductive lines.

When the magnet is moving, then the current of magnetic induction is moving together with it. From known velocity of motion $\mathbf{v}$ and the value of magnetic induction $\mathbf{B}$, it is possible to calculate the intensity $\mathbf{E}$ of appearing vortex field according to electrodynamics formula of transformation of fields $\mathbf{E}=\mathbf{vB}$.

If to change the $\mathbf{E}=\mathbf{vB}$ on induction $\mathbf{D}=\varepsilon_0\mathbf{E}$ in formula of fields' transformation, that will get $\mathbf{D}=\varepsilon_0\mathbf{vB}$, where

$\mathbf{D}$ is electric induction, $\mathbf{B}$ is magnetic induction, $\mathbf{v}$ is velocity of motion, ε_0 is electric constant.

Herewith the appearing electric induction is always transverse to the direction of motion. It is possible to formulate the rule of origin for electric induction under the condition of rectilinear motion: if to dispose the right hand palm so four fingers shows the motion direction of the magnetic flow (the field), connected with moving magnet, and the vector $\mathbf{B}$ falls into palm, then the moved aside big finger will indicate the direction of vector $\mathbf{D}$. The given rule is like the rule for Lorenz' force, but on the contrary (the difference is in frame). In the first case the charge moves, but the magnet rests. Here the magnet moves, but the charge, which points the direction for lines of force of electric induction, is immovable. So, there it is the rule for left hand, but here, on the contrary, it is the rule for right hand. Thereby, if the charge moves, but the magnet is immovable, then the rule of left hand uses for determination of the force. But if the magnet moves, but the charge rests, then the rule of right hand uses for determination of the force.

The origin of electric force is connected with that, the vortex electric field $D = \epsilon_0 Bv$ appears around moving magnet (the magnetic field does not act on immovable charges).

In common literature on electrodynamics there is no any difference between electric vortex field and solenoidal field, but these are different notions. The sign of solenoidal field is the closed lines of electric induction (the flow of vector D through the closed surface is a zero), but for the vortex field the sign is following: the work of forces can be different from zero under the condition of motion along a closed line. That is to say, the vortex fields can agitate the rotational currents.

From the electrodynamics textbook: "The work of forces of vortex electric field can be different from zero, when the electric charge is moving along a closed line."

For instance, when the magnet moves, the vortex electric field appears and this field can be solenoidal or not, depending on magnet's orientation. Let's take such example: the magnet moves evenly, rectilinearly, and it's poles are oriented transversely to direction of motion. According to the rule of origin for electric induction ($D = \epsilon_0 Bv$ that is the rule of right hand), the appearing vortex electric flow is not a solenoidal, since the lines of electric induction are not closed. Its begins in one conditional area of disturbance (+), accompanies the moving magnet, and it finish in another area of disturbance (-). For presentation it is enough to consider only two areas (+) and (-), represented on Fig.1. These dissimilar areas of disturbance appears because that flow of magnetic induction inside the magnet has the inverse direction, that outside the magnet.

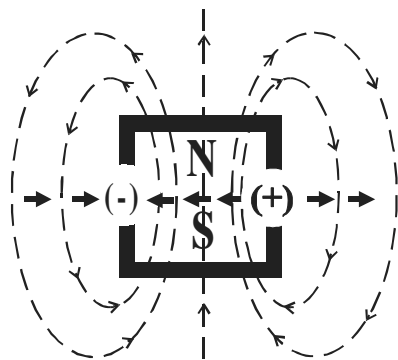


Fig.1




Fig.2

That moving disturbance of electric and magnetic fields presents itself as transverse electromagnetic disturbance. Also, it is necessary to notice, that under such magnet's motion, the appearing vortex electric field is not closed, but the current of electric displacement, connected with it, is closed (a currents are always closed). In given example, for clarity, it is possible to present a intensity of electric field through the Lorenz' force, if to take the frame, in which the magnet rests, and the test charge moves.

On the Fig.1 the moving magnet is conditionally represented (motion is toward to the text, magnet is moving away). N and S are poles of magnet. The direction of lines of electric induction, appearing when the magnet is moving, specified by arrows $\rightarrow$ and $\leftarrow$. Part of the lines begins in positive area (+) and finishes in negative area (-), the areas are placed on the ends of magnet. **The flow of electric induction through closed surface is not a zero; that is to say, these areas of disturbance are moving electric charges.**

From the electrodynamics textbook again: "The flow of vector D through any closed surface is equal to algebraic amount of external charges, covered by this surface. In the electrodynamics these postulates has the same role, as Newton' laws in classical mechanics."

Thereby, according to postulate, it is necessary to consider the appearing dissimilar areas of disturbance (+) and (-) to electric charges, or it is necessary to change the postulate.

It is interesting, that a part of lines of electric induction, which placed frontal and behind magnet, starts and finish at infinity, since the distribution of magnetic induction around magnet has not determined borders.

For clarity, it is possible to make following calculation. For instance, the coil (loop or turn) with current, as a magnet, moves evenly and rectilinearly, but its magnetic poles are oriented transversely on motion direction. Under such motion the lines of electric induction are not closed, and the dissimilar areas of electric field's disturbance appears in space on the edges of this coil.

On Fig.2 the moving coil with current is conditionally represented. It moves from left to right side of the page. The arrows on the coil indicate the direction of current. The appearing dissimilar areas of disturbance of electric field are marked by signs (+) and (-). Knowing, that in medium of the coil $B = \mu_0 I / 2r$ and according to $D = \epsilon_0 Bv$, it is possible to find the electric induction, appearing in the center, between two dissimilar areas $D = \epsilon_0 \mu_0 I v / 2r$, where I is current in the coil, r is radius of the coil, v is velocity of motion, ϵ_0 is electric constant, μ_0 is magnetic constant. The electromagnetic disturbances in transverse electromagnetic waves has the similar field construction, there also dissimilar areas of disturbance of electric field exists, that is to say the lines of electric inductance are not closed. Only the currents of electric displacement and magnetic induction are closed.

Let's consider another example: magnet moves rectilinearly, but its poles are oriented longitudinally to direction of motion. According to the rule for origin of electric induction ($D = \epsilon_0 Bv$ is the rule of right hand), the appearing rotational electric flow is solenoidal, since in this case the inductive lines become closed lines. **Usually in books on the electrodynamics such moving magnet is considered, and the wrong conclusion is thereof done, that vortex electric field is always**

solenoidal, herewith it is forgotten, that poles of the magnet can be oriented not only along the direction of motion, but across also.

From the electrodynamics textbook: "The vortex electric field differs from electrostatic field that it is not related with any electric charges and its lines of intensity are closed lines."

From theory and from experiments it follows, that under transverse motion of magnet the lines of disturbance of vortex electric field can be unclosed and, accordingly, the flow of induction through the closed surface is not a zero. Then there is a direct discrepancy to facts in modern electrodynamics. It is strange, but for the whole history of researches in magnetism the transverse magnet's motion was not considered. It leads to revising of electrodynamics' postulates, which plays such role in electrodynamics, as the Newton's laws plays in classical mechanics. The postulates, giving invalid belief about field processes, accordingly, do not allow to make some correct calculations. Fallaciousness of these postulates was one of the reasons, on which the electrodynamics could not to consider and to calculate the discrete electromagnetic waves (photons), where the magnetic field also is the transverse field (the field construction and calculation of photons are represented on the page <http://www.comail.ru/~alemanov>). **That is to say, not only particles has the charges, but areas of disturbance of field (without particles) are the charges also,** where the flow of electric induction through the closed surface is not a zero. Thereby, the vortex electric fields can be not only as closed flows of induction, but as well as inducted electric charges, accordingly, the laws for electric charges are valid for induced electric charges also. For instance, in the law of conservation of charge: if somewhere the area of disturbance with positive sign appears, that negative area appears also.

From the electrodynamics textbook: "The vortex electric field is generated by the variable magnetic field. Its force

lines are always closed, like force lines of magnetic field."

But before this fundamental postulate, confirming, that force lines of vortex electric field are always closed, it was necessary to consider all variants of change for the magnetic field, including the variant of the transverse motion of the magnet. That is to say, the consideration of physical processes could not be unilateral. Faraday considered the longitudinal motion of magnet and discovered the electromagnetic induction, but the transverse motion of magnet that have the principle importance for understanding of field processes in electrodynamics was not considered. Thereby, the longitudinal motion of magnet brings to arising a vortex electric field with closed force lines, but transverse motion of magnet brings to arising a vortex electric field, where the lines of forces are not closed. In this case it lead to induced electric charges. It is necessary to notice, that this is first mistake, detected in electrodynamics postulates for all time of existence of electrodynamics.

From the electrodynamics textbooks: "...Gauss' theorem is valid not only for electrostatics, but also for electrodynamics, which using a variable in time electromagnetic fields. We are not sure if this hypothesis is valid or it is not valid... Only the experiment can give the answer on this question. The whole collection of experimental facts speaks in favor of this hypothesis." But, unfortunately, the experiment with transverse motion of magnet was not considered seriously in this textbook.

(Editor's note: Well-known Searl's experiments and Godin & Roshchin's experiments are based on such transverse motion of magnets (rollers). In Alemanov's article it was demonstrated that in this case the experiment should lead to induced electric charges. Really it was detected in experiments. Hence this missed aspect of electrodynamics is very important for development of the new energy technologies.)

Gravito-Inert Mass

J.A. Asanbaeva

720000, Kyrgyzstan, Bishkek, Kadyrov's Scientific Center
+996 (312) 47-25-40, +996 (312) 65-02-83
bondarenko@nazaraliev-centre.com

Nature of mass is one of the important problems of modern physics. It is accepted to consider that the mass of elementary particle is determined by fields, which are connected with it (electromagnetic, nuclear and others). However, we didn't create any quantitative theory of mass. There is no theory to explain why masses of elementary particles form a discrete spectrum of values and to allow determining this spectrum.

Mass (m) is a physical value, one of characteristics of matter, which defines its inert and gravitational properties. Accordingly, we distinguish inert mass (m_i) and gravitational mass (m_g).

Inert mass (m_i) characterizes dynamical properties of a body, its property to accelerate under the action of the force ($\vec{F}_i$) and according to the second Newton's law is considered to be constant coefficient of proportionality for the given body between $\vec{F}$ and acceleration $\vec{a}$.

$$\vec{F}_i = m_i \vec{a} \quad (1)$$

Gravitational mass (m_g) is a source of gravity field. Every body creates its gravity field, which is

18. Kozyrev N.A. *Selected Transactions* (Leningrad University Press, Leningrad, 1991) (in Russ.).
19. Lavrent'ev M.M., Eganova I.A., Medvedev V.G., Oleinik V.K., and Fominykh S.F. *On Scanning of Celestial Sphere by Kozyrev's Sensor*. Doklady AN SSSR, 323 (4), p.649-652 (1992) (in Russ.).
20. Akimov A.E., Kovaltchuk G.U., Medvedev B.P., Oleinik V.K., Pugatch A.F. *Preliminary Results of Astronomic Observations of the Sky by the Kozyrev Procedure*. Academy of Sciences of Ukraine, Central Astronomic Observatory. Preprint CAO-92-5P, 1992, p.16 (in Russ.).
21. Oleinik V.P. *Superluminal Transfer of Information in Electrodynamics*. SPIE Material Science and Material Properties for Infrared Optoelectronics. 3890 p. 321-328 (1998) (<http://www.spie.org/>).
22. Oleinik V.P. *Faster-than-Light Transfer of a Signal in Electrodynamics*. Instantaneous Action-at-a-Distance in Modern Physics (Nova Science Publishers, Inc., New York, 1999), p.261-281.
23. Eganova I.A. *The World of Events Reality: Instantaneous Action as a Connection of Events through Time*. Instantaneous Action-at-a-Distance in Modern Physics (Nova Science Publishers, Inc., New York, 1999).
24. Lavrent'ev M.M. and Eganova I.A. *Physical Phenomena Predicted and Revealed by N.A.Kozyrev, in the Light of Adequacy of Space-Time to Physical Reality*. Philosophy of Science, 1(3), p.34-43 (1997) (in Russ.).
25. Logunov A.A. *Lectures in the Theory of Relativity and Gravity*. A Present-Day Analysis of the Problem. (Nauka, Moscow, 1987) (in Russ.).
26. Oleinik V.P. *The Newest Development of Quantum Electrodynamics: Self-Organizing Electron, Superluminal Signals, Dynamical Inhomogeneity of Time*. Physical Vacuum and Nature. 4 p.3-17 (2000) (in Russ.).
27. Jefimenko O.D. *Electromagnetic Retardation and Theory of Relativity* (Electret Scientific Company, Star City, 1997).
28. Oleinik V.P., Borimsky Ju.C., Arepjev Ju.D. *Time, What is this? Dynamical Properties of Time*. Physical Vacuum and Nature. 5 p.65-82 (2001); *New Ideas in Electrodynamics: Physical Properties of Time*. Semiconductor Physics, Quantum Electronics and Optoelectronics. 3 N4 p.558-565 (2000). E-print: quant-ph/0010027.
29. Borimsky Ju.C., Oleinik V.P. *The Course of Time in Classical and Quantum Systems and Dynamical Principle*. Physical Vacuum and Nature. 6 (2001) (in print).

The Principle of Self-Organization, which can be formulated as follows: any material object represents an open self-organizing system whose internal structures are formed with the participation of the whole universe. Apparently, the Principle of Self-Organization, incorporated in nature as one of the integral properties of matter, is nothing more nor less than a spirit (or absolute idea, or creator) which operates the world and creates all its variety.

Physical Mechanism of Nuclear Reactions at Low Energies

V.P. Oleinik* and Yu.D. Arepjev

*Tell me what the electron is,
and I shall explain to you everything else.*

W. Thomson

Abstract

The physical mechanism of nuclear reactions at low energies caused by spatial extension of electron is considered. Nuclear reactions of this type represent intra-electronic processes, more precisely, the processes occurring inside the area of basic localization of electron. Distinctive characteristics of these processes are defined by interaction of the own field produced by electrically charged matter of electron with free nuclei. Heavy nucleus, appearing inside the area of basic localization of electron, is inevitably deformed because of interaction of protons with the adjoining layers of electronic cloud, which may cause nuclear fission. If two or more light nuclei occur "inside" electron, an attractive force will appear between the nuclei that may result in the fusion of nuclei. The intra-electronic mechanism of nuclear reactions is of a universal character. For its realization it is necessary to have merely a sufficiently intensive stream of free electrons, i.e. heavy electric current, and as long as sufficiently a great number of free nuclei. This mechanism may operate only at small

energies of translational motion of the centers of mass of nuclei and electron. Because of the existence of simple mechanism of nuclear reactions at low energies, nuclear reactor turns out to be an atomic delayed-action bomb, which may blow up by virtue of casual reasons, as it has taken place, apparently, in Chernobyl. **The use of cold nuclear reactions for production of energy will provide mankind with cheap, practically inexhaustible, and non-polluting energy sources.**

Introduction

Nuclear reactions at low energies, occurring in physical and biological systems, and, in particular, the cold fusion (CF) of nuclei, attract ever increasing attention (see review articles [1,2]). This is explained by the fact that research on CF (in what follows, by cold fusion we shall understand any nuclear reactions at low energies) opens up the way to the solution of the problem which was set more than 50 years ago in the field of controlled thermonuclear reactions (CTR) and which has not been solved that is the problem to provide mankind with cheap fuel. An important point is that CF allows to create not only cheap, but also non-polluting energy sources, as nuclear reactions at low energies are not accompanied by radiations dangerous to health (γ -radiations, streams of fast neutrons and other particles). Note that the energetic problem facing mankind is presently of special interest in connection with the fact that, according to expert evaluations, the oil-and-gas resources in the world will suffice only for some decades. For this reason the study of CF is among the most important problems of physics.

It is necessary to note that, relying on the standard theory of nuclear reactions describing nuclear processes in vacuum, experts in the field of nuclear physics, engaged in CTR, reject the very possibility of existence of nuclear fusion at low energies. Two basic objections are raised against CF:

1. at low energies the penetrability of Coulomb barrier around nuclei is so small that the probability of nuclear fusion is practically equal to zero;
2. distinction between the atomic and nuclear energy scales is so great that the energy, which might be evolved as a result of nuclear fusion, could not be transferred directly to atomic lattice; therefore the energy above should be emitted in the form of streams of γ -quanta, fast neutrons and other particles. However, such streams of sufficient intensity have not been registered.

The answer to the first objection against existence of CF is that at the heart of CF are nuclear processes occurring in environment, and the basic role is played here, apparently, by collective effects caused by interaction of nuclei with particles of environment in which the nuclear reaction takes place. The laws governing the behavior of interacting nuclei in vacuum are inapplicable to the description of CF of nuclei [3]. Nuclear reactions occurring at low energies submit to completely different laws, which can be established only provided that collective effects mentioned above are taken into account. For this reason the standard theory of nuclear reactions in vacuum can by no means refute the existence of CF.

As to the impossibility of transferring the energy between levels of various scales, we can give an example of the phenomenon of sonoluminescence (luminescence of a liquid when a sound wave causing cavitation passes through it) [4], in which the energy transfer from an acoustic wave to electromagnetic field occurs with appreciable probability in spite of the fact that the distinction between energies of acoustic phonons and quanta of light reaches 11 orders.

As early as 10 years ago J. Schwinger, the Nobel winner and the known expert in the field of the theory of elementary particles and quantum electrodynamics, asserted that it is impossible to deny the reality of CF phenomenon [3,4]. Since then the CF phenomenon for nuclei was repeated hundreds times in laboratories all over the world, tens of patents on the ways of energy generation on the basis of CF were registered and enormous number of experimental works were published, which not only confirmed the existence of effect, but also contained its detailed analysis.

The most convincing evidence for the existence of nuclear reactions at low energies seems to give the mass-spectrometric research of reaction products [5] as well as research on biological systems [6]. Detailed study of electric explosion of foil made of especially pure materials in water, described in [5], suggests that at electric discharges transformation of chemical elements

occurs. Study of optical spectrum of plasma arising at discharge and of the mass-spectrometric analysis of sediments, which remained after the discharge, shows that in plasma there is an appearance of a significant number of chemical elements which were not presented in the initial material of explosive foil and electrodes and also that the isotope structure of the foil material changes appreciably. The change of experimental conditions, for example, of energy contribution in foil, its mass and dimensions results only in redistribution of intensity of plasma spectral lines, i.e. in the change of statistical weight of chemical elements in plasma, but the composition of chemical elements remains unchanged and it essentially depends on the material of foil. As it is seen from the received results, nuclear reactions, which take place at electric discharge, are not accompanied by the occurrence of a neutrons stream and γ -radiation and proceed at low energies of atomic nuclei.

The research mentioned above as well as many others, carried out by different researchers in different laboratories, **allow to draw a conclusion that existence of nuclear reactions at low energies is reliably established.**

The development of research on CF is hampered by the absence of theory of the phenomenon. As noted by Schwinger [3,4], the situation in CF is closely parallel to that one in high-temperature superconductivity: reality of the last, as a result of careful experimental research, is completely established, though theory of the phenomenon is absent till now.

In [5], to account for the transformation of chemical elements, the hypothesis is put forward that at the electric explosion of foil in the plasma channel magnetic monopoles are formed which may overcome the Coulomb barrier even at insignificant kinetic energy due to the great magnitude of their magnetic charge. The monopole, appearing not far from a nucleus, causes its polarization: those nucleons of the nucleus, which are situated more close to the monopole, experience stronger influence of the last, than the nucleons situated on the opposite side of the nucleus. As a result, a deformation of the nucleus arises (the nucleus is lengthened), which may result in nuclear fission.

Obvious drawback of this mechanism of nuclear reactions is that magnetic monopoles have yet to be found out in nature.

Numerous attempts to construct a consistent theory of CF (see reviews [1,2]) have not been crowned with success. As it was noted above, for the CF to be described, the account of the collective effects may be important caused by interaction of nuclei with environment, in which nuclear reaction takes place. But does it suffice to take into account these effects in order that the theory of the phenomenon is constructed? The analysis of the experiments on transformation of chemical elements at low energies and on the CF of nuclei suggests that the discussed phenomenon does

not fall within the domains of exotic ones: it seems to occur in nature constantly, at every step, in both physical and biological systems. Therefore, it is natural to expect that nuclear reactions at low energies should have a simple physical explanation.

However such explanation, which is not beyond the scope of existing representations, is yet to be found. Does not it mean that we are facing here the situation similar to that which has arisen in physics at the end of the 19th century and which has been figuratively described in the words: on the light sky of physics there are only two small dark clouds – the radiation of absolutely black body and the Michelson experiments? Let us remind that in order for these clouds to be removed, it has taken the revision of physical notions about electromagnetic field as well as about space and time.

As is noted in [8], there is a simple physical mechanism of nuclear transformations at low energies which existence follows from the quantum theory of electron as an open self-organizing system [9]. If two or the greater number of light nuclei appear inside free electron, more precisely, inside the area of basic localization of the particle, because of interaction of nuclei with electrically charged matter of electronic cloud, a force of attraction appears between the nuclei which may result in fusion of nucleus. This means that **cold nuclear reaction represents an intra-electronic process** which character is defined by physical properties of the own field produced by electrically charged matter of electron. The purpose of this paper is more detailed consideration of the mechanism above stemming from the spatial extension of electron.

In section 2 physical ideas are formulated and basic results are schematically presented of quantum theory of electron as an open self-organizing system. The theory outlined is necessary to elucidate the origin of the mechanism resulting in the occurrence of nuclear reactions of fusion and fission at low energies. The essence of the developed approach consists in that **the own field created by electron is treated as a congenital, integral physical property of electron, intrinsically inherent in the particle by the very nature of things and for this reason the own field and self-action are included in the definition of the particle** at the initial stage of formulating the theory. As is seen from the received results, electron represents a quantum (elementary excitation) of the field of electrically charged matter. It is a soliton, which physical and geometrical properties are described by the non-linear and non-local dynamical equation similar to the known Dirac equation.

In section 3 the application of quantum model of self-organizing electron to nuclear reactions at low energies is considered. It is noted that because of the presence of simple physical mechanism of nuclear reactions at low energies, which is of a universal character, nuclear reactors represent, in effect, nuclear delayed-action bombs, which from time to time may blow up by virtue

of the casual reasons. Hence, though nuclear stations may provide mankind with energy, however atomic engineering is a very dangerous way of energy production. The only acceptable way of solving the energetic problem consists in the use of nuclear reactions at low energies.

Quantum model of electron as an open self-organizing system

The basis for the standard formulation of quantum electrodynamics (QED) is the hypothesis that electron is a structureless point particle which does not experience self-action. This assumption results in serious difficulties – the divergences of mass and charge of electron and the impossibility to explain stability of the particle (see, for example, [10-12]).

The difficulties mentioned above are very serious. According to Dirac, **the difficulties of QED “in view of their fundamental character can be eliminated only by radical change of the foundations of the theory, probably, radical to the same extent as transition from the Bohr orbits theory to modern quantum mechanics”** ([13], p. 403). “Correct conclusion”, Dirac emphasizes, “is that the basic equations are incorrect. They should be changed in such a way that divergences do not appear at all”.

The main reason of occurrence of difficulties is the assumption that electron is a point-like particle. Therefore, abandonment of this hypothesis is inevitable. As an analysis of the problem shows, the key to constructing a consistent quantum theory of electromagnetism lies in taking account of the Coulomb self-action of electron, i.e. the back action of the own field created by charged particle in environmental space upon the same particle. In the special case that the particle is at rest in an inertial reference frame, own field of the particle turns into static Coulomb field.

E.Schrödinger who suggested the historically first physical interpretation of quantum mechanics put one of the boldest ideas concerning the problem of electron forward. According to Schrödinger's hypothesis, the quantity $e|\Psi(\mathbf{r})|^2$ (e and $\Psi(\mathbf{r})$ are charge and wave function of electron, respectively) is the density of spatial distribution of electron's charge and, consequently, **the linear sizes of electron are the same as those of atom** [14,15]. However, they did not succeed in substantiating the interpretation and, for this reason, it was rejected by the majority of physicists [16].

An important step to the correct understanding of the physical nature of electron was made by A. Barut and by his collaborators [16-18] who formulated and developed quantum theory of electromagnetic processes on the basis of self-energy picture (the Self-Field QED). Using expression for the total own energy of electron, they managed to calculate the Lamb shift and other radiative corrections and to show that radiative phenomena may be described in terms of the

action function, without using the second quantization method. As is pointed out by Barut [17], “the correct quantum equation of motion for radiating electron is not the Dirac or the Schrödinger equation for bare electron, but an equation containing an additional non-linear self-energy term”.

New lines of approach to the problem of electron are offered in [9, 19-24]. The formulation of electrodynamics is considered which represents a synthesis of standard quantum electrodynamics and ideas of the theory of self-organization [25]. The physical mechanism of self-organization of electron consists in self-action. Taking into account the self-action means that electron is treated as a feedback system.

Let us outline schematically the results of the formulation of quantum electrodynamics in which electron is an open self-organizing system.

Editor's note: The authors develop mathematics by using Lagrangian functions, 7 equations. You can contact the authors for more information about.

Thus, the negative result is received: we have tried to take into account self-action of electron in a natural way by supplementing the Lagrangian function with the self-energy term, but we came to an equation that has no reasonable physical solutions at all. This result seems to mean that the standard theoretical scheme reaches here the limits of its applicability and so, remaining in its framework, it is impossible to solve the problem of electron and elucidate the physical nature of electromagnetic interaction.

Essentially new point, which is introduced in [9] into quantum mechanics consists **in the replacement of the model of isolated system described by harmonic oscillator with the model of open system**. Let us advance the arguments indicating the inevitability of using the model of open system as a basis of the description of interaction between microparticles [26].

Note, first of all, that quantum particle theory based on the use of the models of isolated system is, strictly speaking, physically meaningless. Really, any observation conducted on a system represents a process of interaction of the system with the means of observation. But in case of microparticles (quantum particles) this interaction is not weak and consequently it is inadmissible to neglect it, i.e. microparticles should be necessarily considered as essentially non-isolated systems.

A starting point of the standard formulation of quantum mechanics is the physical idea that interaction between physical fields can be reduced to collision of the particles corresponding to these fields, the particles before and after collision being considered as free ones. According to these representations, quantum mechanics is based on the notions of “bare”, non-interacting particles, with the interaction between them being considered as an additional factor which can only

insignificantly alter the physical properties of non-interacting particles. However, such an approach to interaction between physical fields is obviously of an idealized character because particles constantly interact “with vacuum as with some kind of physical medium in which the particles move” [27]. Interaction of particles with vacuum fluctuations is not small and it cannot be removed.

It is well also to bear in mind that the necessary intermediary at studying micro-objects are the means of observations (the devices) with the classical field corresponding to them which should be taken into account in consistent quantum theory [28]. Inclusion in theoretical scheme of arbitrarily weak classical external field results in occurrence of non-zero width Γ of energy levels of “dressed” particles. The basic impossibility to isolate a real particle from vacuum fluctuations of the field and from the classical sources connected to the means of observation is indicative, thus, of necessity to take into account the non-zero width of energy levels of real particles [26].

The use of the harmonic oscillator model, when describing the interaction of electromagnetic radiation with substance, seems to be the main source of serious difficulties of the standard formulation of quantum theory, as such an approach means apparent neglect of those physical processes which, proceeding constantly, are responsible for inseparable coupling of real physical system to surrounding medium. Introducing artificial notion about switching on and switching out of interaction of oscillator with radiation field, we are able to calculate within the framework of existing theory the width of energy levels of oscillator, but we cannot assert with certainty that such an approach results in correct description of interaction.

From the reasoning given above it is seen that they are the models with energy levels of non-zero width that should form the basis for the description of interaction of radiation with substance. It is necessary to formulate such a quantum theory, which would take into account the energy levels of non-zero width Γ . The case in point is that one should introduce an infinitesimal damping Γ into the initial set of equations describing interaction of charged particles with electromagnetic field. Such an approach means the violation in infinitesimal of homogeneity of physical system relative to translations in time. Necessity of violating the homogeneity of time follows from that fact that in the usual approach (with $\Gamma = 0$) the states of the system of interacting fields have degeneracy of infinitely large multiplicity in relation to time translations. According to the fundamental Bogoliubov's concept of quasi-averages [29], when describing the behavior of degenerate systems, one should include into Hamiltonian an infinitesimal term removing degeneracy. In the theory presented here degeneracy of states of quantized fields relative translations in time is removed by introducing the infinitesimal damping Γ into Lagrangian. Thereby the degeneracy under study is removed already in the initial, zero-order approximation, which is of

fundamental importance for the approach based on perturbation theory.

Formulation of the physical idea that quantum friction arises at the very elementary level - at the level of one particle is given in monograph [26]. Impossibility to isolate real particle from the surrounding world is that property which should be taken into account already in the one-particle theory (for each kind of particles), even before switching on the interaction with other particles. Model of the particle as an open system ($\Gamma \neq 0$) is attractive owing to the fact that from the very beginning the degeneracy of states relative to time translations is absent in it, the degeneracy, which is removed in standard approach by taking into account the interaction of particle with vacuum field fluctuations and classical fields. The basis for the developed formulation is the fundamental concept of quasi-averages supplemented with the requirement that the equations of motion of the particle with $\Gamma \neq 0$ follow from the action principle. It should be emphasized that the non-zero damping Γ is introduced into electrodynamics with the aim to establish the structure of the Lagrangian function, which takes into account the property of openness of physical system. After establishing the structure, the limiting transition $\Gamma \rightarrow 0$ is fulfilled.

In our opinion, the development of quantum theory will be inevitably connected with the use of models of open system; as such models reflect more completely the physical essence of interrelations in the real world. It is necessary, thus, to define more exactly the concept of openness of physical system, which, on the one hand, would describe real system accurately enough and, on the other, would be simple enough to describe the particular physical processes.

As open system has the richer physical contents in comparison with isolated system, some essentially new mathematical ideas are needed for its description. First of all, it is necessary to increase the number of independent dynamical variables describing the particle as open system. In papers [9,19-24], as a basis for the description of self-acting electron, the simplest model of open system is used which can be described by the Morse-Feshbach-Bateman Lagrangian function [30,31] and which was successfully used for the description of dispersive medium (the review of articles, in which applications of the model of open system to electrodynamics of dispersive medium are considered, is given in monograph [26]). In this model the number of dynamical variables is doubled as compared with the isolated system, namely, to each dynamical variable of "bare" particle, Ψ , there correspond two dynamical variables, which are denoted by Ψ and $\tilde{\Psi}$. These quantities are considered as components of the wave function describing the quantum state of self-acting particle. One of them, say, Ψ , corresponds in a sense to the particle alone (to the "bare" particle) and the

other, $\tilde{\Psi}$, to the surrounding medium, in which the particle moves.

Editor's note: You can contact the authors directly for more information (8-16 equations).

Equation (16) coincides in its appearance with the usual Dirac equation for charged particle in an external field described by 4-potential. However, in reality, it differs essentially from Dirac's equation. The distinction consists in that **equation (16) is non-linear and non-local**, with the non-locality being of both spatial and time character. Potential ($A_{||}$) and vortex ($A_{\perp}$) components of the 4-potential, entering equation (16), differ from each other by their physical nature: the former describes the Coulomb field and is expressed quadratically in terms of the wave function components of electron, and the latter describes transverse electromagnetic waves and is expressed in terms of vortex electromagnetic field. As a detailed analysis shows, solutions to the basic dynamical equation describe the clots of self-acting electrically charged matter, localized in space, i.e. the particle is a soliton.

The internal energy spectrum of electron is discrete with an indefinitely large number of levels, and to each value of internal energy E_k (k is the set of quantum numbers) there correspond certain linear dimensions and geometrical form of the region of localization of electron's charge. Dimensions and the number of extreme of wave function increase with increasing the value of energy E_k . The distribution of electric charge of atomic electron in the ground state consists of the range of basic localization with the linear dimensions of the order of Bohr radius a_0 ($a_0 \sim 10^{-10}m$) and of the tail stretching up to infinity. It is essential that because of non-linearity of the dynamical equation of electron, wave function does not obey the superposition principle. By virtue of this, electron acquires the properties of absolutely rigid body: the perturbation acting on electron at an instant of time in the range of basic localization becomes known at the next instant $t + 0$ at any distance from the particle.

In Fig. 1 the results of calculation are represented schematically, carried out on the basis of equation (13), of the distribution of electric charge in atomic and free electrons in the ground (a) and first excited (b) states.

According to [9,19], the atom represents a system of nuclear and electronic solitons interacting with each other, the internal energy spectrum of the hydrogen atom, due to electromagnetic interaction, being of a zoned character. The occurrence of zoned structure of energy spectrum of hydrogen atom is explained as follows. Free nucleus, because of existence of Coulomb self-action, has a discrete internal energy spectrum. As the interaction of nucleus with electron is small in comparison with the energy of Coulomb self-action of the nucleus, it can be taken into account by perturbation theory. From here it follows at once that each energy

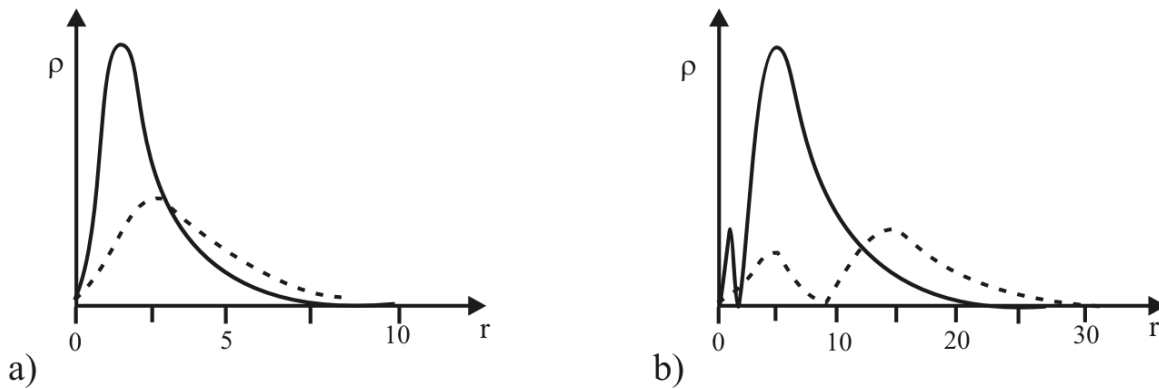


Fig. 1. Density of electric charge (ρ) of electron in the ground state (a) and in the first excited state (b): the continuous lines correspond to electron in the hydrogen atom, and the dotted ones to free electron, r is the distance from the center of mass of electron measured in Bohr radii.

level of free nucleus is split in a zone. There are indefinitely many zones (Balmer's replicas) and in each of them there are indefinitely many energy levels. The lowest zone coincides with the usual Balmer spectrum.

Physical mechanism of nuclear reactions at low energies

The quantum theory presented above schematically of electron as an open self-organizing system is indicative of the existence of the following mechanism of nuclear reactions at low energies [8].

If there occur in the region of basic localization of free electron, which linear sizes in the ground state of the particle are several times as large as those for hydrogen atom (see Fig. 1), two or the greater number of nuclei, each of them attracts on itself the adjoining areas of electronic cloud, resulting in compression of the electronic cloud as a whole. As a result, there appears automatically an attraction of the nuclei, which proved to be "inside" electron, on each other (see Fig. 2).

Calculation shows that the Coulomb barrier around nuclei is deformed, its height decreases and the probability of penetration through the barrier

accordingly increases due to tunnel transition. Under certain conditions this process may result in fusion of nuclei. Obviously, the process in question can occur only at small energies of translational motion of the centers of mass of electron and nuclei: nuclei should be "inside" electron long enough for them to have time to come nearer to each other as a result of electron-nuclear interaction. This mechanism of nuclear fusion is of a universal character. In order for it to be realized, it is necessary to have only a stream of free electrons intensive enough, i.e. heavy electric current, and as long as sufficiently great number of free nuclei.

If heavy nuclei appear "inside" free electron, owing to their interaction with the electronic cloud there occurs polarization of nuclei. Because the own field of electron interacts with protons more strongly than with neutrons, nuclei are deformed (become extended), and this process may result in the decomposition of nuclei to fragments (in nuclear fission).

As is noted in [7], the official version of the reasons for Chernobyl accident contains serious contradictions, a number of facts concerning the accident has no convincing explanations, and this circumstance forces to search for the true reasons for the happening, since

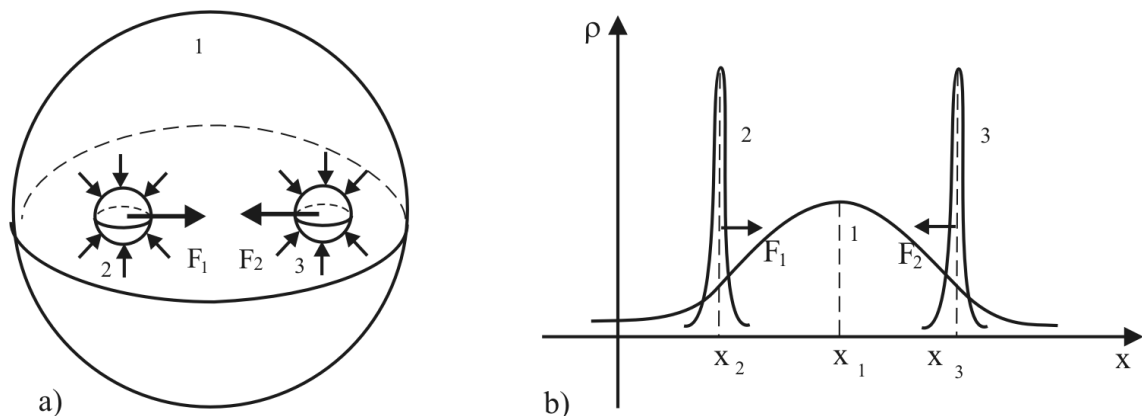


Fig. 2.

The schematic image of interaction of nuclei with electronic cloud: (a) 1 is the region of basic localization of electron, 2 and 3 are nuclei, F_1 and F_2 are the attractive forces between nuclei, which appear at the expense of electronic cloud compression induced by Coulomb forces; (b) ρ is the charge density, 1 is electronic soliton, 2 and 3 are nuclear solitons, x_n ($n=1, 2, 3$) are coordinates of the centers of mass of particles.

“not having understood the mechanism of the one tragedy, we sooner or later shall become witnesses of the other”. The authors hypothesize that the reason of the accident was penetration into the nuclear reactor of magnetic monopoles, which have caused the decay of nuclei ^{238}U , and this has resulted in production of delayed neutrons, growth of power output of the reactor and explosion. As an argument in favor of the assumption, the fact is presented that nucleus ^{238}U are disintegrated under the action of “strange” radiation appearing at explosion of foil.

In the opinion of the authors of [5,7], “strange” radiation is created by those magnetic monopoles, which form bound states with nuclei of atoms. These compound particles give the abnormally wide tracks similar to those of a creeping caterpillar, and also the tracks of complicated shape reminiscent of spirals and gratings. Character of tracks changes when imposing magnetic field, which, as the authors believe, is an argument in favor of the assumption above. There are also some special tracks very similar to scratches and ink spots. “Strange” radiation is of spherical form, it resembles a ball lightning, and its duration is more than ten times as great as that of the current pulse arising at electric discharge. With the course of time the luminous sphere (the ball-like plasma formation) is dividing into many small “balls”.

It is our opinion that “strange” radiation is caused by free electrons in excited state arising in the area of electric discharge. According to [9, 19], linear sizes of the region of basic localization of such electrons can make many tens of sizes of atom. The heavy nucleus, for example, the nucleus ^{238}U , appearing inside the electronic cloud, is inevitably deformed because of interaction of protons with adjoining layers in the distribution of electric charge of electron, and this deformation can cause nuclear fission. If two or the greater number of light nuclei appears “inside” electron, then attractive forces arise between nuclei, which may result in fusion reaction. When electric discharge is strong enough, the areas of basic localization of some electrons can overlap, and if a nucleus lands in the area of overlap, because of Coulomb attraction of nucleus on the adjoining layers of electronic clouds, a bound state may be formed, of two electrons and the nucleus, characterized by the relative stability and significant spatial extension.

Obviously, if the concentration of free electrons is great enough, there may be formed some relatively stable bunch of plasma consisting of great number of free electrons and nuclei, which in virtue of chaotic movement of nuclei and because of the absence of preferred directions should have approximately spherical form. Let us note that atomic electrons, belonging to additional energy zones of atom (Balmer's replicas associated with nuclear self-action, see Section 2) can contribute to “strange” radiation.

As is seen from above, to account for the reasons for Chernobyl accident, there is no need to involve

magnetic monopoles. The scenario of development of events during the accident, described in [7], seems to be quite plausible if only to understand by initiators of nuclear fission not hypothetical monopoles but free electrons, which powerful pulse might arise as a result of electric discharge in the region of turbo-generators.

The existence of simple physical mechanism of nuclear reactions at low energies, indicated in this paper, implies that nuclear reactors are, in effect, nuclear delayed-action bombs, which will blow up from time to time. Explosion of nuclear reactor may take place because of casual short circuit at an electric subcircuit, owing to which there appears an intensive stream of free electrons. This stream, having got for any reasons in nuclear reactor, may initiate explosion of the reactor. It follows from here that though nuclear stations may provide mankind with cheap energy, atomic energetics represents a very dangerous way of producing energy (as well as the energetics using controlled thermonuclear fusion). The only acceptable way of resolving the energetic problem consists in the use of nuclear reactions at low energies.

According to the results obtained, nuclear reactions at low temperatures occur “inside” electron under the action of own field of particle. Hence, to elucidate physical mechanism of CF, it is necessary to study in detail intra-electronic processes and physical properties of own fields of particles. Note that the own field, by its physical properties, essentially differs from the field of electromagnetic waves: this is the field of standing waves of matter, it is of purely classical character and may not be reduced to the set of photons. The own field of charged particle plays in nature a special role, consisting in that it transforms environmental space into the physical environment (physical vacuum) with the properties of absolutely rigid body [32].

As it was repeatedly noted in the literature [1,2], experiments on CF are badly reproduced, and this fact gives rise to doubt the very existence of the phenomenon. Bad reproducibility of results seems to be explained by the fact that CF depends upon great number of parameters: upon electric current density, concentration of free nucleus, concentration of impurities and dislocations in samples, sizes of samples etc. In order to obtain reproducibility of results, it is necessary that all these parameters, describing the environment in which nuclear reactions occur, be the same in various experiments, but to achieve this as a difficult task.

In conclusion we shall dwell upon the problem of linear dimensions of electron, which is of special interest in connection with the mechanism of nuclear reactions indicated here. The inference that the dimensions of electron in the ground state of atom are of the order of Bohr radius, i.e. of the order of atomic dimensions, following from dimension considerations [9,19] and confirmed by quantum model of electron, seems completely unexpected. At first sight, it is in conflict with both the theory of quarks and experimental data

on scattering of electrons. According to quark models, the radius of electron corresponding to its quark structure makes up the quantity of the order of 10^{-22} m [33]. It is necessary to emphasize, however, that the above-mentioned magnitude of linear dimensions of electron refers to the internal structure induced by Coulomb field. The last is long-distance and consequently the linear dimensions of internal structures produced by it (i.e. spatial inhomogeneities in the distribution of electric charge in various quantum states) should considerably exceed the dimensions of quark structures connected with electron. There seems to exist a hierarchy of internal structures of particle produced by Coulomb forces, nuclear forces, inter-quark interactions etc. characterized by the smaller and smaller linear sizes.

As to the experiments on scattering of high energy electrons, according to which the internal structure of electron is not manifested up to distances of the order of $10^{-16} \div 10^{-17}$ m, two arguments, at least, can be adduced in favor of that there is no contradiction here with the experiment. Firstly, in experiments on scattering, investigators were trying to register the details of internal structure of electron within intervals much smaller than Bohr radius, which is why it is not surprising that results of experiments proved to be negative: at high energies electrons behave like point particles, their internal structure has no time to be manifested. Secondly, the results of experiments were analyzed from the point of view of standard representations about electron, which refer to a point particle, but are obviously inapplicable to real, self-acting electron. According to the predictions of quantum theory of electron as an open self-organizing system, real electron is a special object - soliton, i.e. such a cloud of electrically charged substance which, when interacting with other particles, tends to keep its sizes and geometrical form.

At present there is as yet no scattering theory of this kind of particles and for this reason it is impossible to predict with certainty how can the internal structure of electron be manifested in experiments on scattering.

References

1. Storms E. A *Critical Review of the "Cold Fusion" Effect*. J. Sci. Explor., **10**, #2, p.185 (1996). See also: <http://www.jse.com/storms/1.html>
2. Storms E. *Cold Fusion Revisited*. Infinite Energy, **4**, #21, p.16(1998).
3. Schwinger J. *Cold Fusion: A Hypothesis*. Z. Nat. Forsch. A **45**, 756 (1990); *Cold Fusion: A Brief History of Mine*. Infinite Energy, **1**, #1, p.10 (1995).
4. Schwinger J. *Nuclear Energy in an Atomic Lattice I*. Z. Phys. D15, 221 (1990); Prog. Theor. Phys. **85**, 711 (1991); *Energy Transfer in Cold Fusion and Sonoluminescence*. <http://www.geocities.com/CapeCanaveral/Lab/4520/theory.htm>
5. Urutskoev L. I., Liksonov V. I., Tsinoev V. G. *Experimental Detection of "Strange" Radiation and Transformation of Chemical Elements*. Applied Physics, M., 2000, p.83-100. Urutskoev L.I., Liksonov V.I., Tsinoev V.G. *Observation of Transformation of Chemical Elements During Electric Discharge* <http://arxiv.org/ftp/physics/papers/0101/0101089.pdf>
6. Vysotskii, V. I., Kornilova A. A., and Samoylenko I. I. *Experimental Discovery of Phenomenon of Low-Energy Nuclear Transformation of Isotopes (Mn55=Fe57) in Growing Biological Cultures*. The Sixth International Conference on Cold Fusion, Progress in New Hydrogen Energy (Ed. M. Okamoto) Oct. 13-18, 1996, Hokkaido, Japan, Vol. 2, p. 687; Infinite Energy, **2**, #10, p.63 (1996).
7. Urutskoev L.I., Geras'ko V.N. *On the Possible Mechanism of Chernobyl Accident*. http://www.recom.hotmail.ru/CHER_INC_1.doc
8. Oleinik V.P. *To Electronic Technologies of the 21st Century: on the Threshold of Revolution in Communication Systems*. Collection of Reports, Millenium 2002, International Conference "To Innovations in the 21st Century", Odessa, April 13, 2002, p.268-273.
9. Oleinik V.P. *The Problem of Electron and Superluminal Signals*. (Contemporary Fundamental Physics) (Nova Science Publishers, Inc., Huntington, New York, 2001).
10. Berestetsky V.B., Lifshits E.M., Pitaevsky L.P. *Relativistic Quantum Theory*, part 1. (Moscow, Nauka, 1968).
11. Medvedev B.V. *Foundations of Theoretical Physics*. (Moscow, Nauka, 1977).
12. Dirac P.A.M. *Relativistic Wave Equation of Electron*. Progress in Phys. Sciences, **129**, #4, p.681-691 (1979).
13. Dirac P.A.M. *The Principles of Quantum Mechanics*. (Moscow, Nauka, 1979).
14. Schrödinger E. *Quantisierung als Eigenwertproblem*. Vierte Mitteilung. Ann. der Physik, Bd. **81**, S.109-139 (1926).
15. Schrodinger E. *Selected Works on Quantum Mechanics*, Edited by Polak L.S. (Moscow, Nauka, 1976).
16. Barut A.O. *Schrodinger's Interpretation of as a Continuous Charge Distribution*. Ann. der Physik, Bd. **45**, S.31-36 (1988).
17. Barut A.O., van Huele J.F. *Quantum Electrodynamics Based on Self-Energy: Lamb Shift and Spontaneous Emission without Field Quantization*. Phys.Rev., **A32**, #6, p.3187-3195 (1985).
18. Barut A.O., Dowling J.P. *Quantum Electrodynamics Based on Self-Energy: Spontaneous Emission in Cavities*. Phys.Rev., **A36**, #2, p.649-654 (1987).
19. Arepjev Yu.D., Buts A.Yu., Oleinik V.P. *To the Problem of Internal Structure of Electrically Charged Particles. Spectra of Internal Energy and Charge Distribution for the Free Electron and Hydrogen Atom*. Preprint of the Inst. of Semiconductors of Ukraine, N8-91 (Kiev, 1991) 36 p.(in Russ.).
20. Oleinik V.P. *Quantum Electrodynamics Describing the Internal Structure of Electron*. Quantum Electronics. #44, p.51-59 (1993) (in Russ.).
21. Oleinik V.P. *To the Theory of the Internal Structure of Electron. Second Quantization and Energy Relations*. Quantum Electronics. #45, p.57-79 (1993) (in Russ.).
22. Oleinik V.P. *Quantum Theory of Self-Organizing Electrically Charged Particles. Soliton Model of Electron*. Proceedings of the NATO-ASI "Electron Theory and Quantum Electrodynamics. 100 Years Later." (Plenum Press, N.-Y., London, Washington, D.C., Boston, 1997), p.261-278.
23. Oleinik V.P. *Nonlinear Quantum Dynamical Equation for the Self-Acting Electron*. J. Nonlinear Math. Phys. **4**, #1-2, p.180-189 (1997).
24. Oleinik V.P. *Quantum Equation for the Self-Organizing Electron*. Photon and Poincare Group (Nova Science Publishers, New York, Inc., 1999), p.188-200.
25. Nicolis G., Prigogine I. *Self-Organization in Non-Equilibrium Systems* (Wiley-Interscience, 1977).
26. Oleinik V.P., Belousov I.V. *The Problems of Quantum Electrodynamics of Vacuum, Dispersive Media and Intense Fields*. (Kishinev, Shtiintsa, 1983).
27. Bogoliubov N.N., Shirkov D.V. *Introduction to the Theory of Quantized Fields*. (Moscow, Nauka, 1976).
28. Bohr N. *Selected Scientific Works*, V.2. (Moscow, Nauka, 1971).
29. Bogoliubov N.N. *Quasi-Averages in the Problems of Statistical Mechanics*. In the Book: Statistical Physics and Quantum Field Theory. (Moscow, Nauka, 1973).
30. Morse P.M., Feshbach H. *Methods of Theoretical Physics*, V.1. (Moscow, Foreign Literature, 1958).
31. Dakker H. *Classical and Quantum Mechanics of the Damped Harmonic Oscillator*. Phys. Reports, **80**, # 1, p.1-112 (1981).
32. Oleinik V.P. *Superluminal Signals, the Physical Properties of Time, and the Principle of Self-Organization*. Physics of Consciences and Life, Cosmology and Astrophysics, #1, p.68-76 (2001).
33. Dehmelt H. *Experiments with an Isolated Subatomic Particle at Rest*. Progress in Phys. Sciences, **160**, #12, p.129-139 (1990).

The Evolution of Lifter Technology

Tim Ventura

tventura6@attbi.com

INTRODUCTION

Readers of the electric-spacecraft journal might know a little about the Lifter technology popularized recently by Jean-Louis Naudin, but they probably don't know the whole story. In the short amount of time that has transpired since the publication of that article, this technology has both literally and figuratively taken off – going from a “proof-of-concept” prototype by Naudin to an international group of researchers investigating how to give the lifter higher-performance and greater efficiency. With the first commercial products now on the horizon, if you haven't taken the time to read up on lifter technology, this is the perfect time to do so. . .

To give you a complete up-to-date overview of where this technology is, where it is going, and what I think it is capable of, let me start with the basics – an overview of how I became involved with Electrogravity research and what eventually led me to become involved with lifter technology.

MY BACKGROUND

I started college at 16 years old, back in 1992 – at the same time, I purchased a kit containing “hoverboard plans” from Hovertech, Inc. The moment that I received that \$20 white-manilla envelope in October 1992 was the moment that I became involved with what has now been nearly 10 years of electrogravity research.

I worked with Bill Butler – the president and chief-scientist of Hovertech – on a variety of different antigravity, Electrogravity, and levitation ideas from approximately 1992 through 1996. While putting in my college time, I was also taking distinct advantage of the enormous college library at Western Washington University to read up on everything that might possibly relate to Electrogravity. I read books on standard electronics and physics theory alongside with books by the masters of this science, such as T.T. Brown and Nikola Tesla.

Bill and I played with several different ideas – many of them only peripherally related to Electrogravity. For instance, I published a manuscript initially in 1996 describing Tesla's theory on how to reliably produce Ball-Lightning using a standard Tesla coil – the information courtesy of WWU's excellent library. Bill also assisted me with obtaining video footage of a Searl-effect conference that he attended in Denver in the early 90's – this footage was an excellent overview of Searl's design and construction concepts for what he believes is the next major technological step in aviation and space travel.

Bill and I eventually found different paths, and in some ways drifted apart. Bill moved into Geomagnetic levitation research and started intense investigation on the patents of How Wachspress and the magnetic dipole levitator. I went to more traditional technologies – eventually becoming a UNIX system administrator for AT&T Wireless.

I hadn't heard from Bill Butler in about 6 months when he sent me a short email containing the words “hey, check this out” – and a link to Jean-Louis Naudin's “Lifter Experiments” home-page. I visited the site, watched all of the video clips, and then watched them again. This was the technology that I had been waiting for!

LIFTER TECHNOLOGY

I can say without a doubt that the lifter technology is completely revolutionary, but you might not realize how profoundly revolutionary it is until you've stopped to think about it for a bit. What is it about the lifter that makes it so unique, especially when so many inventions claim to produce more and better electromagnetic thrust? The answer is simple – the lifter works repeatedly.

Jean-Louis Naudin started a figurative bonfire when he decided to replicate a “proof-of-concept” experiment by a small Huntsville, AL aerospace contracting firm. The lifter initially came into being in the mind of Jeff Cameron – the chief scientist of Transdimensional Technologies – in the 1970's from experiments conducted with high-power military and research-grade lasers. A device in the lasers called a “pre-ionizer” was used to apply a high-voltage to the lasing-medium to facilitate better performance. Repeated operation of the pre-ionizer had a common side-effect of horribly twisting the wire and foil combination out of shape, which required a decent amount of work to repair.

Jeff Cameron realized that the torsional effect on the pre-ionizer was a side-effect of some unknown force acting on the pre-ionizer apparatus, and he began a long-term investigation into what was causing the apparatus to deform. His eventual results indicated that a force in the foil collector in the pre-ionizer was causing a net-thrust in the entire pre-ionizer apparatus that was making it twist and move on its mounts within the laser – the lifter came to him later as a three-dimensional device to demonstrate this force.

Naudin's genius became readily apparent not through a giant breakthrough in technology, but rather in a more subtle fashion – he replicated the lifter experiments of Transdimensional Technologies and published videos, articles, and complete construction plans on his website to allow others to do the same. In a manner similar to the open-source software movement, Naudin had taken an incredible scientific find that might have otherwise been overlooked and done and incredibly charitable and intelligent thing – he gave it away for others to play with. By following Naudin's instructions, inventors all over the globe began to slowly replicate the

Transdimensional Technologies experiments and thereby validate the proof of concept that Jeff Cameron had created to show that his “mystery force” was real after all. Naudin of course took advantage of these replications of the experiment by showcasing them on his own website – which in turn lends additional credibility to his research.

As far as technology goes, the lifter demonstrates that science and engineering have more than their share of humorous irony. For the years that I researched Electrogravity and antigravity claims, all of the devices that I had seen required something “magic” to make them work. For instance, Bob Lazar’s UFO-claims could have been reverse-engineered except that they require ‘element 115’ to make them work – an element chemically related to Bismuth that is theorized to potentially have electrogravitic properties. I will come back to the possible electro-gravitational properties of Bismuth in a bit, as it turns out that this element may in fact provide some use for future lifter technology.

The Searl-effect disc is an even better example of the “magic” usually involved with building a working Electrogravity device. Searl’s ideas seem valid enough, but although he supposedly demonstrated several working prototypes in the 1950’s, he is currently pursuing millions of dollars in research funding in to replicate those experiments in a modern-day setting.

The irony involving lifter technology is that while inventors all over the world have been searching for the perfect electro-gravitational device for decades, the possible working proof of concept for many of these theories has been sitting in front of us the whole time – the lifter costs less than \$10 in parts to build, and none of them are magic – in fact, for my experiments, all of them were at stores within 2 blocks of my house — balsa wood from the craft store, aluminum foil from the supermarket, 30-gauge magnet wire from the local Radio Shack, and an old computer monitor for the high-voltage power-supply.

LIFTER PHYSICS

Whether or not Jeff Cameron knew it at the time he constructed his lifter prototype, what he was actually building was a 3 dimensional representation of a drawing on a patent application by TT Brown in the 1950’s. In the patent application, the drawing shows a positively charged wire suspended over a grounded foil body which was meant to demonstrate the most basic Biefeld-Brown effect generator. While Brown’s drawing is a little different than Jeff’s design, the resemblance is uncanny enough to indicate that both of these men had the same basic force in mind.

TT Brown’s patent indicates that this Biefeld-Brown effect generator works due to a gradient electrostatic-field between the wire and the foil – in essence, these two elements compose a low-efficiency, high-voltage air-gap capacitor in which the difference in geometries between the two capacitive elements generates a net-

directional force from the larger element towards the smaller element. Jeff Cameron seems to have a practical axiom that goes along with this scientific philosophy, which is that there must be both a leakage current and a capacitance between the wire and the foil in order for the lifter to function.

Conventional physics says that two capacitor elements of different sizes will not generate a net-directional force, so what gives? This is actually the thinking that convinced me to abandon my research into Biefeld-Brown effect technology in 1996 – physics says it doesn’t work. What the books say will happen is that since the wire can only maintain a lower-capacitance than the foil, the overall capacitance between the two elements will be reduced to be equivalent to that on the smallest element (or plate) in the capacitor. This, of course, assumes a 2-element series-wired capacitor, such as the lifter.

I can give you the conventional physics answer to this small riddle by simply saying that the lifter uses a manifestation of ion-wind. This would state that the electrons crossing the air-gap cause a breeze that causes thrust – since the breeze would be traveling down from the wire to the foil, the thrust would be up, as demonstrated in testing. In the ion-wind explanation, the electrons are emitted from small-diameter of the positively charged wire in such great abundance that they move a significant airflow down to the foil where they are absorbed and transported electrically back to the HV power-supply’s electrical ground.

Conventional physics would seem to have the theoretical answer to why the lifter causes lift, but in the experimental setting, which is what we now have an abundance of thanks to Jean-Louis Naudin, the conventional physics explanation doesn’t suffice. Experimentally, there are several deviations from the ion-wind explanation that seem to invalidate it. For instance, if you completely contain the lifter in a plastic-enclosure, it will still generate lift – this would not be the case if a breeze was responsible for lifting the device. How could it be, if the breeze is limited to the inside of an enclosure which itself is levitating?

A more compelling proof that Biefeld-Brown is something other than ion-wind comes from Purdue University, where the lifter experiment was replicated inside a vacuum-enclosure with positive results. While ion-propulsion can work in space, it usually assumes that there is argon, krypton, or other noble gas to be used as the propellant – the vacuum enclosure showed that with no gas available for transport the lifter showed a moderate improvement in performance.

The vacuum enclosure tests are definitely compelling evidence that something else is going on other than ion-wind – at least compelling enough for NASA to file patent number 6,317,310 – “Apparatus and Method for Generating Thrust using a Two Dimensional, Asymmetrical Capacitor Module”. The NASA patent description – which can be accessed from Naudin’s lifter

website – is as vague as it is compelling in that NASA is basically requesting a patent on any technology that generates force using two geometrically dissimilar capacitive plates. Disregarding the fact that this patent was issued nearly 50 years after T.T. Brown's patent using nearly identical descriptions and pictures, and also disregarding the fact that NASA also doesn't understand why the lifter generates thrust, it seems apparent that this phenomena is gaining credibility in engineering circles while physicists seemingly continue to deny that anything is going on.

THE EVOLUTION OF LIFTER TECHNOLOGY

Every good movie always has a sequel, and in technology, if at first a major government agency 'liberates' your idea, it may seem that a sequel is in order. In the case of the lifter, it would appear that the NASA patent would cover this technology to at least some degree – at least until someone overturns this patent under the prior-art rule – which means that the next generation has to be considerably more advanced to escape having the research and development be forfeit to the government.

The pursuit of more advanced versions of the lifter technology is currently underway by several independent inventors, as well as Transdimensional Technologies themselves. Most of the private research by inventors has delved into improving the current lifter design to produce a greater force output and utilize less power to do so. Because the lifter is so simplistic in design, many of these enhancements have been of a very basic nature.

Jean-Louis Naudin was the first independent inventor to do serious work with improving the technology behind the lifter – and even so, the majority of his work has utilized similar materials in more complex arrangements. Naudin has demonstrated dramatically increased lifting forces by building a “lifter inside a lifter” for demonstration purposes. Naudin has also done a great deal of work in taking breaking up the concept of the single triangular lifter into a parallel series of lifting cells – which means that these cells, working in parallel, can contribute to greater stability and higher force output than any single lifting element.

Saviour – an independent inventor working with Jean-Louis Naudin – has done some of the most interesting improvements on lifter design since those by Naudin himself. Saviour's concerns have not focused around the “bigger is better” philosophy that many inventors have stuck by – he has done several experiments to determine the radiation output, remote-controlled applications development, and materials analysis and improvement on the lifter that others have not had the time or expertise to conduct.

A recent experiment by Saviour demonstrates just how this gentleman's foresight is helping other experimenters – Saviour substituted nichrome heating wire for the common lightweight wire used for the emitter, and demonstrated that the lifting force greatly

increased when a higher potential 12-volt charge was used to heat the emitter wire in conjunction with the standard high-voltage charge coming off it.

Transdimensional Technologies – the developers of the initial lifter design – are taking the approach to optimizing lifter performance to another level. They are currently not-so-secretly working on a 2nd generation lifter, which will consist of a 1-piece layered material to replace the current wire and foil design.

The layered material approach to the lifter is an idea that Jeff Cameron may or may not have had after some lengthy discussions with Travis Taylor – the man responsible for testing some anomalous materials known as “Art's Parts”.

Art's Parts were some pieces of material sent by an unknown person to the Art Bell radio talk-show with a note stating that they were pieces of UFO wreckage taken from the often-cited “Roswell crash” in 1947. Whether or not the pieces of material actually came from that crash is unknown, but Art Bell did the honorable thing by sending them to an acquaintance in US Army research named Travis Taylor for a professional scientific investigation.

Taylor, who apparently tested the materials after-hours in a world-class research lab to avoid potential classification by his superiors, used an electron-microscope to determine that the layered materials were actually pieces of metal – containing several hundred microscopically thin layers of magnesium and bismuth. Taylor also tested the layered-metal with a high-voltage apparatus, which seemed to indicate that when a voltage was applied to the material, the layered metal would move – and in some cases levitate.

Taylor reported his findings to Art Bell and sent video clips of his high-voltage experiments, which eventually made it back to a permanent home on the Art Bell radio show website. In addition, Taylor conveyed his belief that the only manner in which the pieces of metal could properly be produced was through an advanced form of electron-deposition technology, due (apparently) to an absence of oxygen-molecules between the different layers of metals. Additionally, the layers of metal were too thin to have been mechanically produced.

Jeff Cameron indicated that Transdimensional Technologies maintained some contact at one point in time with Travis Taylor, apparently as professional colleagues in the defense community in Huntsville, AL. I am not an expert on this relationship, other than to say that to the best of my knowledge these two individuals knew and contacted each other, and that this is how Jeff Cameron might have come up with the 2nd generation lifter idea.

ADVANCED LIFTER TECHNOLOGY

As an inventor, I couldn't care less whether or not the idea for the technology came from a crashed UFO. To be perfectly honest, I'm not what you would call a “believer” anyways, although I have often wondered

about it. My point is not to attempt to lend any credibility to "Art's Parts", but rather to tie in the properties of the anomalous material's high-voltage movement with the underlying theory of lifter operation.

Even mentioning a UFO in a respected publication or article is the kiss of death in today's world – and I wouldn't do it if it wasn't an intricate part of the story. The other interesting thought is that the layered material is once again partially composed of Bismuth – which is thought to possibly have some of the same electro-gravitational properties as Bob Lazar's Area 51 "element 115". Is there a similarity, or merely a coincidence between a claim that hasn't gained credibility and a technology currently under development?

The lifter in its own right is essentially a layered material. One of those layers is the emitter wire, which is highly charged with about 30kV worth of electrons, another layer is the air-gap, which is approximately 3 cm in height, and the final layer is an electrically-grounded "skirt" of aluminum foil that surrounds the lifter. It is also reasonable to expect that there are only two possible forces at work in the lifter – one of which being a possible ion-wind effect moving down from the emitter to the foil, and the other being a possible Biefeld-Brown effect, moving up through the foil to the emitter.

There are a few shortcomings in the lifter as a design that might be overcome if we could transition the layered material from one containing an air-gap to one that does not. For instance, the lifter is currently a rather delicate object, in that having a wire under tension as the emitter makes construction difficult for future automated assembly. Additionally, because the air-gap requires struts to support the emitter wire, a trade off involving the weight versus the strength of the struts is additionally involved in any current implementation of lifter technology.

Some of the other changes that would be helpful to implement when transitioning lifter technology from one type of air-gap to another are changes in the materials used to increase the dielectric capacity. High-K dielectric materials may be used to increase the displacement of electrons in the material to enhance charge transport. And since increasing the dielectric potential of the layered materials also increases the breakdown resistance, it means that thinner materials can be used.

Designing a lifter without an air gap would accommodate lower voltage requirements between the foil and the emitter. The voltage would not have to create the large e-field gradient to create a leakage current across such a large void. Therefore the overall voltage across the device could be greatly reduced, without much cost in thrust. A lower operating voltage in turn means that a lower-output power-supply can be used for a given amount of current, which increases the overall efficiency.

Transdimensional Technologies recent research is utilizing the layered materials approach to eliminate the air-gap and substitute for it high-k dielectric materials that may allow higher overall performance. Although they have not yet released details about the exact composition or thickness of the materials that they are working with, they claim to currently have a 10% reduction in weight using a low-voltage current across the thickness of their newest device.

FUTURE LIFTER TECHNOLOGY

Thanks to the tremendous amount of research being done on lifter technology by Transdimensional Technologies and a loosely affiliated group of inventors around the world, the future of lifter technology seems very bright at this point.

Transdimensional hopes to release some breakthrough research to allow replication of their newest 2nd generation experiments in the very near future, and along with that stands the massive body of research and advancements being done by inventors and researchers such as Jean-Louis Naudin, Saviour, the Lifters-group, and myself.

My personal goals are to attempt to assist Transdimensional Technologies in popularizing this technology to increase awareness of it and help "spread the word" about what it is and how it can potentially help the world.

Imagine if instead of getting in your car and driving through the usual maze of thoroughfares and side streets you were able to simply type in your destination and have a flying vehicle take you there automatically. The lifter technology offers the potential to transform the current transportation market by offering point-to-point aerial transport without the need for roads or freeways.

Additionally, unlike the magnetic-levitation ("Maglev") technologies that are currently being promoted as the future of transportation, the lifter does not require a specially constructed and exorbitantly expensive track to operate – the greatly reduces the per-unit cost on the technology and opens the door for wider adoption by the general public for transportation solutions.

Other individuals are currently working to see if lifter technology may offer cost-effective methods of transport into space, which would reduce the cost greatly and allow a one-piece, reusable method of moving things into orbit.

LIFTER RESOURCES

All of the research involved with the lifter technology is available to the public on the internet. The list of resources below are some of the better and more common resources to obtain detailed lifter information.

American Antigravity

→ <http://tventura.hypermart.net>

→ The author's website that includes video clips, complete instructions, and other related lifter information.

Jean-Louis Naudin's "Lifter Experiments Website"

→ <http://jnaudin.free.fr>

→ A very in-depth website containing video clips, complete instructions,

World-Wide Lifter Replications

→ <http://jnaudin.free.fr/html/lftwrld.htm>

→ An overview with photos and video from many of the independent inventors who have replicated the lifter experiments.

Transdimensional Technologies, Inc

→ <http://www.tdimension.com>

→ The home page for Transdimensional Technologies, the developers of the lifter design.

Blaze Labs (Saviour's Research Website)

→ <http://bel.150m.com>

→ An excellent site on research into lifter enhancements, radiation testing, sealed devices, power supplies, and other topics relating to lifter technology.

Lifter Builders Group

→ <http://groups.yahoo.com/group/Lifters>

→ An email group for the exchange of research findings for those interested in building lifters or staying current on the state of the technology.

NASA Patent #6,317,310

→ The NASA patent regarding obtaining thrust from an asymmetrical two-dimensional capacitor, grant Nov 13, 2001.

Research on the Capacitance Converter of Environmental Heat to Electric Power

N.E. Zaev

143970, Moscow region, village Saltykovka,
Granichnaya Str., 8 529-9664

Nickolay E. Zaev works on creation of the prototypes of converter energy, which do not require any fuel. The direct conversion of environmental heat to electric power is possible in the processes of "charge-discharge" in non-linear condensers or by means of "magnetization-demagnetization" of ferrites. Such converters of energy create cold and electric power without any fuel.

Theory of the converter, results of early experiments on the generation of microwatt power, methods and features of research are given in this article. The methods of generation of a few watts power are described in details. The possibilities and difficulties of creation of powerful capacitance converters are discussed in this article.

I. Grounds of research.

1.1. From positions of orthodox physics there is no subject of research. It is evident that the energy of charging (C) A_c condenser C_x is always equal or more than the energy of discharging (D) A_d , i. e. always $A_c \geq A_d$. Only the advanced analysis shows that it is not always

true. Exactly, in C_x , where $\frac{\partial C}{\partial V} < 0$ an inequality $A_d > A_c$

is possible, and in C_x , where $\frac{\partial C}{\partial V} < 1$, then the work $A_c > A_d$. Therefore we should discuss the nonlinear capacitors (NC). In the end of 1969 I noticed a systematic inequality $A_d > A_c$ during the measurement of A_c and A_d

of many capacitors with different dielectrics. Theoretical grounds and results of measurements of this phenomenon are given in the publications in 1984 [1], [2, page 73]. On the industrial standards NC (varicond), ceramic condensers VK2-ZSH, $4.6, 8 \cdot 10^{-9} \mu F$ with an optimal voltage about 95 V it was stated that $\frac{A_d}{A_c} \sim 1,21$ with the power to about $98 \cdot 10^{-6}$ Wt and "generated" extra power is equal to $21 \cdot 10^{-6}$ Wt.

1.2. In [1] and [2] the strict theoretical proofs of realization of $A_d > A_c$ (there are four of them) are given.

On $1m^3$ of dielectric $|A_d| - |A_c| = -\frac{1}{2} a \cdot \epsilon_0 \cdot E_c^3$ (E_c is an intensity of the field, V/m; ϵ_0 is a dielectric constant of vacuum, a is a coefficient of nonlinearity of the capacitor). Below we state one more proof more connected with the parameters of circuit.

It is well known that with the charge of a linear capacity from the source of constant voltage $V_0 = \text{const}$ through the resistor $R = \text{const}$ it gets an energy $A_c = \frac{C \cdot V_0^2}{2}$ exactly equal to the output energy in the time of charging t_c . The output energy irradiated from the load

R is a Joule heat $\Theta = R \cdot \int_0^{t_c} i^2 \cdot dt$ [3, page 546]. If NC

(nonlinear condenser) is charged, then there are no proofs of such equation. The NC are the variconds or other capacitors, which have $\frac{\partial C}{\partial V} > 0$ in the interval $V = 0 \div V_k$. For the variconds V_k is some voltage, which corresponds to the maximum C_v . If $V > V_k$, then $\frac{\partial C}{\partial V} < 0$. For some other capacitors V_k is a voltage breakdown.

For further consideration let's believe that in the operating area of the given sample of varicond a function

Reality and Consciousness in Education and Activity

A.P. Smirnov

Vice president of International Club of Scientists
190031, Saint Petersburg, Kazanskaya str., 36
Tel: +7 (812) 312-0508
E-mail: science@shaping.org

Relation of thought to existence is the main question of philosophy as science on general laws of Nature was formulated but it still did not interpreted and solved in the frames of generally accepted logic standards. The ways to solve it lead to futile discussions of materialists and idealists, to senseless disputes of determinists with eclectics and apologists of the "chance". This discussion lost its sense without a determination of terms under discussion and condemned debaters to have subjective "gustatory" senses, which were changing while aging and depended on the extent of received and conceived knowledge. Such is the situation in this link of World studying, which does not allow creating a logic chain of reasoning in the understanding of cognizable things.

A paradoxicality of all things that happen is connected with incorrect translations and interpretation of wisdom of ancient philosophers and scornful attitude both to the knowledge of distant past and classical heritage, which highlighted the elements of natural-science approach to Weltanschauung.

According to Plato, **an ideal thing** is a visual thing, which can be felt by our organs of sense. Therefore, the understanding of objective reality is mediated by the crowd of our feelings in such a way that perception of reality by means of these feelings gives us a notion of the World. Hence, **our notions about reality are the subject of research in science, but not the World itself, i.e. the World outside of our consciousness**. So, what should be studied in our notions about the World? Let us refer to the wisdom of ancient scientists again: "The World is given in motion and its laws are the laws of motion". Then, we should speak about laws, order, i.e. about relation and interrelation in the phenomena of motion. This is the distinctness in notions and actions (determinism) to predetermine further development of reality cognition logic, i.e. what has an influence on us and determines specific character of our perception. Further we can speak about formation of ideas about reality, which require some premises, principles to organize these ideas. These principles are given in classical heritage, in "Dialogues" by G. Galilee [1] and "Mathematical principles of natural philosophy" by I. Newton [2]. A notion of force as a measure for momentum was introduced, which manifests in action and disappears from the body after the action is over, and the body keeps its new state due to the inborn "inertia force". **But the force itself cannot do anything without its application with a certain speed**. Then we

introduce a notion of action as a product of acting force F_A and the speed of action V_A .

We offer a law of interaction, which determines the interaction between action of the cause and the effect appeared during this action as a reaction, i.e. the product of the force of reaction F_R and the speed of reaction V_R . Thus, this interaction between the cause and the effect is determined by the transfer of action from one object to another in equal quantity, but with appearance of new quality, which is determined by specificity of interacting objects according to fundamental law of interaction:

$$F_A V_A = -F_R V_R$$

Unfortunately, an incorrect interpretation of interaction manifestation as an opposite counteraction became strong in our mind. This manifestation is perceived as a compensation of cause by action of the effect. Moreover, the incorrect way of writing of the mathematical form of Newton's third law manifestation established in textbooks and scientific literature due to the incorrect translation as $F_A = -F_C$. This very tragic situation for the science suppressed the development of logic in description of processes. Chance and statistic approach to the description of phenomena has taken place in our perception. This approach is based on the model of non-interacting elements, in which there is no order stipulated by the interrelation of elements. The science has developed this model and its properties, and this fact predetermined the evolution of notions about real World.

This ideology penetrated in mathematics, which for sake of physics began to study properties of objects, but not operations with them. Moreover, a possibility to reflect specific character of real physical processes in the interconnection of cause-effect relations by mathematical operations is not realized. It is essential, that fundamental law of interaction establishes manifestation and description of elementary act of cause and effect interrelation, **the law of manifestation of a Fact**. It means that order in the World is conceived through manifestation of concrete facts. The action of law of interaction lies in the basis of these facts.

So, there is a conclusion: the World is perceived through the discrete manifestation of motion forms evolution. Hence, the discrete mathematics of finite discrete aggregate can be applied to describe the World, but not the continual mathematics, which lies in the basis of traditional orthodox physics. All these circumstances lead to numerous problems and difficulties in description of our notions of reality, to the plenty of used principles, which are in contradiction to each other, as R. Feinmann noticed once [3].

And what we can get from determinism, which is based on fundamental law of interaction, law of cause and effect interrelation? **The change of force value in a reaction takes place, i.e. the change of value of the potential gradient, i.e. the change of energy**

concentration. This circumstance is visually demonstrated by the operation of Archimedean lever as well as in all phenomena of the real World. This is Archimedean lever, where the loss of speed takes place, but there is a gain in force. And the load raised on a lower height than the way, which was made by the applied force, will give a huge power during its free fall. This power is higher in so many times, in how many times the time of the load fall is less than the time of action spent on its raising! And this is the fact, which determines specific character of **creation in the real World**. We should attribute both quantitative and qualitative characteristics to energy. This is the side of energy manifestation, which is reflected in Plank's formula: energy is proportional to frequency.

Manifestation of fundamental law of interaction also lies in the basis of general universal regularity of evolution of real many-particle systems with the change in external conditions. This process develops in multistage way, and on the each stage the logarithm of the ratio between the event happened and the event to happen always is equal to the work of external forces. In other words, the relation of the event happened to the resource is in exponential dependence on the initial conditions and extent of external influence. Exponential character of development of processes is the evidence that Nature develops according to the law, which conserves itself during evolution. This regularity, which manifests everywhere, can be naturally called **the Principle of Order**.

Fundamental law of interactions and Principle of Order appeared to be enough to describe and understand phenomena in the observed World. And it is natural to expect that this principle of Nature manifest in finer World also. This World includes lower and higher frequencies, which are not available for us yet to watch this wide-range frequency-wave emanating Universe.

From all aforesaid we should make a conclusion that the logic, which exists in the traditional physical tool,

appeals to the model and principles of the World of non-interacting elements using the range of regularities, which also reflect some features of the real World, but they do not include fundamental law of interaction and Principle of Order, which are necessary and sufficient to describe reality. Descriptions existing in traditional physics are phenomenological ones and concern only those aspects of the phenomena under investigation, which do not include possible qualitative changes during development of processes, because the main property of real processes of interactions (creation of new energy property) was excluded.

The current situation in physics had a strong influence on formation and development of other sciences, other fields of knowledge, since the logic of reflection of cause-effect links was initially excluded. These are the links to determine existence, i.e. existence of constant creation of the World. All these circumstances give grounds to fundamentally revise educational programs, first of all, in physics, philosophy, mathematics, chemistry and biology. A change to the offered logic of cognition, which is based on the Principle of Order and fundamental law of interaction, will fundamentally change our notions about the World as well as will open big opportunities for new technique and technology. A Man has got huge opportunities in cognition and existence, but due to his immorality and features of incorrect aims in the logic of cognition he cannot use these gifts of Nature. We present wider and deeper view on the World and a Man in it, which allow analyzing, watching and operating with those fields of reality, which manifest in finer World, World of higher-frequency energies and other structures of fields. Logic of cognition had not touched these structures yet.

References

1. Galilee Galileo. Selected works in 2 volumes. M.: Nauka, 1964.
2. Newton Isaac. Mathematical principles of natural philosophy. News of Nickolaevskaya Marine Academy, issue IV, V, Petrograd, 1915-1916. Volumes I, II and III, 620 p.
3. Feinmann Richard. Character of physical laws. M.: Nauka, 1967, 160 p.

Old New Energy

Y. I. Andreev, A.P. Smirnov

St.Petersburg, Russia

E-mail: science@shaping.org

Internet: <http://www.physical-congress.spb.ru>

Two kinds of energy, accumulated energy [1] and free energy [2], are considered as an inexhaustible source of natural energy created by Nature itself. It is ecologically clean and possible to be renewed in natural conditions.

The energy accumulated in substance is released as a result of partial decay of substance in elementary particles. At that, the acquired defect of mass is so small

that it does not change chemical properties of substance and is compensated in natural conditions. Physical mechanism of energy-release lies in the fact that an electron in plasma layerwise takes sufficiently smaller elementary particles (electrino) from positively charged atoms or fragments of substance (ions). Electrino give their kinetic energy to plasma, heat it up and move beyond the bounds of reaction zone in the form of thermal and optical radiation. There is no substance, which could not take part in such process of energy-release, i.e. phase transfer of higher form (PTHF). The most appropriate, available and low-cost substances are air and water, which play the role of nuclear fuel in PTHF. It is turned out that usual combustion is also a process of PTHF, in which oxygen is a nuclear fuel and organic fuel is a donor of electrons. In the process of combustion oxygen atoms get the defect of mass equal

concentration. This circumstance is visually demonstrated by the operation of Archimedean lever as well as in all phenomena of the real World. This is Archimedean lever, where the loss of speed takes place, but there is a gain in force. And the load raised on a lower height than the way, which was made by the applied force, will give a huge power during its free fall. This power is higher in so many times, in how many times the time of the load fall is less than the time of action spent on its raising! And this is the fact, which determines specific character of **creation in the real World**. We should attribute both quantitative and qualitative characteristics to energy. This is the side of energy manifestation, which is reflected in Plank's formula: energy is proportional to frequency.

Manifestation of fundamental law of interaction also lies in the basis of general universal regularity of evolution of real many-particle systems with the change in external conditions. This process develops in multistage way, and on the each stage the logarithm of the ratio between the event happened and the event to happen always is equal to the work of external forces. In other words, the relation of the event happened to the resource is in exponential dependence on the initial conditions and extent of external influence. Exponential character of development of processes is the evidence that Nature develops according to the law, which conserves itself during evolution. This regularity, which manifests everywhere, can be naturally called **the Principle of Order**.

Fundamental law of interactions and Principle of Order appeared to be enough to describe and understand phenomena in the observed World. And it is natural to expect that this principle of Nature manifest in finer World also. This World includes lower and higher frequencies, which are not available for us yet to watch this wide-range frequency-wave emanating Universe.

From all aforesaid we should make a conclusion that the logic, which exists in the traditional physical tool,

appeals to the model and principles of the World of non-interacting elements using the range of regularities, which also reflect some features of the real World, but they do not include fundamental law of interaction and Principle of Order, which are necessary and sufficient to describe reality. Descriptions existing in traditional physics are phenomenological ones and concern only those aspects of the phenomena under investigation, which do not include possible qualitative changes during development of processes, because the main property of real processes of interactions (creation of new energy property) was excluded.

The current situation in physics had a strong influence on formation and development of other sciences, other fields of knowledge, since the logic of reflection of cause-effect links was initially excluded. These are the links to determine existence, i.e. existence of constant creation of the World. All these circumstances give grounds to fundamentally revise educational programs, first of all, in physics, philosophy, mathematics, chemistry and biology. A change to the offered logic of cognition, which is based on the Principle of Order and fundamental law of interaction, will fundamentally change our notions about the World as well as will open big opportunities for new technique and technology. A Man has got huge opportunities in cognition and existence, but due to his immorality and features of incorrect aims in the logic of cognition he cannot use these gifts of Nature. We present wider and deeper view on the World and a Man in it, which allow analyzing, watching and operating with those fields of reality, which manifest in finer World, World of higher-frequency energies and other structures of fields. Logic of cognition had not touched these structures yet.

References

1. Galilee Galileo. Selected works in 2 volumes. M.: Nauka, 1964.
2. Newton Isaac. Mathematical principles of natural philosophy. News of Nickolaevskaya Marine Academy, issue IV, V, Petrograd, 1915-1916. Volumes I, II and III, 620 p.
3. Feinmann Richard. Character of physical laws. M.: Nauka, 1967, 160 p.

Old New Energy

Y. I. Andreev, A.P. Smirnov

St.Petersburg, Russia

E-mail: science@shaping.org

Internet: <http://www.physical-congress.spb.ru>

Two kinds of energy, accumulated energy [1] and free energy [2], are considered as an inexhaustible source of natural energy created by Nature itself. It is ecologically clean and possible to be renewed in natural conditions.

The energy accumulated in substance is released as a result of partial decay of substance in elementary particles. At that, the acquired defect of mass is so small

that it does not change chemical properties of substance and is compensated in natural conditions. Physical mechanism of energy-release lies in the fact that an electron in plasma layerwise takes sufficiently smaller elementary particles (electrino) from positively charged atoms or fragments of substance (ions). Electrino give their kinetic energy to plasma, heat it up and move beyond the bounds of reaction zone in the form of thermal and optical radiation. There is no substance, which could not take part in such process of energy-release, i.e. phase transfer of higher form (PTHF). The most appropriate, available and low-cost substances are air and water, which play the role of nuclear fuel in PTHF. It is turned out that usual combustion is also a process of PTHF, in which oxygen is a nuclear fuel and organic fuel is a donor of electrons. In the process of combustion oxygen atoms get the defect of mass equal

to $10^{-6}\%$, which constitutes the so small value that it cannot change chemical properties of oxygen and does not call killing radioactive emanation.

There is a possibility to use energy properties both of oxygen and nitrogen of free air in the process of PTHF. To do this it is necessary to destroy nitrogen molecule at least in atoms or smaller fragments by some initiating influence. It is achieved by electrical discharge, magnetic flow, explosion and other means. These means consume much less energy than produced in PTHF. In particular, such processes were achieved in combustion engines. Such nitrogen mode of operation and combustion is accompanied by oxidation to H_2O , but not to CO_2 , which is more effective in energy and ecological aspects. Accordingly, the power of engine increases and organic fuel is saved. Exhausts from this process mainly contain water vapor [3].

PTHF processes with excessive power release (more than consumed power) were also obtained in heat-generators operating with water.

Free energy diffused in the surrounding space could be transformed into mechanical, electrical or another kind of energy by means of vibration-resonance, electromagnetic and other energy systems. Classification of these systems as well as physical mechanism of energy transformation is given in [2]. The known Searl's engines can serve as an example of energy systems working with free energy.

The developed physical mechanisms of energy-release processes will allow to create industrial, stably operating, ecologically clean energy systems, which do not consume organic and nuclear kinds of fuel, harmful for humankind.

References

1. Andreev Ye.I., Smirnov A.P., Davydenko R.A., Klucherev O.A. Natural enegetics. – SPB, Nestor, 2000, 126 p.
2. Andreev Ye.I., Andreev S.Ye., Glazyrin Ye.S. Natural energetics –2. – SPb, Nevskaya Zhemchuzhina, 2002, 104 p.
3. Patent 2179649, Russia, 2000 / Andreev Ye.I., Smirnov A.P., Davydenko R.A.

On General Nature of Forces



Dr. Evgueni D. Sorokodoum

Entrepreneur and General Director, Vortex Oscillation Technology Ltd, Volochaevskaya Street, 40-B, Flat 38, 109033, Moscow, Russia
Telephone: 7-095-362-8084
e40dum@dol.ru <http://vortex.viptop.ru>

Introduction

In techniques and in our life we got used to certain physical notions concerning force. We usually use these notions in creation of automobiles, airplanes, rockets and other techniques, but we don't think about **the origin of forces** in general. Usually appearance of force in continuum is connected with presence of momentum gradient.

A number of works, which describe various versions about origin of a force appeared [1, 2, 5, 8, 17, 21, 22, 23, 25, 30, 35, 36, 38, 39]. Different mechanisms of appearance of force are considered in these articles. Usually they consider origin of a force in one of the fields,

which are: electromagnetic, gravitational and others. **There was a theoretical attempt to connect the force initiation with energy gradient [33]. Experimental proof of force initiation due to energy gradient was obtained in the works [7, 38].**

Below we made an attempt to show the general regularity of force initiation, which is connected with non-uniform distribution of energy in space. With this process, physical nature of any kind of energy and specific mechanism of force initiation does not play any role. These are only particular cases of general nature of force initiation.

General nature of forces

We are surrounded by space, which is full of energy. Here we mean the energy of any nature: mechanical, thermal, electromagnetic and others. Energy is related with material world and its value is connected with the volume.

Any particle (volume) of continuum has energy:

$$A = A(x, y, z, t) \quad (1)$$

where x, y, z are Eighler's coordinates of the center of particle, t is time.

Transmission of energy from one point of space to another one can take place by various methods, both in connection with energy transmission by material particle itself (which is a "carrier" of energy in this case) and without such transmission (for example, with wave motion). For the volume degenerated in ideal point the energy will be zero. That's why it is more comfortable to operate with the energy density concluded in the

increasing constantly. We are the first who analytically got the law of gravity of the masses from the known equation of thermal conductivity. Appeared that on the relatively small distances (in the bounds of the Sun System) the law of gravity by Newton remains valid, but on the larger distances the sudden decrease goes on (Gauss integral), which naturally solves the famous Zelinger's paradox of gravity.

As a conclusion we should note that in the bounds of a stable galaxy of a spiral kind there is the circulation of ether. Ether moves from the periphery of the galaxy to its center (nucleus) by two spiral branches. This becomes apparent as a weak magnetic field (8-10 micro Gauss). In the nucleus of the galaxy there is the impact of two strings as well as there is formation of the spiral

toroidal circles (protons). Then the protons form the adjoined vortexes around themselves (electron shells) and from the proton- hydrogen gas the stars are forming, which are moving to the periphery by the same branches. There they dissolve in ether at the periphery since the protons will lose their energy and stability due to the viscosity. Ether which has got the freedom will return to the nucleus of the galaxy and this process is going on in our galaxy for hundreds milliard years and it will keep going until the new center of vortex formation will begin to concentrate ether. Then the new galaxy will appear and our galaxy will disappear. But it will not happen soon and we have enough time to understand that we should return to the concept of ether in modern science.

Experimental Demonstration of Cosmic Influence on the Earth Life in N.A. Kozyrev's Researches ("On the Influence of Time on Matter")



Alexandra L. Belyaeva

Bishkek, 720075, Russia 8th Location, 46, apt.80
Tel.: 7-996-31-41-25-79
E-mail: artem_belyaev@mail.ru
Internet: www.newphysics.h1.ru

Editor's note: this article represents a part of the big scientific conception "World models in the new scientific progress". On applying of this conception a great number of practical technical devices have been created (as an example of such device we offer the description of universal electrical bio-heater, which was created by the group of researchers from Bishkek, Kyrgyz Science Technical Center "Energy" during the work on ceramic electroconvector).

We have to note that the position of our editorial board concerning "time" and Kozyrev's work is not in a good correlation with the authors' one.

Nicolay Alexandrovich Kozyrev scientifically and experimentally discovered the action of relations' interconnection, which was falsely named as time. Time cannot cause action because it is absolute and does

not have any physical sense (Samat Kadyrov. Monograph "Theory of unified field").

Author's note: relations' interconnection is an interaction of structurally similar objects. It is a nuclear resonant gain-frequency process: in a stationary electric field, which is modeled by systematic organization, there is a development of similar to structural one, in-focus rays of powerful regular coherent radiations. These coherent radiations are determined by properties of chemical components of interrelated substances.

According to N.A. Kozyrev, it is ought to expect not identical density of relations' interconnection in space. Some processes decrease density; others on the contrary increase density of relations' interconnection. Action of the increased density is weakened according to the law of reversed squared distances; it is shielded by a solid matter, at thickness about 5cm, and is reflected by a mirror, according to the familiar optics law. The action of the decreased density on a detector is shielded, but does not reflected by a mirror. Properties of a matter can be changed under the influence of relations' interconnection. In this sense there is a big advantage in changes of electric current conductivity of resistor, which is brought into Witson bridge and is located near some process. For instance, in order to increase density it is useful to realize the process of evaporation of a volatile liquid; and for density decrease the process of cooling of a warmed-up agent can be realized. Due to these processes, change of conductor resistance is actually realized with opposite signs. Increase of density of the conductor with positive temperature coefficient leads to decrease of its resistance. At negative temperature coefficient there is an effect of the opposite sign, in the direction of changes, caused by temperature changes. Such correspondence to fall in temperature should be observed at changes of other properties of a matter, **because disorder in a matter structure is reduced along with fall in temperature.** The researches have shown the following results at the resistor, which was situated near processes of acetone evaporation on cotton wool and of solution of sugar in water. The

relative resistance change of resistor was observed at the 6th or 5th digit after comma (or even at the 4th digit if resistors had especially high temperature coefficient).

There is now a possibility to study the Universal World not only by means of the investigated spectrum of electromagnetic oscillations, but also through physical properties of relations' interconnection.

At many researches the influence of relations' interconnection on resistor electroconductivity was investigated. Acetone evaporation (at 10-15 cm distance from the resistor) was applied there as the process, which controls sensitivity of a system. However, the process of evaporation can influence on the resistor not only with density increase, but also due to temperature increase that occurs at evaporation. In order to take into consideration this cooling effect, (in the area of evaporating acetone) temperature was measured by Beckman mercurial thermometer with 0.01°C multiplying factor. The first experiments (without thermal protection) have shown the fall in temperature by several hundredth of degree. This fall was enough to cause the changes of resistor electroconductivity. However, the thermometer had been keeping on the demonstration of practically the same fall in temperature at thermal insulation of the resistor. The thermometer reacted on the radiation of relations' interconnection at acetone evaporation.

The part of the thermometer with a placed in a pasteboard tube mercury tank was laid round with cotton wool and put into a glass retort. The experimental process was fulfilled near the retort, and the reading of mercury altitude in capillary was determined by the scale of the thermometer through the closed window in the next room. The mercury altitude was decreased at dissolution of sugar in water (with steady temperature) and it was increased at the release of the squeezed spring, which was placed near the thermometer.

The radiation of the relations' interconnection was observed from many stars. It is caused by the inner processes, which take place on these heavenly bodies. The Sun (with its turbulent processes) radiates the relations' interconnection besides the searched electromagnetic radiation. Actually, if sunlight is recovered with a thin screen, the significant influence on the resistor will be discovered. The influences of the Sun to the Earth through the relations' interconnection become doubtless. These influences of the Sun should have a particular significance in vital functions of organisms, because it brings the beginning for life support. The totality of the researches

demonstrates the dependence of matter state from the changes of the general background of the relations' interconnection. The drift of the devices (that show daily changes) usually stops about at midnight and then changes its direction. As for the seasonal course, there is a density decrease of the relations' interconnection in spring and summer; and there is an increase of it in autumn and winter. It is connected with the absorption of the relations' interconnection by the vital functions of plants and with the return of it at their fading. There are indications at the seasonal changes of chemical processes. For instance, reaction of polymerization has more difficulties in its realization in springtime. V. Zhvirilis observations of minimum and maximum light admission by means of the crossed Nickolya prisms can be explained by the crystalline reconstruction of these prisms.

By Kozyrev, as being invisible, vital source is disseminated everywhere in Nature, thus possibility of its accumulation is the only necessary thing. Such a possibility is realized in vital organisms because all vital functions counteract to the usual course of systems' destruction. The ability of organisms to keep and accumulate this counteraction is the reason, which determines the great role of biosphere for the Earth life. But even if we assume, that spreading of life in Space is one of its peculiar properties, biosphere will not have a decisive significance.

Cosmic bodies (and first of all stars) can serve as the reservoir, which gathers vital source. Enormous stocks of energy flow out of stars in a very weak degree through the radiation of comparatively cold external layers. Inner stars energy is preserved so well, that even at the lack of supplement, matter of the Sun would become cold only at one third degree per year. For the Universe the creative source carries the relations' interconnection. Thus cosmic bodies are necessary for support of life.

Author's note: We apprehend relation's interconnection as natural radioactive background. In fact, it is a nuclear resonance gain-frequency interaction of inertial masses that depends on living systems, especially on its rituals and that regulates its survival. Cosmic bodies regulate this process. Humanity is able to control nature only obeying to natural laws. In-focus beams of powerful laser streams are formed in the electric field of living system organisms. The creation of proton-antiproton pair in the living cells, alongside with the process of the absolute release of energy serves as a creative vital force. The process of radiation, support, absorption of energy by the organization (assembly of particles) is realized through the relation's interconnection and regulates its total mass.

Humanity is able to control nature only obeying to natural laws.

Life without Diseases and Old Aging Preventive Electrical Heater with Programmed Features

Alexandra L. Belyaeva

Bishkek, 720075, Russia 8th Location, 46, apt.80

Tel.: 7-996-31-41-25-79

E-mail: artem_belyaev@mail.ru

Internet: www.newphysics.h1.ru

Universal electrical bio-heater is intended for heating of rooms and preventive clearing of an air atmosphere from disease-producing organisms at continuous exposition (continuous work). The principle of its work fundamentally differs from those of the existing analogues. Carbon crystals are in the basis of bio-heater, which makes it environmentally appropriate.

Bio-heater represents a range of ceramic cylinders, jointed with metal plates on top and underneath. These plates play the role of load-carrying structure. It is used in production areas and living rooms for heating alongside with destruction of pathogen microorganisms. One bio-heater with 0,2 kWtt power is oriented for heating of the area with volume 35-45m³ (in the future production of modernized models powered from solar cells is planned).

As distinct from the usual oil heater, preventive electrical bio-heater destructs agents of infectious diseases, whereas, according to the researches, oil heater stimulates their reproduction.

Absolute ecological cleanness is obtained by release of the quarters from the effect of increased atmospheric dampness with the temperature, appropriate to sanitary code. Any type of mold or fungus disappears in the quarter and in the future these forms do not renew their existence (even after removal of bio-heater).

The absence of injurious radiations is attained by the following: features of raw material, which is used during the process of electrical bio-heater production; radiation is normal during bio-heater working. Pollution-free temperature influence is attained by favorable infrared radiation.

Among the other properties of electrical bio-heater there are following: fire-safety; explosion proof; chemical inertness; enormous effectiveness from the point of view of electric energy demand. Structural simplicity facilitates its durability; there is nothing in bio-heater to be broken.

Technical aspects (applied Know How): In the process of technologic production of ceramic cylinders, from which bio-heater is consisted, **diamond-like cellular**

ceramic structure with superimposed combination of atoms of lattice elements is created. Rhythmic work of cells, which form ceramic mixture, leads to resonance and creates a kind of blow wave (at micro level). This blow wave physically destroys microorganisms that have no calcium framework. It is related only to those microorganisms that are agents of infectious diseases, such as: staphylococcus, enterococcus, enterobacterium, etc. Thus parameters of the evoked blow wave coincide with vibration frequency of the definite types of bacterium and elementals. These blow waves cause the similar effect in room near of bio-heater, e.g. colonies of microorganisms are noticeably decreased there (even at the absence of bio-heater in the nearest room).

Due to its self-organization, bio-heater works in the range of living systems, it is approached to them. There is a realization of active connection with living coaly forms of biological systems. Actually the work of bio-heater is adjusted to them. Bio-heater properties can be programmed at the process of its production.

Bio-heater is a patented product. Patent KR #464 MKI C 04 V 33/24 "Ceramic mixture, possessing heat-radiating properties". Application #20010075.1 at Patent KR #464 MKI C 04 V 33/24 "The way of creation of energy, renewable, programmed hard-phase ceramic-carbon mass structure". Application at Patent KR #464 MKI C 04 V 33/24 "Technology of producing of electrical heaters with anti-resonant air prophylactic effect".

Finale product (FP) purchase is not more expensive than those of existent models of electrical heaters. Cost value is noticeably brought down on organization of the scaled production. It is ought to take into consideration that from all existent types of heating, from the customer's point of view, this one is the most energy-efficient. Manufacturing of such bio-heaters can be organized on the base of acting industrial production of ceramic fabrics. It will require some expenses. Moreover production service is rather cheap because there is no need in maintenance staff.

Electrical bio-heater can be applied everywhere, where there is a need in: a) economical heating; b) decrease of air moisture; c) disinfections of rooms.

As for the life cycle of bio-heater it does not become obsolete morally and technically. It is produced from the materials, which are not liable to wear.

The invention has a certificate of KR Gosstandart. From the end of 1998 the first unimproved modification of bio-heater (with power 0,6 KWtt) were put into serial production in Bishkek (with small test production runs). This time bio-heaters are readily used as medical equipment in hospitals and maternity hospitals in Bishkek. **Inventor: Alexandra L. Belyaeva.**

Technical Report

The comparison of quantity of heat energy, required for heat of rooms, and of heat quantity, which is produced by Belyaeva's electroconvector.

Mavlyanbekov Sh. Yu.

Deputy Director KSTC "Energy"
Internet: www.newphysics.h1.ru

Editor's note: this calculatious demonstrates the advantages of the device, which at 340 Wtt energy consumption produces about 700 Wtt of heat power.

The calculation of heat output, coming from the ceramic electroconvector to a room, was based on the basis of research statement of EVNA-0.2/220 electroconvector's influence on air micro flora of industrial rooms at 23.10.01. - 06.11.01. period.

The researchers were carried out in the arbitrary room in a four-storied large-panel building. This room was on the 3rd floor, with facing east windows. The room was of 52.5 m³ air-space, 3.5 m height and 15 m² area. The calculation of heat, was made on the basis of "Methods for calculation of the requirement in heat and electric energy of buildings". These methods were registered by Department of Justice of Kyrgyz Republic

on 08.09.2000, #154. According to the normative data, temperature of inner air (t_{in}) in the room must be equal to +20° C. In Bishkek planned specified temperature of external air (t_{ex}) for heating is minus 23°C. The average temperature of heating period is $t_{av} = -0.9^{\circ}\text{C}$, specific heat characteristic of the building is:
 $q=0.4 \text{ Kcal/m}^3 \text{ h } ^{\circ}\text{C}$.

Medium quantity of heat energy, which is required for heating, is determined by the formula:

$$Q_{av} \text{ heating} = q \cdot V \cdot (t_{in} - t_{ex}) \cdot 1.12 \cdot [(t_{in} - t_{av}) \div (t_{in} - t_{av})] \text{ Kcal/h}$$

$$Q_{av} \text{ heating} = 0.4 \cdot 52.5 \cdot (20 + 23) \cdot 1.12 \cdot [(20 + 0.9) \div (20 + 23)] = 492 \text{ Kcal/h}$$

Thus at the average annual temperature of the heating period, which is: $t_{av} = -0.9^{\circ}\text{C}$, the quantity of heat energy required for this room, comes to 492 Kcal/h.

According to the research statement, the trials of the electroconvector with 200Wtt power were carried out at the following external air temperature: +10.2°C; +8.5°C; +10°C; +6.6°C. The calculation data and results of its examination are brought together in a table. The parameters of electroconvector with 340Wtt power are demonstrated in the same table.

Table 1

Table of determination of heat entry and heat consumption's correspondence in the experimental room

#	External air temperature, °C	Inner air temperature °C	Normative heat consumption KWtt (Gcal/h)	Experimental heat consumption KWtt (Gcal/h)	Percentage depending on normative heat consumption %	Economy of heat energy kWtt (Gcal/h) comparing with power consumption of the device 0.2 kWtt (0.000172 Gcal/h)	Economy of heat energy kWtt (Gcal/h) comparing with power consumption of the device 0.34 kWtt (0.000292 Gcal/h)
1	- 0.9	+20	0.572 (0.000492)		100	-	
2	+10.2	+20	0.267 (0.00023)		100	-	
	+10.2	+16		0.158 (0.000136)	59	0.2-0.158=0.042	0.34-0.158= =0.182
3	+8.5	+20	0.314 (0.00027)		100		
	+8.5	+17		0.233 (0.000200)	74	0.2-0.233=-0.033	0.34-0.233= =0.107

4	+10	+20	0.273 (0.000235)		100		
	+10	+23		0.355 (0.000305)	130	0.2-0.355=-0.155	0.34-0.355= =-0.015
5	+6.6	+20	0.366 (0.000315)		100		
	+6.6	+19		0.338 (0.000291)	92	0.2-0.338=-0.138	0.34-0.338= =0.002

Calculation data demonstrate a considerable economy of heat energy at daily unevenness of external air temperature.

Heat productivity of the new structure of electric convector with 340Wtt power was calculated on the assumption on the suggestion that heating of the room is carried out by the irradiation at the process of heat exchange.

$$E = \varepsilon \cdot C_0 \cdot T^4 \cdot 10^{-8} \quad \text{Wtt/m}^2$$

where: $C_0 = 5.67 \text{ Wtt/m}^2 \text{ K}^4$ is a radiant emittance of blackbody, $\varepsilon = 0.93$ is an emissivity factor of the surface of earthenware duct tube; $T = 70^\circ\text{C} = 343 \text{ K}$ is the temperature of the surface of earthenware duct tube.

On substitution of the known values into the formula we get:

$$E = 0.93 \cdot 5.67 \cdot 343^4 \cdot 10^{-8} = 727 \text{ Wtt/m}^2$$

As the area of irradiation surface is equal to $S = 0.96 \text{ m}^2$, then quantity of heat, which is evolved by the convector, comes to:

$$E_k = S \cdot E = 0.96 \cdot 727 = 698 \text{ Wtt (or 600 Kcal/h)}$$

The quantity of heat, which is required for the heating of the room, is 492 Kcal/h (at the external air temperature equal to minus 0.90 and temperature in the room equal to plus 200).

Thus, electric convector with 340 Wtt power is able to heat totally the room with 60m3 area.

Editors note: 340 input and 700 output!!!

Longitudinal Waves in Vacuum: Creation and Research

Ph. Dr. Kirill P. Butusov

190121, Saint Petersburg, Angliysky prospect, 5-18
Tel: (812) 113-8511

The author presents a new elegant system, which is the symmetrized Maxwell's equations. In practice it gives a possibility to create the longitudinal waves in vacuum. This system is of great importance in telecommunications and aerospace technique.

There is a stable paradigm in electrodynamics that the existence of the longitudinal waves in vacuum is impossible. This paradigm played its negative role preventing scientific minds from solving this problem. However, Maxwell was not as categorical in his opinion on this question as his following were.

Particularly he wrote: "Science of electromagnetism as well as optics is not able to confirm or deny the existence of longitudinal oscillations."

Maxwell's dynamic equations are usually considered as partial derivatives in time. However, the total

derivative in time includes the so called substantial derivative, which was shown in the equations for the moving coordinate system. In particular, one of these equations was written by Maxwell himself to explain the phenomenon of electromagnetic induction discovered by Faraday. This induction takes place in the conductor moving across the field lines of electromagnetic field:

$$\vec{E} = \vec{V} \times \vec{B}; \quad (\text{I})$$

Other equations were obtained later by other scientists. In the table I below Maxwell's equations are given in a split form. Their static and dynamic parts are given separately as well as the equations for moving and fixed coordinate systems. Such matrix concept of Maxwell's equations allowed finding their incompleteness. Really, the analysis of the matrix shows its high symmetry. However, full symmetry of the system of equations is broken by the absence of the equation (X). It seems to be strange and calls a desire to remove this defect in such an elegant system of equations.

A new equation is introduced in the Table 1 for the full symmetry of the matrix:

$$\nabla \cdot \rho = -\frac{1}{c^2} \cdot \frac{\partial \vec{j}}{\partial t}; \quad (\text{X})$$

Fundamental Properties of Aether

Alexander M. Mishin

Author's note: In the article the principles determining major properties of aether are formulated on the basis of an empirical material.

Real aether [1-6], the primary and superfine essence of which is still a secret, has turned out to be absolutely non-standard superfluid three-dimensional material medium, which simultaneously is at solid, liquid and gas phases. The first master phase of aether is a specifically solid absolute space or an energetical "bottom" of the Universe ("celestial stronghold"). At that the solid phase is considered as mesomorphic vortical-wave structure, which has particular holographic properties. Classical matter represents to be one of the stable and energetic space-time levels of the Universe. Aether vortexes exceed all conceivable space scales, have quasi-material properties and create a great number of stereo-dynamic subspaces (parallel worlds).

The first basic principle, to which aether entirely follows, is the principle of the least disturbance (the least action). Many well-known and unknown physics laws are the subsequent of this principle. In particular, any motion in macroscopic aether happens in such a way to minimize the interaction with the matter of our world, with zero moment of the disturbance momentum. In the classical physics this principle has been reflected as Le Shatelye principle, as variation principle, laws of thermodynamics etc.

The second principle is the principle of fractality, which confirms the similarity of forms and properties of quantum aether vortex structures regardless of their space scale. This principle also determines the Universe as stereodynamically multivariate system in the form of hierarchy of vortical-wave structures of the unified aether (fractal matreshka). On the researching of the macroscopic objects of the Universe it is possible to make a conclusion about microcosm structure if taking into account the changes of frequencies and velocities of action transmission.

In the third place there is a principle of physical autonomy, which confirms that any solitary mass (for example a planet) creates aether system. The particular principle of relativity, which reflects one of the fractal properties of the Universe, can be applied to this system. Such autonomous mass becomes similar to the miniuniverse with its aether subspaces, which repeat the basic phases of the Universe spectrum in more narrow (which depends on the size of mass) frequency band of space-time frequencies. Thus, in the local system of the Earth solid aether reproduces the structure of gravitational field with energy "bottom" in the mass center. As the result such spherical body occurs to be an energy drain and warms up from within.

The fourth is the principle of interaction between matter and vortex-wave forms, which do not depend to the spectral part of the Universe, that is quasimatter. This is the principle of new interaction in nature. The value of energy interaction in each experiment diminishes in time according to exponential law that is explained by the forming of energy informational or adaptation barrier, which separates parallel worlds and reflects the properties of vortex tenacity of aether as superfluid medium. At that, time of interaction is proportional to the size of quasimatter and the barrier for the earthly conditions is lowered at the indefinite period, on the assumption of only thrice-repeated observation of forces (triad law).

According to this principle, aether dynamic experiments in the earth laboratory do not have classical repeatability that, from the one hand, gives occasion to doubts in the objectivity and scientific character of the non-traditional experiments and from another hand it is the most reliable test feature of macroscopic aether motions. Biosystems have special relations with this principle.

The fifth is the principle of many-dimensional autobalance of forces. All vortex and linear motions of macroscopic aether organize themselves in the way that in the band of space-time spectrum of the local system (usually with the aid of fluid and gas aether) occurs to be self-balanced, that is they have zero resulting impulse and the moment of impulse due to the existence of the proportionate antivortexes and antistreams of another spectral structure at the same space volume. The self-balanced vortex structures and streams are practically closed for the outer watch from the direction of our material world, at least with respect to the methods of classical physics. The principle of autobalance of forces reflects aether properties as unified synergetic system and has a significant applied meaning.

Let call the principle of viability of aether dynamic systems as the sixth principle. Only a stereodynamic multivariate system is a viable one, that is a system, which during a definite period of time has the opportunity, called as life cycle, to realize interconcerted self-oscillating processes of vortex-wave character simultaneously at different phase states (subspaces, layers) of aether. The most important features of such a system are its space-time quasimaterial (vortex-wave) broadbandness and finite time of existence, which is determined by the conditions of creation of the energy-informational barrier. Self-oscillation regime demands the presence of an energy source, oscillatory circuit (a pendulum) of any character, intensive process (of negative tenacity) and a channel of positive feedback (negative entropy).

In the sense, referred above, any material system is viable and occurs to be a big system in the form of coordinated community of multivariate subsystems. In its turn each big system as a part of the hierarchy is a

constituent of bigger system, until everything is embraced by the Biggest System, that is the Universe.

The seventh principle of the universal energy interchange is the physical realization of the law of unity and struggle of oppositions. This principle determines spontaneous creation of thermodynamic and antigravitation potentials. Any local matter mass (a body), situated in the open space, creates an exchange process with the surrounding aether volume in the way that more fine-structure fluid aether is absorbed by the body, and the less power-consuming gas aether is radiated. As the result the body as a heat engine gets energy due to the cooling of aether exteriors. At that, antigravitation forces acts between bodies and aether exteriors, which have different temperature.

This principle, which establishes the existence of antipodes of the second law of thermodynamics and Newtonian attraction, is realized mainly in cosmic scales and explains in which way the energy is created in the bowels of planets and stars and why the Universe is stable as regards to gravitation. Obviously, the most unexpected for the modern Physics is the discovery of non-traditional nuclear processes where conditional reactions of decay and fusion occur at the usage of quasimatter.

More deep research of new experimental results and of the stated above scientific principles lets to determine the priority-driven strategic tendencies in Physics, to open more entirely the laws of mechanics and

thermodynamics of many-dimensional aether, including the theory of non-traditional waves and new types of electromagnetism. At that, the supreme aim is the research of differences in aetherodynamics laws on the Earth (in a laboratory) and in outer space, the unknowing of these differences has caused logical insularity, false all-sufficiency of classical physics, which had refused as "not wanted" the aether conception and fundamental Universal laws.

References

1. Mishin A.M. On the new properties of physical vacuum, gravitational field and mass. DD USSR, 1988, p. 44
2. Mishin A.M. Experimental results on the registration of aether wind // New ideas in Natural Sciences. Series: Problems of research of the Universe, issue 18. – SPb: RAS, 1995, p. 24-33
3. Mishin A.M. The Aether Model as Result of New Empirical Conception. New Ideas in Natural Sciences. (On materials of the International Conference). Part I – SPb: RAS, 1996, p.95-104
4. Mishin A.M. The physical system of artificial biofield // "New Energy Technologies" – SPb: Faraday Labs Ltd, 2001, issue #1, p. 45-50
5. Mishin A.M. Antigravitation and new energy processes // "New Energy Technologies" – SPb: Faraday Labs Ltd, 2001, issue #2, p. 37-41
6. Longitudinal thermomagnetic effect // New Energy Technologies – SPb: Faraday Labs Ltd, 2002, issue #2(5), p. 38-41

Irving Langmuir and Atomic Hydrogen

Nicholas Moller

PO Box 201
34008 Eretria
Greece

Editorial

In this paper Dr. Nicholas Moller describes the history of development of Atomic Hydrogen technologies in details. It is remarkable that this technology can be applied not only for welding processes but also as a clean free energy source. It is important to note that in this case the hydrogen process does not involve a consumption of hydrogen, which is not combusted in the process. Atomic hydrogen is not really a fuel but rather a medium, gateway or a super-conductor of ZPE form the vacuum of space, converting ZPE radiation and ultra-high frequency electrical energy into infrared (heat) radiation.

This is the story of Irving Langmuir who was the first to develop a theory on Atomic Hydrogen on the basis of empirical research and experimentation. His work in this field lasted from 1909 to 1927. During this period he was employed by the Research Laboratory of General



Irving Langmuir.

Electric Company. Patents and discoveries developed by Langmuir during his time with General Electric were to a considerable extent instrumental in laying the foundations for what is today one of the largest corporations in the world.

The question that gave birth to this article, is why his work and discoveries on Atomic Hydrogen were the only work that received hardly any attention at all and why his revolutionary breakthrough was deprived of world attention for almost 100 years? This question becomes even more relevant when taking into consideration the high standing he enjoyed with his contemporaries (including being awarded the Nobel Prize in Chemistry)

and it is better to make it distantly after exclusion of man presence near experimental stands and devices. At the same time it is quite obvious that on applying of small capacity and fixed time of irradiation it is possible to develop methods for curing of human diseases, which are considered now as incurable (for instance of diabetes, some diseases of haematogenic system, of cancer and possibly of AIDS).

References

1. Proceeding of the International Scientific Conference "New Ideas in Natural Sciences" Problems of Modern Physics, p. 176-187
2. Journal of new energy, Vol. 3, #4, 1999, I.M. Shakhparonov "Interaction between Kozyrev – Dirak radiation and radionuclides", p. 85-89

3. Kozyrev N.A. Selected works, Leningrad State University, 1991, part 3
4. Lavrentyev M.M. Eganova I.A. Luzet M.L., Fominykh S.F. / Reports by AS USSR. – 1990, Vol. 314, #2, p. 352-355
5. Lavrentyev M.M., Gusev V.A., Eganova I.A., Luzet M.L., Fominykh S.F. // Reports by AS USSR. – 1990, Vol. 315, #2, p. 368-370
6. Methodological materials on experimental pharmacological and clinical trials of immune modulating effect of pharmacological remedies. - Ministry of Health USSR, M., 1984
7. Talmadge J.E. and Chiragos M.A. Comparison of immunomodulatory and immunotherapeutic properties of biologic response modifiers. Springer Seminar Immunopathol., 1985, 8, 429-443

Effect of Magnetic Blow Wave Field on Wine Systems

I.M. Shakhparonov (Corresponding author), S.A. Grin, S.R. Tsimbalaev, L.N. Kreindel, V.N. Kocheshkova, A.I. Podlesny, S. Yu. Gelfand

AGD Firm, Peschanyi pereulok, House No.20P korpus No.1, Lfl. 33 125252, Moscow, A- 252, Russian Federation

Russian Institute of Canning Industry, Shkolnaya Street. 78. 142703 Vidnoe 3. Moscow Region, Russian Federation

Introduction

Authors communicate the data on influence of Magnetic Blow Wave (MBW) field on several wineproducts. It was found, that MBW did not lead to significant changes in the major components of the wineproduct (sugar, organic acids, minerals). At the same time the taste and aroma of treated wine become more pleasant; content of heavy alcohols and wine stone in the treated samples was less than in non treated ones. A mechanism of transformations was also discussed.

Keywords: *Magnetic Blow Wave (MBW), Wineproduct, GLC of aroma compounds and ethanol, HPLC of sugars, Atomic Absorption Spectrometry (AAS) of minerals, Heavy alcohols and aldehydes, Wine stone, Turbidity tendency, Organoleptic evaluation*

Magnetic Blow Wave (MBW) was obtained for the first time during the investigations on ball lighting generation under the laboratory conditions (Shakhparonov 1994). MBW as a physical object is interesting because of some facts, which suggest that MBW is a magnetic monopole. The MBW can also interact with the matter and transforms it in a definite way. Typical example is an elementary carbon in the form of graphite, which is transformed by such magnetic treatment into ferromagnetic substance (ibid).

The graphite, which is initially diamagnetic, transforms to paramagnetic one with general radiation dose of about $7 \cdot 10^{19}$ neutrons/cm². Other types of radiations could not affect this way (Svoistva 1975). So one unit of MBW can be considered as $1 \cdot 10^5$ of neutron masses. This fact may be regarded as an indirect evidence for assuming that MBW and magnetic monopole are the same things. In the absence of excited radioactivity a slow MBW [$v/c < 1 \cdot 10^4$] occurs, which does not ionize atoms (Devons, 1963). Therefore, their interaction with the matter can be observed only indirectly. No data exist on the interaction of MBW with organic substances. The experiments and results reported in the present communication may be a starting point for development of technology and to formulate the methods for vintage wine and best quality spirit production.

Materials and Methods

Assuming that MBW and magnetic monopole are the same things, a number of conditions were selected for all experiments. The MBW source and the samples were placed in the same axis and the axis was oriented according to magnetic meridian direction. Such magnetic orientation is appropriate, as the energy of magnetic monopole theoretically increases in a magnetic field (Devons, 1963). All of samples were placed at 250 cm distance from MBW source, in hermetically closed glasses. It should be noticed that MBW could penetrate through many other barriers, for example into cast iron reservoir with wall thickness of 5 cm (Amaldi, 1970).

The quality investigations were made by using of standard equipment. HPLC, equipped with refractometric detector was used for sugars estimation. Separation of organic acids in forms of their ethyl esters and acid esters was carried out chromatographically using a column packed with polyethyleneglycol succinate and the following temperature option: initial temperature is 120°C, final temperature is 220°C, temperature growth rate: 8°/min. GLC was also employed for determination of ethanol. Minerals content

was examined with Atomic Absorption Spectrometry (AAS). Electronic spectra of samples were obtained with double beams UV Vis spectrophotometer equipped with permanent wavelength scanning. Redox potential was measured with EV-74 potentiometer.

The aroma alterations in the wine samples were investigated by GLC method after preliminary concentration of aromas by solid phase adsorption. The concentration was carried out by barbotation of inert gas (nitrogen) through liquid and consecutive catching of volatiles with tube trap, filled by Polysorb 1 sorbent (Lur'e 1972). The well-known analogue of Polysorb 1 is Porapak Q. The tube may be regarded as a short chromatographic column, and volatiles go through it according to their retention times. The choice of sorbent was motivated by the fact, that retention times of water and ethanol was rather small (ibid). Thus, a concentration process can be ended at the moment, when water and ethanol have passed through the column, as the other volatiles remained bonded. The aroma desorption was made with ethyl ester. The analysis of the concentrates obtained was carried out with gas chromatograph equipped with flame ionisation detector (FID), column 3 m x 3 mm, packed by Carboxav M on the Supelcoport. Temperature for the analysis was programmed from 100 to 190°C with increase of 1°/min. Isothermal conditions in the borders had durations of 2 and 40 min respectively. The "mild" conditions of separation were also employed (initial oven temperature was 80°C with isothermal condition duration 5 min, temperature growth rate 1°/min, final temperature 150°C and isothermal condition duration 40 min).

Optical activity was tested with Spectropol at D line of Na (580 nm). The samples were evaluated organoleptically by a group (12 persons) of workers from Russian Institute of Canning Industry. Turbidity tests were made under the methods of Valuiko et al (1987). In some cases, qualitative tests were completed by MPL turbidimetric measurements. Before testing samples were filtered. Determinations of heavy alcohols and aldehydes contents were carried out in accordance to National Standard (GOST, 5363-67) as follows below. Determination of the constituents of "heavy spirits" (i pentanol, i butanol) was based on reaction of the sample with salicylic aldehyde in a presence of H₂SO₄. Rose colour develops if sample contains the heavy alcohols. The density was measured with Vis-photometer and the quantitative determination was carried out using standard graph made with mixture solution of i pentanol and i butanol. A method for determination of aldehydes content is based on a reaction of fuchsine sulphite. The developed colour was measured with Vis-photometer. Calibrating plot constructed basing on typed solutions was used for quantification.

Results and Discussion

Investigations of wine quality changes after MBW treatment were performed using two samples of portwine ("Zemfira") type wine. Sample 1 was a

reference (non treated) and sample 2 was treated with MBW.

In both samples, the fructose and glucose levels were practically the same and amounted to $43.8 \pm 3, 32.22.5$ g/l respectively. Sucrose and maltose were absent. Total sugar content was 76.0 g/l though the level marked on the label was 80 g/l. It is thus apparent that the treatment of wine with MBW does not lead to noticeable changes of sugars content. Results of organic acids determinations are given in the Table 1.

Table 1
Main organic acids content, g/l

Acid	Treated wine	Initial wine
Lactic	0.0265	0.00187
Oxalic	0.010	0.0088
Succinic	0.209	0.18
Malic	4.56	4.22
Tartric	0.0805	0.0895
Citric	0.401	0.483

Standard deviation for the determination method was estimated as 7 %. This fact shows that differences in organic acids content are not significant. It should be noted that a tendency of slight increase in light acids (up to malic) in the treated wine was observed in contrast to noticeable change in more heavy acids. The ethanol content of both of samples was 181 and 184 g/l for non treated and treated samples, respectively, though the label on the bottle indicated 190 g/l concentration. Standard deviation was 5 %. Thus, MBW treatment does not lead to significant changes in alcohol content.

Atomic Absorption Spectrometry (AAS) data indicated that the samples were practically identical in terms of K, Na, Ca, Mg, Fe, Cu and Zn contents (data are not shown).

Similarly, spectra of treated and non treated wines, diluted 150 times before photometry, were practically identical, thereby pointed out that polyphenols are unchanged.

When wine is industrially treated with IR or microwave heating, ultrasonic, ultraviolet and g radiation, different reactions occur and there include redox reaction, esterification, condensation, hydrolysis, Maillard reactions, etc (Kishkovsky 1988). Most of reactions are accompanied by redox potential changing. Increase in Redox potential points out the increase in concentration of oxidants, i.e. oxygen, peroxides, and other compounds, which are electron acceptors. Redox decrease is a result of oxidation processes (ibid). Redox potential was practically constant ($\Delta E = 145$ mV and 150 mV in samples # 1 and 2 respectively). Evidently, oxidation processes, like they occurred during heat treatment, were absent during the MBW treatment.

One of the important reactions to be considered is the Maillard reaction. Essentially it appears in form of browning, decrease in reducing sugars and amino acids, and new aromas formation. While our result evidences on absence of irrelevant aromas, alterations of wine colour, and sugar content, thereby indicating insignificant contribution of Maillard reaction on wine quality changes due to MBW treatment. Technological treatment often leads to esters accumulation that improves wine aroma. It's well known that the most important in this context are the esters of C₆-C₁₄ fatty

acids (Kishkovsky 1988). During heat treatment, storage and other physical influences, different kinds of acid esters accumulate. These have weaker aroma than esters of fatty acids. But their appearance proves the existence of esterification processes. A comparison of aromas chromatograms of the samples 1 and 2 proves occurrence of changes in concentrations of the individual substances (increasing of peaks length with retention times of 13.10, 100.9; decreasing of peaks length of 54.85 min). An order of peaks exit of different volatiles is given in the Table 2.

Table 2

Exit order of different volatiles

Exit order, from published data for Carbovax 20 M	Retention time in our experiments, min	Exit order, from published data for Carbovax 20 M	Retention time in our experiments, min
Acet aldehyde	3.8	i-Pentanol	23.56
Ethyl acetate	4.71	i-Amyl butyrate	
Diacetyl	4.82	Acetone	
Methanol	4.91	n-Pentanol	27.92
Ethanol	6.01	i-Amyl valerate	
n-Propanol		Ethyl lactate	
i-Butanol	13.58	Ethyl caprilate	52.6
Butyl acetate	13.59	Acetic acid	
i-Butyl acetate		Diethyl succinate	
Ethyl valerate		Ethyl laurate	
n-Butanol	17.73	Phenyl ethanol	
Amyl acetate	20.70	Diethyl malate	

A comparison of retention times of components with peaks of standard substances of wine aroma indicates that butyl acetate and i-butanol are very close to peak 2. Data on chromatographic separation with mild condition showed that i butanol and butyl acetate peaks exited simultaneously. Organoleptic evaluation recorded a nice smell in the treated wine, thereby due to the formation of butyl acetate. Data indicated the presence of ethyl malate, ethyl tartrate and ethyl citrate in the samples, in addition to two peaks corresponding to ethyllactate and ethyl oxalate. The large experiment error does not allow any inference on changes of their

height after magnetic treatment. Identification of peaks with retention time factor especially in such complex system is not unquestionable. However, the best way is to use the chromato mass spectrometer, which allows inference according to their individual mass-spectrum.

Organoleptic evaluation can depend on aliphatic alcohols content. Determination with GLC shows (Table 3), that their quantity in the both samples is rather small with respect to average values taken from literature for this type of wines. Thus such changes can not be recognized with such evaluation. For both of samples pH was equal to 4.0.

Table 3
Aliphatic alcohols content, mg/1

Alcohol	Sample #1			Sample # 2	Average literature values (Kishkovsky 1988)
Methanol					80-350
i-Propanol					0,3-3
n-Propanol	less	than	20		5-50
i-butanol	less	than	20	less than 20	20-100
n-Butanol	less	than	10	less than 10	2-10
i-Pentanol	less	than	20	less than 20	100-250

The results of optical activity measurements indicated, that both samples are not optical active. Filtration, clarification and dilution could not change the optical activity. Perhaps, there is a compensation of different forms of D- and L- compounds in the samples, thus total activity was very close to zero, and magnetic influences could not change equilibrium between the forms.

Organoleptic evaluation of more delicate taste and aroma of the treated sample with respect to non treated one, MBW treated sample as more complete, harmonic, noble, and natural in contrast untreated sample was recorded as excessively bitter and sour in spite of practically the same pH of samples.

It is interesting to test the tendency of wine to make a different kind of turbidity after the MBW treatment. Data showed that both samples were not positive for protein turbidity. In term of reversible colloid turbidity formation, after storage at 7.5°C for 1 day, the MBW treated sample was homogeneous, in contrast to the formation of different phases with different refractometric numbers in untreated sample. Both the phases in untreated sample were liquid, with a density very close to each other, but the borders of phases were like broken lines when crystallization begins in crystallization process. This alteration in untreated sample may be due to micelle state changes or of structurization of product.

The tendency test for polysaccharide turbidity based on the reaction with phenol in presence of H_2SO_4 and determination of the derivative formed by photometrically, indicated, that difference in concentrations of polysaccharide in the both samples are very small, the levels being 119 and 106 mg/l for untreated and treated samples respectively. These values are close to range of polysaccharide stability (150-200 mg/l), and thus do not allow any conclusion on changes of relative stability of the samples. A tendency for polyphenols turbidity, due to polyphenols associates precipitation upon addition of salt did not show differences. Turbidity, as determined in MPL apparatus, was 15 FEM as against value of 0.2 FEM before testing in untreated sample. These numbers were respectively 14 and 0.3 FEM for treated sample. Thus it indicates that both the samples are very stable with respect to polyphenols turbidity and that the magnetic treatment does not lead to alteration in the polyphenols stability.

The data on the colloid stability indicate, that both the samples showed rather high resistance against protein, polysaccharide and polyphenols turbidities. Besides, treated sample showed higher stability with respect to reversible colloid turbidities.

It is interesting to investigate as to how heavy alcohols and aldehydes, which are often produced, when low-grade technology is used, are affected by magnetic treatment. For these studies, a system of simple mixture, consisting only of spirit and water, was used.

Commercial vodka bottled in standard 0.5 l bottles and artificial solutions, containing 40 % of food derived rectified spirit were used. Data showed, that MBW treatment significantly influenced the heavy alcohols content, as the reduction in heavy alcohol was more than two times. In addition, it reduced aldehydes by more than 3 times in vodka, and more than 30 % in rectified spirit. Data indicate that efficiency of aldehydes removal is higher when the sample contained higher level of aldehydes. Thus, the MBW treated vodka and rectified spirit will be better than untreated one. It is however stressed that untreated samples were also recorded as good by sensory panel. So, limits for aldehydes are usually present in high quality vodka established by National Standard (GOST 5363- 67) are 6 - 15 mg/l. Thus the organoleptic evaluation of samples does not allow to find difference in aldehyde levels in these samples.

Table 4

The main results of heavy alcohols and aldehydes determination (mg/l) in vodka and solution, contained 40 % of rectified spirit

Substance	Non-treated vodka	Treated vodka	Non-treated spirit	Treated spirit
Alcohols	8.7	2.55	3.38	1.5
Aldehydes	1.5	0.4	0.6	0.4

Sediments formation and its character were also evaluated. The sediment in treated grape juice was dense and more dark, the formless, non crystalline sort, and gel like form. The volume of the sediment occupied up to 30% of total volume. The sediment did not sink or float, nor it stick to the walls of glass. It was found that 100 ml of juice gave about 155 mg of dry sediment. Microscopic investigations showed an absence of any kind of bacteria or fungi in the sediments.

The effects of high energy of magnetic influences on sediment were also investigated. The experiments were carried out with "Portwine Erevanski, vol. 0.5 l, white, spirit content 19 vol %, sugar 10 %, prepared according to GOST (National Standard) 7208-84". Crystalline sediment appeared on the walls and especially on the bottom of the bottle after the BMW treatment. An amorphous precipitate was also presented, and it can be separated by decantation. Crystalline sediment, after washing with ethanol and drying to constant weight, weighted 69.2 mg, and was of bright brown colour. A tartrate content as a tartrate acid, of the sediment was 59% mass. If it is considered as a tartar (a wine stone) of potassium sodium tartrate, then tartar content in sediment works out to be 86%. If it is considered as a tartar of dipotassium tartrate, tartar content in sediment will be 93%.

Generalization of data shows the positive effect of magnetic treatment on the wine samples, leading to harmonic taste of treated wine and absence of non

pleasant tastes. Most of the changes were found to be in the flavour and taste components, which were minor substances in the product. For example esters concentration changes during the treatment. At the same time the content of major components, such as sugars, organic acids, particularly, heavy organic acids, and especially ethanol remain constant. It seems logical from kinetic point of view, when simple processes, like esterification, are preferable with respect to many stages reactions, and reactions with high activation energies, which can go at hard conditions. Also, it seems logical that magnetic treatment may influence on electrical state of colloid species. Thus magnetic treatment can be considered as mild, selective in the comparison with many other physical methods. Nevertheless, the changes lead to acceptable energetical and nutritious value of the product. Data show that difficult problems, such as tartar removal, can be solved by MBW treatment.

References

1. Amaldi E. et al in: Preprint CERN, Report 63 13. Search of Dirac Magnetic Pole, 1970.
2. Devons S. Search for Magnetic Monopole, Sci., Progr. (No.204), 601 (1963).
3. GOST (National Standard) 5363 67. Vodka. Metody ispytaniy (Testing Methods).
4. Kishkovsky Z.N., Skurikhin I.M., Khimiya (Wine Chemistry), Moscow: VO "Agropromizdat", 1988, 253 p. (in Russian)
5. Lurle A.A. Sorbenty i khromatograficheskie nositeli (Handbook on Sorbents and Chromatographic Supporters), Moscow, Khimiya, 1972, 320 p. (in Russian)
6. Shakhparonov I.M. in: Sharovaya molniya v laboratorii (Ball Lighting in the Laboratory) / Collection of Articles. Moscow: Khimiya, 1994, 400 p.
7. Svoistva konstruktsionnykh materialov na osnove ugleroda (The Properties of Constructional Materials Based on Carbon) / Handbook/ Nagorny V.G., Kotosonov A.S., Ostrovsky V.S., Dymov B.K., Lutkov A.I., Anufriev Yu.P., Barabanov V.N., Belgorodsky V.D., Kuteinikov A.F., Virgelev Yu.S., Sokker G.A. Moscow, Metallurgy, 1975, P. 73 77 (in Russian)
8. Valuiko G.G., Zinchenko V.I., Mekhuzla N.A. Stabilizatsiyavina (Wine Stabilization), Moscow: "Agropromizdat", 1987, 160 p. (in Russian).

The Fundamentals of the New Principle of Motion

By The Group Studying Inertialess Natural Processes (GSINP)
123430, Moscow, Mitinskaya Str., 40-1-244 Email: gibip@mail.ru

P. Sherbak

The concepts of active and passive interaction between the moving object and the space form the basis of the new principle of motion.

So as to be more understandable, let's consider what is the old principle of motion. For this we will use the concept of a moving object and the space in which the object is moving. Naturally, material objects and the space can't interact between each other directly, because the space is the philosophical category. In this case we can understand physical essence of natural phenomena easily. In our view, the material objects interact with some fundamental energy of space (FAM), which fills all space with a different density. Thus the energy (FAM) is inalienably connected with the space. One of the first names of this energy is "ether" in the early scientific works. So, for the simplicity we will accept that the object and the space interact between each other.

Thus, all existing methods of motion which have been invented by mankind till the present time are based on activity of the material object that means the one expends some energy to produce the motion, and at the same time space is passive, it means that space does not need to spent any energy to move the object. And so in common case space tries to keep the object

in the former state interfering with accelerated movements of the object (in accordance with **the 1st, the 2nd and the 3rd Newton's laws**).

It should be noticed that such method of motion (for the speed, which is much less than the speed of light) takes place both in animate and inanimate natures. In this case the level of energy of motion and reaction of space (or an environment) are not very high. Incidentally, the energy of object can be of different types: electrical, chemical, biochemical, mechanical etc. The common consequence of this type of motion is existence of the **inertia**. The classical physics can't answer the question: "what is inertia?" The same situation is applied to the concept of **mass**, which is closely connected with inertia. The classical physics says that **the mass is a measure of inertia**.

There is the new principle of motion of material object: the object is passive and space is active. In this case it's more favorably for space in the energy aspect to move the passive object and to spent some power then to keep the object in the present place in the former state of immobility (in accordance with **the 1st, the 2nd and the 3rd Newton's laws**). And so we should introduce **the 4th law of Newton's mechanics**. It says that **there are the systems of coordinates in which the body is moving not rectilinearly with acceleration when this body is in the state of immobility**.

The basic and the main differences of the offered principle of motion from the existing methods at the end of the XX century are the following:

- 1) **The absence of inertia of motion;**
- 2) **There are no limits for the speed of motion;**
- 3) **The absence of "fuel reserves" "on board" of the moving material object.**

Nikola Tesla and Instantaneous Electric Communication

Vladimir I. Korobeynikov

Russia

E-mail: elen@mail.infos.ru

Nikola Tesla (1856-1943), an outstanding inventor, was and still remains one of the most mysterious persons in the history of electrophysics. Whereas the most scientists were moving together in direction of microparticles investigations, as the basis of matter structure and of nature itself, he was going in opposite direction. He had a keen interest in the investigation of electric charge of the Earth as a whole. He was looking for the ways to influence on it, to control its state and methods of its regulation.

Therefore, exactly, the most of his searches, experiments, the purpose of constructions and buildings, created according to his conceptions, cause perplexity and misunderstanding of scientists even in nowadays.

The most mysterious of his main experiments were made in USA after 1904. After Nikola Tesla death in 1943, all his diaries and records over a period from 1904 year had mysteriously disappeared. Probably they were stolen (it was known, what to take). Lost records could "cast light" on one of the most "strange" of his buildings in the form of the enough tall tower, on the top of which a specially created toroidal transformer was placed. This transformer could create there a huge electric potential up to the billion volts.

Nikola Tesla switched on this tower-device, what caused the fright and even panic in mind of people from nearby settlements. Of course! Because of very high electric potential there began air ionization, which spread very high to the atmosphere accompanying by the effect of color play. Such luminous, color-playing sky caused even a horror of people, who knew nothing about the experiment made and its goals. They did not guess that Tesla by means of the electric charge, created of the tower, was influencing on the electric charge of the Earth as a whole (about 600000 Coulomb). There was a global scale in Nikola Tesla's investigations.

There is no point in detailed analysis of the fact that the potential of the tower top influenced on the Earth charge. Interaction of charges-balls with the distortion of field lines, distortion-distribution of charge on their surfaces, induced charge, is beautifully described even in school physics textbooks. In Nikola Tesla investigations the

Earth had the role of one of the charged balls. It was possible by changing of charge on the tower to deform electric charge distribution on the whole Earth surface at once. This deformation (electric currents) could be fixed at once in every point of the Earth surface. It is alluring to use this effect for data transfer telecommunication, both on the Earth, and in space.

After such introduction the question "How does the system of instantaneous electric communication for any distance look like and work?" is still opened. First of all, the readers need to know, that such instantaneous communication is possible in principle. The proving it theoretical calculations, are rather difficult for popular interpretation. Some part of readers can take it on trust, and those who are most interested in can apply to works of Oleinik V.P. (quantum physics) the professor from Kiev Polytechnic University. At the minimum there are two necessary works: Oleinik V.P. "Faster-than-light transfer of a signal in electrodynamics. Instantaneous action-at-a-distance in modern physics" (Nova Science Publishers. Inc. New York. 1999) and Oleinik V.P. "Latest development of quantum electrodynamics: self-organizing electron, faster-than-light signals, dynamical heterogeneity of time." (Physical vacuum and nature. 4. 3-17. 2000).

"PC" magazine has devoted a rather significant article entitled "Computers and teleportation" to V.P. Oleinik works, concerning instantaneous electric communication ("PC" #6, 2000). Note, that the author of the given article has also found the possibility of instantaneous electric communication, but by means of materialistic methods, absolutely different from Oleinik's ones, what is most important – two different solutions point to the possibility of this communication. "PC" #6, 2000 in the article "Circles on fields" cited mathematical formulae of the structure of electron electro-magnetic field as an illustration (it refers to the Earth too) that the author of this article has got.

The most attentive readers of that article could notice, that one vector Hz absolutely "ignores" Special Theory of Relativity, since its mathematical expression does not include the velocity of light, whereas it presents in other vectors as a product of electric and magnetic conductivity. Magnetic line of this Hz vector goes to infinity and returns back from infinity. It surrounds the whole Universe. It is alluring to use exactly this (Hz) line for the **instantaneous** communication for any distance.

It is not so difficult to do it. In the Fig. 1 the easiest and most available for understanding line of the **instantaneous** electric communication is shown. A rotating charged dielectric ball (an "electron", isn't it?) is used as transmitter. The ball can be electrically charged up to the limit of charge flow-out into the ambient space. Around the charged rotating ball there appears electro-magnetic field, entirely analogous to the electro-magnetic field of the Earth (and of the electron too). The central magnetic line Hz goes to the infinity and returns

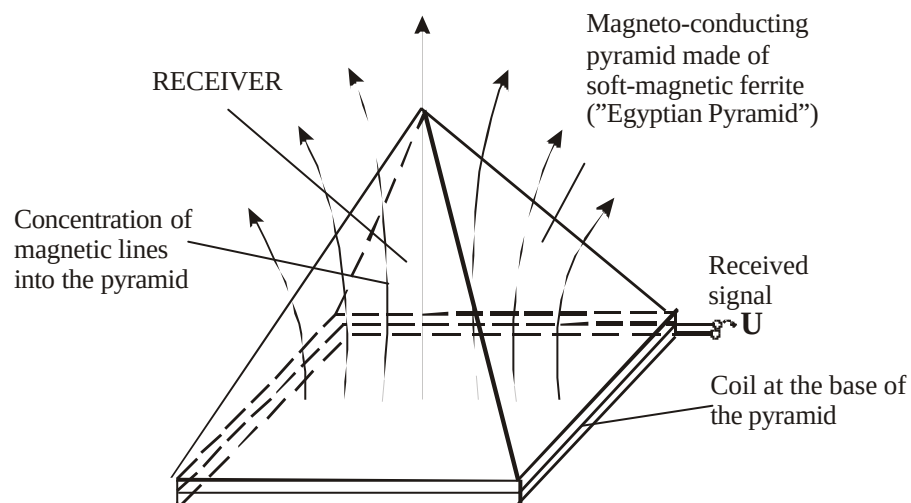
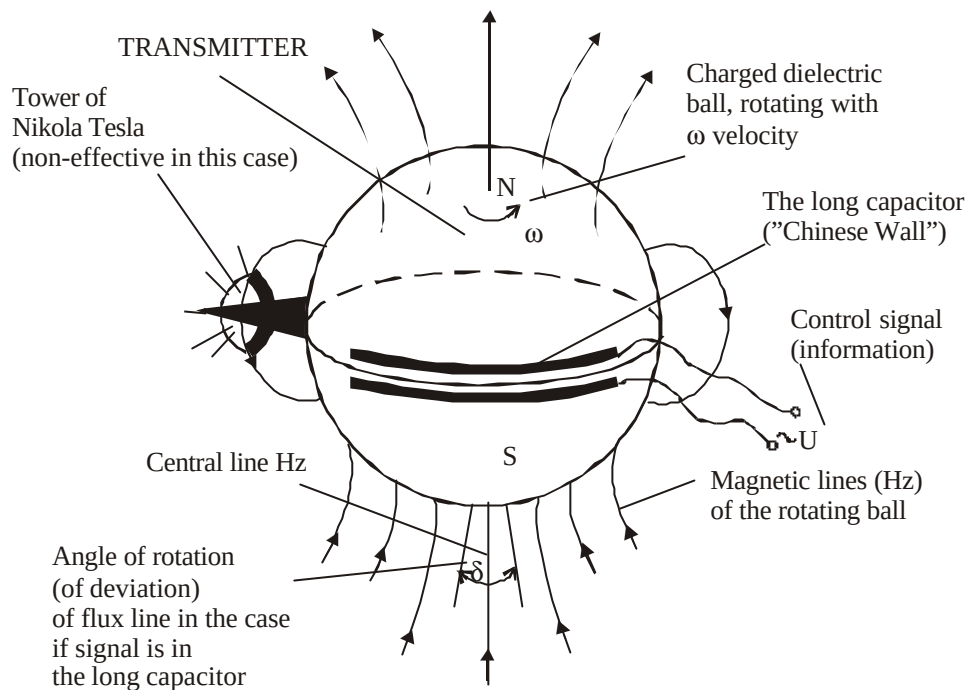


Fig.1

Line of the instantaneous electric communication on the basis of rotating charged ball and pyramid

back from it to the opposite side of the ball. In the same way the central magnetic line of the Earth (Hz) goes from one pole to the infinity through the whole Universe and returns from it to the center of the opposite pole.

If by the information to force the rotating ball (electron) to "wag by tail" (by Hz vector) which stretches through the whole Universe, then this "wagging" can be controlled instantly in every point of the Universe. While the rotating ball has a steady distribution of the surface charge, the line Hz does not change its dynamic position in the Universe.

If such distribution of the surface charge is broken, space position of the line Hz also will change. On mounting the Tower of Nikola Tesla on the surface of rotating ball and measuring the potential on this tower in time with an information it is possible to change the charge distribution on the ball, and, respectively, the space position of central magnetic line (Hz) in the whole Universe at once. Big disadvantage of the Tesla tower is that maximum influence on charge is executed in the point under the tower, and farther it began decreasing roughly (exponentially), according to physics laws.

Hence it is advisable to influence on the whole surface of charged ball, but not on some point of it. It is possible to influence at once on the very big part of surface by the long capacitor, placed on the perimeter (equator) of the charged rotating ball. Because of optimality reasons, this capacitor length should not exceed a quarter of the ball perimeter (equator) length. Charging and discharging this long capacitor on the ball equator by the data signal, only the position (angle φ) will be changed, not a value of the infinitely long magnetic line (Hz) in the Universe. It is a data transfer.

The natural question appears: "How to make on the Earth the most powerful transmitter for the **instantaneous** electric communication?" The answer suggests itself: "It is necessary to use the Earth itself as a rotating charged ball." It is not effective to use Nikola Tesla's Tower to deform the Earth electric charge. To place on the Earth very long (about thousands km) capacitor is quite easier. However, it must be placed not on the equator exactly, but moved a little bit because of the initial heterogeneity of the Earth surface charge distribution, caused by the presence of continents and oceans. It will be necessary to find the line of electric equator, where the amount of charge north and south of it is similar. This line will not be ideally straight and will be situated near the 30th parallel.

As a matter of fact, this grand capacitor is already built, but is half-broken. This capacitor is very well known – it is a Great Chinese Wall. The ancient, powerful Chinese Tzcin' Shi Huandi empire adapted and used it (capacitor) for the protection from nomads incursions. How unexpectedly and originally it is! In this case the electric iron would be the best tool for spiking. It is clear enough that the charged ball (as well as the Earth) will "wag by tail", which stretches through the whole Universe and does not change its energy, but only changes its position in space in time with information. Now we can go on to the question, concerning the way to control the Earth "wagging by tail" in the Universe, and thus to read information **instantaneously** in any point of the Universe.

In the Fig. 1 it is shown the input device of the electric communication receiver, made of the magnet sensitive material (it can be soft-magnetic ferrite) in the form of pyramid, with the proportions of well-known Egypt pyramids. Magnetic field lines of the far space pass through the pyramid from the top to the base and are concentrated by pyramid. If there is no signal (the "wagging by tail" of the far planet-transmitter is absent), then the magnetic flow, coming through the pyramid, does not change, and induced voltage in the coil, placed in the base of the pyramid, is absent (no information). If "wagging by tail" begins, then the magnetic flow, coming through the pyramid, will change, and it will cause the appearance of voltage on the coil in the base of the pyramid in time with the information.

Thus, the signal is received instantly. Here it is necessary to remind once again the difference between the

instantaneous and usual radio transmission. The usual radio transmitter for the transmission of the information uses the **energy** distortion of space by the information. This energy change in space happens with the velocity of light and hence there is the loss of time for information passing. In the considered case there is **no energy** change in space, there is only a change of magnetic lines position (Hz).

This is exactly the vivid and fundamental difference between the usual electric communication and the instantaneous one. **In other words, in usual transmitter during the fixed time interval there is the change of signal energy (instantaneous value), whereas in instantaneous transmitter there is no this change (only information). This is exactly the fundamental difference.**

Evidently, to receive instantly the signal from the opposite part of our Galaxy, we need rather big pyramid, in order to concentrate a big amount of field lines into the oscillatory circuit under the pyramid. The question can appear: why the pyramid, why not a cone? The point is that lines of the Earth magnetic field (the very lines that compass needle reacts on) in the any place of the pyramid horizontal section have the same density of distribution and are directed strictly parallel to the pyramid base. The cone in its horizontal section cannot provide such uniformity of distribution that is why it is not advisable to use it. From the space magnetic field lines pass through and concentrate in the pyramid strictly at right angle to the pyramid base.

This is the riddle of pyramids wonderwork. Any person coming into a pyramid, at the same moment feels the change of mental and physical condition of organism; which is very different from that it was before the entering into a pyramid. Of course! Visitors come inside, into concentrated magnetic field lines of the powerful and functioning magnetic core of the receiving electric circuit, what is absent outside the pyramid.

It is strange, but most of tourists are afraid of the ill effect, which can be produced by electrical systems on their health, but there they stand in a queue to feel this effect in pyramids. Concentration and division of magnetic field lines are the easy and effective way to reject a noise, created by the Earth magnetic field.

It is clear, pyramids should be oriented very thoroughly, so that lines of the Earth magnetic field would be strictly parallel to the base and to the opposite (East-West) sides of pyramid. To get such exactness of orientation in modern conditions is very problematically.

The most convenient place to build a pyramid (pyramids) is on the electric equator, in the place of its intersection with the electric meridian. Such place is located in Egypt, near its capital Cairo. And again we meet a paradox: such pyramids are already built on the Earth, but they are half-

broken. And Egypt was not less powerful than the ancient Chinese empire.

The Egyptian dynasty of Pharaohs has “completed” and adapted pyramids to burial-vaults, where mummies of dead Pharaohs were buried. Perhaps, it is even more incredible than in China. The impression is given that ancient powerful civilizations on the Earth had a competition between themselves, who will use radio-engineering constructions for instantaneous galactic communication in the most incredible way. Let’s give to a reader an opportunity to select a “winner”.

It must be noted that «PC» already published information that the Chinese Wall and Egyptian Pyramids are radio engineering constructions, intended for the instantaneous galactic communication (PC #114, 1997, etc).

There appears an interest in the possibility to produce very simple and manufacturable systems of instantaneous electric communication right now. Radio-electronic industry can produce them, but still does not guess about it.

Furthermore, such systems of instantaneous electric communication can be created at home, and even senior

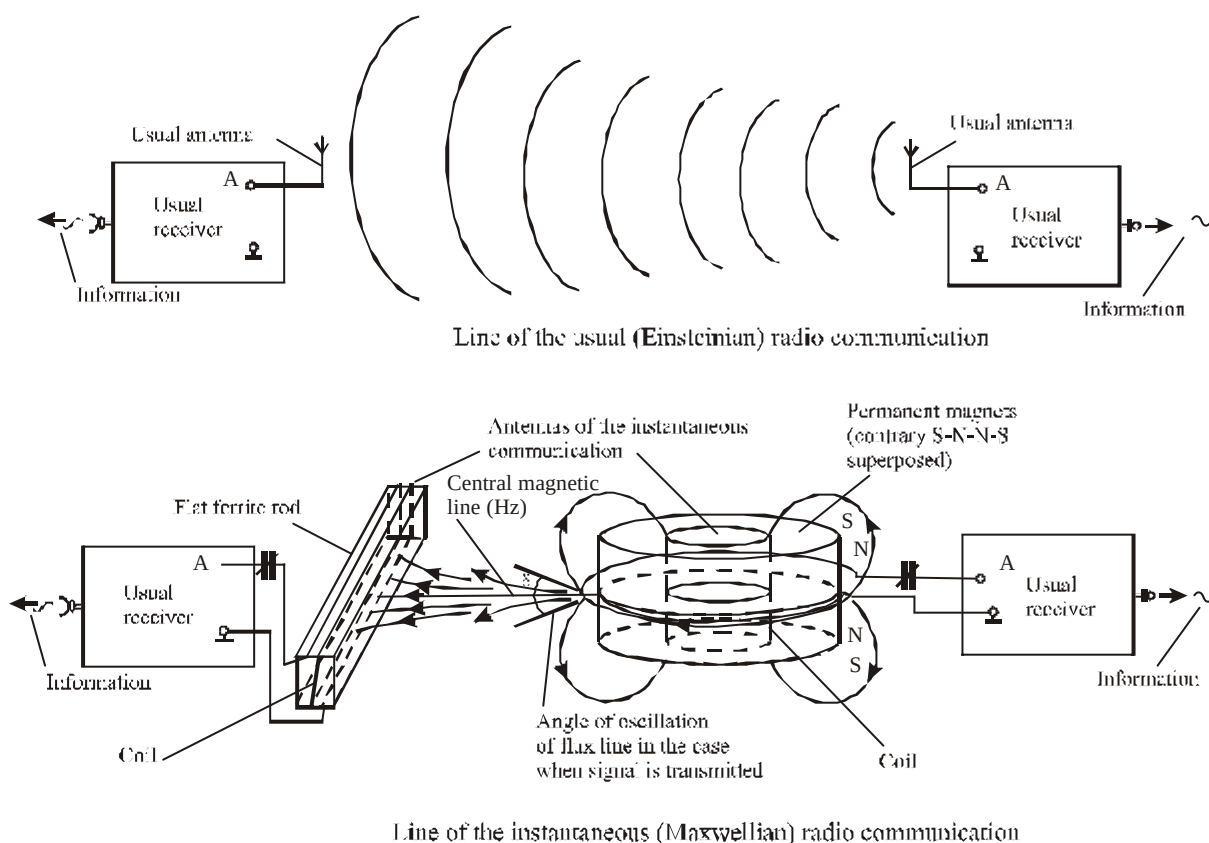


Fig. 2

Transformation of the usual line of communication of usual receiver-transmitter into the instantaneous one

pupils are capable to use them. In the Fig. 2 there is shown the construction of instantaneous electric communication line in comparison with the usual one. It can be produced even at home conditions. Two permanent magnets, connected between each other by analogous poles, are used as transmitting circuits.

Permanent magnets can be replaced by electromagnets. In the magnet connection point there is a coil, which while the signal passing through it will change its position (angle 5) in the space of the central magnetic line (Hz), coming out from the place of two magnets connection. Receiving circuit is available to be made of the flat ferrite, but coil

must be winded along, through butt-ends of core, so that the whole internal part of the coil would be maximal (in area extent) filled by ferrite.

The obtained coil can be completely “winded” (screened) by flat ferrite of big size. For more clearness of the experiment the central magnet line of transmitting part must be directed strictly along the axis of the receiving coil.

Now, if we give the alternating voltage (information) from transmitter to the transmitting coil, fixed on the permanent magnet, then the receiver, connected to the circuit of the

transmitting coil, placed on the flat ferrite, will detect an alternating voltage (information). Maximum effect is achieved at the resonance (coincidence of transmitter and receiver frequencies).

It is checked. It works. The dullest experts in radio-electronic (after the reading above) can rejoin, without making an experiment, that it is an absolute nonsense that any communication is out of the question. Coils with absolutely perpendicular axes, besides one of them is screened, do not interact with each other.

And here the most interesting thing starts. In the Fig.2 as it was mentioned above, the usual communication line and the instantaneous one were compared. The usual transmitter cannot generate the vector Hz that is why systems of usual and instantaneous communication cannot see each other in strict sense. What does it mean? It means, that in the same city it is possible to transmit on the one-carrier frequency ("what a nightmare!") two absolutely different television channels without any noises of one to another.

Usually by frequency match of a transmitter to the working frequency of another one, the radio communication is broken, but here it does not happen. Here some additional explanation should be given. As the vector Hz, which "ignores" the theory of Einstein is received from Maxwell equations, it follows that the usual (Einsteinian) system and the instantaneous (Maxwellian) one work on mutually perpendicular electromagnetic field lines (vectors).

In the Fig. 2 such difference is shown clearly. These are just "jokes" of complex numbers, when one value is absolutely perpendicular to another and nevertheless together they form a single whole. In other words it means, that two greatest persons in science Einstein and Maxwell as a matter of fact are something like "Siamese twins", completely grown together at the angle of 90 degrees, even by heads. On the one hand every one is on his own, but nevertheless they are the common (complex) organisms.

Hence there are a lot of misunderstandings on happened phenomena. How many scientists tried to find some mistakes of Einstein? They produced very convincing proofs concerning instantaneous interactions in nature. These scientists did not suspect that time and still do not guess now that they already for a long time are "walking" in the complex physics, which still does not exist. Einstein and Maxwell ("Siamese twins"), each occupies his own part of the complex number (complex physics) and they cannot be already taken off from there.

The only third, free "vacancy" is left to throw on the both of them at once the common "collar" and "reins", i.e. to fasten them ("twins") together by module and argument as any complex number. In this case no matter how the one part of complex number "ignore" the other one, only its argument will change, and module always will be equal

to the conditional unit. Only this single fact in principle changes the conception about "appearance" and "disappearance" of elementary particles! Even considered instantaneous and usual communications on the same receivers and transmitters in a complex conception (complex physics) eliminate appeared "misunderstandings" of all kinds.

Advantages of the instantaneous (Maxwellian) electric communication are especially evident during the connection with long-distance spacecraft. At present in the interval between sending of control signal to the station in region of Solar System peripheral planets and getting the reply it is possible to have a small break for dinner (it is very convenient).

In the case of the instantaneous electric communication use, duty operators will have "no dinner". Moreover, the system of instantaneous electric communication can realize two-way communication underwater and from underwater to overland. It is clear that input and output circuits of such system must be covered by slushing composite for the protection from aggressive effect of the salt sea-water. Such systems of instantaneous communication are very required to submarines.

Now, when readers know and understand the principle of operation of instantaneous (Maxwellian) electric communication systems and their advantages over usual ones (Einsteinian), we can only wait, when radio-electronic industry will start to produce these very required systems.

ELECTRIFYING TIMES

an online and published magazine about Electric, Hybrid, Fuel Cell Vehicles, advanced batteries, ultra capacitors, fuel cells, microturbines, free energy systems, events and exhibitions worldwide

63600 Deschutes Mkt Rd,
Bend Oregon, 97701

541-388-1908

fax 541-388-2750

etimes@teleport.com

www.electrifyingtimes.com

Subscription \$13/3 issues

Institute for Planetary Synthesis

P.O. Box 128, CH-1211 Geneva 20,
Switzerland

Tel. 41-022-733.88.76, Fax 41-022-733.66.49

E-mail: ipsbox@ipsgeneva.com

website: <http://www.ipsgeneva.com>

The Unified Gravitation Theory

(The unified super-principle,
which controls the Universe)

I. P. Kuldoshin

Orenburg, Neftyanikov str., h. 2, apt. 9,
460019, Russia

(Editor's comments by Alexander V. Frolov)

A forum of the leading USA physicians took place in the White House in March 1998 in presence of President Clinton. There was only one question: "When will the nature of Gravitation be opened?"

The well-known USA physician-astrologer S. Hoking declared that it possibly would occur in twenty years and it would be **the Unified Theory of All**. So, the scientific world by default called it the greatest discovery of the future.


Some time later a new hypothesis pretending to this discovery has got its birth in Orenburg. Despite this fact this hypothesis would gain recognition and status of the **Greatest Discovery of Mankind** only by 2018 that was predicted by S. Hoking.

To present day there have been written a lot of hypotheses on this problem but they haven't been recognized. Many scientists consider our Universe as living and functioning according to the unified and rigid laws in Macro and Microworld, which provides automatic regulations of all its processes due to **circulation of radiant energy of the Universe life in cosmic space**. This energy is inexhaustible and environmentally clean, and Mankind may learn using it in the nearest time for the welfare and for prevention of **contradirectional irreversible ecological** catastrophe.

There is no alternative for humankind to escape and it will not appear in the future. Only cosmic energy will save us. From the book "Secret Doctrine" by E.P. Blavatskaya we can get complete information about the fact that a highly developed civilization of Atlases on the Earth had a **"General Theory of All"** yet 10-12 thousand years before our civilization. They had no automobiles, but instead they had flying objects (aircrafts) "Vimana" of various types as well as ships and submarines, on which they also used **Cosmic energy**.

While reading an abstract in General Soviet Encyclopedia, I got acquainted with the theory of "Aether wind", which was abolished in the beginning of the XX century, and then I understood that this theory contains a deposit to discover the nature of gravitation.

The nature of gravitation is the only one and there are no alternatives in theoretical as well as in physical sense. When scientific world of entire planet abolished the theory of "Aether wind", it lost the possibility to

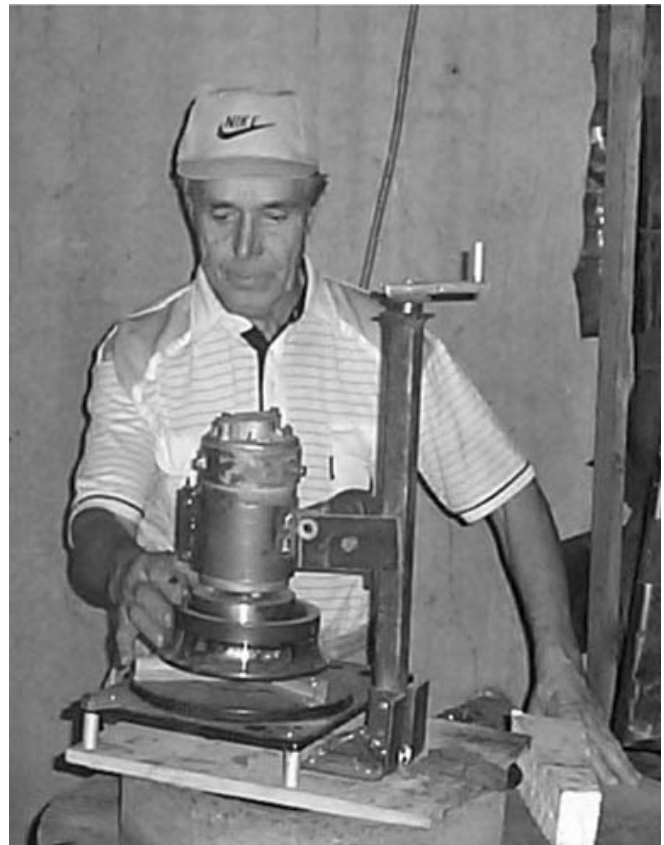

discover the nature of gravitation. The XX century was marked by a revolutionary development of scientific and technical progress, but there was an almost 100-year stagnation in cognition of the Universe elements.

The theory of "Aether wind" supposed that all Cosmos is filled with aether particles flying with the speed of light (these particles are "neutrino" according to modern understanding). **The role of gravitation, carrier of light and retarding medium in Cosmos** was attributed to this motion of particles.

But this theory allowed chaotic motion of particles, which is impossible in mechanism of the Universe, which is adjusted up to automatic mode. Besides, motion of these particles is not possible without an absolute buffer unit, which prevents their head-on collision at the speed of 600000 km/sec (it is thermonuclear explosion and death of matter, i.e. the Universe). E.P. Blavatskaya wrote that Cosmos is filled with radiant energy of the Universe life, luminophore, electromagnetic aether. Thereby she predicted a ready solution to make correction in the uncompleted theory of "aether wind". On the basis of above stated and due to the **un-assumed dawning up**, the theory of "aether wind" was completed. It was the ground to develop a hypothesis of radiant "aether wind". Particles of this wind (neutrino) are electromagnetic particles and move with the speed of light in all directions as **contradirectional paired single-stream flows** (like electrical current in twin-wire cable). Due to this, an absolutely stable concentration of these beams in cosmic space is provided according to the principle "what has come in, the same has gone out".

The hypothesis formulates new views on the problem of structure of elements of the Universe material world.

Some separate conclusions do not match the views of modern scientific thought on the problems of physical principles of material world structure and functioning of the Solar system.

List of topics of the hypothesis

1. The hypothesis discloses the operating environment of a super-mechanism, which controls the Universe (it is a radiant "aether wind").

2. It discloses the nature of retarding mechanism of flying objects in Cosmos (its name is Lorenz-Fitzgerald compression).

3. It proves the absence of Universal gravity and beams of light as we usually conceive it. (The beams of aether wind collide and compress matter. An alternative to the notion about beams of light is a temperature wave impulse on the beam of aether wind. It explains why the speed of light doesn't depend on the speed of the source of light. Light is a "passenger" on the beam of "aether wind").

4. This hypothesis discloses the mechanism of stabilization of rotary and orbital movement of the Universe matter in macro- and micro world due to retarding medium in Cosmos.

5. It discloses the mechanism of reverse rotation of Venus due to the forces of autorotation.

6. It discloses the mechanism of reverse orbital movement of planets and satellites of planets. (Such a planet had not been opened yet, but there are 6 satellites in the Solar system, which move counter to the others, and it is not an occasion, but **a particular case of the effect of aether wind beams**).

7. It discloses a real nature of Tunguska catastrophe. (There were about 100 hypotheses, but **neither of them** was recognized to be true).

8. It discloses **the nature of gravitation** and gives an explanation that gravitation can be:

- usual (vertical);
- horizontal;
- circular

It is important to note: not the entire matter takes part in gravitation, but 1/3, i.e. 33,3% of matter.

9. It discloses the **nature of Levitation** and proves that 1 liter of water on the surface of the Earth can have the weight from 0 up to 3 kg.

10. It discloses the **role of gyroscope effect in life support of the Universe. The gyroscope effect allows transformation of translation energy of radiant "aether wind" to the rotational energy for practical needs of humankind.**

11. This hypothesis gives scientific and technical recommendation for creation of cosmic energy converters.

12. It gives scientific and technical recommendation for producing of levitation effects for any technical systems.

13. It discloses the possibility of cosmic flights with the super-light speed.

14. It explains experiments on metering of horizontal gravitation (The first experiment was made on February 27, 1999).

15. It discloses the particle (neutrino) of original matter of the Universe and gives its characteristic. (Ancient thinkers called modern "neutrino" as "Aether", and it was not occasionally, because its diameter is in 10^{25} times smaller than atom's diameter.

All matter of the Universe consists of the same indivisible particles "neutrino" presented by three groups:

- "energy" group, which is in the beams of "aether wind";
- building group, which forms the part of any micro particle;
- free group (neutral-reserve) as a building material for new matter and operating environment of all electromagnetic processes.

All neutrino of three groups rotate with the speed of 3×10^{43} rps (equatorial speed of neutrino is equal to the speed of light).

Fields are formed in every particle as a result of rotation:

- strong field of a small volume doesn't allow particles to close up;
- weak field of a big volume is a general mechanism of gravitation.

As scientists write at the present time, the World is subdivided on a dense world (which we can see) and fine world (invisible). At that the density of such world is in 10^{15} times less than density of water.

It is known in science that all matter of the Universe both great and small rotates and is a gyroscope. Particles of matter get rotation with their birth, thus the fields are born in them simultaneously. **Matter cannot exist without rotation, which generates fields.**

All mechanism of interaction between three groups of particles is based on the mutual repulsion. This is the only mechanism, which always and automatically is able to create the necessary stable interval between the particles and only this mechanism provides the function of gravitation.

Many scientists of the late XX came close to the discovery of the nature of gravitation, but they didn't accept a thought to conceive **the motion of aether particles as a pair-counter flow**. And there are three necessary conditions to realize gravitation:

1. The particles should have the fields of repulsion.
2. The contradirectional flows should envelop the particle of matter from two sides.
3. While one beam is passing a matter mass then the force of fields should decrease and gravitation effect should appear.

Mechanism of gravitation


Gravitation appears due to the intersection (*Editor's note: interference*) of fields, produced by beams particles and fields of the visual matter. As it was mentioned above, the beams are paired and contradirectional. Usually the beams in cosmos are mutually balanced and they do not call gravitation effects.

But on the surface of the Earth the contradirectional beams are not similar in their power. The powerful beams come from above, i.e. they only penetrate the atmosphere, and the weakened beams come from below, i.e. they penetrated all the Earth. Thus, gravitation appears.

Gravitation is a unique property of "aether wind" beams to loose part of their power during penetrating of matter mass. **Gravitation** is the difference of forces of contradirectional beams. (*Editor's note: Really other authors reported this idea also. I cannot find who was the first in discussion about gradient of aether as nature of gravitation.*)

Horizontal gravitation

As a particular case, there is **horizontal** gravitation on the surface of the Earth. It appears on the boundary between lowland (of the sea) and plateau. In this case one beam goes above the surface of the Earth (water), and the counter beam penetrates mountain range and

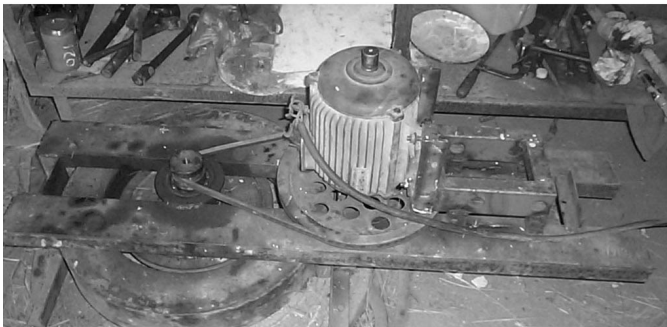

weakens. The first measurements of horizontal gravitation effect were made on February 27, 1999 on the route Orenburg – Samara at 49 km before Syrtinskiy slope.

A leaden load (0,5 kg) on the float (a piece of foam plastic) moved on the water surface (not in the sea but in basin) towards the mountain.

Horizontal gravitation is much more weaker than usual gravitation, but it can reach the value that makes water to flow at some angle upwards.

Circular gravitation

Only fast-rotating bodies can create circular gravitation.

All bodies rotate by their orbits around the Sun in the open space of Solar system **due to circular gravitation guided by rotating the Sun**. Furthermore; circular gravitation always is direct (co-directional to the Sun rotation) and reversed gravitation on the periphery of Solar system. A planet with reverse orbital movement had not been discovered until now, but 6 satellites of planets in the Solar system have reversed orbital movement.

Here is the proof of the fact that circular gravitation appears only around the fast-rotating bodies and **slow-rotating bodies, for example, the planets Venus and Mercury cannot form circular gravitation**, that's why they have no satellites.

Our Sun is a prototype of mechanism to transform translation energy of aether wind beams into rotary energy.

(*Editor's note: According to Kozyrev, any star is a transformer of time (chronal type of energy) into heat energy. Really, the aether wind can be considered as the chronal type of energy in our understanding and for our usual three-dimensional measurement equipment. To my mind it is a clear link to notion of 4-dimensionsal objects, i.e. the time. **Time can be described by parameters of the aether wind, i.e. its velocity, direction and density. So, we can say that quantitatively time can be described by formulations for kinetic energy of the aether movement. From the other hand it is equivalent of heat energy, which can be measured by usual methods after transformation of the longitudinal waves of the aether in transverse electromagnetic waves.***)

Therefore, any mechanical disk rotating very fast will create a circular gravitational field, which is able to rotate all bodies in the direction of the disk (for example, a rim mounted on its bearing co-axially with rotating gyroscope). I designed and tested a similar device in January 2000. A gyroscope (of 200 mm diameter and 3 mm thick) was over-speeded up to 18 thousand rpm. Rotation of gyroscope called slow (but with a good momentum) rotation of the rim of 15 kg weight.

The gyroscopes with the mass of 0,5 kg, 15 kg and 90 kg were tested during summer of 2001. All them called rotation of the rims.

(*Editor's note: There are other experimental facts. Fast rotation of mass should produce rotation of some part of nearby aether. Self-closed aether forms vortex and if photon is trapped by this vortex, then*

experimenters can see “ring of light” near rotating mass. The rings or self-closed photos can exist in the same place after the mass was stopped or removed away.)

Nowadays gyroscopes in military devices are over-speeded up to hundreds of thousands of rpm. The more rates the gyroscope has, the more energy the rim will produce if it is connected to some generator. But these research works led to single-valued conclusions that gyroscopes themselves cannot produce big quantity of additional cosmic energy not jointly with permanent electromagnets. The Sun as well as planets has natural electromagnetism and their circular gravitation increases in many times due to the presence of electromagnetic fields.

(Editor's note: I think it is obviously that a rotating magnet can involve into the rotation much more quantity of aether than any simple rotating mass. In some theories any magnetic field is considered as circulation of aether particles.)

Electromagnetic fields are the unique boosters of circular gravitation. So, the gyroscopes themselves cannot produce necessary quantity of cosmic energy per unit mass of gyroscope without using of electromagnetism.

In October 2001, I got a copy of 24 patents description. There were patents on “perpetual motion machines”. But since such “perpetual motion machines” cannot exist in reality, then we can explain them as gyroscopical transformers of cosmic energy. Efficiency of these transformers varies from 150% up to 10⁶% and practically all of them work using gyroscope. But nowadays only the transformer (Bauman's machine) works in Switzerland, in Maethernitha theological community, Linden city. Some systems have been working from 1980 and producing total power of 750 kWtt, the gyroscopes of 2m diameters are provided with constant magnets.

Besides, there are ready transformers of cosmic energy in Russia. The Professor of Moscow State University, Academician of Russian Academy of Natural Science Leonid Leskov spoke about them in the first half of 2001. He actually said that Mr. Chubais does not allow innovation of energy transformers, which are ready for commercialization (see newspaper “Raduga”, Samara, July 2001).

I assume that any kinds of such transformers work on the energy produced by “Aether wind” beams. Perhaps our earth ancestry (Atlases) used this energy to fly as well as extraterrestrials. I remember information about flying platforms, which were designed in Germany in 1943-1945. Nowadays there are publications that there are not less than 10 captured extraterrestrial's spacecrafts on the Earth, and some samples were tested in Russia and the USA.

On the basis of all above-mentioned it becomes extremely clear that the main secret of Nature was discovered, and let's representatives of conservative science don't pull the wool over people's eyes to prove that “it is impossible”. It is possible! Physics is an experimental science in its main part, and there is no completed theory until now.

As a result, I'd like to make some conclusions: The secret of Gravitation nature was discovered not in connection with new scientific investigation, but due to dawning up and understanding of the fact that gravitation since earliest times was produced by “Aether winds”, which fill all cosmic space. Instead of improvement of “Aether wind” theory, academician science abolished it and forgot it such as some scientists of nowadays don't have an idea of it. While abolishing of “Aether wind” theory, scientific world spent 100 years in vain to find an alternative to it. A real Cosmic scientific and technical progress was slowed down during this term. Without this progress all humankind will kill environment of the Earth in 30-40 years!

Rush hours for humankind to turn to cosmic energy came, we have not even an hour to wait, and otherwise we will loose a chance to survive. Today the scientific and technical level is such that taking into consideration the buildup made by inventors – enthusiasts, who created more than 50 types of Cosmic energy transformers, it is possible to begin repetition work in one year. Now there is the only barrier to do it, i.e. market relations in energetics developed during last 100 years.

Let's look into near Future. The process of energy resources (coal, oil, gas) formation in bowels of the Earth took hundreds million years. There was period of clean ecology in the World Ocean, on land and in the atmosphere. **And all it catastrophically had been diminishing during 2-nd half of the XX century. There are about 40 years for our civilization to reach the boundary of having no chance to support normal life on the Earth.** An irreversible process of struggle for survival using underground environment and protection from mortal ecology will begin. Our close posterity will not forgive us this betrayal.

Is there any solution? Yes, there is.

It is necessary to publish the descriptions of all “perpetual motion machines” models as well as unprofitable publication of short technical documentation in the Internet and magazines, which will give a chance to many companies, research groups and individuals to re-produce them. But at first we should choose the models, which are the most reasonable in technology and prime cost. Such a way of replication of the models will give people confidence, interest and reliable information on existence of inexhaustible salutary cosmic energy. And the victory will be the reward for courageous, enterprising and advanced people.

which generates electrical voltage $E_{\uparrow} = \ell \frac{dB_{rot}}{dt}$ in the structure of vacuum. This voltage generates Gravitational Impulse itself $G = 4\pi E_{\sigma} S \cdot (\Delta r_g)^2$, where $\Delta r_g = e_0 \frac{E_{\uparrow}}{b}$.

The supposed "Gravitational Impulse" in the experiment by Podkletnov is modeled by a quarter of cosine curve.

Duration of this curve is determined by the decrease of magnetic field "trapped" into the superconductor due to the partial heating of semi-conductor emitter after plasma passed the discharge of 2MV with the current strength of 10000 A. The formula of the model is the following:

$$X'' = Ae^{-2\pi f_0 D_0 t} \cos(2\pi f_0 \sqrt{1 - D_0^2} t) \quad (1)$$

the calculation is made for the frequencies of 30, 3, 0,3 and 0,03 Hz and acceleration of 12 m/sec², which appears for the mass of the pendulum 30 g with the force horizontally to gravitation 0,03·12=0,36 N.

It can be supposed that it is necessary to make more careful solution of the problem to find the effect on the pendulum by its reaction, which is known from experiment. We should apply the more correct use of spectral method of solution of differential equation for the pendulum with setting of impulse effect. Further, having the recording of temporal function of magnetic field by Hall-effect devices and using Maxwell formulas,

we should find electrical field acting in physical vacuum. This field will give us the force of gravitational impulse.

The experiment by V. Roshchin and S. Godin is simpler for physical modeling (Editor's note: the author assumes it is simpler than Podkletnov's effect). All input and output parameters are known to the authors, i.e. force of the magnets, frequency of variable magnetic field in the local place of space vacuum, change of gravity. Furthermore, there are known cylindrical formations of magnetic "loops" around the device and their approximate arrangement with the intervals divisible by the half of rotor radius. Effects of temperature decrease at 8° C in cylindrical atmospheric formations can be simply explained by adiabatic decrease of air pressure due to the decrease of gravitation between molecules of air. Formulas for estimation of decrease of gravitational and inertial forces are the same that for Podkletnov's experiment:

$$E_{\uparrow} = \ell \frac{dB_{rot}}{dt}, \quad (2)$$

$$G = 4\pi E_{\sigma} S \cdot (\Delta r_g)^2, \text{ where } \Delta r_g = e_0 \frac{E_{\uparrow}}{b}. \quad (3)$$

References

1. Podkletnov E., Giovanni M. Impulse Gravity Generator Based on Charged Superconductor with Composite Crystal Structure.
2. Roshchin V., Godin S. Experimental research on physical effects in dynamic magnetic system // Letters to the Journal of Theoretical Physics, 2000, vol. 26, issue 24.
3. Rykov A.V. Principles of full-scale physics. // Institute of Earth Physics RAS, M.: 2001, 58 p.

New Sources of Energy from the Point of View of Unitary Quantum Theory

L.G. Sapogin,

Department of Physics, Technical University (MADI)
Leningradsky pr. 64, A-319, 125829, Moscow, Russia
E-mail: sapogin@cnf.madi.ru, sapogin@cnf.madi.msk.su

Yu.A. Ryabov,

Department of Mathematics, Technical University (MADI)
Leningradsky pr. 64, A-319, 125829, Moscow, Russia
E-mail: ryabov@vmat.madi.ru

V.V. Graboshnikov

Representative in Moscow of Sceptre Electronics Ltd.
Millennium House Business Center
12, Troubnaya Street, Moscow 103045, Russian Federation.
E-mail: sceptre@orbita.ru

Abstract

The Unitary Quantum Theory (UQT) is a new version of the field quantum theory, which has been developed by the principal author (Prof. L.Sapogin) of this paper

for over 25 years. The theory is directly related to the problem of new energy sources, and this paper can be of interest for Journal of New Energy for it is the UQT (and not the classical Newton mechanics or the modern standard quantum mechanics) that provides a theoretical basis for the development of new sources of energy and for the explanation of the operation principles of the existing and functioning over unity devices.

The fundamental provisions of the UQT and a number of results received on the basis of it were published in many scientific journals and reported at international conferences (see [1-6], etc.). Generally, the UQT as expressed by the language of formulae and equations represents a new mathematical model of interaction and movement of elementary particles in the form of a complicated system of non-linear integral-differential equations, an important property of this model principally defines the trajectories and velocities of the particle movement in space (unlike the standard quantum theory, which directly defines only the probabilities of the presence of the particles at a certain point in space). Another, and the most essential (for the problem of new energy sources) property of the UQT is the absence of the energy conservation laws and the

impulse for single particles in it. That is why the UQT makes theoretically possible processes of energy generation as if from nothing, if they are regarded from the classical mechanics point of view or the standard quantum theory (while the UQT is able to explain the phenomenon), as well as creation of a device with efficiency above 1. In other words, the UQT provides for a theoretic possibility of making a perpetual mobile!

In the 1970's, when the UQT started to be developed, there was nearly no data of the observed phenomena, or any experimental results confirming this unusual theory. Today, such data are abundant. For example, such processes can be named as generation of excessive heat energy during cavitation of very small water bubbles; generation of excessive electric energy in an anomalous gas discharge; excess generation of electric energy when electric current passes through proton-conducting ceramics, etc. Besides, and still more important, operating devices that have been created much more energy than it was necessary for these devices functioning: electric current generators "Testatica" (Switzerland); thermal cell CETI (J.Patterson, USA); heat generators (Yu.S. Potapov, Moldavia, J.Griggs, USA); electric current generators (P.Correa, A.Correa, Canada); electric engines on magnetic ceramics (Japan), and others. The said phenomena and operation principles of the above-mentioned devices can be explained with the help of the UQT.

In this paper we will also touch upon such an important problem as cold nuclear fusion. The feasibility of this nuclear process, which is categorically denied by the standard quantum theory and nuclear physics specialists, was predicted by the author of the UQT as far back as in 1983. This phenomenon was discovered in 1989 (electrochemical experiments, M.Fleischmann, S.Pons). Many subsequently received experimental data confirmed the existence of nuclear reactions under very small energies, of nuclear transmutations in plants and biological objects, very slightly connected with generation of energy [7-8]. From the point of view of the UQT, which provides an explanation of the cold nuclear fusion mechanism, this process can be applied in practice (after the relevant devices are designed) for generation of energy, for production of isotopes, and for nuclear waste liquidation.

Introduction

Inventors, as well as swindlers of all kinds, had long ago been trying to construct, or at least design, a *perpetual mobile*, i.e. an imaginary machine that produced work without any outside energy. Peter the Great even founded the Imperial Russian Academy of Sciences for such research, but the modern Russian Academy of Sciences does not like to recollect this circumstance. On the other hand, the French Immortals in 1755 decided not to consider any *perpetual mobile* projects at all, and, as we would see, were quite right as regards the Newton mechanics. The brilliant success

of the classic mechanics has strengthened still more the sacred belief of the mankind in the Divine Infallibility of the Conservation Laws, and today it is nearly indecent to express any doubts about these laws.

Let us first of all find out the origin of the conservation laws in ordinary mechanics. Practically any textbook will tell you that the Energy Conservation Law (ECL) follows from the homogeneity of time, the Impulse Conservation Law from the homogeneity of space, and the Angular Momentum Conservation Law from the isotropy of space. That is why many people have an impression that the conservation laws themselves follow only from the quality of time and space, which is today an undoubtedly relativistic notion. But, for example, the angular momentum is not a relativistic notion. So, such a narrow approach is not altogether correct, and it is necessary to turn to the second Newton law, or the equation of relativistic dynamics and the system insularity. However, *the qualities of the time and space ensue exactly from the analysis of the Newton mechanics*, though they are often construed incorrectly. Let us remind you the correct interpretation.

Homogeneity of time suggests that *if at any two moments of time two similar experiments are made in similar closed loop systems, the results thereof will not differ*.

Homogeneity and isotropy of space mean that *if a closed loop system is moved from one part of space to another, or is oriented differently, nothing will change*.

The making of the fundamental energy and impulse conservation laws from the Newton equation is very simple. Let us put down the main equation of dynamics as

$$\mathbf{F} = \frac{d\mathbf{P}}{dt}$$

For closed loop system $\mathbf{F}=0$ (no external forces operating) and the equation integral will be

$\mathbf{P} = \text{Const}$ the impulse conservation law.

Now let us take the main equation of dynamics as:

$$\mathbf{F} = m\mathbf{a} = m \frac{d\mathbf{v}}{dt}$$

and multiply it scalarwise by $\mathbf{v}$

$$\mathbf{F} \cdot \mathbf{v} = m \frac{d\mathbf{v}}{dt} \cdot \mathbf{v} = \sum_{i=1}^3 m \frac{dv_i}{dt} v_i = \sum_{i=1}^3 m \frac{d}{dt} \left(\frac{v_i^2}{2} \right) = \frac{d}{dt} \left(\frac{mv^2}{2} \right)$$

where v is the module of the velocity vector $\mathbf{v}$. For closed loop system $\mathbf{F}=0$, and the equation integral will be

$$\frac{mv^2}{2} = \text{Const}$$

one of the forms of the energy conservation law. From the definition of the angular momentum for a particle,

$$\mathbf{L} = [\mathbf{r} \times \mathbf{P}]$$

Differentiating both parts by t , we get

$$\frac{d\mathbf{L}}{dt} = \left[\frac{d\mathbf{r}}{dt} \times \mathbf{P} \right] + \left[\mathbf{r} \times \frac{d\mathbf{P}}{dt} \right]$$

Since the impulse vector is parallel to the velocity vector, the first bracket will equal to zero. On the basis of the resultant equation and the definition of central force as not creating any momentum, we get

$$[\mathbf{r} \times \mathbf{F}] = 0 \quad \text{or} \quad \mathbf{L} = \text{Const.}$$

In case of the central force in an unclosed system, the angular momentum is preserved by value and direction. The angular momentum conservation law for a closed loop system results in the same way as the impulse conservation law from the equation of the rotary motion dynamics:

$$\mathbf{M} = \frac{d\mathbf{L}}{dt}$$

For a closed loop system, the momentum of external forces $\mathbf{M}=0$ and the integral of the equation will be the angular momentum conservation law

$$\mathbf{L} = \text{Const}$$

In relativistic dynamics the emergence of the energy and impulse conservation laws separately can be easily received from the relativistic ratio for energy and impulse

$$E^2 = P^2 c^2 + m^2 c^4$$

Term $m^2 c^4$ is an invariant, i.e. the same in all reference systems. In other words, it is a certain constant. This equation can be represented in a slightly different form

$$E^2 - P^2 c^2 = \text{Const}$$

For the equation to be valid, it is required that

$$E = \text{Const} \quad \text{and} \quad P = \text{Const}$$

and this none the other but conservation laws for energy and impulse.

Strictly, relativistic mechanics has a conservation law for 4-impulse vector P^μ , but we will not dwell on these details, because small energies are what we are interested in.

In the classical theory, the energy conservation law states that the energy of a closed loop system remains unchanged, so, if the energy of such a system is designated at a moment $t=0$ as E_0 , and at the moment t as E_t , $E_0 = E_t$.

Conservation laws in ordinary quantum mechanics

The standard quantum theory formulates the energy conservation law in the same way. In quantum mechanics we have the same movement integrals as in classic mechanics. A certain value L will be a movement integral, if

$$\frac{d\hat{L}}{dt} = \frac{\partial \hat{L}}{\partial t} + [\hat{H}, \hat{L}] = 0 \quad (1)$$

Since $[\hat{H}, \hat{L}]$ is defined by commutator of operator $\hat{L}$ and of Hamilton's operator, any value L , *not depending explicitly on time*, will be the movement integral, if its operator commutes with the Hamilton's operator. When value L does not explicitly depend on time, the first item in (1) turns to zero. There remains

$$\frac{d\hat{L}}{dt} = [\hat{H}, \hat{L}] = 0 \quad (2)$$

and for the movement integrals not explicitly depending on time the Poisson quantum bracket equals zero. From (1) and (2) it follows that the average value of the movement integrals does not depend on time:

$$\frac{d}{dt}(L) = 0$$

All good papers on the quantum theory prove that probability $w(L_n, t)$ to find at any moment t any value of the movement integral, i.e. L_n , does not depend on time. Further, is constructed as the movement integrals not explicitly dependent on time. Since operators $\hat{L}$ and $\hat{H}$ commute, they have common proper functions, which are functions of stationary states. Let us note that the latter follows from solutions of the equation without time, which was received from the full equation with imposition of requirement

$$\Psi(\mathbf{r}, t) = \Psi_0(\mathbf{r}) \exp\left(i \frac{E}{\hbar} t\right)$$

equivalent to search of only periodic solutions. Further, quite naturally, *there appeared an equation without time with actually imposed conservation laws, because now nothing depends on time*. Expansion by such proper functions looks as follows:

$$\hat{L} \Psi_n = L_n \Psi_n \quad \hat{H} \Psi_n = E_n \Psi_n$$

where

$$\Psi(x, t) = \sum_n c_n \Psi_n(x) \exp\left(-i \frac{E_n}{\hbar} t\right) = \sum_n c_n(t) \Psi_n(x) \quad (3)$$

$$c_n(t) = c_n \exp\left(-i \frac{E_n}{\hbar} t\right) = c_n(0) \exp\left(-i \frac{E_n}{\hbar} t\right)$$

Since (3) is expansion into proper functions of operator L_n , probability does not depend on time:

$$w(L_n, t) = |c_n(t)|^2 = |c_n(0)|^2 = \text{Const}$$

Since energy is a movement integral and probability $w(E, t)$ to find at a moment t an energy value equaling E , does not depend on time, then:

$$\frac{dw(E, t)}{dt} = 0$$

Let us note once again that it is *the probability to find a certain value that does not depend on time, but not the value itself, which for any separate event is accidental and can assume a wide range of values.*

The quantum energy conservation law in the above form suggests a possibility of defining energy at a given moment without subjecting it to uncontrolled change, which raised no doubts in classic mechanics. But in the quantum theory the energy, without changing its value, can only be measured to

$$\Delta E \geq \frac{\hbar}{\tau}$$

where τ - is measurement duration. Formally, it does not present any difficulties for the energy conservation law, since energy is a movement integral, and we have much time to make long measurement. For example, let us make measurements during time τ , then leave the system to itself for time T , and then define energy again. The classic quantum energy conservation law states that the result of the second measurement will coincide

with the result of the first measurement to $\Delta E \approx \frac{\hbar}{\tau}$.

But even in the ordinary quantum theory all this is not consistent enough. For the real vacuum fluctuations can interfere, that always influences the results of a single process, but their influence disappears after the passage to an ensemble of events. Here we have a violation of the conservation law due to vacuum fluctuations, though existence of movement integrals, unlike in the Unitary Quantum Theory (UQT).

The generally accepted quantum theory carefully avoids the question of conservation laws for individual events in the case of small energies. This question is either not discussed at all, or it is said that *the quantum theory does not describe individual events. Yes, it does describe individual events, but it can only predict a probability of this or that result.* It is clear that in this case there are no conservation laws for individual events (it is wrong to speak about it in case of an accidental result of an individual event), and they appear only after the averaging by large ensembles of events. Essentially, it can easily be proved that classic mechanics follows from

quantum mechanics after summing up by a large number of particles, because for a sufficiently big mass, the length of the de Broglie wave becomes much less than the body dimensions, and no quantum-wave qualities can be talked about.

Conservation laws in Unitary Quantum Theory

In the UQT [1-14] any quantum particle is not a point, but a source of field like in the ordinary quantum mechanics, but it represents a bunched field (wave packet) of a certain unified field. The dispersion equation of such a nonlinear field turned out to be such that the wave packet (particle) during its movement periodically appears and disappears, and the envelope of this process coincides with the de Broglie wave. Numerous particles during their periodic disappearance (spreading in the Universe) are repeated appearance from vacuum fluctuations. A theory of quantum measurements has been built, and the probability interpretation follows from the mathematical formalism of the quantum theory [10,11], and it is not postulated as in conventional quantum mechanics. Unfortunately, the main UQT equation turned out very complicated, for it is a system of 32 nonlinear integral-differential equations, which could require for their solution some new mathematical methods. But from this the relativistically invariant Hamilton-Jacoby equation, and the Dirac equation system strictly follow.

Papers [13,14] give a solution of the simplified scalar integral-differential UQT equation, which gave a localized solution for the form of a wave packet representing a particle. It turned out that the integral from a bilinear combination of such a solution for the whole volume gives with the precision of 0.3% the value of a non-dimensional elementary electric charge [13,14], which was essentially its first theoretical calculation. Then, this solution in the form of a periodically appearing and disappearing wave packet (which square describes the density of a spatial charge) can be replaced by an oscillating charged particle [15-18], the movement whereof will be described by the conventional Newton equations:

$$m \frac{d^2 \mathbf{r}}{dt^2} = -2Q \text{GRAD} U(\mathbf{r}) \cos^2 \left(\frac{m}{2\hbar} \left(\frac{d\mathbf{r}}{dt} \right)^2 - \frac{m\mathbf{r}}{\hbar} \frac{d\mathbf{r}}{dt} + \varphi_0 \right) \quad (4)$$

$$m \frac{d^2 \mathbf{r}}{dt^2} = -2Q \text{GRAD} U(\mathbf{r}) \cos^2 \left(-\frac{m\mathbf{r}}{\hbar} \frac{d\mathbf{r}}{dt} + \varphi_0 \right) \quad (5)$$

where m , Q , $\mathbf{r}$ - mass, charge, and radius-vector of the particle, $U(\mathbf{r})$ - external potential, φ_0 - initial phase.

Since $E = -\text{GRAD} U$, and a magnetic field also exists, the Lorenz force should also be calculated for $\mathbf{F} = \frac{Q}{c} [\mathbf{v} \times \mathbf{H}]$, but in the electromagnetic wave $\mathbf{E}$ and $\mathbf{H}$ are equal, and for small energies value $\frac{v}{c} \rightarrow 0$, and

force $\mathbf{F}$ can be ignored. Both these equations produce qualitatively similar results for different problems, but the first non-autonomous equation evidently does not have any movement integrals at all, and any hope for analytical solutions is very unreal. But for the second autonomous equation such hope still exists. Let us note that these equations describe more accurately the experimental results of scattering on the coulomb potential than the classic Rutherford formula! Application of these equations for the tunnel effect and scattering on short potential also produces correct results, but in this case passage through a high barrier (tunnel effect) will be defined by the initial phase. Of greatest interest, however, is the harmonic oscillator problem.

It is possible that a change in the properties of a material point in the process of its movement is just another step in the material point movement theory. In conventional mechanics this idea is not altogether new. There are Meshchersky's equations for bodies with a changing mass, and Tsiolkovsky's equation for a rocket. But so far, in the conventional quantum theory, the particle has a permanent and stable in space and time set of properties, and in the UQT all the parameters of the particle are changed and oscillate during movement.

It should be noted that *Newton did not introduce the notion of a material point at all*, and it would be ridiculous to think that he was not able to have this natural and rather trivial idea. Most probably, and it is not by chance, for today many troubles of the field quantum theory are rooted in the approach to the particle, as to the point, the most vivid example being a large bouquet of divergences. Nevertheless, this approach is very convenient and should only be used correctly. Let us also remember, that in accordance with the Newton corpuscular theory, beams of light were to be regarded as a flow of certain particles. They are emitted by a shining body in all directions and move in an empty space or a homogeneous medium evenly and straight, i.e. in the same way as the ordinary material particles do in the absence of any external or interaction forces. Newton explained reflection and refraction of light beams on the surface of border between two homogeneous mediums by the effect of certain forces on this border, in the direction perpendicular to the surface. These forces changed the normal velocity component, but did not touch upon the tangential one, which allowed to derive the reflection and refraction laws. However, the inability of such a theory to account for the light partial reflection and passage phenomena, as well as the Newton rings (which he himself discovered), led him to bouts (or fits) theory, which is quite modern, although nearly forgotten. Newton believed that for full explanation of all the processes it was necessary to suggest that some light particles could experience reflection bouts, and others – passage bouts. Let us imagine light falling to a flat surface, which is partially, reflects and partially passes. With quantum description of this phenomenon, a particle connected to the falling wave at the time of hitting the surface has a certain probability of passing or being reflected, and

Newton simply used the word “bouts” in place of the word “probability”.

It is absolutely clear that all descriptions of processes by the equation with an oscillating charge will be an approximation, because it is evident that no movement equations for a material point can describe even the simplest interference processes on a semi-transparent mirror, during which a material particle should be divided in two parts which will later eliminate each other by destructive addition. It is surprising, but the numerical solution of the problem of scattering on a short potential (the Ramsauer effect) for equations (4) and (5) gives the correct diffraction picture! But if we want to describe an individual particle correctly in the conventional quantum mechanics, the picture becomes inexact and purely probabilistic. At every given moment of time a particle can exist in only one of the mutually incoherent states, because one particle cannot move in different directions simultaneously (it cannot have many impulses at the same time). Nevertheless, there seems to exist a whole class of processes, where description with the help of equations (4) and (5) have certain sense. It is well known that in all experiments the local energy and impulse conservation law in individual quantum processes are true only under high-energy values. But under small energy values it is not so, at least because of the ratio of uncertainties and the probabilistic character of all the quantum theory predictions, and the idea of a global, not local ECL, is invisibly present in the quantum mechanics, and is certainly far from new.

In the strict UQT and the quantum measurement theory, a great role belongs to unavoidable vacuum fluctuations. It is clear that these fluctuations are totally unpredictable and non-invariant in relation to space and time translations. The same can be said otherwise: there are no habitual properties of time and space in this theory. Space-time is now not homogeneous and not isotropic. For example, if the system is transferred to a new point in space, or a certain experiment is repeated at another time, at the point where particle parameters are studied, and it interacts with the macro-device, a new value of vacuum fluctuations (different from the previous one) can appear and produce a different result. Of course, all this is only true for small energies and individual events.

Still more destructive is the UQT for the notion of a closed system. For individual events under small energy values this notion is simply unacceptable for the following reason: vacuum fluctuation at the location of the particle (e.g. in a potential pit) can be sharply changed at any moment. It can be caused by different factors – the nature of vacuum fluctuations itself, or the tunnel effect of another random particle.

Sometimes it is stated that conservation laws follow from the Nether theorem, though these results are present in the works by D. Gilbert and F. Klein. For any physical system, the movement equations from which can be received from the variation principle, each one-parametric continuous transformation that leaves the

variation functional invariant, corresponds to one differential conservation law, and there exists a clearly conserved value. It is easy to see, however, that vacuum fluctuations imposed on the varied function (integral of Lagrangian) do not in sum remain unchanged during parametric transformations (at least today it seems so), and this consideration does not work without preliminary of ensemble.

And now we are in for a little philosophy. The local Energy Conservation Law (ECL) in individual processes follows from the Newton equations for closed systems. It would be naive to think that its local formulation will be preserved forever, and would be a bad mistake to transfer the ECL from the Newton mechanics to the quantum processes without any changes, because the latter are more fundamental.

References to the first principle of thermodynamics are, strictly speaking, groundless, because this principle is a postulate. For example, well-known Russian mathematician N. Luzin, in a letter to an inventor wrote that the first principle of thermodynamics is the result of unsuccessful attempts of the mankind at building a *perpetual mobile*, and strictly follows from nothing. *Today it may be said with a great degree of certainty that no sophisticated machine in the framework of the Newton mechanics can be a perpetual mobile*, and the decree of the French Academy of 1755 not to consider any *perpetual mobile* projects is still valid. We will only add that now it is valid only for those projects that are based exclusively on the Newton mechanics.

There is the tendency in modern physics to reduce ECL, especially in theory, to the rank of a secondary derivation from the movement equations (movement integrals). Some physicists restrict the ECL to the framework of the first principle of thermodynamics, others, like D. Blokhintsev [37], think it quite probable that with the development of a new theory the form of the ECL will undergo certain changes. F. Engels wrote in his "Dialectics of Nature": "...none of the physicists actually regard the ECL as an eternal and absolute law of nature, a law of spontaneous transformation of the movement forms of the matter and the quantitative constancy of this movement in all its transformations". But many people do not share this opinion. M. Bronstein in his book "Structure of Matter" wrote: "The ECL is one of the main laws of the Newton mechanics. Nevertheless, Newton did not ascribe to this law the general character that this law actually possesses. The reason for this *erroneous* (italicized by authors) opinion of Newton of the ECL is very interesting...". It is now clear that in view of the above, such an opinion was not at all erroneous. Let us remind you that Newton predicted many things, even the UQT, in his "bouts theory".

On the other hand, the authors of quantum mechanics realized that there was no conservation law for single quantum processes under small energies at all. The idea that the construction of ECL, together with the second law of thermodynamics, was a statistical law, true only

on the average and inapplicable to individual processes with small energy, first occurred to Schroedinger, and later to Bohr, Kramers, Slater, and Gamov. In 1923 Bohr, Kramers and Slater made a desperate attempt to develop the theory, where the energy and impulse conservation laws in case of scattering would be true only statistically, on an average for long periods of time, but would be inapplicable to elementary events. Lev Landau even called it "Bohr's wonderful idea".

Later, however, the authors gave up this approach and, besides, this idea at that time did not follow from the quantum theory equations, and the authors, *to come out of the predicament, simply declared that quantum mechanics did not describe individual events at all*. Thus, the most vivid paradox of the quantum science was removed by a simple ban on thinking about it! But the ingenious idea that conservation laws do not apply to individual quantum processes and emerge only after the averaging by the ensemble of particles remains alive. This idea might have been a little premature, and, possibly, should be a little different.

The Unitary Quantum Theory (UQT), on the contrary, individual particles, and the difference in their behavior is accounted for by the initial phase of the wave function. In this case, local conservation laws do not exist for a single particle, and measuring the initial phase or some other parameters for an individual particle is quite a different matter. It is not true that the UQT has given up probabilistic description. Probabilistic interpretation remains, but the probability now is strongly dependent on the initial phase. Although the equations with an oscillating charge can determinately predict a particle's behavior, the measurements can be made only with the help of a macro device, which will give only a probabilistic result. Impossibility to determinate measurements does not change anything, for the UQT provides for a possibility of influencing the probability value, which was earlier unavailable. The existing Von Neumann theorem about hidden parameters does not effect our result, but the relevant discussion is too cumbersome, and we will leave it out.

*In other words, **all the requirements**, wherefrom the classical conservation laws follow, are now absent. We can hardly expect the conservation laws for individual particles to be preserved under small energies in such a situation.* Today we are convinced that the classical energy, impulse and angular momentum conservation laws for individual quantum objects are not valid under small energy values because of periodic appearances and disappearances of the particle. All direct experimental tests of the conservation laws were made for large energy values, and for small energies of an individual particle only probabilistic results can be received, and, in this case, it would be indecent even to recall the conservation law.

Energy generation and perpetual mobile

Let us make the following imaginary experiment. For simplification purposes we will use in our reasoning a

certain quantum ball-particle. When a classical ball approaches a wall (perpendicularly for simplification), the speed of the reflected ball is always equal to the initial speed (we ignore friction and regard the ball and the walls as absolutely elastic). In the case of a quantum ball, the speed of the reflected ball will acquire in different experiments with absolutely equal initial conditions a whole range of values: some balls will be reflected at a speed greater than the initial speed, others – at a speed equal or lower than the initial speed, and all this is described by quantum mechanics.

Let us ask the following question: what if a second wall is found, parallel to the first one, in order for the ball to increase its speed after each reflection from the wall? Then we will have increased ball energy without any special efforts on our part. Such phenomena appear in the problem of particle oscillations in a potential pit (not necessarily parabolic) on the basis of equations (8) and

(9), when four types of solutions are possible, three of which are most important for us: stationary, “maternity home”, and “crematorium”. In the two latter solutions traditional conservation laws do not work. These solutions are presented in Fig. 1. Such oscillator behavior explains many experimental facts. From the physical point of view, it means that in stationary solutions with fixed discrete energies (conventional quantum mechanics) the speed of the particle reflected from the wall will be equal to the speed of the falling particle. If the speed of the particle is decreased after each reflection, it will mean the “crematorium” solution, and if it increases, the “maternity home”. Scenarios for situations will depend on the initial phase of the wave function and the particle energy. In ordinary situations the “crematorium” and “maternity home” solutions always compensate each other, and we find conservation laws.

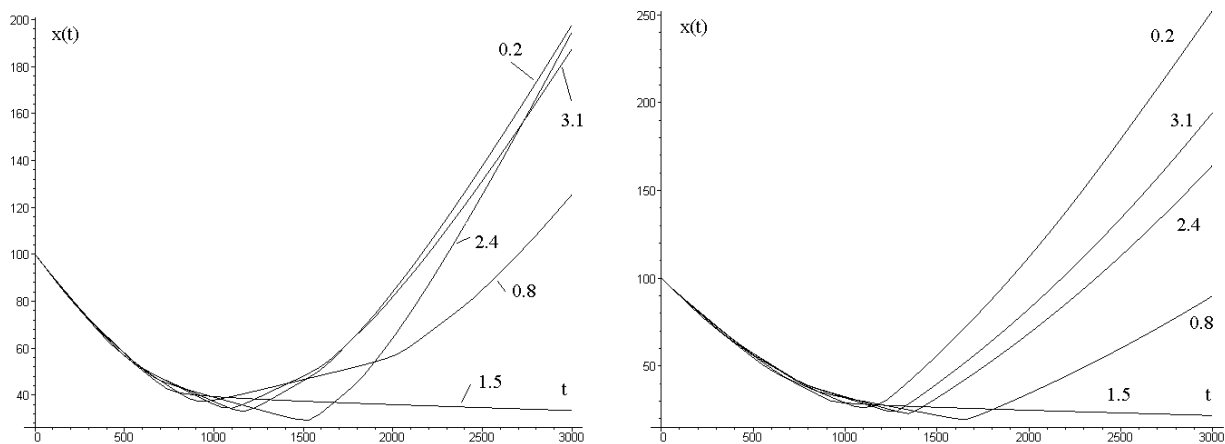


Fig. 1. Dependence of the distance between the moving charge and the nucleus on time for autonomous and non-autonomous equations.

The task of the future developers of new energy systems of the 21st century will consist in creating such initial conditions for a great number of particles making up a body that only the “maternity home” solution would be realized, and the “crematorium” solution would, if possible, be suppressed.

It follows from the above that if the unitary quantum theory ideas are applied correctly, there is no fundamental taboo for a perpetual mobile. Such a taboo, as it was shown, does not formally exist even in conventional quantum mechanics (no conservation laws for individual processes with small energies), and, in order to generate energy, they should be somehow accumulated (all random processes with excess energy should be grouped together). But conventional quantum mechanics refuses to describe individual events and is unable to offer any ways for such grouping. The unitary quantum theory seems to offer such an opportunity.

However, the great idea of free energy generation was distorted by effort of some research associations

interested to keep their stability degree, that everyone who started speaking about it was considered to be a crazy man.

Modern experimental physics has verified the correctness of conservation laws either for very large energies in individual quantum events, or for big macroobjects, when automatic averaging by ensemble is made, but the area of very small energies for individual events today is a *terra incognita*.

In order to see how the conservation laws for reflection (repulsion) of an individual particle from the Coulomb heavy nucleus with different values of the initial phase are violated, we have solved numerically one-dimensional equations (8) and (9) under the different initial conditions:

$$\hbar = 1, m = 1, 2Zze^2 = 1, x_0 = 100, V_{x0} = -0.1$$

In the Fig. 2 the distances between the moving particle and repulsive nucleus are shown as a time function, for

different initial phases in cases of non-autonomous and autonomous equations.

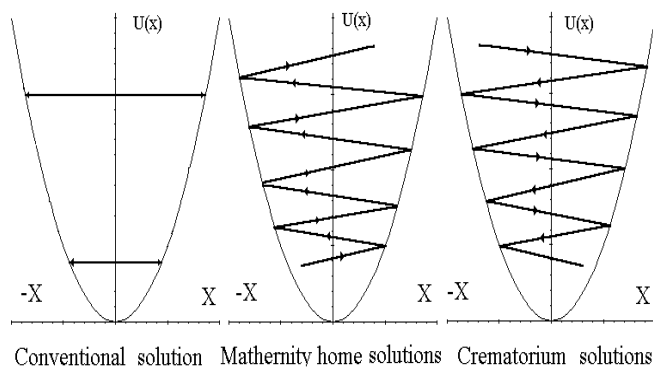


Fig.2 Three types of solutions for oscillator

It is evident from the calculations that the speed of a reflected particle can be equal, lower or higher than the speed of a falling particle. This situation seems to be true for all potentials.

Calculations were also made for other potentials: harmonic oscillator, Yukawa, Gauss, dipole, hyperbolic secant, and Wood-Saxon, and the quality results were nearly the same. If we sum up the impulse of all the particles falling with different phases and compare it with the summarized impulse of all the reflected particles, the summarized reflected impulse, for example, for the Coulomb potential, will be several percent higher than the summarized impulse of the falling particles. For other potentials such a small deviation can even be in the opposite direction. On the whole, this problem is very complicated and requires additional research, because all this is also dependent in quite a complex way on the initial conditions (initial speed, phase and distance).

Philosophically, any categorical taboos, like the impossibility of creating a *perpetual mobile*, are absolutely unacceptable. If everyone is convinced of it forever, the conservation laws and *perpetual mobile* taboos will remain unshakable as long as the human civilization exists. Of course, the funeral of the Conservation Laws can be very prolonged. Anyway, we are not going to do it, and our article might be just a cleanup for the future tomb, and the splendid funeral with all the necessary honors will be organized by future generations. *On the other hand, these laws will never die out completely and will surely be applied, but such spheres of science and technology will appear, though small at first, where these laws are not valid.*

The truth should be accepted irrespective of where it comes from. Words of F. Engels from the "Dialectics of Nature" will be quite appropriate here: "When the solar system ends its life circle and shares the fate of all the finite things, when it falls victim to death, what will happen next? Thus, we come to a conclusion that the heat emitted into the universe should have an opportunity, in a way yet to be established by the natural sciences, to turn into another form of movement, where it can be accumulated again and start

functioning. And in this case the main problem that prevented transformation of dead suns, back to red-hot nebulae will disappear".

The question of whether the conservation law exists in global form (we have already proved its not being local) remains open, because nothing leads to it except the inertia of the human mind. This inertia was based on the Newton laws, which were replaced by quantum laws. This mental inertia leads to a situation, when in case excessive energy is generated during solution of movement equations, a question arises how it can happen, and where it comes from. Of course, if a particle (e.g. a photon) falls on a semitransparent mirror, the packet is divided into two halves, which, due to imposition of vacuum fluctuations, will be recorded by photomultipliers as full-fledged photons [1-5]. The result is that energy is taken as if from vacuum: two photons appear in place of one. Another photon can be divided on the mirror into two halves, but they will not be recorded by the meters, and the energy will allegedly pass into vacuum. So, at one time we borrowed energy from vacuum, and then gave the same amount of energy back to vacuum at another place. You can think like that, and this process might take place. But if we consider the equation with an oscillating charge, the energy and impulse conservation laws are not valid there for solution of the movement problem, and vacuum fluctuations have nothing to do with it at all. As for the question of where the energy comes from, it is the result of our mental inertia, and is, essentially, an atavism imposed by the Newton mechanics. But the latter appears as a result of an extreme passage from quantum mechanics, which is more fundamental.

It is interesting to note that there is a bomb in the logical definition itself of the energy conservation law. If energy is something that cannot appear or disappear and always simply passes from one form to another, the only value satisfying this condition is zero. We are far from assuming that energy does not exist. But the problem of existence is solved differently in different philosophical systems, and the mathematical approach seems to be the most correct one: *an object exists if it is free from contradictions*. Energy has bad luck in this case, for under such an approach it should be zero.

Some cosmologists (for example, British prof. Fred Hoyle) are very willing to have a process, in accordance with which the Universe has certain places where energy appears from other certain places, in which it is eliminated. Besides, any philosopher at least a little bit familiar with astronomy, looking at the bright night sky, will see the birth of matter and its expansion into a still greater space. But for this purpose the Global Energy Conservation Law is superfluous and only denies what is observed. The head reels...

Cold Nuclear Fusion and Nuclear Transmutation.

Let us approach the epoch-making experiments made by Fleischmann and Pons in March 1989 [30] from the positions of the equation with an oscillating charge. One

of the authors predicted in 1983 [9] the possibility of such nuclear reactions under very small energies. Without going into well-known details, we will sum it up very briefly: cold nuclear fusion exists, and there are no people or theories capable of giving a clear explanation. The chain of various mechanisms meant to explain this intriguing phenomenon is growing, but few really believe in them. The reason is as follows.

When a charged particle interacts with the nucleus, the potential energy is like in Fig. 3, where the right top part of the curve is conditioned by mutual Coulomb repulsion between the nucleus and the charged particle.

The repulsion potential will be

$$U(r) = \frac{Zze^2}{r}$$

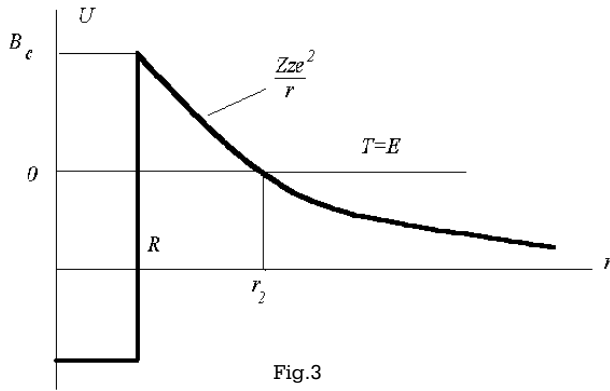


Fig.3

where Z – charge of the nucleus, and z – charge of the approaching particle, e – charge of the electron, r – distance between the particle and nucleus. When $r=R$ (critical distance), then the potential energy curve goes sharply down, which is due to the emergence of intense nuclear gravitation, the potential whereof today appears more complex than could be imagined mathematically. If the charged particle overcomes the Coulomb barrier with a height of

$$B_c = \frac{Zze^2}{R} \approx \frac{Zz}{\sqrt[3]{A}} \text{ MeV}$$

it will further get into the nuclear gravitation area and a nuclear reaction will take place.

Let us look at the nuclear interaction of a charged particle with kinetic energy $T < B_c$. From the point of view of classical mechanics, there will be no nuclear reaction in this case, because the particle will approach the nucleus and at a certain distance $r < R$ from the top of the Coulomb barrier will turn back and be reflected from it. However, from the point of view of quantum mechanics, there exists a tunnel effect, and the probability of such a tunnel passage, or transparency of potential barrier D is described by a well-known formula:

$$D \approx \exp\left(-\frac{2}{\hbar} \int_{r_1}^{r_2} \sqrt{2\mu(U-T)} dr\right) \quad (6)$$

where $\mu = \frac{Mm}{M+m}$ is reduced mass. The bottom integration limit r_1 coincides with the nucleus radius R , and the top limit r_2 can be found from the condition

$$T = \frac{Zze^2}{r_2}. \text{ After integration we will get}$$

$$D = \exp(-2g\gamma)$$

$$\text{where } g = \frac{R}{\lambda_{B_c}}; \gamma = \sqrt{\frac{B_c}{T}} \arccos\left(\sqrt{\frac{T}{B_c}}\right) - \sqrt{1 - \frac{T}{B_c}},$$

and value $\lambda_{B_c} = \frac{h}{\sqrt{2mB_c}}$, the de Broglie wavelength corresponding to the kinetic energy of the particle equal to the barrier height $T = B_c$. If $T \ll B_c$, expression (6) is easily transformed to look as

$$D = \exp\left(-\frac{2\pi R B_c}{\hbar v}\right) = \exp\left(-\frac{2\pi Zze^2}{\hbar v}\right) \quad (7)$$

where v is velocity.

Let us now see what the shocking cold nuclear fusion will look like on the basis of the above considerations. The deuteron energy in an ordinary electrolytic Fleischmann-Pons cell will be about 0.025 eV, and the height of the Coulomb barrier for this case is

$$B_c = \frac{Zze^2}{\sqrt[3]{A}} = 0.8 \text{ MeV}. \text{ In classical mechanics it would}$$

be just naive to talk about overcoming such a barrier with a height dozens times greater than the kinetic energy. Let us now see how the tunnel effect will improve the situation. Let us assess the value of g and γ for the case of collision between two deuterons with such energy:

$$g = \frac{R\sqrt{2mB_c}}{\hbar} = 1.9;$$

$$\gamma = \sqrt{\frac{B_c}{T}} \arccos\left(\sqrt{\frac{T}{B_c}}\right) - \sqrt{1 - \frac{T}{B_c}} \approx 8883 \quad \text{and the}$$

probability of such a process will be $\exp(-2 \cdot 1.9 \cdot 8883) \approx 10^{-7328}$, i.e. practically pure zero. The fusion cross-section will be defined by the product of nuclear cross-section and the tunneling probability:

$$\sigma = \sigma_{nuc} D$$


and, in the case under review, is also a very small value. If the clash parameter of deuterons is not zero, the emergence of centrifugal potential

$$U = \frac{\hbar^2 l(l+1)}{2mr^2}$$


will still further lower the probability of such interaction.

It is these very circumstances that make the nuclear physics scientist think that there is no cold nuclear fusion as such. For example, such a serious and responsible edition as Encyclopedia Britannica 2001 found no place for the notion of cold nuclear fusion at all. Such an official position can be understandable only from the point of view that quantum mechanics is absolutely true and unshakable. Despite this, for the 12 years since the Fleischmann-Pons experimental discovery, nearly 30 international conferences have been devoted to this subject, there are lots of books and magazines on this subject, and the number of articles on the problem is nearing ten thousand. Today the situation is gradually developing in the positive direction, and the research in the field of hot nuclear fusion, which has already wasted over \$90 billion for 45 years, is slowly coming to naught.

But today there exist well known experimental data on cold nuclear fusion. They are numerous and various. We will dwell only upon the most important and sufficiently reliable results. Thus, the classical view of electrolysis of a palladium cathode saturated with heavy hydrogen in heavy water identifies an anomalous quantity of heat energy up to 3 kWt/cm³, or up to 200 Mj per small sample. Products of nuclear reaction have also been found: tritium (10⁷ - 10⁹t/s), neutrons with energy of 2.5 MeV (10-100n/s), and helium. Absence of He³ among the reaction products shows that heat is not generated by reaction $d+p$. Besides, emission of charged particles (p, d, t, γ) is observed. Similar processes are observed in case of a gas discharge on a palladium cathode, of phase passage in different crystals saturated with heavy hydrogen, irradiation of deuterium mixture with a powerful sound or ultrasound flow, in cavitating microbubbles in heavy water, in a tube with palladium powder saturated with heavy hydrogen under a pressure of 10-15 atm., etc. In certain reactions (e.g. $d+t \rightarrow \alpha + p$) neutrons of 14 MeV are absent, and such a strange situation occurs in other cases too. Activity of Li⁶, Li⁷ in reactions with heavy hydrogen and protons failed to be discovered, whereas reaction



was well recorded even in biological objects. But the most intriguing fact of all these processes is the shortage of nuclear reaction products for explanation of the emerging heat effects. Thus, in certain cases the number of nuclear reaction products (tritium, helium, neutrons, quanta) should be millions of times greater in order to account in some way for the quantity of the generated heat. Generation of such a big amount of energy cannot be accounted for by either chemical or nuclear reactions, or by phase passages. The well-known interaction $d+d$ goes along three channels:



All these reactions are exothermal. The third channel has a very small probability. It was experimentally discovered that they could occur under very small energies. In a molecule D_2 the equilibrium position between atoms is 0.74A and in accordance with the conventional quantum theory, these two deuterons could accidentally enter a nuclear fusion reaction. But the interaction value is very small $\lambda_{D_2} = 10^{-64} c^{-1}$. There is a known estimate that in the water of all seas and oceans there are 10⁴³ deuterons, and in 10¹⁴ years there will be only one fusion.

It follows from the aforesaid that the main problem impeding the occurrence of the $d+d$ reaction lies in the existence of a very high Coulomb barrier. Our approach allows for this problem to be solved, and there is such an opportunity in the UQT. The UQT equation solutions show that the distance to which deuterons can approach each other is strongly dependent on the phase of the wave function (by the way, it is absolutely clear intuitively).

Let us consider the one-dimensional problem [15-18,31]. There is a stationary nucleus with charge Ze at the point of origin, and another nucleus is approaching it along axis x (charge ze , mass m) at a certain initial velocity. The non-autonomous and autonomous equations of such a problem will look as follows:

$$m \frac{d^2 x}{dt^2} = -\frac{2Zze^2}{x^2} \cos^2 \left(\frac{m}{2\hbar} \left(\frac{dx}{dt} \right)^2 t - \frac{m}{\hbar} \frac{dx}{dt} x + \varphi_0 \right) \quad (8)$$

$$m \frac{d^2 x}{dt^2} = -\frac{2Zze^2}{x^2} \cos^2 \left(-\frac{m}{\hbar} \frac{dx}{dt} x + \varphi_0 \right) \quad (9)$$

Since an analytical solution was not found for all the areas of initial phases, numerical methods were applied with the following initial values: $Z=z=1, e=1, m=1, x_0=-10, \hbar=1$ for different initial velocities and initial phase values. As had been expected, braking or acceleration of the particle happens only when the charge is large. But at the last stage, under certain initial

phases close to $\frac{\pi}{2}$, a wonderful process occurs: velocity, charge and repulsing force are very small. Due to phase ratios, the small charge is not changed for a long time, which means that the particle (or rather what is left of it) is not influenced by any forces, and it is crawling at a permanent small speed for a very long time ("the snail effect") inside the field of another particle, and can come very close to the center. Such movement with a very small charge and a small speed can last for several hours, and disconnection of the external field will not effect this movement. This process reminds of quiet and

invisible scout penetration into the enemy territory. This phenomenon occurs only in certain phase areas, and can be conveniently called a phase hole, which is illustrated in Fig. 4 resulting from the solution of equation (8).

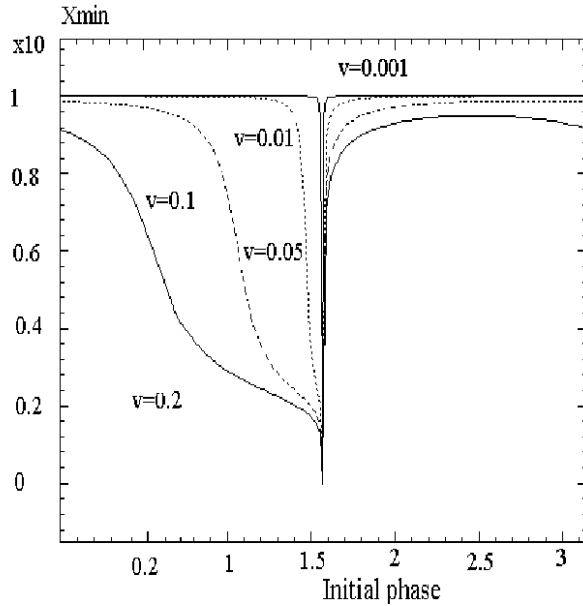


Fig.4. Distance to the turning point of the moving charge depending on the initial phase value for different initial velocities.

Let us note in passing that now we can account for one of the nuclear physics anomalies, which has a tendency to be totally ignored. Under a nucleon energy of 1 MeV, its velocity is 10^9 cm/s, nuclear radius is 10^{-12} cm, and the passage time of the nucleus is 10^{-21} s, but the time period in which the nucleon passes is usually anomalously long - 10^{-14} and even more, and it is absolutely unclear what the nucleon is doing in the nucleus so long. In our model it is easily explained by the "snail effect".

For the same equation, the minimum distance was calculated between the charges dependent on velocity (Fig. 5) for different initial phase values. For comparison, Fig. 5 also shows the result of the classical calculation based on the Coulomb law. It is obvious from Fig. 4 and 5 that the minimum distance to which charges can approach each other is nearly independent of kinetic energy, but with reduction of speed the initial phase area width is reduced as well. In other words, reduced energy brings also reduced probability of a nuclear reaction.

The same results are true for the autonomous equation (9). Under the conventional quantum theory, the ratio of the reaction speeds in the tritium and neutron

channels should be close to unity: $\frac{t}{n} = 1$. But in many experiments on cold nuclear fusion this value is very different from unity and equals $\frac{t}{n} = 10^9$. In different


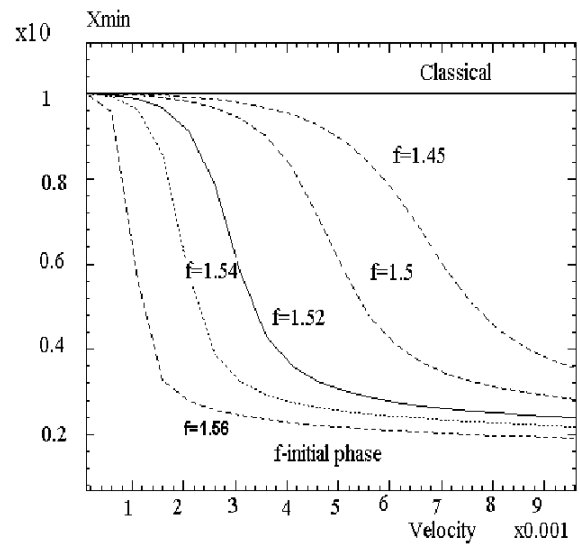


Fig.5 Minimum distance between charges depending on the initial velocity for different initial phase values.

experimental situations it is reproduced by different experimental groups with a very high accuracy. This very intriguing problem has so far received no simple explanation. Let us dwell on a possible cause for such a phenomenon. With a small velocity in the phase hole, neutrons are affected by nuclear gravitation forces, and protons are affected by electrostatic repulsion forces. Under the effect of this momentum, the deuteron will have enough time to turn in such a way that the neutron parts of the deuteron would face each other. After the neutron gravitation the nuclear forces will be saturated, which will weaken the proton connection, and one of the protons will leave the system. This reaction can be conditionally presented in the following form:



This reminds of the Oppenheimer-Phillips effect.


It is well known, however, that under big energies, the probabilities of the first and second reaction channels are the same, and this phenomenon should somehow be accounted for. Increased probability of the neutron channel with growing energy can be connected with the appearance of secondary neutrons in the reaction $T + D = He + n$ (14.1 MeV). In a deuterium-rich environment, a big part of the resultant tritons will pass to neutrons in the process of this reaction, which has a cross-section of 5 barns under an energy value of 70 KeV. According to assessments in [32], the number of such secondary neutrons per one triton is

$7.9 \cdot 10^{-12}, 1.7 \cdot 10^{-9}, 2.7 \cdot 10^{-6}$ for energy tritons 10, 20 and 100 KeV respectively. Thus, the prevalence of $\frac{t}{n} > 10^6$ can be expected only in those reactions, where tritium is born with energies over 40 KeV.

It should not be assumed, however, that the phase hole phenomenon in its whole area leads to a nuclear reaction. It can be assumed that reduction of the Coulomb repulsion is followed by reduction of strong

interaction. But how? Today nobody knows the exact equation of the strong interaction potential. Besides, the particle approaches the turning point $X_{\min}$ is rather "thin". Will it be able to take part in a full-fledged nuclear reaction, or will it fly through, like it happens with the electron in the s – states of the atom? There are very narrow phase areas, when soon after the particle stops the charge grows quickly and is sharply accelerated. The charge can even be maximum in the nuclear force effect area. May be, it is this narrow phase area that is responsible for cold nuclear fusion, and in case of strong interactions the phase hole mechanism must be operating as well.

It was discovered long ago that nuclear transmutations have a mass character (especially in plants and biological objects), but they have little to do with energy generation. Examples of such reactions:




In reactions of this type, a very slow proton (with practically zero kinetic energy) penetrates the nucleus in the above-mentioned way and remains there. *No intranuclear energy is generated, because both before and after the reaction the nucleus remains a stable object.* In classical nuclear physics, the nucleus usually became unstable after it was penetrated by a charged nucleon with a large kinetic energy and always broke into parts, and the nuclear debris had an even greater kinetic energy. Reactions of the above type were considered impossible under small energies and for this reasons were not studied by classical nuclear physics. It seems to be a *completely new type of nuclear transmutations, not recognized by modern nuclear science, but experimentally discovered rather long ago.* Today there is a great deal of experimental material confirming mass nuclear transmutation phenomena. Moreover, there are many projects of neutralizing nuclear excess with the help of this technology. Journals *Infinite Energy, New Energy, Cold Fusion, Fusion Facts*, etc. and Internet are full of such projects.

Of course, a change in the nuclear charge will result in restructuring of electronic atom shells, but the energy related to this process will be about several electron-volts and is nothing in comparison with the energies of nuclear reactions from several to hundreds million electron-volts. By the way, nuclear engineers are accustomed to such energy ranges in nuclear reactions. It was this circumstance that made them deny *a priori* all nuclear processes in biology, because under such energy values of the debris dozens and hundreds thousand of complex biological molecules will be destroyed.

Quite a long time ago, Lois C. Kervran [33] wrote a book about nuclear transmutations in biology, and now, nearly 20 years later, its second edition was published! It gives, evidently for the first time, numerous

experimental data of the above-mentioned phenomena. The reaction of the official science is very interesting. For example, well-known physicist Karl Sagan, after reading the book about such *experimental* data, advised Kervran to read elementary textbooks in nuclear physics!

Some time later a research was made by Panos T. Pappas [58], who studied one of the well-observed nuclear reactions in biological cells:



Classical biology has long known about the existence of equilibrium, when the ratio between the number of K and Na ions is maintained with greatest accuracy despite the shortage or even absence of K ions in food. Later, in work [59] this nuclear reaction was even called the life equation, and the existence of such nuclear reactions in biological objects was proved by M.Sue Benford with the help of direct physical methods.

All thermonuclear fusion programs are based on blunt heating and compression of the reacting material. Despite the progress achieved, the head of the works in England, Dr. Alan Gibson [34], established several years ago that the model reactor design would be created not earlier than in 50 years. Today, this point of view is generally accepted. Even if the reactor is once made (although the authors have grave doubts about it), it will be very complicated, expensive, and harmful for the environment.

Classical approaches have so far not yielded any positive results, despite multi-billion investments and a great number of physicists, engineers, service personnel, and managers involved. It is only natural that this army of researchers is a potential impediment for all alternative projects of new power engineering. It has been noted that *"viability" of any idea is proportionate to the number of people involved and investments made.* For these reasons, the Fleischmann-Pons works were given a hostile reception in the USA and other countries.

All the controlled thermonuclear fusion programs are accompanied with the adjective "controlled", although there is no control whatever. It is simply that the initial quantity of the reacting substance is *prudently* made very small. For example, a ball of lithium deuteride during laser reduction has a diameter of several mm. So far no one has been seriously considering the question of utilizing the energy of an explosion of such a ball, which is approximately equal to the energy of an explosion of a box of antitank grenades.

The straightforward approach to fusion used by the modern science is very natural, because quantum mechanics has no methods of influencing this process. The future of really controlled nuclear fusion systems may be not on the way of primitive and blunt method of heating and compression of the material, but following UQT on the way of using collisions of nuclei having small

energy and corresponding fine adjustment of the wave function phase.

It is essentially possible in case of imposition of the external controlling electromagnetic field on the reacting system, which contains quasi-fixed ordered deuterium atoms and free deuterons. The same properties can be demonstrated by special atomic grid geometry. Diffraction scattering of a deuteron flow on such grids will lead to automatic deuteron selection by energies and phases.

It seems that in the Fleischmann-Pons electrochemical experiments such an ordered system existed in the Pd-D grid, and some phasing occurred, which accounts for the results of these experiments [30].

Today it appear to us that the cold nuclear fusion processes will be effectively used for nuclear waste liquidation and production of isotopes.

Many researchers [35,36] discovered that the quantity of heat generated in the process of electrolysis of ordinary water on nickel electrodes (there is no hope for nuclear reactions in such systems) is the same as in the electrolytic cell with heavy water. It confirms other measurements, which showed that the quantity of nuclear reaction products is millions times less than is required for such an amount of generated heat, and its origin remains a mystery.

Further we will give certain concrete data demonstrating the phase values of a deuteron with an oscillating charge, under which the deuteron can approach the nucleus to a critical distance of 10^{-12} cm or less, i.e. giving the data to estimate the value of the above-mentioned phase "hole" in the interval $(0, \pi)$ of the phase change.

Assume that the stationary nucleus with the charge q is placed to the coordinate origin $x=0$ and the deuteron with the same charge q is placed at the initial moment $t=0$ to the point $x_0 < 0$ on the x -axis, and the deuteron velocity equals $\dot{x}_0 = v_0 > 0$. The units of mass, length and time are chosen in such a way that $m = 1, \hbar = 1, c = 1$ (m - deuteron mass, c - light velocity). Charge q equals 0.085137266. Our units are connected (to 4 significant figures) with the system (kg, m, s) as follows:

$$\begin{aligned} 1 \text{ mass unit} &= 3.345 \times 10^{-27} \text{ kg}, \\ 1 \text{ length unit} &= 1.049 \cdot 10^{-16} \text{ m}, \\ 1 \text{ time unit} &= 3.502 \cdot 10^{-25} \text{ s}. \end{aligned}$$

The electron velocity corresponding to its energy of 1eV equals $5.931 \cdot 10^7$ cm/s. The deuteron velocity corresponding to such energy will be assumed to be 3680 times less, and in our units it will be $5.372 \cdot 10^{-7}$ (if $c = 3 \cdot 10^{10}$ cm/s). Then the deuteron movement towards the nucleus is described by the equation

$$\ddot{x} = -\frac{2q^2}{x^2} \cos^2\left(\frac{1}{2}(t+t_*)\dot{x}^2 + x\dot{x} + \varphi_0\right), \quad (10)$$

where the parameter t_* is defined under the condition that the argument of cosine equals φ_0 for $t=0, x=x_0, \dot{x}=\dot{x}_0$ (thus $t_* = -(2x_0)/\dot{x}_0$), and this parameter may be considered as the initial moment of so called local time.

In the interest for us are namely solutions of eq. (10) under very small deviation ε from phase φ_0 and so we

put $\varphi_0 = \frac{\pi}{2} + \varepsilon$ and rewrite eq.(10) in the following form:

$$\ddot{x} = -\frac{a}{x^2} \sin^2\left(\frac{1}{2}(t+t_*)\dot{x}^2 + x\dot{x} + \varepsilon\right), \quad (11)$$

where $a = 0.0144967$. Let the initial x_0 to be equal - 500000 of our length units (i.e. approximately $5 \cdot 10^{-9}$ cm) and the initial deuteron velocity v_0 to be

equal to the velocity v_{00} corresponding to the deuteron energy of 1 eV or less. But it turned out that the precision of numerical integration of this equation under such initial conditions and under values $|\varepsilon| = 10^{-15}$ and less is small and besides the interval of the integration must be very large. That is why this equation also had to be transformed by passing to "slow" time $\tau = |\varepsilon|t$ to

the equation relative to the variable $w = \left(\frac{dx}{d\tau}\right)^2$ as a function of x :

$$\frac{dw}{dx} = -\frac{2a}{x^2} \left\{ \frac{1}{\varepsilon^2} \sin^2 \left[\varepsilon \left(\frac{1}{2}(\tau + \tau_*)w + x\sqrt{w} \pm 1 \right) \right] \right\}, \quad (12)$$

where $\tau_* = -(2x_0)/\sqrt{w(x_0)}$ and $+1$ if $\varepsilon > 0$, and -1 if $\varepsilon < 0$. It must be added also the equation for τ as a function of x :

$$\frac{d\tau}{dx} = \frac{1}{\sqrt{w}}. \quad (13)$$

The system of equations (12, 13) is, so to say, a "model" system describing fairly accurately the deuteron movement under all values of $|\varepsilon|$ from 10^{-24} to 10^{-6} . Numerical integration of this system was fulfilled under different values of ε and under following initial conditions:

$$w(x_0) = 2.103, \tau(x_0) = 0, x_0 = -500000, \tau_* = 689573.18 \quad (14)$$

It may be noted that the initial deuteron velocity v_0 equals 1.450172 (following the relation

$\dot{x}_0 = |\varepsilon| \sqrt{w(x_0)}$) for given initial $w(x_0)$ and for $|\varepsilon| = 10^{-7}$, i.e. such velocity is approximately 3.7 times less than velocity v_{00} corresponding the deuteron

energy of 1eV. If $|\varepsilon| = 10^{-6}$ then the velocity v_0 is approximately 2.7 times greater than velocity v_{00} .

It turned out that the numerical tables for values of w, τ obtained under different values of $\varepsilon < 0$ in the interval $(-10^{-24}, -10^{-6})$ don't differ essentially from each other. The following table is true to three-four significant figures for τ and $\dot{x}/|\varepsilon| = \sqrt{w}$:

x	τ	$\dot{x}/ \varepsilon $
-500 000	0	1.450
-50 000	$1.426 \cdot 10^6$	0.0493
-500	$1.002 \cdot 10^7$	0.000489
-200	$1.067 \cdot 10^7$	0.000440
-100	$1.090 \cdot 10^7$	0.000425
-80	$1.100 \cdot 10^7$	0.000423

If reducing the table values of x to centimeters, we obtain the following corresponding approximate values:

$$5 \cdot 10^{-9}, 5 \cdot 10^{-10}, 5 \cdot 10^{-12}, 10^{-12}, 0.8 \cdot 10^{-12}$$

The time interval ΔT , in which the deuteron reaches the critical distance 10^{-12} cm from the center, is $67350/|\varepsilon|$ of our time units or

$(1.090 \cdot 10^7 / |\varepsilon|) \cdot 3.502 \cdot 10^{-25}$ seconds. If nuclear forces are not taking into account then the deuteron may approach the distance less 10^{-12} cm .

We present here the table, where are given the initial deuteron velocities v_0 in velocities shares v_{00} and the corresponding time intervals ΔT (in seconds) for different values of ε .

ε	$\frac{v_0}{v_{00}}$	$\Delta T \text{ (s)}$
-10^{-6}	2.7	$3.82 \cdot 10^{-12}$
-10^{-7}	0.27	$3.82 \cdot 10^{-11}$
-10^{-22}	$0.27 \cdot 10^{-15}$	$3.82 \cdot 10^4$ (≈ 10.6 hours)
-10^{-23}	$0.27 \cdot 10^{-16}$	$3.82 \cdot 10^5$ (≈ 10.6 hours)

Let us note that the given data change essentially under positive values of ε ($10^{-6}, 10^{-7}$, etc.). There is some asymmetry of solutions behavior under negative and positive values of ε . The calculations show the minimum distance $|x|_{\min}$ more than 500 of our lengths units even

for relative big initial $w(x_0) = 10000$. Thus, if we limit ourselves to the condition that the deuteron energy is not over $(0.27)^2 \text{ eV}$ at a distance of $5 \cdot 10^{-9} \text{ cm}$ from the central nucleus, and the whole process of deuteron movement towards the nucleus does not exceeds approximately 10.5 hours, then the interval

$(\frac{\pi}{2} - 10^{-7}, \frac{\pi}{2} - 10^{-23})$ is approximately the sought

phase "hole" in the whole interval $((0, \pi))$ of phase change φ_0 in eq. (10).

If many deuterons with the energy not more than $(0.27)^2 \text{ eV}$ at the distance $5 \cdot 10^{-9} \text{ cm}$ from the nucleus are equally distributed along their phases φ_0 , the ratio of the length of this "hole" to π , equaling approximately $0.3 \cdot 10^{-7}$, is equal to a share (or a relevant percentage of $0.3 \cdot 10^{-5}$) of deuterons overcoming the Coulomb barrier.

The above figures express at least the order of probability of the cold nuclear fusion occurrence, and this order is absolutely incompatible with the figures in the classical quantum mechanics mentioned above. Let us note once again that a one-dimensional problem was solved, and in case of an accurate analysis (not zero sighting distance will be taking into account) this probability will be lower. Let us also pay attention to

the large time intervals ΔT calculated if $|\varepsilon|$ is very small. It explains well the effect (observed by many researchers) of continuation of cold nuclear fusion reactions during even many hours after the disconnection of the voltage in the electrolytic cell. This effect was named even "life after death".

As for the analysis of the deuteron movement with the help of the autonomous equation, the calculations lead to initial velocities v_0 , exceeding the above mentioned numbers, although the general motion picture is the same. But the autonomous equation is interesting, because in the area of those values $x, \dot{x}$, under which the product $x\dot{x}$ is modulo small, it is possible to replace $\sin(x\dot{x})$ with $x\dot{x}$, and the eq.(11) under $\varepsilon=0$ to replace with simplified equation (describing the deuteron motion from initial point $x_0 > 0$ to center)

$$\ddot{x} = a \frac{(x\dot{x})^2}{x^2} = a\dot{x}^2$$

This equation has a very simple analytical solution. Without giving very simple calculations, we will present the final formulas.

Let us take the following initial conditions:

$$x(0) = x_0 > 0, \quad \dot{x}(0) = -v_0 < 0$$

Then

$$\dot{x}(t) = -\frac{v_0}{1 + av_0 t}, \quad x(t) = x_0 - \frac{1}{a} \ln(1 + av_0 t)$$

It follows from these formulas that the velocity of a particle moving in accordance with the initial equation never turns to zero, and under

$$t = t_* = \frac{\exp(ax_0) - 1}{av_0}$$

$x(t_*) = 0$, i.e. the particle reaches the center of the nucleus, its velocity at this moment being

$$\dot{x}(t_*) = \frac{-v_0}{1 + av_0 t_*} = -v_0 \exp(-ax_0) ,$$

so that it *passes through the nucleus and moves further.*

For example, let $a=0.0144967$, $x_0 = 1000$ ($\approx 10^{-11}$ cm),
 $\dot{x}(0) = 5.37 \cdot 10^{-10}$ (≈ 16 cm/s).

Under such initial data, the product $x\dot{x} = -0.0000537$,
 so it is quite possible to replace $\sin(x\dot{x})$ with $x\dot{x}$.
 In this case,

$$t_* \approx 2.3 \cdot 10^7 \quad (\approx 8 \cdot 10^{-18} \text{ s}),$$

$$\dot{x}(t_*) \approx -29.9 \cdot 10^{-17} \quad (\approx 9 \cdot 10^{-6} \text{ cm/s})$$

These figures fit well into the reasonable framework, so the autonomous model can also be of use for the movement analysis in the problem under review. The phenomenon of particle passage through the Coulomb potential accounts very well for the existence of pendulum orbits in the Bohr-Sommerfeld model, when in states $1s, 2s, 3s$ etc. the electron passes through the nucleus. Such states in the strict theory and experiment have no impulse, so in the Bohr-Sommerfeld model they were discarded as absurd. Now they have a right to existence. Further, the experimental data for angular distribution of non-elastic scattering by nuclear reactions (including reactions with heavy ions) reveal the big amplitude of the scattering forward. It is impossible to explain such effect by the formation of intermediate nuclei but it is may be explained from the viewpoint of our UQT.

General Principles of Creating New Energy Sources

In the ancient classical *perpetual mobile* idea it is supposed that energy is just created and not taken from outside (impossibility of a *perpetual mobile* is the first law of thermodynamics). There have appeared lately many articles and even books dwelling on the idea of energy generation from vacuum. We are not in complete agreement with many of these works, and we will dwell only on some of them, which, in our view, can be of interest. One of the main ideologists of this completely new sphere in science are Daniel C. Cole and Harold E. Puthoff, and their first serious work entitled «Extracting energy and heat from the vacuum» was published in Physical Review E, vol. 48, #2, (1993). In this work authors use the Casimir forces [60] making them produce useful work. The appearance of such forces in vacuum is understandable intuitively: if in a stormy sea we put vertically into the water two big parallel plates, on the outside part of these plates the waves will hit them at random, and between the plates there will be no waves. Then, the hitting of the waves outside the plates will produce a gravitation force between them

(the Casimir force discovered experimentally long ago), which the authors of this interesting work are going to exploit. It is easily seen that in this idea energy is generated from vacuum fluctuations.

Our approach is altogether different. When the equation with an oscillating charge was solved for the quantum oscillator, 4 types of solutions were discovered. For us only two of them matter – “crematorium” and “maternity home”. In one solution (“crematorium”) the particle slowly falls to the bottom of the pit and finally turns into a “specter” (under the strict unitary quantum theory it disappears, spreads about the Universe and contributes to vacuum fluctuations everywhere). In the other solution (“maternity home”) the particle can even be born of a very small fluctuation, or accumulate a sufficiently big energy. Let us underline once again that both these processes are not at all logically connected. In other words, there are such systems where energy will disappear completely (electrolytic baths), or increase unlimitedly (it might be our Universe).

It is the energy conservation law that presents the strongest impediment in all cosmological approaches. However, universes with birth of matter have long existed in scientific cosmology independently of us. There is known the theory of British astronomer Fred Hoyle based on the idea of continued creation of matter from nothing. The question of whether such an approach is realized in nature and whether the energy emitted by quasars is the result of work produced by a certain gigantic pit, is the most intriguing question of the future.

It is yet unclear whether the values of appearing and disappearing energy in these solutions are equal. But neither in the strict UQT nor in the equation with an oscillating charge vacuum (as a big set of random oscillations) is needed for energy generation. Of course, UQT admits of such an energy exchange with vacuum. For example, during split of a photon on a semitransparent mirror, at one time both halves of the photon will not be registered and will give their energy to the vacuum and disappear for the observers for good, at another time there will appear two photons out of one, and the lacking energy will be taken from vacuum. But *the movement equations (4) and (5) themselves know nothing about vacuum and can generate energy due to their nature* (they are noninvariant relative to the coordinate translations) and the conservation laws we are so accustomed to do not exist for them.

Let us remind you once again that the latter follow from the Newton equations, and the Newton equations result from averaging by a big number of events, while for individual events of small energies no conservation laws in quantum physics exist.

In other words, it can be said philosophically that a motion of a small wave packet, once started, will give birth to other movements (energy) and, consequently, to matter. Since most various and breath-taking speculations are possible, up to the creation of a universe, we will stop here.

Thus, the generated or disappearing energy in our approach can be manifest not only in the changes of the particle velocity during movement in a certain potential, but in the appearance or disappearance of the particles themselves as well. A change of the particle velocity in movement is most easily discoverable, and it is the velocity increase that can be used for generation of heat or electric current. There can be energy systems, which exploit the fact itself of charge oscillation and the consequence of it. It is very probable that these phenomena, contradicting the most fundamental laws of modern science, have been long discovered and even applied. But these are the very phenomena that are the easiest to be exploited at the first stage of development of such new energy technologies.

When an energy generation mechanism is used, crematorium-type solutions should be suppressed. But all the quantum processes are built on the basis of elementary acts, and each of them is impossible to be controlled separately. But if the probabilities of such processes are controlled, they, being multiplied by the great number of participants in the process, automatically become macroscopic variables of quantum kinetics, and the process itself becomes possible. It can easily be achieved, if process participants with correlated initial phases are selected.

Let us remind you that the Newton and relativistic classical mechanics follow from the strict UQT, while the Newton movement equations with the resultant energy and impulse conservation laws follow from the oscillating charge equation with averaging by the particle ensemble composing a classical body (material point). But these conservation laws are nonexistent for individual microparticles in our theory, and they appear only in case of averaging by the ensemble of particles. Thus, if the energy-generating processes are accumulated, and the processes where energy disappears are suppressed, a classical *perpetual mobile* can be created.

But the UQT and the oscillating charge equation have other differences not only from the equations of classical mechanics, but also from some equations of electrostatics and electrodynamics.

There is a fundamental theorem of circulation for the electric field. Let us dwell on it in more detail. Let us have a vector field $\mathbf{E}$, which can be an electrostatic or a gravitation field.

$$\mathbf{E} = P(x, y, z)\mathbf{i} + Q(x, y, z)\mathbf{j} + R(x, y, z)\mathbf{k}$$

Line integral

$$\Gamma = \oint_l (P dx + Q dy + R dz) = \oint_l \mathbf{E} d\mathbf{l} \quad (15)$$

is called circulation of vector field $\mathbf{E}$ by contour l . Of course, circulation depends not only on $\mathbf{E}$, but also on the passage direction accepted in contour l ; by changing the passage direction we will change the circulation

sign. Form (15) is convenient for mathematicians, but for our purposes we will present equation (15) in a different way. If both parts of equation (15) are multiplied by electric charge q , on the right we will get the integral of force $q\mathbf{E}$ by way $d\mathbf{l}$, i.e. work for moving the charge along a closed loop contour. It is well known that this value is zero.

$$\oint_l q\mathbf{E} d\mathbf{l} = 0 \quad (16)$$

If this value were not zero, an energy source could be created. For this purpose a charge should be moved in electric field $\mathbf{E}$ from point a , located in the high voltage area of the field, to point b , located in low voltage area of the field, and then back, but along another route. The values of work from $a \rightarrow b$ and from $b \rightarrow a$ would be different, and we could extract work from the field without making any changes in the system. When the charge is constant, it is certainly true, so for a macroscopic constant charge this theorem is an analog of the energy conservation law. The authors have not come across such an interpretation of the energy conservation law in other works. If the charge is microscopic, then in the UQT it changes, depends on time, coordinate and velocity, so work from $a \rightarrow b$ and from $b \rightarrow a$ will be different, in this case work can in principle be extracted from the field without any changes made in the system.

Discussion of Experimental Results

Let us now get down to explaining some very unusual experimental results, which the authors have nothing to do with, and which they sometimes regard rather skeptically. The point is that the sphere of new energy sources is the headache of all the human civilization, and in this sphere, like nowhere else, the dividends can be exorbitantly high, and for this reason there are in this sphere a lot of swindlers (even among the theoreticians) and simply erring people. The official science of the world does not so far believe in such research, but the most suspicious fact is the great multiplicity of such works. The authors are not inclined to regard all these people as swindlers or erring, because the UQT can offer a beautiful and simple interpretation of certain phenomena.

There are strange plants with the efficiency over 100%. They are even manufactured in small quantities and are rated among energy-saving devices already termed over unities. Japanese researchers take these problems very seriously, and the leading role in studying this problem belongs not to the USA, but to Japan, which even finances many US institutes in this framework. The total Japanese expenditures for this research exceed \$200.000.000 a year. It can be forecast that with the Japanese mentality and the state policy of exporting not natural resources, but superhigh technologies and intellect, Japan will find itself among the leading countries early in the 21st century. We think that our readers will not be surprised to hear that Russia has

not allocated a single cent for this program, and all research was made on pure enthusiasm.

In the USA such works do not get official governmental support either (like, for example, the dying out hot nuclear fusion problem), but a great number of private firms and individual businessmen are conducting large-scale research. The following US journals are devoted to the subject: *Journal of New Energy*, *Infinite Energy*, *Cold Fusion*, *New Energy News*, *Fusion Facts*, and *NET-Journal* (Switzerland).

Switzerland, Italy, Germany, and France are also among the countries where the new energy problems are seriously researched from the cold nuclear fusion point of view.

A very young sphere of power engineering has emerged and is quickly developing, which researches many new energy sources. In future those new energy-saving sources will first be used, which will considerably differ from the existing ordinary energy transformers in that they will generate additional energy that can be used in the interests of the mankind. The development of civilization will then be limited not by long-expected reduction of natural fuel resources, but by heat pollution of the environment.

Let us enumerate just a few of the new energy directions:

1. The Patterson fuel cell (CETI).
2. Supermagnet-superengines of Takahashi, Aspden and Adams
3. Swiss plant Testatika.
4. Engines operating on water.
5. Hypersound Griggs pump, the Potapov and Schaffer heat generators.
6. Schoulder and Fox cluster systems.
7. N – machines of Farade, Bruce de Palma, Newman, Searl, Tewari, etc.
8. PAGD reactor of Canadian researchers P Correa and A. Correa.

This list can be complemented with the surprising experimental results received by physicists A. Samgin and A. Baraboshkin (Russia, Institute of High-Temperature Electrochemistry under the Russian Academy of Sciences, Ekaterinburg) [24,25] and T.Mizuno [26] (Japan). They appear to have used, totally independently of each other, special proton-conducting ceramics, which, when electric current runs through them, generate a thousand times more heat energy than the electric energy consumed. In some experiments by T.Mizuno this value even exceeded 70000(!). T. Mizuno in a personal talk with one of the authors of this report said that he feared very much the radiation sickness.

But no α , β , γ radiation or nuclear debris was found, and the nuclear processes are not responsible for such energy generation. Such proton-conducting (or, to be more exact, deuteron-conducting) ceramics was made using the power metallurgy methods by agglomeration under high temperatures. In other words, all the

chemical processes in it had long been over. The origin of such an amount of excessive energy is absolutely incomprehensible in the framework of conventional science, for they cannot be accounted for either by nuclear or chemical reactions, or by phase passages. At first the authors of this experiment supposed nuclear fusion reactions of the D+D type. At our request, A. Samgin replaced heavy hydrogen (deuterium) during ceramics production with ordinary hydrogen. If the effect of such huge energy generation was connected with the nuclear D-D reactions, all the anomalous heat effects would have disappeared, but they persisted. After such a large quantity of energy was generated, the tablet disintegrated into powder.

These effects can easily be explained by UQT from the harmonic oscillator theory point of view. When the tablet is agglomerated, there remain in it some caverns of a size of hundreds Angstrom units. When direct or alternating current flows through it, the protons and deuterons in their movement (there are few electrons in such ceramics) get into these caverns, and a process can start which is described by the “maternity home” solution. A particle accumulating energy, oscillates in such a pit, and finally the energy will be sufficient both for heating and for destruction of the pit walls (tablet turning into powder). The same processes seem to be taking place in a palladium electrolytic cell with heavy water, and in a nickel electrolytic cell with ordinary water, which accounts for anomalously large heat generation, not related to nuclear processes.

It would be good to verify experimentally the dependence of the tunnel effect on the initial phase. But it seems us that it is more important for our opponents, since both cold nuclear fusion (CNF) and discovery of nuclear transmutations (*which, from the point of view of modern science, are even more absurd than the existence of CNF*) evidently cannot be accounted for in any other way. Besides, such a direct experiment is of a fundamental value. There are today a lot of people and groups in the world, who pin great hope on exploiting the nuclear transmutation phenomenon for the purposes of processing and recycling of nuclear wastes, and the question of industrial generation of tritium for military purposes using CNF methods was under consideration in Los-Alamos. Internet magazines are full of such information. We are not giving Internet addresses here, because everything is constantly changing in this live system.

Let us analyze some of the above-mentioned devices. The first, the oldest and the most mysterious information was information about internal combustion engines operating on water.

Let us give just one example. When we were students, one of our teachers, the late Professor G.V. Dudko (1959) told us that in 1951 he had participated in the testing of an internal combustion engine [39,55-57]. The device represented a hybrid of a diesel and an ordinary carburetor engine, where a gas of petrol was needed to start it and then ignition was switched off, and an

ordinary fuel pump sprayed into the cylinder warmed up and strongly compressed water with special additives (which the inventor himself put into the tank in small quantities, and which, as we now understand, represented the principal secret). The engine was installed on a boat. The researchers were riding for two days in the Azov Sea, and only water vapor was the engine exhaust. Professor Dudko himself drew the water fuel overboard and poured it into the tank. They needed much water, several buckets a day, but there was no shortage of it... The question of why, if everything was so great, these engines are still not in use, can occur only to a person who has never lived in Russia.

From the point of view of the solutions of the harmonic oscillator problem, the following theoretical possibility exists [40,44,47,55-57]: if water with the necessary additives (which, evidently, represent the secret of many invented engines operating on water) is compressed and sprayed into the cylinder, each drop of water, when it gets into the cylinder after being compressed, will start dilating and will pass by inertia the equilibrium position. As a result, caverns (empty volumes) can be formed in it, with a size of several dozen of Angstrom units. If a free proton (or some other microparticle) gets into such a cavern in the required phase (it is supposed that the task of the additive is exactly this), the "maternity home" solution will be realized and some of the drops will explode... Later we heard and read many times about various Russian inventors, who had successfully created and tested engines operating on ordinary water with some mysterious additives.

Of course, the possibility of catalytic water decomposition with small energy consumption before spraying into the cylinder is not at all excluded. There are films and information in Internet about testing of cars operating on water, which is catalytically (with small energy consumption) decomposed into oxygen and hydrogen. Such power engineering would be ecologically absolutely clean, and the only restriction would lie in heat pollution of the environment.

An ideal solution for the motor transport could also lie in use of some new types of electric energy generators. The UQT even admits of the possibility, which was long observed in the experiments of Nicolas Tesla and in those made by Canadian physicists the Correas, who even received a patent for a system generating energy from vacuum fluctuations (as they believe) [45]. The readers could have got acquainted with our detailed theory of these processes in [46]. But the ideal system for the automobile would certainly be Testatika.

Any imagination will be amazed at the thermal cell CETI created by James Patterson, USA [27], in which takes place the electrolysis of specially made nickel balls in ordinary water. The US paper «Fortean Times»¹ 85, 1995, wrote about it: "December 4, 1995 will go down into history. On this day a group of independent experts from 5 US universities was testing a new source of energy with a stable output heat power of 1.3 kWt. The consumed electrical energy was 960 times smaller". All

experts note that the generated heat is of mysterious origin and cannot be explained by chemical or nuclear reactions, as well as by phase passages. The US ABC TV showed on February 7 and 8 1996 in the «Nightline» and «Good Morning America» cycles of programs about the development by Patterson of a new energy source generating hundreds of times more energy than it consumes. The mysterious nature of the generated heat was again underlined. It is interesting [34] that Motorola tried to buy the CETI patent from its authors for \$20.000.000, but met with a refusal. We are sure that Motorola had invested a certain amount of money into the study of this problem before making such a serious offer. All that happens within the Patterson element has nothing to do with nuclear reactions (although Patterson told one of the authors that he was of a different view), and, in our opinion, can be accounted for by exactly the same processes as were described above for proton-conducting ceramics.

The sonoluminescence phenomenon, when certain liquids start shining if weak ultrasound is run through them, also looks very mysterious. No satisfactory explanation has so far been found for this experimentally proved phenomenon, discovered by Moscow University Professor S.N. Rzhavkin in 1933. As Nobel Prize winner Professor Yulian Schvinger said, "it has no right to exist, but it does exist" [38]. This phenomenon can also be explained from the above-mentioned positions.

There are also heat generators (Yu. Potapov [21-23], Moldavia, James J. Griggs [28], and Huffman [29], Schaffer - USA). In them many cavitating bubbles are formed during circulation of ordinary water, in which excessive energy is generated, with the output to input energy ratio approaching 1.7. In these experiments and plants no chemical or nuclear reactions can take place, and thousands of Potapov's heat generators have been manufactured for heating homes. In such devices (they are very different in appearance) a great number of cavitating bubbles are created in a flow of water. This is achieved either with the help of interrupting the water flow with a special rotor (J. Griggs, Huffman, Schaffer), or the water flow is twirled by a special helix and then enters the zone of sharp dilation, where cavitating bubbles are formed (Yu. Potapov). In general, it should be said that cavitation remains a great puzzle for theoretical hydrodynamics and science. For example, forged multi-ton screw propellers of big nuclear submarines under certain operation modes and geometry of the surrounding forms can be destroyed by cavitation within only a few hours. It happens because of huge energy generated in cavitating bubbles.

Under certain values of phase and energy, a particle in the pit, each time reflecting from the walls, will have a greater velocity than that of a falling particle (this is within the uncertainty relation), and after many reflections will accumulate a fairly big energy which will be generated in the form of heat or bremsstrahlung when the pit is destroyed, and, finally, the energy of the oscillations of such a particle accumulated in the

pit will always be transformed into heat in an ordinary solid body or a liquid. This physical idea immediately accounts for both sonoluminescence (although for sonoluminescence in general this mechanism is less primitive), and energy generation in proton-conducting ceramics, nickel during electrolysis in ordinary water (CETI element), and water bubbles of commercial heat generators. The theory predicts that the samples should be fissure due to increased pressure on the walls of the potential pit with the growth of energy, which fact also takes place, since both ceramic samples and nickel balls in the CETI element finally disintegrate. It is evidently for these reasons that any metal containing much hydrogen in its grid becomes fragile and is quickly destroyed, which fact is well known to engineers.

The small number of experiments does not so far allow for making concrete conclusions as to what particles generate energy in pits (microbubbles). Besides, for at least an electron to disappear a pit of about 0.5 MeV is required, while in a solid body the pits are about several eV deep, and what seems to happen is only loss of kinetic energy, and not disappearance of particles. The fact that this process requires very deep potential pits, which do not exist in a solid body, does not change the essence of the matter.

Of course, under ordinary conditions, both competing solutions usually take place at once: “maternity home” and “crematorium”, which compensate for each other and the energy is preserved. For energy generation, the “maternity home” solution should prevail. Both these processes take place simultaneously and compete with each other, but, formally, they are not connected in space and time. The complexity of the energy generation problem lies in suppressing the “crematorium” solution by a careful selection of different parameters and promoting the “maternity home” solutions. So far we cannot say for sure what the optimum dimensions of such cavitating bubbles are, or which object oscillates in them, because for this purpose special experiments are needed, which so far have not been staged.

Of course, the inexorable Robber in the form of the Carnot principle stands in the way of transformation of the heat generated in a heat generator or ceramics into electrical or mechanic energy. In accordance with this principle, all mechanic or electrical energy can be transformed into heat, but the reverse process is always connected with big losses.

If there are experiments and plants in which energy generation contradicting the conventional conservation laws is discovered, there should also exist opposite ones, where energy disappears completely, i.e. the “crematorium” solution prevails. It proved to be true. There are such modes during electrolysis in electrolytic baths, under which the temperature of the solution in the bath is strongly reduced for unaccountable reasons, and this fact has no explanation at all. This phenomenon long ago was noted by attentive industrial engineers, and it is called the “bath-freezing” mode [49,50].

Chinese physicist Swe-Kai Chen from Taiwan in his experiments [48] stably observed the same phenomena. It is quite easily explained: a particle with a velocity exceeding the most probable velocity in this distribution gets into caverns on electrodes and after some oscillations reduces its velocity, which becomes smaller than the most probable one, and then the particle leaves the cavern at a small speed, and the same process can happen to another energetic particle. This leads to the cooling of the cell in the case of such mass processes.

The problem of ferromagnet magnetization (the Easing model) can also be reduced to the orientation of a magnetic doublet by the external magnetic field, and then it is essentially the harmonic oscillator equation with a slightly different return force ($F = \frac{\mu}{r^3}$) and all the conclusions made earlier remain in effect. That is why magnetization should also produce energy generation effects. This proved to be true. For the general public everything began on May 17, 1996, when Frode Olsen from the research group “Free Energy” showed on the Norwegian TV (TV2) a surprising film about a “dynamic sculpture” made by artist and sculptor Reidar Finsrud from Skaarer, Norway. The author of this “dynamic sculpture” *had no idea about physics* and had been making it for 12 years. Einstein's idea of how discoveries are made conveniently comes to mind at this point: everyone knows that a certain thing cannot be done, but there is a man who does not know it, and it is he who makes the discovery.

This “dynamic sculpture” accompanied by an “explaining” poster «*perpetual mobile*» represents an iron well-polished ball with a diameter of 2.7 inches weighing about 2 pounds. The ball is rolling along a circle on close guides resembling two parallel skids with a diameter of 25 inches past the poles of three permanent magnets, where it is magnetized. In the area of three permanent magnets three more mobile magnets are installed on special mobile 5-inch long levers, and these magnets, when the ball passes them, are slightly inclined (due to the ball gravitation) and, after the ball passes them, are raised by the holding springs (sway like yokes). The ball makes a complete turn in 3 seconds. All this magic (***they say the ball had been rolling along the close contour for more than a year***) does not have any sources of energy and is installed for everyone to see in a Norwegian picture gallery on a special stand covered with a glass cover. The authors only saw a good TV film about this installation and were mostly surprised at the fact that the ball had not stopped during uninterrupted shooting (about 20 minutes).

We are well acquainted with circus tricks, but it is absolutely incomprehensible how such a trick could be staged using some secret methods. It is clearly seen that the ball in its movement always partially transfers its energy to the three long swaying pendulums, but there is no way to use them for pushing the ball and making up for friction, this being the only trick that could, in our view, be applied here. All the rest is clearly visible and contains nothing suspicious.

Let us estimate the generated energy. At an initial speed of about 1m/s the ball stops after 30 seconds, if all the magnets are removed. It means that the energy consumed in 30 seconds is about 0.5 joules, or 1/60 Watt. The total energy generated in a month is 43,200 joules, and this is huge energy, much greater than that of a good shell!

It is clear (if the word is relevant here at all) that when the ball is approaching the permanent magnet and the process of magnetization is going on, it is accelerated, but when it mechanically gets past the equilibrium position and, moving away from the magnets, becomes demagnetized, the gravitation (which now starts slowing the ball down) will be slightly less than it was at the moment of the ball's acceleration. This small difference in forces provides for small positive work to overcome friction. Energy generation and similar things during magnetization had been *predicted* by one of the authors in magazines *Infinite Energy* vol.1, No.2, p.38, (1995); *Proceedings of the ICCF5*, p.361, April 9-13, (1995), Monte-Carlo; *Cold Fusion*, No 11, p.10, (1995); *Chinese Journal of Nuclear Physics* (vol. 19, ¹², 1997). The quantum-mechanic processes are very complicated, but some of them can be understood.

All keen physicists were quick to understand it, and J. Naudin in France made a similar, but much simpler experiment. A ball of a soft magnetic material is swaying along parallel U-formed skids in a system of four magnets. Near the bottom of the U-form there is a small smooth step. It may have been made to make the magnetization and demagnetization processes different in time, which is very important. If there are no magnets, nothing interesting happens and oscillations are quickly (in a few seconds) damped. If the magnets are present, oscillations go on up to 3 hours 27 minutes. It appears that in this case the author failed to find good material and parameters of the plant, so friction was not compensated completely. In all these experiments demagnetization of permanent magnets does not happen, because the experiment is repeated many times with the same results.

And now a few vague words about demagnetization processes. During magnetization of the ball, the magnetic moments of its atoms are oriented (like the hands of a compass) along the field lines. When the ball leaves the magnetic field area, the atom magnetic moments are disoriented under the influence of the heat motion, and it becomes demagnetized. In the unitary quantum theory the share of the oriented magnetic moments in the external field can be bigger than in the conventional quantum mechanics (the "maternity home" solution), and the ball gravitation can be stronger due to it. Disorientation of these moments happens similarly in both theories. It seems to be for this reason and due to the difference in magnetization and demagnetization time that a difference in magnetic forces occurs when the ball approaches the magnet or moves off from it.

The scientists of the older generation will remember that a similar toy was shown in the 30's to David Gilbert, who said it was the most interesting thing he had ever seen. A question arises as to why it has not yet been realized. We do not know a physical-mathematical answer to this question, and it is not our task to analyze the social reasons of this phenomenon. Japan has a different mentality, and there is a governmental program for generating energy from permanent magnets. Takahashi [51] even seems to have made an electric engine with an efficiency of up to 318%!

Still more mysterious is the long-known problem of energy shortage in many biochemical reactions with ferments (enzymes). For example, in the well-studied reaction of disintegration of polysaccharides in the presence of lysozyme the following happens: a polysaccharide molecule gets into a special cavern in a big lysozyme molecule, and some time later its debris are thrown out of it (Fig. 6). The broken binding energy of the polysaccharide is about 3 eV, while the energy of the heat movement is only 0.024 eV. From the standard science point of view, it is absolutely unclear where lysozyme takes the energy to break the polysaccharide. No satisfactory mechanism for explanation of such reactions (and they are very numerous) was found, and all this was "swept under the carpet", as physicists say. The UQT provides for a completely new look at the catalytic processes, which has an incomprehensible source of energy reducing the molecule activation energy. From our point of view, this process is a variant of the "maternity home" solution for oscillator.

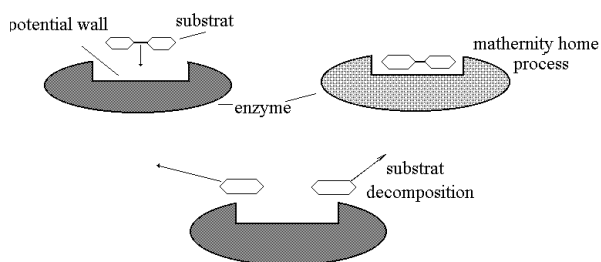


Fig.6. Break of polysaccharide molecule by lysozyme.

The most surprising thing is that in all the cases generation of excessive energy cannot be accounted for by chemical reactions or phase passages. If nuclear reactions do sometimes happen (which should not be according to modern science), they can account for only a hundredth or a thousandth share of the generated heat energy. There is no doubt that all these are effects of new physics, for in the framework of the old physics all this is simply unexplainable.

But the existence of a plant that produces *out of nothing* about 10 kilowatt of direct current electric energy with a voltage of 300 V seems nearly impossible. The story was described by one of the authors in three different magazines, and we will just give a brief resume [52-54].

In summer 1999, at the invitation of Swiss physicists (Director of the Institute of New Energy Sources in Egerkinhen Adolph Schneider), one of the authors

visited several research organizations. It is interesting that there is such an institute in small Switzerland, and there is none in big Russia. The purpose of the invitation was very simple: to explain the operation of a plant generating energy out of nothing, i.e. a *perpetual mobile*. In Switzerland such plants are called Testatik Machine M/L Converter from religious group «Methernitha» (Address: Methernitha, CH-3517 Linden, Switzerland, phone: ++41 31 97 11 24).

Such machines exist today in the Swiss town of Linden near Bern. Part of the town belongs to the Religious Christian Community, which is fenced and heavily guarded. There are about 250 members of the Community, many of them are physicists, graduates of the universities of Geneva, Lozanne, Bern. It is not only a research laboratory, they have their own TV center, a film studio, a small furniture plant, shops, garages, residential blocks, and support services. You will probably have guessed that this community does not consume any energy, and this is the most accurate fact in the whole story, for the inquisitive journalists have found out that no money from them comes to the accounts of the local power station, which provides power for all the town. In a cellar of one of the houses they have a power station that produces energy... out of nothing. The author of this inexhaustible source of free direct current energy is Swiss physicist Paul Baumann. Let us briefly describe these fantastic plants: they are of four types (sizes) with capacities of 0.1, 0.3, 3 and 10 kWt. Externally, the plant resembles very much the standard electrostatic machine with Leyden jars often used in physical demonstrations. There are two acrylic disks with 36 pasted narrow sectors of thin aluminum, which rotate in different directions. In the first samples ordinary gramophone records were used for disks. The machine is started by pushing the disks in different directions by fingers. The rotation speed is 50-70 turns per minute. After the start disks rotate independently and can be easily stopped by hand, the direct current voltage is about 300-350 V, and the current is up to 30A. The mechanical energy used for rotation (only 100 mWt, according to measurements made by Austrian Professor S. Marinov) is hundreds of thousand times smaller than the generated electrical energy. The biggest plant for 10 kWt has plastic disks with a diameter of over 2 m, the smallest one – 20 cm, the weight of the plants is small enough, the 3-kWt machine weighing about 20 kg.

The charge separation process (which consumes energy!) practically does not slow down the disks. Connection of a load in the form of a 200-Wt bulb does not change the rotation speed either. No cooling or heating of the air or machine parts during long operation takes place, only a slight smell of ozone is felt. The system is noiseless, compact, environment-friendly, and can be installed anywhere.

The Community management thinks, and quite rightly, that wide spread of such systems in the world will lead to a heat explosion, because all the energy generated by the mankind finally finds itself in an energy dump

(is transformed into heat), and all this can finally lead to overheating of the environment. They absolutely do not believe (and not without grounds) in the capability of the mankind as a whole to negotiate reasonable use of this invention, and they think that the harm caused by it will be greater than from nuclear, bacteriological, or conventional weapons. Their main idea for the mankind is to live in balance with the environment and to make full use of the energy of the wind, the sun, the water, etc. For this reason the Community is heavily guarded, and they are not going to donate their main discovery to the mankind.

Professor Stephan Marinov visited the Community twice (in July 1988 and in February-March 1989). He was even given such a plant with a capacity of 100 Wt (300 V, 0.3A), which he studied in his laboratory. As far as we now know, even the inventor of this machine does not fully understand its operation principle, so he contacted Marinov out of sheer curiosity of a scientist.

In 1989 Professor Marinov published a book "Thorny Path to Truth – Documents of Violation of Conservation Laws" in International Publishers East-West. The book contains a lot of photos, a measurement report, and a description of the plant. He also organized a research group called "Free Energy" within the Community (Methernitha Group Stephan Marinov Free Energy).

There are very interesting words in this book: "I can state without any doubts that this machine is a classical *perpetual mobile* in its pure form. After the initial push, it goes on rotating by itself for an indefinitely long time, constantly producing electrical energy in the amount of 100 Watt... It is still unclear, however, how it all can happen...". As far as we know, nobody has managed to build a similar plant elsewhere.

We have an approximate idea of how the plant operates. The idea is as simple and ingenious as that of the wheel, which is absent from the surrounding nature, so the inventor could not borrow the idea. We will just show that the existence of such a plant is in full conformity with the UQT. It is natural that the plant operates on the basis of the charge separation principle. Let us have two metal spherical surfaces with a hole, isolated from the earth and from each other. If, with the help of an insulated stick, we transfer the first electron from Ball A to the internal surface of Ball B through the hole, a difference of potentials will occur, and if we transfer the second and the subsequent electrons, Ball A will attract the transferred charge, while Ball B will repulse it, and energy will have to be spent during the transfer of charges (Fig. 7).

Let us remind you that under the existing circulation theorem (16), the charge transfer work will consume the same amount of energy as will later be generated during the passage of electric current resulting from charge separation. But in the UQT the circulation theorem (16) for an *individual elementary charge* is not valid. Thus, we can select the time and route, along which the charge will be transferred in such a way, that

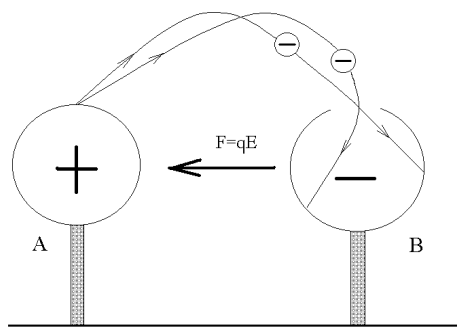


Fig.7. Work for moving the charge depends on method of movement and route.

the charge value during the transfer will be close to zero, and, consequently, the electrostatic force and the charge transfer and separation work will be close to zero too. For example, instead of selecting the route you can wait for the charge to be reduced to zero and then transfer it quickly, and when the charge increases, immediately stop the transfer and fix the charge. Or you can duly select the route and velocity. There are many options. This was evidently realized by Paul Baumann, who is *so far* practically unknown to the official science, and who can find consolation in the idea that the inventor of the wheel will never be known at all. The problem of simple arrangement of all this is just a matter of technique.

You cannot help, thinking that all these might be just tricks. The history of *perpetual mobile* abounds in evidence of downright swindling and frauds, and not a single positive result before, and who can guarantee that the information given above will not prove to be another swindle?

First of all, if all the people always piously believe in the unquestionable stability of the energy conservation law, there will never be any progress in this sphere, and it is then unexplainable how man got down from the palm at all. Secondly, to justify the proposed rebellious position, the following idea comes in mind: if 30 years ago somebody had told the authors (who were then already professors) that at the beginning of the next millennium they would deal in such research, it would have seemed not only a silly joke, but an absolutely impossible thing as well. But, as Voltaire said, "He is silly who does not change".

In conclusion we wish to express with certainty that the time of theoretical recognition and of practical universal using of overunity devices will come soon and become the epoch of new energetics. The people of our planet will regret that so much oil, coal and gas was burned causing terrible ecological losses.

The authors thank astronaut V.A. Dzhanibekov and Professor A.P. Buslaev.

References

1. Sapogin, L.G. Unitary Field and Quantum Mechanics. In: Investigation of Systems. Academy of Sciences of the USSR, Vladivostok, No 2, p. 54-84, 1973 (in Russian).

2. Sapogin L.G. On Unitary Quantum Mechanics. Nuovo Cimento, vol.53A, No 2, p.251, 1979.
3. Sapogin, L.G. A Unitary Quantum Field Theory. Annales de la Fondation Louis de Broglie, vol.5, No 4, p.285-300, 1980
4. Sapogin, L.G. A Statistical Theory of Measurements in Unitary Quantum Mechanics. Nuovo Cimento, vol.70B, No 1, p.80, 1982.
5. Sapogin, L.G. Statistical Theory of Detector in Unitary Quantum Mechanics. Nuovo Cimento, vol.71B, No 3, p.246, 1982.
6. Boichenko, V.A. and L.G. Sapogin On Equation of Unitary Quantum Theory. Annales de la Fondation Louis de Broglie, vol.9, No3, p.221, 1984.
7. Sapogin, L.G. and V.A. Boichenko On Solution of One Non-linear Equation. Nuovo Cimento, vol.102B, No 4, p.433, 1988.
8. Sapogin, L.G. and V.A. Boichenko On Charge and Mass of Particles in Unitary Quantum Theory. Nuovo Cimento, vol.104A, No 10, p.1483.
9. Sapogin, L.G. Clearcut Picture of Microworlds. "Journal Technique for the Young" (Tekhnika Molodezhi). Moscow, No 1, p.41, 1983 (in Russian).
10. Sapogin L.G., "Statistical Theory of Measurements in Unitary Quantum Mechanics," Nuovo Cimento, vol. 70B, No.1, p.80, 1982.
11. Sapogin L.G., "Statistical Theory of Detector in Unitary Quantum Mechanics," Nuovo Cimento, vol. 71B, No. 3, p. 24M, 1982.
12. Boichenko V.A., Sapogin L.G., "On Equation of Unitary Quantum Theory," Annales de la Fondation Louis de Broglie, vol. 9, No. 3, p.221, 1984.
13. Sapogin L.G., Boichenko V.A., "On Solution of One Non-linear Equation", Nuovo Cimento, vol. 102B, No.4, p.433, 1988.
14. Sapogin L.G., Boichenko V.A., "On Charge and Mass of Particles in Unitary Quantum Theory," Nuovo Cimento, vol. 104A, No.10, p.1483, 1991.
15. Sapogin L.G. "Deuteron Interaction in Unitary Quantum Theory", and "On Mechanisms of Cold Nuclear Fusion". In: Proceedings of the Forth International Conference on Cold Fusion, vol.4, Theory and Special Topics Papers TR-104188-V4, July 1994, p.171-178, Hawaii. 1994.
16. Sapogin L.G. "Deuterium Interaction in Unitary Quantum Theory", and "On Mechanisms of Cold Nuclear Fusion". In: Fusion Source Book. International Symposium on Cold Nuclear Fusion and Advanced Energy Sources, Belarussian State University, Minsk, May 24-26, p.91-98. 1994.
17. Sapogin, L.G. "Cold Nuclear Fusion and Energy Generation Processes in Terms of the Equation". Chinese Journal of Nuclear Physics vol.19, #2, p.115-120, 1996 .
18. Sapogin, L.G. «Cold Nuclear Fusion and Energy Generation Processes in Terms of the Schrödinger Equation». Infinite Energy [E.Mallove, editor], vol.1, No 5,6, p.75-76, 1996.
19. Sapogin, L.G. «Energy Generation Processes and Cold Nuclear Fusion in Terms of the Schrödinger Equation». In: Proceedings of the Sixth International Conference on Cold Fusion, Progress in New Hydrogen Energy, October 13-18, 1996, Japan, vol.2, p.595-600.
20. Sapogin, L.G. "Energy Generation Processes in Terms of the Schrödinger Equation." Proceedings of the 2nd Russian Conference CNFNT (in Russian) p.18-24, Sochi, September 19-23, 1994.
21. Potapov J.S. Patent of the Russian Federation No 2045715 Heat Generator and Device for Heating of Liquids. Registered on the 10-th of October 1995; priority from the 26-th of April 1993 (in Russian).
22. Potapov J.S. Water as a Source of Life and Energy. Enerjiatarekossadi, Revu. p.25- 29, September 1998, Budapest.
23. Potapov J.S., MD, Patent No 649 Instalatie pentru obtinerea energiei electrice si-termice. Buletin Oficial de Proprietate Industriala, No12, p.18-19, Chisinau (in Moldavian).
24. Samgin A., Baraboshkin A. et al. Influence of Conductivity on Neutron Generation Process in Proton-Conducting Solid Electrolytes. In: Proceedings of the 4th International Conference on Cold Fusion. Palo Alto, USA, v.3, p.51-57, 1994.
25. Samgin A. Cold Fusion and Anomalous Effects in Deuteron Conductors during Stationary High-Temperature Electrolysis. In: Proceedings of the 5th International Conference on Cold Fusion. April 9-13, 1995, Monte-Carlo, p.201.
26. Mizuno T., Enio M., Akimoto T. and K. Azumi Anomalous Heat Evolution from SrCeO₃-type proton conductors during absorption/desorption of deuterium in alternate Electric Field. Proceedings of the 4th International Conference on Cold Fusion, December 6-9, 1993, Hawaii, vol.2, p.14., EPRI, Palo Alto, USA, 1994.
27. Patterson J.A System for Electrolysis, U.S. patent No 5,494,559, 27 Feb. 1996; Miley G.H. and J.A. Patterson in: Proceedings of the 6th International Conference on Cold Fusion, Progress in New Hydrogen Energy, October 13-18, 1996, Japan, vol.2, p.629-644.

28. Griggs J. Calorimetric Study of Excess Heat Production within Hydrosonic Pump System Using Light Water. Fusion Source Book. International Symposium on Cold Fusion and Advanced Energy Sources, Belarusian State University, Minsk, Belarus, May 24-26, p.248-253, 1994.
29. Huffman M.T. From a Sea of Water to a Sea of Energy, Infinite Energy, vol.1, No 1, p. 38-45, 1995.
30. Fleischmann M., Pons S. Electroanal. Chem., v.261, p.301, 1989.
31. Sapogin, L.G. and I.V.Kulikov "Cold Nuclear Fusion in Unitary Quantum Theory". Chinese Journal of Nuclear Physics, vol.17, No 4, p.360-370, 1995.
32. Cryz W.: Rivista Nuovo Cimento, 1, Special No, 42, 1969.
33. Kervran Lois C. Biological Transmutations. Swan House Pub. Co, NY, 11223, 1972.
34. Private Communication.
35. Notoya R., Noya Y., Ohnisi T. Fusion Technology. vol. 26, p. 179-183, 1993.
36. Swartz M. Journal of New Energy vol.1, #3, 1996.
37. Blokhintsev D.I. On Energy Conservation Law. In: Works on Methodological Problems of Physics, p.51, 1993, Print of Moscow State University. (In Russian).
38. Schwinger J. Casimir "Energy for Dielectric". In: Proceedings of the National Academy of Sciences, vol.87, p.8370-8372, 1990, "Cold Fusion: Does it Have a Future?" Journal "Cold Fusion", vol.1, #1, page 14-17, 1994.
39. Sapogin L.G. «What Can Our Power Engineering Be Like in the Next Millennium», Journal Business-Match, 14, 1998 (In Russian).
40. Sapogin, L.G. On One of Energy Generation Mechanisms in Unitary Quantum Theory. Infinite Energy [E.Mallove, editor], vol.1, No 2, p.38-39, 1995.
41. Sapogin, L.G. On One of the Energy Generation Mechanisms in Unitary Quantum Theory. Proceedings of the ICCF5, p.361, April 9-13, 1995, Monte Carlo.
42. Sapogin, L.G. Energy Generation Processes and Cold Nuclear Fusion in Terms of the Schrödinger Equation. In: Proceedings of the Sixth International Conference on Cold Fusion, Progress in New Hydrogen Energy, October 13-18, 1996, Japan, vol.2, p.595-600.
43. L.G. Sapogin, "On One of Energy Generation Mechanisms in Unitary Quantum Theory". Proceedings of the 2nd Russian Conference CNFNT (in Russian) p.18-24, Sochi, September 19-23, 1994; Cold Fusion, No 11, p.10, 1995.
44. L.G. Sapogin, "On One of Energy Generation Mechanisms in Unitary Quantum Theory". Cold Fusion, No 11, p.10, 1995.
45. Correa Paulo and Correa Alexandra XS NRG in Technology, Infinite Energy, vol.2, #7 p.18-38, Nr 8 p.10-15, #9 p.33-37, 1996. US Patents, numbers: 5.416.391, 5.502.354, 5.449.989.
46. Sapogin L.G. Theory of Excess Energy in PAGD Reactor (Correa reactor). In: Proceedings of ICCF-7, Vancouver, April 1998; Infinite Energy, No 20, 1998, p.49.
47. Sapogin L.G. "New Source of Energy?" Journal "Acknowledgement and Physical Reality", Moscow, vol. 2, #1, page 34-40, 1997, (in Russian).
48. Swe-Kai Chen, Chu-Yung Liang «Observation of Cell Temperature Drops». In: Proceedings of ICCF-7, Vancouver, April 1998, p.68-72.
49. Jakimenko L.M. Electrolysis of Water. Chimia Press, Moscow, p.p. 33, 86, 90-114, (1970) (in Russian).
50. Pfeleiderer N. Electrolysis of Water. pp. 12, 17-18, 1935, Leningrad (in Russian).
51. Rothwell J. Yasunori Takahashi's Supermagnets, Infinite Energy, vol.1, No 5,6, p.33, 1996.
52. Sapogin L.G. "Is This Really True?", Infinity Energy, N 28, 2000.
53. Sapogin L.G. «Perpetual Mobiles Operating in Switzerland», magazine «Chudes a Prikluchenia» # 2, 2000.
54. Sapogin L.G. «They Say There are No Perpetual Mobiles. Then what is it?», magazine "Samolet", 4, 2000.
55. Sapogin L.G. XXI Century - New Sources of Energy? In: Chudes a Prikluchenia, Moscow, No 11, p.32-35 (In Russian) 1996, and No 3, 1998.
56. Sapogin L.G., Kulikov I.V. "Neue Quantenfeldtheorie und prozesse zur electromagnetischer und thermischer energie mit overunity effekt", DVR-Mitglieder-Journal 2/2000.
57. Sapogin L.G. "The 21st Century: Will it Bring a New Quantum Picture of the Universe and New Energy Sources?", Journal of New Energy, vol.2, #3/4, 1999.
58. Panos T. "Electrically Induced Nuclear Fusion in the Living Cell", Journal of New Energy vol.3, #1, 1998.
59. M.Sue Benford, R.N. M.A. "Biological Nuclear Reactions: Empirical Data Describe Unexplained SHC Phenomenon" Journal of New Energy vol.3, #4, 1999.
60. Schwinger J. "Casimir Energy for Dielectric". In: Proceedings of the National Academy of Sciences, vol.87, p.8370-8372, 1990, "Cold Fusion: Does it Have a Future?" Journal "Cold Fusion", vol.1, #1, page 14-17, 1994.

KOZYREV-DIRAC EMANATION.

INTERACTION WITH MATTER and METHODS OF DETECTING

Dr. Ivan M. Shakhparonov

125252, Russia, Moscow, Pestchanny Pas. 20-1-33
phone/fax 8-095-198-2012

In this paper the authors show the possibility of creation of a new kind of emanation. The magnetic monopole beam can be made in space as a result of focusing of some natural substance. Special devices based on the Moebius band elements make the given focusing. This emanation is able to magnetize graphite and organics, decrease the radioactivity, and influence the oncology diseases. The time reverse technology is realized in such devices.

Experimental data, which allow making a conclusion about existence of previously unknown emanation, are

presented in this report. Here are descriptions of experiments and methods of measurement. The effects of interaction between new type of emanation and matter have been obtained.

Till the present moment theoretical physics didn't pay attention to the nonoriented configurations and spaces. The reason of this situation is the fact, that from the philosophic point of view it is not possible to determine and locate the area of the nonoriented topological structures in our world. We (eight scientific teams) joined our forces and we needed more than 30 years to solve this problem by an experimental approach.

The fundamental tenet of the casual mechanics developed by Kozyrev can be formulated as follows. There are two types of energy in the Universe. The positive or «right» energy acts as a factor of the entropy increase. The negative, or «left» energy tends to decrease the entropy, i.e. it acts as a factor, which regulates the entropy increase. The «right» energy is transformed to the «left» one and this fact may be interpreted as a course of time from the past to the future. When the energy is transformed from the «left» to the «right» form, time is reversed. Kozyrev supposed [1] that through revolving of a body together with a

6. Activation by nuclear magnetic resonance;
7. Activation by electronic paramagnetic resonance;
8. Activation by electrochemical force.

All these methods can be used as possible way to high efficient energy systems. Gerlovin wrote: "Usually 1, 6 and 7-th methods of structural activation are realized in catalysis simultaneously. Besides, catalysis differs from macroscopic methods because it has the most minimal distances from the sources of activator fields to the activated molecules. And finally, an active participation of force fields created by nuclei of atoms and significantly more active participation of disturbed EPV is possible in catalysis. That's why catalysis is the most effective method of structural activation. The detailed account of this method exceeds the limits of this article and we can only annotate it." [1, p.333]

Information stated above is only a small part of the questions appeared under consideration in Gerlovin's theory of fundamental field (TFF). Other important questions should be considered with a new experimental data.

References

1. Ilia L. Gerlovin, "Foundations of unified theory of all interactions in matter", published in 1990, St.Petersburg, Russia.
2. To the question of multipolarity, Alexander V. Frolov, New Energy Technologies, #1 (4) 2002, St.Petersburg, Russia.
3. N. A. Kozyrev, Selected works, St.Petersburg, LGU, 1991.
4. Practical application of time rate control (TRC) theory, Frolov A.V., New Energy Technologies, #3, 2001, p.15, St.Petersburg, Russia.

Antigravitation Force and Antigravitation of Matter. Methods of its Creation

Anatoly K. Gaponov

Sadovaya Str. 195, Novosibirsk, 630009, Russia

Part I

For a long time there is an opinion in physics about antimatter as a possible source of antigravitation, but the researches on this subject came into a dead end. The existent presentations and formulas forbade the conclusion about antigravitation, but our conducted investigations brought us to the possibility to get antigravitation of substance and to the paradoxical conclusions concerning the next:

1. Two types of space exist:

- a) The Absolute space
- b) The Relative space

2.a The Gravitation Field is the relative space, which has accelerated motion, directed to the center of a planet.

2.b The Antigravitation Field is the relative space, which has accelerated motion, directed from the center of a planet.

3. Gravity force does not depend on mass of a body! The mass can be presented in three versions:

- a) m_k – mass as amount of atoms.
- b) $W_{m_A}^e$ – electronic-atomic energy in mass.
- c) $W_{m_G}^m$ – mechano-gravitational energy in mass.

On the basis of the stated notions we offer to revise the essence of force not only in Coulomb's formula, but in Newton's formula too.

$$F = K \frac{q_1 \cdot q_2}{R^2} \qquad F = P \frac{m_1 \cdot m_2}{R^2}$$

It is well known, that mechanical energy can be bringing in electrostatic charge, where mechanical energy runs (turns) into energy of electric field, where

$$\text{(mechanical energy)} \quad F \cdot R \rightarrow \frac{E_2 \cdot V_{m^3}}{2} \quad \text{(electrical energy)}$$

Similarly it is also possible to insert mechanical energy into mass of a body. As the result, the mechanical energy will turn into energy of gravitational field, where

$$\text{(mechanical energy)} \quad V \cdot F \cdot t \rightarrow \frac{g^2 \cdot V_{m^3}}{2} \quad \text{(gravitational energy)}$$

Since the volume of the Earth is constant, the acceleration of gravitational field will be increased.

It should be logical to expect, that when removing the mechanical energy from mass the inverse process will occur, that is to say acceleration reduction of gravitation field will occur.

In his works I. Newton affirmed about existence of two spaces:

The Absolute space - is an immovable non-rotatable space, which represents a limited cube, with our planet in the center.

The Relative space – is a movable space. It can move with acceleration in the absolute space.

Editor's note: In aether conception this means two parts of aether: some part is involved into the motion with the mass, but another part of aether is immovable.

The main mistake in search of aether consisted in the following: Maikelson's experiments were aimed on

search of relative velocity between bodies and space. However, it was the **relative acceleration** between bodies and space that was necessary to search for.

To quote the conclusions of I. Newton: "Body can keep the quiescent mode or mode of rectilinear uniform motion ..." By this, he postulates, that the relative linear velocity between solids and space does not exist. But we know that for rotation it exists (the famous experiments with revolving pail of water).

The gravitational field is the accelerated "falling" relative space, which represents a spherical form. If relative space moves, thus the question appears: where does it move? There is only answer: it moves in the absolute cubic space.

In Einstein's theory there is notion of unified and curved space in gravitational field, but the contradictions appear here, and on concerning that N. Tesla writes: "Only by presence of force field it is possible to explain the observed motion of celestial bodies, but thus the hypothesis of curvature of space is not necessary. The whole scientific literature on this subject is futile and doomed on oblivion". [1]

The fact that gravitation is the accelerated moving relative space can be proved by observation of accelerated moving rocket, where the acceleration in rocket is equivalent to the acceleration in gravitational field. Accelerated movement of rocket is relatively, that allows speaking about either acceleration of rocket motion in immovable space, or accelerated motion of space in immovable rocket!

The anti-gravitational field is the relative space, which has accelerated motion from the center of a body (for example: rotating cylinder, Earth satellite and etc.) But it is possible to create the model of anti-gravitation without rotations. On the basis of analogy between mechanical and electric energy comes to conclusion that gravity between bodies does not depend on mass of the body, but on mechanical-gravitation energy, contained in this mass, which is possible to contribute or to extract from. **Therefore, this is the internal gravitation energy.**

Part II

The "Mass" can be considered as a measure of three different conditions of matter:

m_k - as a measure of amount of atoms, representing a "framework" or "container", in which two types of independent energies are concentrated.

$W_{m_A}^e$ - as a measure of electric energy, which can be either accumulated or extracted, and it have a "compressed" form.

An example of accumulation of electric energy in mass is a big cylinder, rotating with linear velocity, close to velocity of light, in this cylinder the mass of electric and magnetic fields of atoms increases. There are another

possible ways to contribute and to extract the said energy from mass.

And finally $W_m M_G$ is the mass, which can be a measure of mechanical energy, or it can be either inserted or extracted from the matter (it can be identified as the gravitational mass). This gravitational mass is what we put our attention on, because it affects upon gravitation and it is able to create antigravitation.

"In his time N. Tesla worked on more general problem, which is the problem of matter and energy. And he has found, as he believed, the new physical principle, on the ground of which he brought forth his gravitational theory that was named dynamic gravitation. But he did not tell about it until almost the end of his life". [2] **Really, dynamic gravitation is the energy of motion.**

Let's take the following indications:

V – mechanical velocity

F – force

t – time.

In this case the product $W = V \cdot F \cdot t$ has the dimension of energy. Hereinafter, let's take

I – strength of electric current

U – difference of potentials

t – time.

Then $W' = I \cdot U \cdot T$ has the dimensional of energy.

Thereby, $W \sim W'$ that is to say, the following products are accepted as equivalent:

- $V \cdot F \cdot t \sim I \cdot U \cdot T$

- In previous materials it was reported about untraditional way for accumulation of energy, under the condition, in which at constant current I the product $q = U \cdot t$ will depend on amount of inserted energy in unchangeable circuit $L = \text{const}$, in which the energy can be accumulated by untraditional way not only in electric capacity, but also in inductance.

Similarly the energy can be accumulated by untraditional way in a moving body, under the condition $V = \text{const}$ and $m_k = \text{const}$ (the product $qr = F \cdot t$ will depend on inserted energy and have unlimited value). **Exactly this charge will create the powerful gravitational fields.**

- Let's take: F is mechanical force, R is distance. Then the product $F \cdot R$ has the dimensionality of energy. For the uniform electric field the product $E_a \cdot \frac{E^2 \cdot V}{2}$ also has the dimensionality of energy. In this case E_a is constant, E is intensity of electric field, V is volume. Thereby, $F \cdot R \sim E^2 \cdot V$. Similarly, $V \cdot R \cdot t \sim g^2 \cdot V$

We have received the correlations of resemblance for heterogeneous physical values, on the ground of which the following physical experiments can be offered:

On the grounds of the above-mentioned analogies it can be assumed that the accumulation of “compressed” energy is possible in mechanics, as well as in electricity. Since the velocity is relative, that the mass can have zero velocity relatively a observer, who moves with this mass, but the force field will remain unchangeable, since it depends on already invected mechanical energy.

Let's note that:

When the “compressed” electric energy is accumulated, the power field does not change.

When the “compressed” mechanic energy is accumulated, the power field increases.

Now we have come to the amazing conclusion that the gravitational force does not depend on mass of matter, but it depends on mechanic energy, which is included in this mass. This energy is unstable and at contact with land it is disappearing, and at zero gravity it can be saved for a long time.




Fig. 1 The first way to obtain the antigravitational force.

1. The magnets are not revolved.
2. The cylinders of charged capacitor are revolving in different directions.

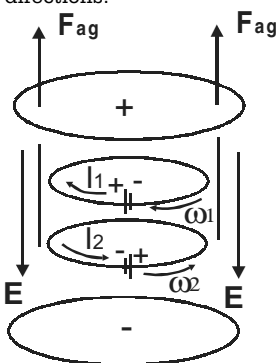


Fig. 2 The second way to obtain the antigravitational force.

1. The capacitor plates are charged and not revolving.
2. The current circuits are revolving in different directions.

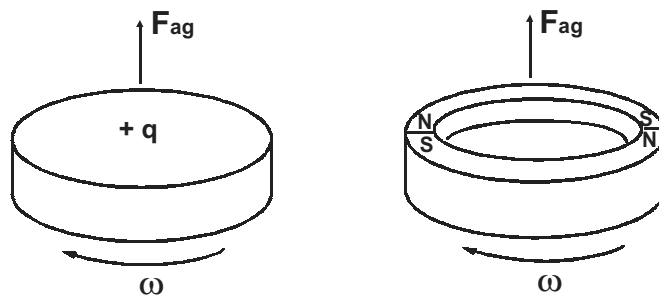


Fig. 3. The third way to obtain the antigravitational force

- a) electric
- b) magnetic

1. The disk and the ring are made from electrical current conductive material.
2. When these disks rotate, the currents, which emit the mechanic-antigravitational energy in the manner of heat, are formed there.

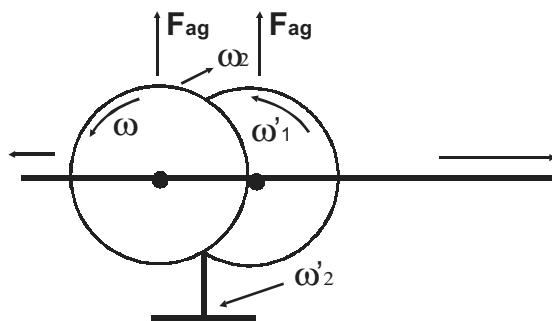


Fig. 4. The fourth way to obtain the antigravitational force.
Mechanical method.

1. This is an extraction of energy from matter. It was reported in details on the 10 international symposium in Volgograd, Russia.
2. The difference with electric circuits is that it is possible not only to extract the mechanical energy, but also to insert additional energy in the system.

References

1. Magazine Inventor and Rationalizator, Russia, #9, 1979.
2. Magazine Inventor and Rationalizator, Russia, #9, 1979, p.28

The Capacitor, which has the Energy of an Atomic Bomb

(Review of Anatoly K. Gaponov's research by Eugenie and Marina Golomolzins)

Is it possible to place a pail of water into a one-liter jar? At the first look the answer is obvious: certainly not! However, the inventor from Novosibirsk, Anatoly Gaponov thinks differently. He does not “press” water,

but electrical energy, placing an energy equivalent of atomic bomb into ordinary electrical capacitor.

Everybody using ordinary batteries knows its defect: they need frequent recharging. Gaponov's capacitor is slightly smaller than a matchbox. Just come home by electrical automobile, take out the capacitor from engine, and then put it into the pocket. For home needs you can just insert the capacitor into plughole to power the light, boiler, and TV system. In general, each electronic device can have its own capacitor, then an electrical wiring is not necessary. After one

On the grounds of the above-mentioned analogies it can be assumed that the accumulation of “compressed” energy is possible in mechanics, as well as in electricity. Since the velocity is relative, that the mass can have zero velocity relatively a observer, who moves with this mass, but the force field will remain unchangeable, since it depends on already invected mechanical energy.

Let's note that:

When the “compressed” electric energy is accumulated, the power field does not change.

When the “compressed” mechanic energy is accumulated, the power field increases.

Now we have come to the amazing conclusion that the gravitational force does not depend on mass of matter, but it depends on mechanic energy, which is included in this mass. This energy is unstable and at contact with land it is disappearing, and at zero gravity it can be saved for a long time.




Fig. 1 The first way to obtain the antigravitational force.

1. The magnets are not revolved.
2. The cylinders of charged capacitor are revolving in different directions.

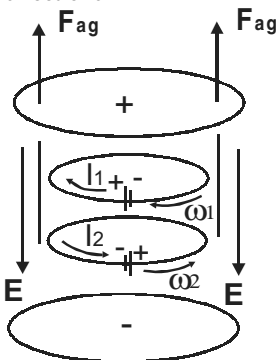


Fig. 2 The second way to obtain the antigravitational force.

1. The capacitor plates are charged and not revolving.
2. The current circuits are revolving in different directions.

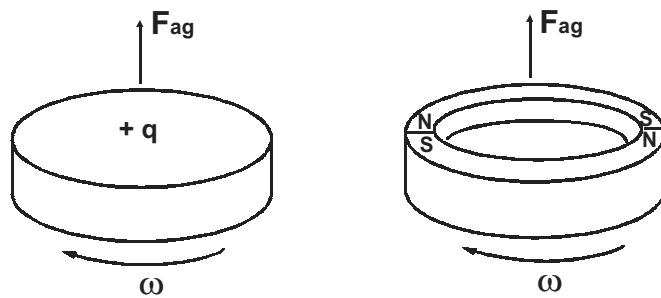


Fig. 3. The third way to obtain the antigravitational force

- a) electric
- b) magnetic

1. The disk and the ring are made from electrical current conductive material.
2. When these disks rotate, the currents, which emit the mechanic-antigravitational energy in the manner of heat, are formed there.

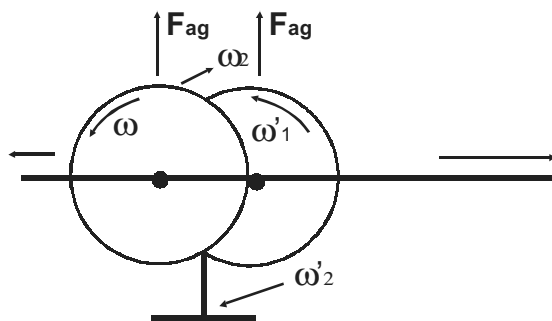


Fig. 4. The fourth way to obtain the antigravitational force.
Mechanical method.

1. This is an extraction of energy from matter. It was reported in details on the 10 international symposium in Volgograd, Russia.
2. The difference with electric circuits is that it is possible not only to extract the mechanical energy, but also to insert additional energy in the system.

References

1. Magazine Inventor and Rationalizator, Russia, #9, 1979.
2. Magazine Inventor and Rationalizator, Russia, #9, 1979, p.28

The Capacitor, which has the Energy of an Atomic Bomb

(Review of Anatoly K. Gaponov's research by Eugenie and Marina Golomolzins)

Is it possible to place a pail of water into a one-liter jar? At the first look the answer is obvious: certainly not! However, the inventor from Novosibirsk, Anatoly Gaponov thinks differently. He does not “press” water,

but electrical energy, placing an energy equivalent of atomic bomb into ordinary electrical capacitor.

Everybody using ordinary batteries knows its defect: they need frequent recharging. Gaponov's capacitor is slightly smaller than a matchbox. Just come home by electrical automobile, take out the capacitor from engine, and then put it into the pocket. For home needs you can just insert the capacitor into plughole to power the light, boiler, and TV system. In general, each electronic device can have its own capacitor, then an electrical wiring is not necessary. After one

or two years you will just have to come into electric service station and charge your magic capacitor like a gas balloon. Meantime, this research work began from hypnosis.

Anatoly Konstantinovich Gaponov (by birth from Kaluzhskaya region) is Ziolkovsky' countryman. In his youth Gaponov was brought by fate into Sakhalin, where he showed hypnotic abilities. As an inquisitive person Gaponov had organized a research group, started experiments and soon he understood that human brain had incredible possibilities.

A mental prick was made distantly to the hypnotized man, and he uttered a cry of pain. The ability to see people through, to define and to avoid organism's faults, was revealed in a hypnotic trance. It was possible to inspire pleasant emotions, to force "watching" a film on the given subject, as if on the screen. An uneducated person became an erudite, as if being connected to a certain global information database. Thus an idea to make an amazing experiment was appeared.

In one of the experiments Gaponov hypnotized the person with four classes education, and asked, if it was possible to transmit the electric current without wires? The hypnotized person gave the answer, that it was possible. For that it is required to convert the electric energy in x-ray radiation. And what afterwards? Afterwards it is required to focus that rays. By what? By the lens made from quartz glass, gold coated. It was a miracle! The person told about things that in usual condition he had no idea of! The information was received from somewhere outside.

Further quite an amazing thing has occurred. Gaponov asked the hypnotized person, if it was possible to intensify the abilities of hypnotist's brain?

He answered, that he could. "He turned me round and stared at the back of my head, - recalls Anatoly. - And suddenly the smile began to tear my mouth. I could not do anything with myself. When my mouth was sprawled literally from ear to ear, the hypnotized person in some inhuman voice declared that experience could not be continue since the cerebral hemorrhage would occur. I was hardly able to give the order to stop the experiment".

Thereby, the experiments with hypnosis gave the beginning to the thirty-years period of inventions in the field of accumulation and transmission of energy. After the return to native Kaluzhskaya region, Gaponov was occupied with physics, development of logical thinking and became the town champion in chess.

The necessary books fell into his hands by themselves: some time a certain acquaintance gave it to read; another time he found the last copy in a bookstore. As a majority of self-taught inventors, Anatoly preferred practical experimentation. In quest of laboratory for realization of his own ideas, he moved to Novosibirsk. **As a result, in 1980 Gaponov has made experimental system for compression of energy.**

From the school Physics we have known the notion of "electric arc" – it is a small blue lightning between two electrodes. Gaponov has tamed this lightning in such a way, that having drawn apart two wires, which executed the role of electrodes, by hands and got the arc by length up to half meter. Anatoly confirms that in principle, it is possible to create an arc of any desired length under any amperage.

One of the experiments found out one more enigmatic characteristic of electric discharge. During electric photography of arc a person happened to be between the camera and the system. On typing pictures, the researchers have found with surprise, that the electric arc was perfectly seen through the person. That is to say, it created the invisible field, for which material object was not an screening obstacle, and which was fixed on the film.

The further experiments with electric arc have allowed to get a new source of energy, as well as to open the possibility of setting light and sound on fire! Just imagine, you ring up a bell, it's sound waves spread at once in all directions, and then flash up with bright blaze.

(Editor's note: this experimental facts are rare modern evidences of possibility to create longitudinal electric waves. It is clear analogy here with sound waves in air since they are longitudinal waves also. Alexander V. Frolov)

When the problem of energy source was solved, Gaponov turned to the problem of energy accumulation. According to Gaponov, he has proved experimentally the possibility of charging of an ordinary capacitor with any amount of energy. This statement sounds paradoxically: how it is possible to place the unlimited amount of contents in limited volume? However, this is not a simple way.

Gaponov believes that energy "placing" occurs not in space, but in time by means of his system! In what way? Imagine, that you fill one-liter jar with water. But already after an instant the water-filled jar is in past, and that present one is once again ready to be filled. And so ad infinitum. Water as if it fills a certain "time reservoir", and a jar is just a neck of this "time reservoir".

(Editor's note: This method is described in other articles also but usually it is pure mathematical discussion about Minkovsky space-time and theoretical proposals. Gaponov's experiments are realization of fantastical idea to take power from the time flow, i.e. from Past or from Future to get over-unity in Present space. Alexander V. Frolov)

"It is possible to demonstrate one more example, - Anatoly Gaponov adds. – Let's charge the capacitor with the expectation, that it will supply the light bulb

for one second. Thereby, on the Earth this light bulb will be on only for an instant. But if the same capacitor with light bulb is placed in rocket and dispersed around the Earth at the velocity, closed to velocity of light, time on the board of rocket will be so slowed that the light bulb on rocket will be glowing infinitely long for an observer from the Earth. It means, that in any case it is the same energy quantity, but in one case it's action is sprawling for a second, and in another one it is sprawling for eternity! It is possible to say, that in my system I have created the condition corresponding to this hypothetical rocket".

The system for accumulation of electric energy could be charged by ordinary wall plug 220 VAC. Time period of charging is different and depends on the certain scheme of the system. By the way, sea electric slopes are the certain natural analogues of such capacitor. Some elements of internal device of these sea creations reminds the "pump" elements for placing of electric energy into "temporal jar".

Finally, the third Gaponov's invention is the system for transmitting of energy without wires. As well as in two previous cases, there is an experimental device. Anatoly Gaponov speaks that he has succeeded in getting the essence of experiments for transmitting of energy, which were conducted by Tesla.

It is clear, that the main advantage of this method is an absence of wires and losses of electric energy. The electricity could be transmitted directly into any point, where receiving equipment placed, let say from Kaluga to Sahara. However, this is not so interesting for anybody, since for the present day Anatoly Gaponov's inventions don't have demand.

" The first system was created twenty years ago", - says Mr. Gaponov. - "Now I am fifty five, but things have not budged an inch". He adds dreamily: "Eh, if only I had a laboratory and some money..."

Gritskevitch's Hydro-Magnetic Dynamo

Oleg V. Gritskevitch

RUSSIA, 690002, VLADIVOSTOK,
Okeansky prospect, 99 - ap.112
phone/fax: (7-4232) 424-674 Email: ogri@mail.primorye.ru
Russian Academy of Energy and Information,
Russian Academy of Natural Sciences

Editorial: The article presents construction and operation of Oleg V. Gritskevitch's hydro-magnetic dynamo, which is an example of very powerful new energy system. The prototype in Armenia has been produced over 1500 KWtts power during several years.

The author was born on 14 August 1936 and grew up in Vladivostok, Russia. He is married and has a son Boris. Gritskevitch is a physicist by education. He worked in the Far - East branch of the USSR Academy of Sciences. Since 1985 he has been working independently as an inventor. He has more than 70 patents on inventions ranging from household engineering up to high technologies, which he has been trying to apply in our country and met big difficulties. After numerous attempts to receive the patents the author was convinced that outflow of the information occurred. Therefore he has received the state certificates as on know-how (on a French way of patenting), for all his inventions.

Introduction

During the Institute for New Energy 1999 Symposium, I lectured on my hydro-magnetic dynamo. This paper is my attempt to explain the construction and operation of my dynamo.

To fool investigators of my secrets, I have an occasion provided misleading information. For example, the drawing accompanying the Russian patent referenced below shows a cylinder across the toroid to fool readers. The real dynamo only has the toroid without the cylinder. Even its name "hydro-magnetic dynamo" is somewhat deliberately misleading.

I have some familiarity with the new energy field. Nearly all purported new energy devices are fairly small electrical generators. The dynamo may be the only new electrical generator which most nearly meets all the requirements of an ideal large-scaled electrical generator. My dynamo really is the single most valuable invention the world has ever known.

Alexander V. Frolov of St. Petersburg recommended me to contact with Dr. Patrick Bailey, Institute for New Energy since Pat has lots of contacts who could possibly help me with patenting my invention of a new source of energy in USA.

I conducted the work on the theory and creation of the electrostatic generator-converter «Hydro-magnetic dynamo» about 20 years. (See dynamo history below.) The first primitive equipment was created when I worked in Academy of Sciences. During that time various changes were introduced in the generator and in the theory of its work. It is now possible to manufacture, install, and apply it in industry.

For the first time I made the public report on this work in 1991 on a symposium in Volgodonsk city. The report received the positive replies and reviews of the experts of a nuclear industry in USSR. The same year I was accepted in International Nuclear Society. In these years I offered development of this technology to different state bodies and private enterprises. But there was the only answer: "It is very interesting and perspective project, but there is no money for it".

NEW ENERGY TECHNOLOGIES #7

1. Gravitonics is Electronics of the XXI Century, Spartak M. Poliakov, Oleg S. Poliakov
2. Experimental Research on Gravitational Propulsion System. Review
3. Beamship Technology: A Re-working of Early 20th century Discoveries, Russell Anderson
4. Commercial Antigravity, Tim Ventura
5. Action without Reaction. New Gravidynamic Paradox, Yuri N. Ivanov
6. New Possibilities of Vortex Electric Power Devices, Stanislav A. Lisnyak
7. Investigation of Electric Energy Transmission Processes in non-Metallic Conducting Channels, D.S. Strebkov, A.I. Nekrasov, S.V. Avraamenko
8. Microcosm – Universe - Life, Alexey G. Shlienov, Ernest L. Petrov
9. Hypothesis of a Theory of Everything, Jack P. Gibson
10. The Charge and Mass of a Photon, Dzabrail Kh. Baziev
11. The Homopolar Motor: A True Relativistic Engine, Jorge Guala-Valverde, Pedro Mazzone, Ricardo Achilles
12. Weight Reductions Generated by Bucking-Field Permanent Magnets, William C. Simpson
13. Advanced Nuclear Waste Decontamination Technologies, Mark Porringa
14. Experimental Investigations of the Radioactive Isotope Half-Value Period Changing in the Local Volume of Cause-Effect Relations, Igor A. Melnik
15. Tilley Electric Vehicle
16. The Problem of Time: Force as the Cause of Change in the Course of Time, Valentin P. Oleinik
17. Time and its Physical Relationships, Andrew Michrowski
18. Time as Phenomenon of the Expanding Universe, Michael H. Shulman
19. The Experiments on Thermo-Gravitation. Review
20. Letters to the Editor from Hector D. Perez Torrez


New Energy Technologies

Published by Faraday Lab

Issue #4 (7) 2002

Research on advanced space propulsion methods and new energy systems

History of invention: Poliakov's vortex drive



*Patented by Research
Institute of Space Systems
named by Krunichev, Russia*

Also in this issue:

- * *New gravodynamic paradox*
- * *Experiments on weight reduction*
- * *New possibilities of vortex energetics*
- * *Experiments on homopolar motor*
- * *Physical relationships of time*



Gravitonics is Electronics of the XXI Century

Hypothesizes, Conclusions, Speculations

**Spartak M. Poliakov,
Oleg S. Poliakov**

60-let SSSR str., 1-167, Fрязино,
Moscow area, 141120, Russia
Tel: (096) 564-65-67

(This article was published in "ELECTRONICS: Science, Technology, Business" magazine 5/2000 p. 8-13)

Today we can easily insist that ways to solve main gravitonics problems are already defined, at that the practical realization of any of them will mean the break through in engineering. So, what successes has the Russian science already achieved in the area of gravitonics, and what priorities can we lose here in the nearest future?

Introduction to Gravitonics

The electronics of the "past century" uses electron as a ball, which has weight, radius, electric charge and magnetic moment. These very parameters define electron behavior in the electrostatic, magnetostatic and electromagnetic fields. But electron abilities are not limited by it; electron spin and internal microstructure features remain unaccounted and unclaimed. Evenly speaking, General Theory of Relativity (GTR) of Einstein was a power impulse for mathematical physics development and gave birth to many productive ideas. But the main problem, that is the secret of gravitation, remains undisclosed... In works of K.P. Stanjukovich [1] and A.Z. Petrov [2], who carefully followed GTR, it was shown that this theory described neither energy, nor impulse of gravitational radiation, i.e. it can not explain gravitation. About 20 years ago V.B. Braginsky, today's RAS Corresponding Member, came up with an idea: "if the propagation speed of gravitational signal is higher than the velocity of light, there will be already another theory, not GTR!" Maybe, the reason is the postulation of equality of gravitational and electromagnetic radiation velocities?...

Today the approximate theory of gravitational radiation sources can be built on the basis of the following simple considerations: if during annihilation of "electron-positron" pair there creates the pair of gamma-quantums with energy about 0.511 MeV, then the pair of back gamma-quantums with the energy about 0.511 MeV, could create "electron-positron" pair. Is it possible to assume, that electron, positron and gamma-quantum with the energy about 0.511 MeV are just three stages of one and the same object?! If it is possible, then for the rational description of the given object we will have to suppose the existence of subparticles, named by us unquantums [3], or named by other authors microleptons [4].

On the basis of Heisenberg uncertainty relation conformably to the energy and duration of quantum of electromagnetic radiation, measured by laboratory means, it is possible to calculate the minimal "electrical length" of photon (i.e. quantum geometrical extension in free space in wave-length units), which is equal to 137λ , and in the unquantum theory it is equal to 137 unquantum-antiunquantum pairs. On the basis of these conceptions it is possible to construct the spatial microstructure model of electron. So, what kind is it?

We think, that electron can be represented as thin-walled spheroid, walls of which are two light (C) barriers, separating the "internal" part of electron from the "external" one. From the traditional physics point of view "over-barrier" space is an "imaginary" one. This very space can contain the gravitational mass of electron. The radius of the gravitational spheroid is equal to the half of the classic electron radius, and its imaginary weight is 137 times more than the rest mass of electron. Being "cut" off by the double light C-barrier, unquantums of the spheroid internal part are as if non-existent for the outer world, and the rest mass of electron is formed by magnetic energy of three unquantums on the external orbit with the classic electron radius. This very spheroid, rotating with the tangential velocity C, let us get the precise value of the electron spin.

The study of presented model shows, that:

- The "electromagnetic" rest mass of electron is "magnetostatic";
- The gravitational mass of electron is an imaginary value and it is 137 times more than the rest mass of electron;
- The gravitational radius of electron is two times less than the "classical" one;
- The "internal" gravitational radius of electron is 45.7 times more than the external one, i.e. the internal space is compressed per 45.7 times (!);
- The spin is equal to the classical one, but this value is imaginary one (!);
- The value of the "effective" electron charge is three times more than the classical tabulated value;
- The native magnetic field of electron is equal to $8,9 \cdot 10^{13}$ Oersted;
- The gravitational constant is equal to $10^{33} \text{ cm}^3/\text{g} \cdot \text{s}^2$, i.e. it is about 10^{40} more than the "world" gravitational constant of the Earth;
- The gravitational energy of electron is equal to $137 \cdot 0.511 \text{ MeV}$, i.e. 137 times more than the equivalent energy of the rest mass of electron.

The model is paradoxical. But it can be tested experimentally! Comparing "electromagnetic" rest mass of electron with the relation of electromagnetic energy to gravitational one, it is possible to determine the connection between magnetostatic and gravitational energy of electron, and, therefore, with energy of the magnetized ferromagnetic.

Gravitational constants of the Earth and of the electron differ in about 10^{40} and can be described by the same simple equation:

$$\gamma_{loc} = 2k\gamma_0 \cdot \omega^{3/2},$$

where k - is a parameter of the gyroscope shape, γ_0 - is absolute universal constant, equal to $1/137$ and ω - is native rotation frequency of the gyroscope.

Let us assume, that gravitational constants of all objects should be described by this equation. By substitution of the new gravitational constant into the known equation of the gravitational energy $W = \gamma m^2 / r$ we will get the equation of the gravitational energy of rotating gyroscope with any size (from electron up to the Galaxy!). Thus, the main point of the "non-Einsteinian" theory of gravitational energy sources comes to the thing that any rotating object and any magnetized ferromagnetic have their own gravitational energy, and the sources of gravitational radiation can be only nonlinearly moved objects, or objects which are in the state of change of phase (for example, permanent magnet during its demagnetization). It is the gravitational theory and explanation of "strong" and "weak" interactions!

Laboratory test of the equations

Magnetostriction

J.P. Joule found the effect of change of ferromagnetic linear sizes and volume during magnetization as early as 1842. Magnetostriction is widely used in modern technique, but in the physical encyclopedia of 1963 there is the following honest acknowledgement: "For the most ferrites both longitudinal and transverse magnetostriction is negative; the reason of it is still unclear."

In the scientific literature magnetostriction is usually defined as $\lambda = \Delta L / L$. However, during the change of external field to some arbitrary and enough small value ΔH , it is advisable to define magnetostriction as $\lambda = 1/L \cdot \Delta L / \Delta H$, since in magnetostriction experiments the value $\Delta L / \Delta H$ (or $\partial L / \partial H$) is changed. By means of the suggested equation $W = 137(BHV) = BHV/\alpha$, which connects magnetic energy with the gravitational one, it is possible to get enough simple equation for the magnetostriction:

$$\lambda = 1/L \cdot \partial L / \partial H = \alpha \cdot k / (B \cdot H)_s \cdot H^2 \cdot \partial \mu / \partial H$$

where $(B \cdot H)_s / \alpha$ - is the density of gravitational energy in the point of magnetic saturation, k - is the parameter of share of gravitational field in the magnetostriction effect, H - is magnetic bias, $\partial \mu / \partial H$ - is differential magnetic conductivity.

The new equation qualitatively corresponds to four known features of magnetostriction [5], namely:

- The magnetostriction sign is defined by the sign of $\partial \mu / \partial H$, i.e. by the course of the magnetization curve, measured in the direction of calculated component of the linear magnetostriction;

- Graphical sum of three linear components of magnetostriction, calculated by three main axes of the anisotropy form of the model, is always negative and numerically close to the value of the volume magnetostriction;
- Magnetostriction is an even effect, since the equation includes squared value of the external magnetic field;
- Dependence of magnetic conductivity μ from the filed H and hence dependence $\partial \mu / \partial H$ has a hysteresis nature. Therefore, the magnetostriction is a hysteresis phenomenon too.

So we have the right to "close" the question of physical encyclopedia on the cause of magnetostriction. **Magnetostriction is the secondary gravitational effect of ferromagnetic "self-constriction" in its own gravitational field.**

Gravitational-optic effects of GTR

Distortion of the light beam, passing near the Sun and the photon frequency bias in the field of terrestrial gravity (the Nobel experiment of Paunda and Rebki) are the main arguments in favor of GTR canonization. It is very attractive to repeat these experiments in laboratory conditions, basing on our conception of the origin of gravitational field.

The acceleration of gravity, used in experiments with ferromagnetic, reached the value $4.72 \cdot 10^{15} \text{cm/s}^2$, i.e. about $4.8 \cdot 10^{12} \text{g}$. At such values of acceleration there is no necessity to introduce a definition "space masses". In these experiments there was used the optically transparent ferromagnetic, which was the saturated solution of manganese chloride in water at room temperature. The experiment on the beam distortion was made in 1975 [7]. It was shown, that this effect is the result of two simultaneous processes. The first is an intense drift of magnetic ions, which forms the gradient of index coefficient that causes the light beam distortion. Another process is a relatively weak gravitational beam distortion, for which, nevertheless, the relation of deviation angle to the track length (the length of the dish is about 100 mm) is turned out to be about 10^{10} more than in "Einsteinian" gravitational-optic experiments.

The experiment on bias of the optic radiation frequency [8] was made in 1978-1980 and was repeated in 1983. With use of heterodyne and interferometrical methods of measurement we were succeeded to observe effects of "red" and "blue" frequency biases in the non-uniformly magnetized ferromagnetic by means of simple displacement of the working dish (with the length about 40 mm) from one side of the magnet gap to another. The maximum displacement is about 10^{-5} , that is about 10^{10} more than in the experiment of Paunda and Rebki.

Problem of the propagation speed of gravitational radiation

There are still only few publications about such fundamental parameter as the propagation speed of

gravitational radiation; it is able to speak only about pages, or even lines! Let us refer to major sources:

I. Newton: *"The propagation speed of gravitational interaction is equal to infinity."* It is an argument, because otherwise we would have to bring the "delay" parameter Δt into the Law of Gravity, what is not noticed in real conditions of star observations [9].

P.S. Laplace in 1787, taking into account observation errors of that time, showed, that gravitational interaction speed was about $50 \cdot 10^6$ times more than the light propagation speed, i.e. it was about $1,5 \cdot 10^{18}$ cm/s [10].

A. Einstein: *"The propagation speed (of gravitational interaction) is equal to the light velocity"*. This statement is postulated.

Even during the change of propagation speed of gravitational radiation between the Earth and the Moon it is impossible to define the signal delay about 10^{-11} s, i.e. we cannot measure directly the propagation speed of gravitational radiation (supposing that we have both generators of the gravitational radiation and receivers of it). But this speed can be estimated by the reflection impulse, what exactly was made in 1987 [3]. And its value is about $9 \cdot 10^{20}$ cm/s!

On the basis of conservation law of impulse of unidirectional radiator with arbitrary energy type we can get a simple equation:

$$F / (dW / dt) \cong 10^4 \cdot V / C^2 \quad [g/Wt]$$

where V – is the speed of radiation propagation, F – is tractive force in grams, dW/dt – is power of radiation in Watts and C – is velocity of light.

For making the experiment there were constructed, produced and adjusted: sensible scales with one degree of freedom (sensitivity of balance is about 1g at the oscillator mass together with the moving element of scales which is about 50kg); the indication system of small mass changes (phase-meter receiver); gyroscopic system, changing the mass in the dynamic mode (there are 16 possible operating modes – from the rotation with steady and variable angular speed up to the forced precession with the variable angle of precession, with the "right" and "left" rotation of all load-bearings elements at option); power sources and commutation automated system. The period from idea up to its realization took about two years (1985-1987) [3]. Taking into account the real parameters of the system, the program of calculation was drawn and propulsive burns were calculated. The results of machine computation can be compared with real impulses, demonstrated on the screen of the oscilloscope.

If strange speed value $177 C^2$ is discarded, then the middle speed value is close to C^2 , i.e. to $9 \cdot 10^{20}$ cm/s! Of course, we would like to think that this is the second fundamental matter speed of our world, which we has approached experimentally ...

Gravitational receiver

During the creation of gravitational antennas and receivers there appear almost insuperable difficulties from the modern fundamental science point of view. That is why it is advisable to look at this problem from another side. At first, it is necessary to consider gravitational radiation interaction not with the mass, which it goes through without losses, but with the gravitational field of independently gravitating mass, when the interaction must be the most effective because of the principle of physical processes reversibility. At second, it is necessary to choose some critical parameter of auto-gravitating receiver as a value, which is directly measurable by gravitational detector. For example, angular velocity of free rotation of thin disk with big diameter, the frequency of magnetization precession during NMR (nuclear-magnetic resonance) or NFMR (non-linear ferromagnetic resonance) etc. can be chosen as such a value.

In 1987 there was the first successful attempt to receive the gravitational impulse. The source of external signal was gyroscopic precessing system with the variable angle of precession (the propagation speed of gravitational radiation was measured by it). Double gyroscope, setting in motion by one electric motor, but with the opposite directions of rotation, was used as a detector. Between disks there was placed the source of light, impulses of which, passing through disks openings, were registered by photodiodes. Their signal came into differential circuit of data processing. The memory oscilloscope reproduced impulses of gravitational radiation. At that radiating system and memory oscilloscope was started up simultaneously. During the work process there appeared a problem of exciting of slow auto-oscillations of gyroscope-detector. This problem together with the low frequency of auto-oscillations of mechanical system led to a conclusion that this research direction is not very promising. However, the fact of detection was proved!

Gravitational engine of continuous action

Only about nine years passed since the appearance of the idea about engine up to its realization! In 1997 the engine was produced and tested. The engine with weight about 28 kg was made "weightless" on the magnetic hanger, and longitudinal draft, appearing in accordance with the impulse conservation law, was measured by micrometer detector of longitudinal shifts (sensitivity is about 50g/point). Such engine could be built still in the beginning of the last century... However, it has a secret **that is a gyroscope with the variable radius, working in the continuous mode**.

The engine power is defined by the formula

$$\frac{dW}{dt} = 5k\gamma_0\omega^{3/2}\left(\frac{m^2}{r^2}\right) \cdot \frac{dr}{dt}$$

In June of 2000 there were made experiments with the model of gravitational engine, which represents a

gyroscope with the variable radius (see photo on the 1st cover page). The mercury was used as rotating fluid. Tests were made in the Research Institute of Space Systems named by Krunichev. In three experiments, at a certain speed of rotating fluid there was fixed a decreasing of the engine weight (38,5 kg) up to 1.0-1.5 kg (2-3%). The specific impulse of the engine was equal to 2.5-3.0 kg per kilowatt of electric power. Analysis shows, that the increasing of propulsion force is possible at optimization of design and operating modes.

Some preliminary resume

In the magazine "Foreign Literature" #1, 1967 the article "For hundred years forward..." by Jack Marabini was published. There were made some conclusions about prognostic work of firm Rand Corp., including the area of gravitational technique. Namely:

- Development of communication facilities on gravitational waves in 2000;
- Creation of spaceships with antigravity engines in 2050;
- Transformation of gravitational energy into electric one in 2100.

In the article it was noted, that the most "fantastic" predictions of this firm, as a rule, come true passing ahead.

According to our crude estimations, the propagation speed of gravitational radiation is "C" times as much than the velocity of light, but we know neither laws of attenuation and propagation of gravitational waves, nor laws of their reflection and refraction, nor laws of their interaction with the substance... The large routine work is expected: making of measurements and investigations, tabulating of obtained data, publishing and society familiarization of the results, their "popularization". It is necessary to learn to use gravitational radiation and to protect oneself from its accidental influences, to design standards and dosimeters, etc., i.e. to repeat the way of radio engineering and nuclear physics comprehension.

For that we need generators and receivers of gravitational radiation. It means that the financial support is necessary. And engineers are sure to be ready to pay the highest price for the chance to give to the Mankind spaceships, systems of instantaneous communication with them and real perspectives for the very long history.

Conclusion

We have already passed the long way, if not in space, then in time. We have made:

- Gravitational engines of continuous action with the specific impulse about 2.5 kg/kWt [11];
- Transformers of gravitational energy into thermal and electrical ones [12];
- Communication system based on gravitational waves [13];
- Receivers of gravitational (microlepton) radiation of biological and mineral objects [5];
- Devices for control of "laboratory time" flow (time machine) [14].

The main goals of the authors were to attract readers' attention to the problems, which demand an urgent solution. Some questions were decided, and even seemed to be clear. It also seems to be clear what to do further. And what do you think about it?

References

1. Stanjukovich K.P. Dr. Phys.-Math. Sc. CTR and gravitation // Seminar of the Moscow nature investigators society. // M. – 1966.
2. Petrov A.Z. Some peculiarities of CTR // Seminar of gravitational chair of Kazansky SU. (Preprint / Ukraine Academy of Science) // Kiev – 1971.
3. Poliakov S.M., Poliakov O.S. Introduction into experimental gravitonics. // M.: Prometey – 1991.
4. Patent #2113000 RF. Method to search minerals by their own radiation, device for its realization and microlepton detector / Ohatrin A.F., Ohatrin A.A., Sizov V.S. Priority from 21.07.1997.
5. Kirensky L.V. Magnetism. // M. Nauka – 1967, p.141.
6. Vonsovsky S.V. Magnetism // M. Nauka – 1971, p.404.
7. Poliakov S.M., Martynov V.F. Method of deflection and focusing of optic radiation. A.n. #2187534, 10.11.1975.
8. Poliakov S. M., Olihov I. M. Dorofeev V. A. and others. Displacement of optic radiation frequency in non-uniformly magnetized ferromagnetic // Proceedings of the Moldova Academy of Science. Series of Physicotechnical and mathematical sciences. // Kishinev – 1983, #2, p. 57-59.
9. Isaac Newton. Mathematical beginning of Natural Philosophy // Transl. Moscow-Leningrad – 1936.
10. Laplace P. S. Statement of the world system. // Leningrad, Nauka, vol. 4, p. 197-198.
11. Poliakov S.M., Poliakov O.S. The beginnings of experimental gravitonics // In: Proc. of Int. Conference "New Ideas in Natural Science" // S.P. – 1996, p. 529-536.
12. Potapov Ju.S., Fominsky L.P. Eddy energy // Cherkassy, Kishinev OKO-Plus – 2000, p. 387.
13. Akimov A.E, Shipov G.I. Torsion fields and their experimental manifestations // Proc. of Int. Conference "New Ideas in Natural Science" // S.P. – 1996, p.22-225.
14. Chernobrov V.A. Secrets of time // M., AST – 1999.

About the authors:

Spartak M. Poliakov. Graduated from Kishinev State University. Profession is physicist-experimenter. He works in electronic industry for about 47 years. S. M. Poliakov is the author of more than 50 scientific works. One of his latest books is "Introduction into experimental gravitonics". Interests: microwave engineering, gravitational electronics, faster-than-light communication transformation of gravitational energy into electric one.

Oleg S. Poliakov. Graduated from Moscow Institute of Electronics. Profession is "Semi-conductor electronics". Interests: computer engineering, industrial gravitonics. He is a co-author of "Introduction into experimental gravitonics" and "Self-tutorial of computer work".

BEAMSHIP TECHNOLOGY

by Russell Anderson
russanderson3@hotmail.com

Read in this issue a report by Russell Anderson, USA,
on beamship Model Flying Craft

www.americanantigravity.com



Publisher Faraday Lab Ltd
Editor-in-Chief Alexander V. Frolov, **Editor** Olga O. Leontyeva,
Designer Ekaterina F. Yakovleva
Scientific Advisory Board Kyrill P. Butusov

New Energy Technologies Magazine, is published by Faraday Lab Ltd,
six times a year. Correspondence Address:
POBox 37, St.Petersburg, 193024, Russia
Phone: 7-812-380-6564, net@faraday.ru, www.faraday.ru

Subscription: \$90 any foreign. Air mail delivery included
PRINTED IN RUSSIA Copyright © 2002 by Faraday Lab Ltd.
All rights reserved.

Experimental Research on Gravitational Propulsion System

Editor's: It is a review of the article by V. A. Menchikov, the Director of Research Institute of Space Systems, named by Khrunichev, Russia. The article was published in "Polyet" magazine #10, 2001, p.38-39, Russia. It scrutinizes the matters on development of propulsion systems based on the unconventional approach to the problem of gravity, i.e. gravitational engines. It also cites the results of the gravitational engine model research made by means of the experimental facility, created in the Khrunichev Research Institute of Space Systems.

The device, transforming rotary motion into unidirectional motion, looks like S.M. Poliakov's one. It also operates with rotation of liquid, which causes the propulsive force. Truly speaking, Poliakov had an agreement with Research Institute of Space Systems named by Khrunichev in 2001. Some funds were assigned to develop the device, however the project, into which Poliakov had put a lot of work, still remains unrealized. Besides, the scientist's name is not even mentioned in the patent.

Scientific and technological advance opens to mankind more and more wide abilities to use space for the solution of global problems. In many respects the complete realization of these abilities will be defined by the development of means used for delivery of payloads into the space. In the XXI century the dominating use of reactive chemical and electrical propulsion systems in rocket-space technique as well as low application level of engines with other physical principles can be the factor of an "inhibitory" influence for the development of such techniques. It is caused by the fact that created rockets practically do not correspond to noticeably increased standards of safety, operating costs, costs for transport operations execution and ecological influence on the environment.

Thus, there becomes to be urgent the problem of development of alternative approaches towards the creation of propulsion systems, made for the rocket-space technique on the base of unconventional ideas and engineering solutions. A rather old-established idea of creation of gravitational engine should be concerned as one of such ideas. It is based on the unconventional approach to the problem of gravity. Nowadays many countries take part in solution of the gravitational problem, namely Russia, USA, Japan, etc., and if till recently only some scientists and inventors showed the interest to this problem, then now it arouses interest of research-and-production majors. Unfortunately, now it is not possible to speak about sufficient theoretical or practical development of this idea. However, the interest is so considerable, that practically separate experiments on this subject were made earlier and they are still made

nowadays. After all, stakes are very high and are defined by applied nature of the problem (the ability to create qualitatively new engines for the rocket-space technique), as well as by its scientific significance.

One of the directions to solve the problem of the creation of gravitational propulsion systems is the realization of associated theoretical and experimental methods of the search of physical processes, leading to the antigravity effects appearance, which cannot be adequately described by existed theoretical conceptions. V. Shauberger's patent, based on the postulate of gravitational energy radiation by "disturbed rotating mass" can be considered as an example of such practical realization. Taking into account a number of known experimental results, a model of gravitational engine and experimental system for estimation of this model parameters were made in Research Institute of Space Systems named by Khrunichev to provide the practical realization of Shauberger idea (Fig.1). It is the metal construction, which provides the model displacement in upward direction with the ability of its rotation around vertical axis.

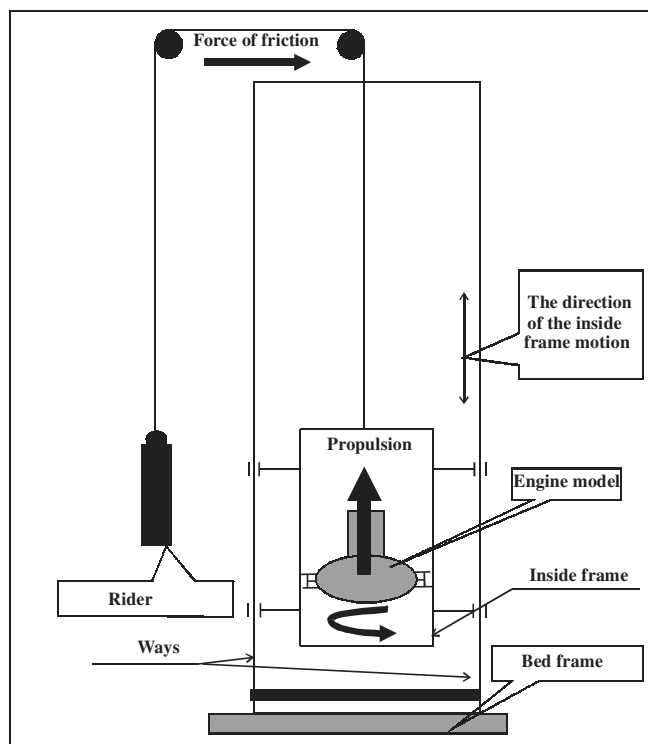


Fig.1

Schematic circuit of the experimental system

Later, to increase the system sensitivity it was improved and the block system of suspension was replaced by the lever frame.

Turning angle of the stand frame, where the model of gravitational engine is suspended, depends on the following: weight and geometry characteristics of the frame; weight characteristics of the engine (of counterweight); engine propulsion and frictional forces in bearings. Laser indicator of frame turning angle and vertical ruler let increase the gauge of lifting height of

the gravitational engine model proportionally to the arm of light beam.

On using this system there was made a wide cycle of tests, which qualitatively confirmed the presence of propulsion force. Tests were recorded by video. The analysis of experimental results shows, that acting time of propulsion was about 12 s at each switching. During repeated switching of the gravitational engine model in different conditions it is able to create the propulsion, the value of which at 40...50 s of operation can be about 3 standard units of propulsion force (1 standard unit of thrust is about 10gs), and while using the powerful electromotor it can be about 80 standard units of propulsion at the intervals up to 4 s.

Research Institute of Space Systems named by Khrunichev, works on automation of experimental

researches and on development of laboratory resources for factor analysis of appearance of the propulsion vector with the usage of the described model of gravitational engine.

Patent

The patent was published in the Bulletin of Patent Information in 2001.

(11) 20946

(51) 7 F 16 H 27/00

(21) 2001121237/20

(24) 01.08.2001

Editorial: V.A. Menchikov together with A.F. Akimov, A.A. Kachegan and V.A. Svetlichnyi have got this patent. Dr. Spartak M. Poliakov, being the author of the principle, is not mentioned at all in the patent.



NEWS REVIEW

Boeing Tries to Defy Gravity

According to Jane's Defence Weekly (UK), <http://www.janes.com>, Boeing, the world's largest aircraft manufacturer, has admitted it is working on experimental antigravity projects. These projects are able to overturn a century of conventional aerospace propulsion technology and alter the entire aerospace business. Boeing uses researchers by Yevgeny Podkletnov, who claims to have developed a device, which can shield objects from the Earth's gravity. Many conventional scientists, who have not been able to reproduce Dr Podkletnov's results, view his project, named «GRASP» (Gravity Research for Advanced Space Propulsion) with suspicion.

Dr Podkletnov claims to have countered the effects of gravity in an experiment at the Tampere University of Technology in Finland in 1992. The scientist says he found that objects above a superconducting ceramic disc rotating over powerful electromagnets lost weight. The researches have shown that the reduction in gravity was small, about 2%, but the implications - for example, in terms of cutting the energy needed for a plane to fly - were immense.


His devise, named "impulse gravity generator" is capable to produce a beam of "gravity-like" energy that can exert an instantaneous force of 1,000g on any object - enough, in principle, to vaporize it, especially if the object is moving at high speed. Laboratory installation has already demonstrated the 4in (10cm) wide beam's ability to repel objects a kilometer away and that it exhibits negligible power loss at distances of up to 200km.

Applications of the device can include space launch systems, artificial gravity on spacecraft, aircraft

propulsion and "fuel-less" electricity generation ("free energy"). However, observers say that Podkletnov's device could be engineered into a radical new weapon, for example, adapted for use as an anti-satellite weapon or a ballistic missile shield.

Documents, obtained by reliable sources, show that Boeing is taking Dr Podkletnov's research seriously. It is also possible, Boeing admits, that "classified activities in gravity modification may exist". The paper points out that Podkletnov is strongly antimilitary and will only provide assistance if the research is carried out in the "white world" of open development.

Boeing is the latest in a series of high-profile institutions trying to replicate Dr Podkletnov's experiment. The military wing of the UK hi-tech group BAE Systems is working on an anti-gravity programme, dubbed Project Greenglow. The US space agency, Nasa, is also attempting to reproduce Dr Podkletnov's findings, but a preliminary report indicates the effect does not exist.

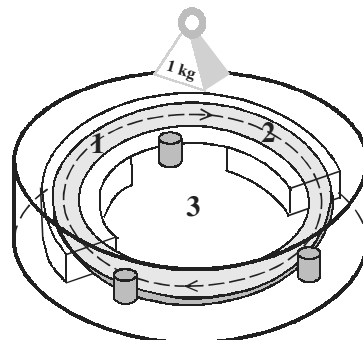

1. Solenoids create magnetic field
2. Spinning, super-conducting ceramic ring
3. Liquid Nitrogen acts as coolant

BEAMSHIP TECHNOLOGY

by Russell Anderson
russanderson3@hotmail.com

Read in this issue a report by Russell Anderson, USA,
on beamship Model Flying Craft

www.americanantigravity.com



Publisher Faraday Lab Ltd
Editor-in-Chief Alexander V. Frolov, **Editor** Olga O. Leontyeva,
Designer Ekaterina F. Yakovleva
Scientific Advisory Board Kyrill P. Butusov

New Energy Technologies Magazine, is published by Faraday Lab Ltd,
six times a year. Correspondence Address:
POBox 37, St.Petersburg, 193024, Russia
Phone: 7-812-380-6564, net@faraday.ru, www.faraday.ru

Subscription: \$90 any foreign. Air mail delivery included
PRINTED IN RUSSIA Copyright © 2002 by Faraday Lab Ltd.
All rights reserved.

Beamship Technology: a Re-working of Early 20th century Discoveries

Russell Anderson

Applied Electrogravitics 377 Avon Rd., Ste. D-119
Devon, PA 19333 russanderson3@hotmail.com
484-255-1072

Some Basic Background

The concept of an electric aero-spacecraft with no moving parts was initiated by the Yugoslavian electrical wizard **Nikola Tesla**, who lit the entire world 100 years ago, at the turn of another century, with his revolutionary AC electric current. In 1916-17, Dr. Francis Niepher performed meticulous mass-deflection experiments under rigorous scientific conditions with lead spheres suspended by wires with shielded and unshielded containers. An accounting of this important series of experiments is in TRANSACTIONS OF THE ACADEMY OF SCIENCE OF ST. LOUIS VOL.23, 1916 and 1917. Related article is in THE ELECTRICAL EXPERIMENTER, March 1918.

Before 1905, **George S. Piggot** was routinely suspending small silver balls to water globules, corks, wood, using the electrostatic field from a specially designed Wimshurst machine in a glass container under several atmospheres of pressure to raise the current level. Output voltage was typically 500KV. The field was propagated by a charged sphere. A small curved conducting plate on the floor acted as a ground. He observed unusual patterns of blue dots with filaments over the suspended objects, sometimes with an anomalous 1/2 cm "dark band" on the suspended objects. Piggot states, "It is my firm conviction that that somewhere on the outer confines of our planet there exists a similar contracting belt thru which naught but the gravitational vibrations of the sun penetrate, and these vibrations absolutely annihilate or absorb all other less powerful ones". If the force was Coulombic in nature, objects would be first attracted, and then strongly repelled by the charged metal sphere. After the objects were suspended, Piggot found he could remove the conducting ground plate, and the objects still floated, suspended. The phenomenon of levitation was accompanied by "luminous halos".

In 1925-27, **Albert Einstein** released his scientific "gem", his "zur Einheitlichten Feldtherie", or the Unified Field Theory for Gravitation and Electricity, to the press and the scientific community. It combines electricity, magnetism, and gravitation into a single mathematical expression, showing how High-Voltage/Low Current electricity (Electrogravity) -and conversely Low-Voltage/High-current (magnetogravity) "acceleration-fields" (G-field) could be produced using then-available

relatively LOW-technology. Indeed, a very simple technology. The unifying field is the electrical field (because it can produce gravitation and repulsion fields, as well as magnetism). His Crowning work was released with much press write-ups and fanfare, then it was quickly forgotten as if the scientific community and the world had suffered some kind of collective amnesia!

All of the readers of this magazine need no introduction to the pioneering work of American Scientist **Thomas Townsend Brown**, who was playing around with an X-ray tube around the same year as Einstein's Unified Field Theory was released. He filed his first patent for this newly and accidentally discovered "electrogravitational-effect" which causes motion in a high-voltage condensor or capacitor configuration. He was only 17 at that time. The discovery that high-voltage/low amperage electrostatic potentials applied to an object causes motion in the direction of the positive pole, and electrical charges naturally move to the OUTER surface of an enclosed charge-conductor, held strong prospects for what Brown would later name the "space-car", and wrote an article "HOW I CONTROL GRAVITATION". His pioneering work, and demonstration of devices in Hawaii during World War II, drew attention from the department of Naval Intelligence. He was invited to work on "Project-Rainbow" (the Philadelphia Experiment for Electromagnetic Stealth) because of his pioneering work on what was starting to be understood very covertly as a true WARP DRIVE. Experiments with certain new and classified arc-welding apparatus at the Philadelphia Navy Yards to weld armor-plate for battleships was (by use of banks of primitive but powerful avalanche-discharge capacitors) producing anomalous and unexplained effects, such as disappearing tools and other apparatus in the heavily shielded welding chamber. These strange effects were accompanied by a strange "blackout -zone" which, like Piggot's early work, was not optical in nature. TT Brown's devices in his AH Bahnson Labs home movies lift more than their own weight and move inside vacuum chambers in these films. TT Brown later founded NICAP in 1956, which became the most respected UFO data gathering and hard scientific organization in the world, besides the US department of Naval Intelligence itself, and the Foreign Technology Division at Wright-Patterson Air Force base in Ohio.

My background and work

I primarily have a background and degree in computer programming, electronics, most fields of science, Flying Saucer Technology research (almost 30 years worth), Radio/Control fixed and rotary-wing aircraft since 1972. I have been experimenting and working with high-energy and electrogravitic devices and systems since 1987. I built my first small High-Voltage generators starting around this time. I built kits from Information Unlimited and elsewhere.

In late January 1990 I built my first working 2-foot flying discs, which were a direct replication of Thomas Townsend Brown's most important representation of his electrogravity-propelled scale-model vehicular concept, from US Patent #2,949,550. In January 1992, I built a 120KV high-voltage/low-current electrostatic generator from an Information Unlimited kit, primarily for force-field propulsion research.

In June 1999, I built a tower and rotor apparatus to complete the experiment, and I powered it with the output from a 100KV generator I built from an Information Unlimited Kit. The results were spectacular, and taught me a great deal about what was involved in producing and maximizing the Biefeld-Brown Electro-gravitational effect. **I suspected from my research, and my experiments, that the basic effect was not due to current-flow and resulting ion-wind. When there was current-flow, the effect is attenuated, power consumption goes up, and thrust goes DOWN.** In late June of 2000, I presented this working TT Brown Electrokinetic Apparatus with larger 1-meter discs at the 2nd Antigravity Conference in Reno, NV, hosted by Jim Cox. A VHS videotape of this working and spectacular presentation at the first part of the conference is available from www.soundphotosynthesis.com

Now that I had mastered producing horizontal thrust, vertical thrust, or antigravity, was the next goal. About this same time, there was buzz all over the Internet about claims of two or three individuals who sounded credible at the time who had successfully replicated the many multi-layered "gravity-warp capacitor" or "electric rocket". Oddly, these claims could not be verified, and the individuals making the claims disappeared back into the woodwork. Such actions are bizarre and hinder the progress of true science, which is undergoing a shift in paradigms right now, if not a change in dogma.

I spent months die-cutting hundreds to thousands of tinfoil and aluminum-foil circular-notched conductor plates and wax paper and mylar rings. I did some initial testing with a Tin and wax-paper 400-layer gravity warp-capacitor heap, according to plans I had acquired from H & A Industries in 1992, and what was on Bill Beatty's amateur science site. No one else has come forward with positive results on this tedious and time-consuming device. So much work for so little effect! And,

if you short out the stack with too much power, you must tediously and laboriously search thru hundreds of layers to find the dielectric layers with the telltale carbonized holes. The Electric rocket has been recently successfully replicated and tested in hard vacuum and patented recently by Hector Serrano. The Serrano effect is identical to the so-called Biefeld-Brown Electrogravitational effect. They are one in the same thing. I may dust off my completed 400-layer grav-cap, but I hardly find it worth the time and effort, because of my recent work starting in early October 2001.

The Lifter and The Evolution to Beamship Model Flying Craft

Although I had attempted a few small "Hagen" patent-type antigravity (VTOL) models in the early 90s, I found their performance poor at best and their power consumption high. In late summer, 2001, someone, I forget who, on the JLN's lab list of researchers and anomalous science-experiment and technology enthusiasts ran across a website owned by Transdimensional Technologies, of Huntsville, Alabama (famous for NASA research facilities, the late Dr. Rolf Schaffranke, author of the important ETHER TECHNOLOGY, under the pseudonym "Rho Sigma", and Dr. Tom Bearden) had produced a hovering device. From my previous work, I recognized it immediately as TT Brown's Electrokinetic Apparatus that I had successfully replicated and demonstrated before a live audience years earlier. I noticed the capacitors were made from Aluminum FOIL, not the thin-but-heavy Aluminum sheet stock from Home Depot that I had been using for years, (I had assumed that to make my 3-foot discs hover and ascend vertically, I would have to use voltages in the hundreds of kilovolt range, and generate high x-ray, UV, and possibly gamma-ray emissions as a by-product, in other words, a typical flying saucer with all the associated radiological effects that have been documented for over half a century) so they could lift their own weight. The result matches almost exactly the simplest graphical representations of TT Brown's patent from 1960, and De Seversky's Ionocraft patent from 1964, which was a thin foil cathode plate with a thin anode wire separated from the cathode by stand-off insulator posts. I was eager to reproduce these devices (I don't know how I overlooked this simple solution, it was all sitting in those old 1960s Brown and De Seversky patents I have studied for 15 years previously) and many people around the world, especially the webmaster of the JLN Lab's site French researcher Jean-Louis Naudin, who began replicating many different types of larger and more sophisticated devices, some of which resembled model spacecraft, and began amassing tables of very useful data, that researchers could use as basic guidelines to follow. I replicated the first hovering device, the "Lifter" (so-called by Transdimensional Technologies) as a 1-foot triangle, with 2-inch foil cathode and #42 enameled copper magnet wire. To energize it I used a commercial power supply from Gamma High-Voltage Research that I had acquired from Ebay some years ago. It was perfect

for antigravity research, having full metering, and variable voltage from 0 to 40KV, and current limiting from 0 to 1.5 milli Amperes of current. The heavy 1-meter discs of the Electrokinetic Apparatus were too heavy and the rotor-friction too great for this low-powered device (60 Watts, maximum), but for the lifter, it proved ideal.

My first "lifter" antigravity device worked, but its performance was less than ideal. It had to be stripped of its lower balsa-wood frame and some of its foil before it would degravitate (counterbary), and it "maxed-out" the current-limited power supply at 33KV I 1.5mA, for a stable hover (actually this is an upward flight configuration, because the device is tethered to the lab table with 3 sewing threads). That is 49 Watts. The concept of a hovering TT Brown Electrokinetic Apparatus had been proven to my satisfaction, however, and I initiated more research into past works and patents to raise efficiency to workable levels. The performance was slightly better than my early 1990s "wire-grid" type devices. I found this slightly encouraging.

After a couple months reading and research (why re-invent the wheel, its all been done before), I started to replicate larger models in February and March 2002, but kept coming up against a size-barrier with the Multi-cellular (grid) approach that many researchers had assumed would raise thrust, and efficiency. This approach obviously did neither, as no one seemed to be able to produce hovering devices above a certain size, the current consumed (adding to total wattage consumed) was prohibitive with the low-powered (still high-voltage, low-current) devices that most of the mostly amateur researchers were using. Researchers around the world started to replicate different versions of the basic lifter 1 (an 6 to 12-inch equilateral triangle). The lifters are always tethered to the testing surface with 3 strings to keep them from going dangerously unstable and possibly short-circuit when they reach the limit of the umbilical supplying power to the device.

From my previous Biefeld-Brown effect replications years earlier, and from carefully reading Brown's EK Apparatus patent, I knew that increasing the diameter of the wire would reduce leakage current created by coronal discharge, mostly coming from the forward electrode, which in the 2 and 3-foot saucers consisted of an arc of copper tubing in the front quadrant of the saucer, or disc. Corona robs power (amperage) from the disc that otherwise would be used to "propel" the disc. Increasing the diameter of the copper tubing, as per Brown's patent if the effect was due primarily to ion-wind, more current and current flow between the electrodes would be desired to effect more air movement. But this is not what I saw in the saucers. **There was apparently another, far more powerful but subtle force effecting silent propulsion of the saucers that had nothing to do with charge-transfer and ion-momentum.**

In February of this year, I undertook an effort to replicate and improve performance and reduce power consumption of the lifter device, based on data from my electrogravitic work of years past. I started by using thicker diameter enameled copper magnet wire, #35 to #30 diameters. I first built a 1-foot equilateral triangular basic "Lifter-1", weighing only 3.5 grams. On March 16th, I built a lifter with the thicker #35 enameled copper wire.

I made the three sides 1-foot long and exactly 2-inches high. After experimentation, I found the optimum spark gap for my High-Voltage power supply (Gamma High Voltage Research 40KV with current limiting to 1.5mA). The small silver-colored device leapt off the test table and pulled violently against its anchor strings to a distance of about a foot. This seemed like a great deal of force for such low power. The large discs of my TT Brown EK apparatus required a good deal higher voltage to initiate motion in the direction of the anode. The device consumed 26KV I 0.56mA DC, which calculates out to 14.56 Watts. I was getting more excited, because this was the best efficiency seen of any result yet posted.

On March 19th, I tested 2 lifters glued together in a "diamond" shaped configuration.

This 2-foot device weighed 6.0 grams, with the same #35 wire and a 2 and 5/8" air gap. It took 25KV to nullify the weight of the device, and it achieved a stable hover at 35KV I 0.8mA. That is 28 Watts. This is about what I had initially expected, double the power for double the Watts. Still, this was far less overall power going into the device to achieve a stable hover than my first primitive and radically shorn and trimmed device. After lift off to the extent of the anchors, I found I could reduce power slightly and maintain a stable hover. On March 22nd at 3:49 pm I got the diamond lifter to achieve a stable hover with a 2 and 5/8" air gap at 29.5 KV I 0.32mA. This was only 9 Watts! This was unheard-of efficiency. I was further encouraged to build and test larger hovering devices to see how large I could get them with my low-powered commercial power supply.

I then built a "lifter-2", which consists of three 1-foot triangular capacitor cells taped together. It weighs 11.4 grams. March 30th at 3:22 pm, the device achieved a stable hover at 38KV I 0.57mA for 19.76 Watts total power. The larger device was more energy efficient than a device 1/3 the size. I wanted to see how far this could go, so I added three more lifter cells to make a 6-cell device, 3 feet on each of its three sides. I was eager to check the performance of this fairly large device. This was the diameter of my horizontally propelled TT Brown Discs.

This device weighed 21.6 grams. I kept the spark gap the same distance on this device. However this device failed to achieve counterbary (lift). It just sat on the test table, filling the air with the smell of ozone and

making a sizzling sound (corona noise). I noticed that the current maxed-out on the power supply at a fairly low voltage and would not go any higher.

I concluded in my disappointment that all that wire from all the inter-connections to the cells was causing corona leakage and robbing current, which otherwise would be used by the device for propulsion.

The idea then hit me that perhaps I could make a device with the same outer diameter as the 3-foot device, but have greater efficiency because of a much shorter length of wire. I built basically a 3-foot (1-meter) version of the first 1-foot device. This device weighed 16 grams. It lifted off the table with amazing force and hovered stably with 152mA 30KV which is 15.6 Watts. Not only had I achieved a larger-size device, but far better power efficiency for a much larger and heavier device. I was overjoyed! I saw that I had a great deal of lifting force to spare. I had not even come near the limit of my power supply. I added extra bracing at the corners and extra balsa and a triangular paper "payload -tray" in the center of the device, supported by three 1/16"x1/16-inch balsa stock. The extra bracing and payload area added approximately 2 more grams. With a 5 gram payload, the device consumed 39.9 KV 10.99mA, for total power consumption of 39.5 Watts. I was really encouraged at that point, because I knew that these results were unheard-of, in terms of energy efficiency. I had solved the problem of decreasing efficiency by dispensing with a "grid-based" device. Increasing the area of the capacitor plate was one of the factors that increased performance and efficiency, lessening the input power requirements with increasing size. Now the Biefeld-Brown effect could be properly studied, now that most of the ion-flux had been eliminated, resulting conservation of energy by the device, and resulting in greatly increased propulsive force.

Since I now knew the limit of payload for the device at the power level I was using, I added a balsa framework that approximated a central cabin area, and three small styro-foam spheres on the center of the straight sides on short lengths of balsa. The device no longer looked like a test device, but now looked like a scale model spacecraft. I remembered the Edouard "Billy" Meier UFO contact case, and knew that all his original photographs and movie footage of extraterrestrial spaceships the extraterrestrials themselves called "beamships" (there are several styles and variations, all with different specific functions and capabilities, some manned, some remote-controlled "telemeter discs" that had a tri-hemispherical undercarriage that I knew from past research were propulsion condensers) and that the original un-tampered photos all passed rigorous analysis using the latest and most sophisticated computer and other equipment, case detractors notwithstanding. Also the spiritual messages of these genetic brothers of Man and their accounting of humankind's history and origins from far across space rang true and struck a chord with me.

I decided to name this new 1-meter model spacecraft Beamship Variation I. The three sides of the device performed the same function on this device that the three spherical or hemispherical capacitors often seen on the underside of full-size "beamships" (Daylight-disc-type UFOs), which illustrates a similar if not identical propulsion methodology to full-size 3 to 7 meter and larger "off-Earth-built" aero-spacecraft. Clearly the propulsion methodologies were exactly the same in the model as in the full-size flight device.

I immediately built a 4-foot diameter model with a full cabin framework and internal payload area and achieved even greater performance and efficiency. I was ecstatic. This 4-foot device I dubbed Beamship Variation II. I received a suggestion from Mr. Tim Ventura of American Antigravity that performance could be increased by using small diameter stainless-steel wire. It seemed unlikely to me that smaller diameter wire would increase performance, it contradicted Brown's patent, and my own past research with large electrogravitic discs. But Stainless steel has a high number of free electrons in the outer valence atomic shells (electron orbits).

So I obtained some #40 stainless locally and the results confirmed Mr. Ventura's suggestion. Corona noise was heard at a much higher power level, and was greatly attenuated in volume. Leakage current was less, and the two Beamships now had more thrust with less power input. They even carried more payload at less power input. Variation II weighs 21 grams and loft a payload of 6 grams at 40KV 1mA for 40 Watts total power. Again, this was unheard-of efficiency. The anode wires sang a strange harmony as the Beamships floated in the air, stably at any altitude, from floor to ceiling, without any fuel or visible means of support. This was very Beamship-like.

I thought that now since corona discharge on the anode wire was less, I could decrease the spark-gap distance without creating a spark (which kills lift). Thrust seemed initially to increase, but efficiency went down because there was current-flow now, and current consumption went way up. The supply would now max-out at 37KV 1.5mA and would not increase because of the current limiting. The Beamships now were noisy, as the foils chattered loudly because of all the ion-wind that was now rushing downward along and past the foils. I used a concert fog machine to observe the ion-flux vector, and filmed it digitally with my Logitech webcam, and with VHS analog video.

Analysis of the fog -tests showed a circular vortex of air surrounding the anode wire that flared out into a downwash of air below the Beamship. I was disappointed, because I thought then that the thrust action of the device was due to simple ion-transfer. A useful-enough effect, but of questionable use in the vacuum of space without an ionizing medium.

Beamship Variation III

I reasoned I had just about enough power in the supply to build and fly a 6-foot (2-meters) Beamship. Since the balsa came in 3-foot lengths, this was simple. As with all the lifter devices and the more evolved and efficient Beamship-series model aircraft, construction techniques are extremely simple and require little skill to assemble. Weight of the Beamship Variation III is 42 grams, with 6-feet of length on its 3 sides. Height of the foils was still 2". Full frame and cabin, with Searl "IGV"-type landing legs, to support the weight of this heavy and very large device. I set the spark gap at 2 and 1/2 inches. At 12:15pm EDT, May 12th, 2002 the Beamship was weightless at 32KV with current maxed-out at 1.5mA.

The device barely lifted off, and "hopped", across the floor once or twice at full power. It had the same loud rattling of the foils due to the terrific downwash of electrified air. I needed to raise the power level. I increased the distance of the spark gap to 2 and 3/4". Now the Beamship took off straight up with power to spare, as if it was one of the smaller craft. Beamship Variation III is weightless at 30KV I 0.85mA (25.5 Watts), and airborne into a stable hover at 35KV I 1.35mA. That is only 47.25 Watts. It can carry a payload of 5 grams, or 5 grams worth of additional framework and structure, to the limit of the power supply, which is 60 Watts (40KV I 1.5mA).

The 42-gram, six-foot model aero-spacecraft only consumes 47.25 Watts at hover, but my first small and trimmed device ate up 49 Watts! Clearly, using the single-cell Beamship methodology had a huge advantage over the "multi-cellular" design that other researchers had built and tested, seemingly reaching an impasse in terms of size and efficiency, which my large single-cell Beamship technique had seemingly solved. In early April my 1-meter Beamship, weighing 22 grams including 5-gram payload, consumed 39.6 Watts. So the 42-gram, 6-foot Beamship used only 7.65 Watts more total input power at stable hover than the 1-meter Beamship. Power-to-weight ratio for the 2-meter Beamship V. III works out to 1.125 Watts to lift 1 gram stably of scale model electric spacecraft. With little to no ion wind, the Beamship had plenty of upward force and achieved stable counterbary at greater efficiency than I had ever heard or read about. Also, I was not aware of any devices in scientific history that has achieved this type of counterbary for this little input power and this colossal size. I performed additional fog-tests with two red semiconductor-emitted laser beams in the plane of one side of the device, one above the wire, one below the foil. The Beamship without all the ion-wind was nearly silent again, except for "singing" and softly "thrumming" anode wires. These laser-beam tests further confirmed the marked absence of ion-wind with a larger spark gap.

At 1.125 Watts-per gram at 57KV I 1.4mA (78.8 Watts) would lift 89.775 grams worth of electric spacecraft. So

not only is the larger size in a single cell far more efficient than the "grid" design, in thrust and power consumption, but the reduction in current from increasing the spark gap raised power level to the device, while dropping power consumption of the device. My initial suspicion of ion-wind producing most of the thrust in the Biefeld-Brown effect had been disproven also because of the great weight of the device. I never would have discovered this important fact if I had stayed with smaller devices, trying to raise their efficiency. And I never would have discovered the efficacy of the Biefeld-Brown effect if I had stayed with the multi-cellular "lifter" methodology. One of the factors that raises the level of propulsive force (if "propulsion" is the right word) is increasing the area of the plate, according to TT Brown's patents. So the larger size single-cell capacitor's ability to reduce power consumption and effect greater propulsive force and upward acceleration, was easily explained by the Biefeld-Brown Effect. Brown had been vindicated. My gut feeling had seemingly been confirmed: this was our first warp-drive (reaction-less drive).

My experiments had yielded greater efficiency, and greater size and weight of VTOL hovering models than any that I had ever heard or read about. I still am having difficulty taking in these facts; and it is very awe-inspiring to see such a large device de-gravitate and hover stably at any altitude, from floor to ceiling.

Next for me is a higher-powered supply (60KV), moving up to a three-meter Beamship Variation IV, improvements to the cathode such as a thin, symmetrical airfoil shape, as Brown suggests in his patents, tungsten wire, and then carbon-wire for the anode, and full heat-shrink coverings on the frames, running lights, onboard lasers, onboard digital/proportional Radio/Control, and now that we know the power requirements, and have a good handle on efficiency, onboard power generation. I have already begun designing with my associates our own custom-made outboard and inboard battery-powered power supplies, and finally will cut the power umbilical to the model electric spacecraft permanently, and Beamship technology advances further. If the on/off duty cycle is pulsed at a low frequency, power input can be reduced by two-thirds, at least. Experiments conducted by Jean-Louis Naudin last fall (2001) confirm this phenomenon, suggested by Brown and De Seversky in their patents. Clearly, onboard power can easily be effected, using modern miniaturization and circuitry. Pitch and roll vector control can be achieved by electrically isolating the anode wires on the three sides of the ship, and varying pulses to these three wires. Yaw control can be achieved by simply installing a horizontal-double sided capacitor inside the ship near one corner. Simple full 4-channel flight control is thus achieved.

The Beamship series aircraft are fascinating research and entertainment devices (see cover page), and are the vanguard of a whole new generation of radio/controlled antigravity model aircraft with no moving

parts and dead silent propulsion. But they are more than that. The Beamships, if allowed, could probably rise up at any speed thru the atmosphere, right up to near-Earth-orbit, and probably keep on going out into limitless space. No need to achieve ballistic escape velocities of miles-per-second. This is non-ballistic flight. They even have a certain amount of wind resistance outdoors and indoors because the electrical field causes air to flow AROUND the model flying craft, not into it. This is such a safer, environmentally cleaner, vibration and nearly silent and more pleasant method of aero- space travel than carrying tons of explosive reaction mass, which can and does explode. No more use of heat energy to effect transportation.

The 21st century has begun in earnest!

Beamship series aircraft are available for sale for research and hobby/entertainment use right now through the American Antigravity website: www.americanantigravity.com. Look for the Applied Electrogravitics antigravity technology website late spring, 2002. You can contact me, Russell Anderson for details on pricing, and new and improved variations, and power supplies for outboard and onboard drive, which are currently in design stages.

Editor's note: More ideas on development of T.T. Brown's patents are on our web site: <http://www.faraday.ru>. Read about T-capacitor!

Data Table 1

Antigravity device	Weight of device	Wire type	Voltage/current	Total Watts	Payload	Payload/power
1-foot "Flyer-1"	3.2 grams	#42 enameled copper	33KV I 1.5mA	49	None	_____
1-foot "lifter-1"	3.5 grams	#35 enameled copper	26KV I 0.56mA	14.56	None	_____
2-foot "diamond-lifter"	6.0 grams	#35 enameled copper	29.5KV I 0.32mA	9	None	_____
2-foot, 3-cell "lifter-2"	11.4 grams	#35 enameled copper	38KV I 0.57mA	19.76	None	_____
3-foot, single-cell "Beamship Variation I"	16 grams	#35 enameled copper	30KV I 0.52mA	15.6	None	_____
Beamship Variation I-fully-rigged	18.5 grams	#35 enameled copper	_____	39.5	5 grams	39.9KV I 0.99mA
4-foot "Beamship Variation II"	21 grams	#40 stainless-steel	_____	40	6 grams	40KV I 1mA
6-foot "Beamship Variation III"	42 grams	#40 stainless-steel	35KV I 1.35mA	47.25	None	_____

References

1. Ether Technology, by Rho Sigma,
2. Lost Science, by Gerry Vassilatos,
3. The Philadelphia Experiment, by William Moore,
4. High Energy Electrostatic Research Vol. 1, Antigravity and UFOs, by Raymond A. Nelli, Homemade Lightning, by R.A. Ford,
5. Antigravity – the Dream Made Reality, by John Searl, The Law of the Squares Book 4, by John Searl,
6. The Antigravity Handbook, compiled by D.H. Childress,
7. The Coming Energy Revolution, by Jeanne Manning,
8. Agnew H. Bahnson Labs home movies (1957-60), JLN labs website, Bill Beatty's "weird-science" website, American Antigravity website (www.americanantigravity.com).

Patent references

1. A.H. Bahnson, Jr. Electrical Thrust Producing Device, USP # 2,958,790, filed May 12,1958, granted Nov. 1, 1960.
2. Marcel Jean-Joseph Pages (France), # 1,253,902 Petit-Viton, filed Jan 5, 1960, granted January 9th, 1961
3. G.E. Hagen, Flying Apparatus, #3,120,363, filed Sept. 11th, 1958, granted Feb. 4th, 1964
4. T.T. Brown, Electrokinetic Apparatus, #2,949,550, filed July 3rd, 1957, granted Aug. 16th, 1960
5. T.T. Brown, Electrokinetic Generator, #3,022,430, filed July 3rd, 1957, granted Feb. 20th, 1962
6. A.P. De Seversky, Ionocraft, # 3,130,945, filed Aug. 31st, 1959, granted April 28th, 1964
7. V. Gradecek, Electric Aerospace Propulsion System, # 3,177,654 filed Sept. 26th 1961, granted April 13th, 1965

SmartPAK Technology™


invention by William Alek

the world's first commercial all solid-state system that provides a "standard" platform for experimenters, researchers, and developers to do energy-related practical applications, experiments, and perform exploration of highly efficient alternate energy system



The theory of operation is based on the amount of energy that is required to magnetize and de-magnetize ferromagnetic materials utilizing a core/coil/magnet assembly. It has been discovered that it takes MORE energy to magnetize a suitable core assembly than to de-magnetize it. The SmartPAK system is designed to measure and collect the difference, and store the excess energy for later use.

The SmartPAK device is controlled by a 68HC908GP32 microcontroller programmed to measure input/output voltages and currents, calculate COP, and contains software algorithms for a complete "turn-key" power management system. The device features a "standard" user interface, which allows the user to design their own custom core/coil/magnet "head assemblies", and immediately test and display in real-time its' performance.

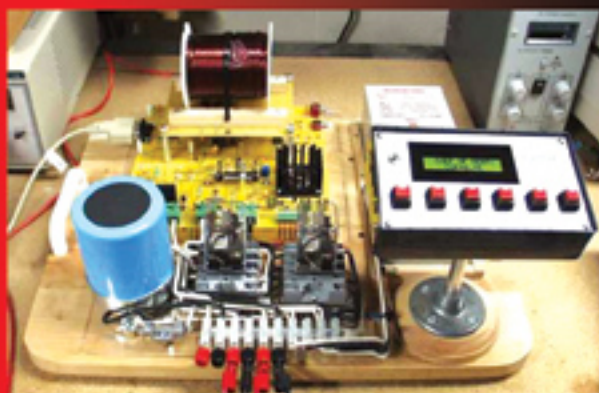

William Alek

President and CEO of INTALEK, INC

**3506-43rd. Place
Highland, Indiana 46322-3129
e-mail: wsalek@intalek.com**

**Correspondence Address: POBox 37,
St.Petersburg, 193024, Russia
Phone: 7-812-380-6564,
net@faraday.ru, www.faraday.ru**

Commercial Antigravity

Tim Ventura

tventura6@attbi.com

Introduction

Let me begin by posing a simple question that I would like the reader to keep in mind throughout this article: How far away is commercial antigravity? I'm not talking about a laboratory experiment where a giant magnet is used to levitate a frog, or secret UFO experiments that the government isn't sharing with the business world, but a real, viable antigravity solution to what I consider to be the most pressing issue facing the world today – transportation.

Who can answer a question like that? How far away is commercial antigravity? The author has read numerous scientific texts on the subject, and is familiar enough with contemporary theories of gravity, antigravity, and electromagnetism to suggest that most scientists believe that commercial antigravity is at least 100 years away from existence. But the author believes that most scientists are wrong.

Defining terms

Any article about antigravity would not be complete without properly defining the terms to be used. In this article, antigravity is not used in the strict sense of the word. The author's intent is to discuss a method of propulsion, which for all intents and purposes can be considered antigravity, and may include antigravity – but also may include several other forms of similar propulsion. The reasoning behind this is that experience has shown that the majority of people in the world don't care how something works – they care what it can do for them. This article is about the effect of Antigravity – not the cause.

Real Antigravity would consist of an apparatus used to either reduce the apparent mass of an object or reduce the effects of gravitational attraction between the Earth and an object. An example of an apparatus that may in fact do this is the Podkletnov superconductor apparatus currently being tested by NASA.

This Podkletnov device essentially consists of a spinning superconductor that self-levitates above a pool of liquid nitrogen and supposedly creates a “beam” or “shaft” of antigravity (or reduced gravity) directly above it as it operates. The levitation of the superconductor itself is not antigravity – it is a well-known side effect of ceramic-superconductors called the “Meissner Effect”. The Meissner effect is simply a side effect of the superconductor's interaction with the Earth's magnetic field, and is easily explained by physics.

Podkletnov claims that when he worked with a team of researchers investigating superconductors in Russia

around 1991, the smoke from the tobacco pipe of a fellow researcher began to climb steeply in a column directly above the superconductor. The researchers began to think that they were on to something, and Podkletnov subsequently performed several follow-up experiments that led him to the conclusion that the levitating superconductor produced a shielding effect between the Earth and anything positioned directly above the superconductor. He reasoned that gravitational shielding would provide a “column” of reduced gravity above the superconductor that should extend up and away from the Earth indefinitely. Podkletnov calculated that with a rapidly spinning levitating superconductor he had achieved a 2% loss in weight for anything directly over the superconductor.

Podkletnov's research is interesting and compelling, and it would fall into the category of “real” antigravity – but I am writing about Podkletnov's type of research as well as enormous amount of research and theory available on electromagnetic propulsion systems. These can be considered “effective” antigravity.

The Harrier jet fighter can swivel its engine exhaust-nossels to create vertical lift, which resembles antigravity in that it is VTOL takeoff. However, the Harrier does not use effective antigravity because it has all of the functionality and side effects of an aircraft. A helium blimp would be a closer example to “effective” antigravity, but it too is not – because it works on basic aerodynamic principles.

Aerodynamics is not effectively antigravity – aerodynamics is instead expensive, difficult to manufacture, prone to explosive failure, and highly unreliable. This is not to suggest that a jet aircraft is unreliable, because it has a variety of backup systems, but that the technology itself is unreliable in that a jet is adversely effected by the medium that it uses to propel itself. Air pressure, humidity, temperature, and strong winds all cause a degree of unreliability. In addition, turbine engines stretch the limit of what mechanical engineering can achieve – which is why they are prone to break if even something as small as a bird gets sucked in during flight.

Antigravity is not about moving the air around — it is about a medium-agnostic means of air transportation that produces vertical and/or directional lift without relying on air-pressure like a wing or blimp. Antigravity is an electromagnetic or electrogravitic system for reducing the weight of an apparatus to allow it to lift more easily. Antigravity is pushing a button and having your vehicle take off without runways, noisy engines, minimum flight-speeds, propellers, or any of the other drawbacks that limit conventional aircraft from achieving popularity similar to what an automobile might have.

The author's definition of Antigravity for the purposes of this article is confined to electromagnetic or electrogravitic devices that reduce the weight of an

object to enable it to take off without conventional thrust-producing apparatus. This definition might also fit many of the classical characteristics known at one time as "the electric spacecraft".

1. *Business Analysis versus Scientific Analysis*

The author disagrees with the majority of scientists as to when commercial antigravity will become possible for some very basic and obvious reasons. To begin with, the majority of credentialed physics-related scientists come from a theoretical school of thought, which tends to limit their world-view to only contain those things that are currently or potentially explained by theory. The author, however, comes from an experimental school of thought that seeks to capitalize on existing observational data without the rigorous need to explain every last detail of its functionality. The author is an engineer, not a scientist – and engineers don't need to totally understand how something works in order to make it better.

This difference between the engineering point of view and the physicists is also different in the manner in which they seek out observational data. A physicist looks towards naturally observable data, and in the event that none exists they look towards current theories to explain potential future observations. The engineer is more open to ideas that are less rigorously tested from the perspective of scientific method, but are currently observed as potential solutions to real-world problems.

2. *Potential Technologies Overview*

Physicists currently tend to dismiss the entire concept of Electrogravity, and the reasoning behind their logic is very sound. To begin with, Electrogravity is not observable in nature. In addition, many of the claims by those persons who submit Electrogravity and antigravity devices for public review are faked, exaggerated, or just plain wrong.

Physicists are responsible for maintaining a working body of theoretical knowledge, and if they were to admit results such as Schnurer's without skeptical scrutiny it would undermine the very fabric of technology itself. If the Podkletnov results were to be accepted as fact at face value without rigorous proof, imagine the amount of money that would be wasted in attempts to build enormous Antigravity vehicles based on this theory.

In the middle of the spectrum lies the concept of Maglev, which is mentioned here only for the purpose of specifying that Maglev is not commercial antigravity. It has been mistakenly thought of as antigravity by many because it utilizes a magnetically-levitated train to improve the velocity of the train and reduce transit time between stops. In reality, Maglev is not really a vehicle at all.

The definition of a vehicle would be a device that transports itself as well as its passengers and cargo between two points. This is why an automobile is

considered a vehicle but an escalator or elevator is not – the automobile transports its entire propulsive apparatus to another location, but an escalator or elevator does not move – it merely repositions its cargo between points. The Maglev train is not really a vehicle at all – it is actually a very long electromagnetic armature that transports people and cargo between its ends at high speed. While it may serve a commercial need, it is not to be confused with Antigravity.

On the opposite end of the spectrum is the author of this article – who has built and successfully tested over 30 electromagnetic "Lifters" at the time of this writing. The Lifter is a device based on research by Transdimensional Technologies and related to research by Thomas Townsend Brown that demonstrates an antigravity effect when a High-voltage DC current is applied to it.

Currently, the exact method of propulsion for the Lifter is being debated. It is thought to be one of two things – either an effective form of "ion-wind" propulsion, or else a form of field-effect propulsion based on an as-yet unknown force. While the debate about the exact nature of this propulsion is important with regard to future research, in reality it does not change the observational data that demonstrate that this technology works perfectly, consistently, and reliably.

The Lifter design was demonstrated by the author in a continuous mode of operation for over 7 hours straight on Sunday, April 21st, 2002, at the Seattle Center "EarthDay and Renewable Energy Exhibition". During this seven hour period of time, the author's Lifter hovered at a tethered height of 12 inches from the surface of the table, powered by a 30 watt load from a simple computer monitor.

This article is not meant to get into the details of methods of antigravity, only to suggest that it already exists in the form of electromagnetic propulsion systems if nothing else. The author is confident that in time physicists will find a theoretical reason for why the Lifter operates as it does, but for the time being the fact of its operation overshadows the method of its operation.

3. *Market Needs*

Commercial Antigravity doesn't require a 2% loss in weight to operate – it will require something akin to a 200% loss in weight. A commercial antigravity device will have to demonstrate exceptional performance to gain market acceptance, but not for the reasons that might immediately come to mind.

One might believe that skepticism from the scientific community would prevent antigravity technology from gaining the scientific acceptance needed to become a commercially accepted engineering discipline. The long term view, however, shows that this is not the case – engineering and market forces drive innovation, and formal science plays a supporting role in explaining and

quantifying the innovations that engineers have already commercially qualified as valid.

The real roadblock to success for commercial antigravity is market acceptance. The author's demonstration of the Lifter technology at the Renewable Energy Exhibition helped him to realize that the vast majority of consumers have no idea what antigravity technology could be used for, much less what they themselves could use it for. The same thinking was apparent at the dawn of the age of personal computing, when the idea of having a computer in the home was a completely foreign concept.

So in brief, a market does not exist for antigravity technology, which is why inventors working with this technology have been unable to find appreciable support for their work. Many inventors look at this technology and ask, "how could the public not understand how valuable a technology like this is?" – but that isn't the problem. The problem is that most innovators with an interest in antigravity are so closely tied to the science behind the technology that they fail to review and address the business needs that drive the market acceptance of a new technology. In other words, people don't buy antigravity – they buy solutions. People don't buy cars to simply have a car – they buy cars because people need transportation needs that they have to fulfill. People don't buy computers because they want to have a computer – they buy computers because they want to share and process information and communications.

Marketing Requirements

How will antigravity technology gain the market acceptance to become a commercially viable technology? There are a variety of ways in that antigravity technologies will become commercially viable, but only after antigravity is no longer sold as antigravity – it needs to be sold as a personal or business solution.

The solutions that antigravity technologies are best prepared to provide at the moment are in the realm of transportation technology. This includes moving people and cargo to destinations in a similar manner to conventional transportation technologies such as aircraft or automobiles.

With regard to providing transportation solutions, antigravity has the ability to incorporate the best features of both contemporary automotive and aerospace technologies into a single technology that will serve point-to-point transportation needs better than either of the two aforementioned technologies could by itself.

For a moment, assume that a person wants to travel from Los Angeles to New York in a short period of time. Currently, the most convenient method of transportation to accomplish this would require the person to take an automobile to the airport, and from there take an aircraft from the Los Angeles airport to the New York airport.

After departing at the New York airport, the passenger must then take another vehicle to their intended destination.

Commercial antigravity technology could serve a dual-purpose short and long-range transportation role, taking on the aspects of both ground transport as well as air transport.

Product Delivery Requirements

In order to deliver commercial antigravity as a viable solution to business needs, a variety of work will need to be completed on the various component systems of this technology to turn it from what is currently a "proof of concept" into a commercial reality.

Let us assume for a moment that we have developed a working device based on Antigravity or some method of Field-Effect Propulsion. While this is the critical stepping stone to success, this is by no means the end all be all of the development cycle.

To begin with, the technology must be perfected to the point of being both economical and reliable. As it stands now, the market already has technologies in place that fulfill some or all of the requirements for the technology that Antigravity is being developed to replace. In order to serve as an effective replacement for these technologies, antigravity technology must then demonstrate that it both costs less in terms of operation and manufacture, as well as being more reliable than conventional air-transportation solutions.

I mention reliability in light of the recent negative media attention surrounding several recent commercial airline crashes. From a marketing perspective, air-travel disasters provide a great deal of negative publicity for the airline industry. Since the airline industry has a mostly successful track record of delivering passengers and cargo, people are for the most part willing to forgive the occasional air-disaster. However, with a new technology such as antigravity-based air-transport, there is not a long enough track record to permit public acceptance of air-disasters. One substantial disaster in the early days of antigravity could serve to forever damage the credibility of this new technology.

With regard to being economical, any type of antigravity system that intends to surpass existing methods of air-transport must be able to do so at a less-expensive rate to own and operate, and must have a vehicular lifespan at the very least similar to conventional air-transport devices. This would allow the total cost of ownership (TCO) to be less for an antigravity vehicle than it would otherwise be for a conventional craft.

There is one caveat to acceptance of antigravity technology as compared to conventional aircraft, which is simply that if antigravity vehicles are able to operate in an environment or manner that precludes conventional aircraft, then they should be able to gain a market niche without immediately having to surpass conventional aircraft in the area of TCO.

Assuming that we can develop a propulsion system that is both more reliable and less expensive to operate for the transportation of passengers and cargo, we then have to build up the skeleton of a vehicle compatible with this form of propulsion around the actual propulsion system.

For instance, a conventional aircraft has pitch, yaw, and several other flight controls, but for an antigravity vehicle there is a high likelihood that some or all of these controls will not be required, thereby changing the dynamic of flight associated with the craft. This will require new methods of pilot certification and flight-qualification, as well as requiring a control-philosophy to be created surrounding how the craft will operate.

I use the phrase "control-philosophy" instead of simply "control layout" because one of my assumptions about antigravity propulsion systems is that they will allow more flexibility in the design process for engineers to determine how the craft "should" fly, as opposed to an aircraft or helicopter, in which the components determining speed and handling are based primarily on an interaction between the design of the craft and the atmosphere.

In brief, an antigravity cargo-transport may have very different needs for flight than perhaps a lightweight passenger vehicle would, although there would also need to be a consistency between the control-systems of these devices to reduce the need for extra pilot training and competency testing.

Therefore, it should be apparent from the last few paragraphs that not only are there several propulsion-system related challenges involved with developing a commercial antigravity device, but there are also several challenges in the design, training, support aspects of this technology that also factor into the requirements

to be complete before a complete product can be delivered.

Conclusion

At the beginning of this treatise, I posed the simple question of **"how far away is commercial antigravity"**. The reader, I expect, probably interpreted that question in terms of time, which is the usual measurement of questioning when new technologies will become part of our lives.

However, as I have attempted to demonstrate throughout this article, **the time component is much less important to the development process than is the distance component – that is, how far away from commercial antigravity we are.** When I use the word distance, I mean specifically what tasks must be completed in order for antigravity to go from being a proof-of-concept approach to a new form of propulsion-system to being a completed vehicle ready for manufacture.

I have attempted not to address the legal implications of antigravity technology with regard to certification for general or specific use – my thought on this is that the discussion of legal ramifications of antigravity is best left for another time. This is due primarily to the size and scope of that discussion, which is beyond what I am attempting to analyze in this article.

So, in finale, how far away from commercial antigravity we are depends not so much on time as on the rate at which we can perform the work required to provide the underpinnings on top of which the technology can be built. This seems important to me, as it underscores how close we appear to be to a working method of antigravity propulsion, and how we might consider focusing resources and goals to achieve the realization of this common dream that we share.

EDITORIAL: PERPETUAL MOBILE OF 1902

There is one more interesting example of perpetual mobile, which was described in the collected articles [1]. The motor shown in Fig.1 was invented in 1902. The vessels *b*, *c*, *d* and *e* are mounted on a shaft *a*, and have one side *f* tangential to the shaft, and the other side radial. Compressed air is forced into each vessel through the valves *p*. It is stated that under "the action of the internal pressure of the vessels, and after a slight impulse has been given to same, in the direction of the arrow, the whole apparatus will begin to move and continue to do so without ever stopping, the velocity corresponding to the pressure established within the vessels".

Really simple... Let's try to examine it.

Reference

R.A. Ford. The Perpetual Motion Mystery. A Continuing Quest, 1987
Lindsay Publications, Inc., Bradley, IL 60915

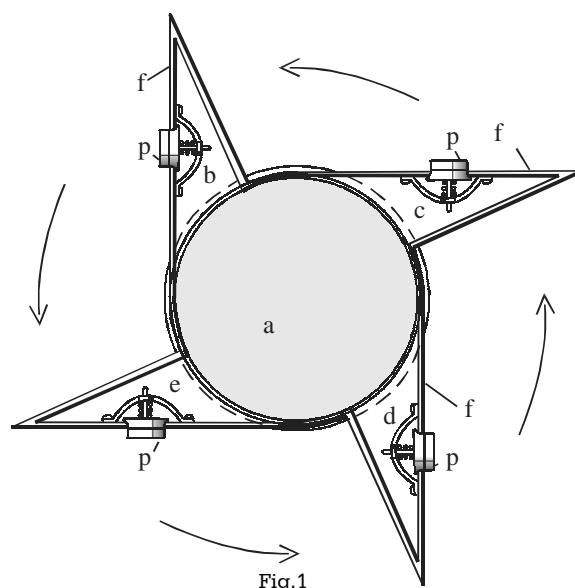


Fig.1

Action without Reaction

New Gravidynamic Paradox

Yu. N. Ivanov

Academician of Russian Academy
of Natural Sciences

Saikina, 11/2, app.4, Moscow, Russia

Tel: (095) 277-33-76/276-50-39

mirir@narod.ru

<http://www.mirir.org>

Editorial: Yu.N. Ivanov discovered a new unusual physical phenomenon that is a gravidynamic paradox. The sense of the paradox is the existence of the situation, which is not forbidden by physical laws and which allows any man (even a child) easily hold suspended or carry things with 100kg or more weight by means of some simple device. This phenomenon is just a part of the significant applied topic and a demonstration of the possibility to cancel weight characteristics of any material object. Per se it is a work on the obtaining of the methods to eliminate aircrafts weight.

We can use only resistant things as a support!

Galilee-Newton's Laws are in the basis of classical mechanics. Thought concerned fundamental, these laws do not explain the main thing, i.e. the internal processual essence of the phenomena, described by them. There is another scientific line – the quantum mechanics, which tries to discover the essence of deep processes. There is no connection between these lines, therefore they as if exist independently. There are also long-time conversations about necessity to combine the quantum and the classical approaches. We suppose, that practically the combining has already happened, since thanks to rhythmodynamics, there appeared phase, frequency and velocity of light in formulae of classical mechanics (without these attributes the quantum mechanics is impossible). It was revealed, that phase-frequency method of late mechanics formulae presentation gives a real physical sense both to formulae themselves, and to concepts which seemed vague before (*namely: cause of motion, force, velocity, inertiality, gravitation*). In this sense, the upcoming rhythmodynamics fills up the gap between the main physical lines and draws them together. But let's change the vector, since **the subject of the given article is to concern cases in which the third Newton law is not directly valid.**

Newton formulated the third law in the following way:

“Action always has equal and opposite interaction, in other words, actions of two bodies on each other are equal and directed in opposite sides”.

This law represents the fact that one-way action of one body to another cannot exist in nature, but there is only an interaction between them, i.e. there is no action without reaction [1].

We must note, that the third Newton law is valid only for systems with 100% feedback, appeared in the interaction period. For example, during the magnet influence on the iron object it is revealed, that this object also starts to influence upon the magnet, i.e. to attract it with the same force. It happens because in the period of action of magnetic field the iron object itself becomes the source of magnetic field (Fig.1). Here the magnetic field, as an especial environmental condition, acts as a mediator, i.e. exists by itself in the interval between object and magnet .

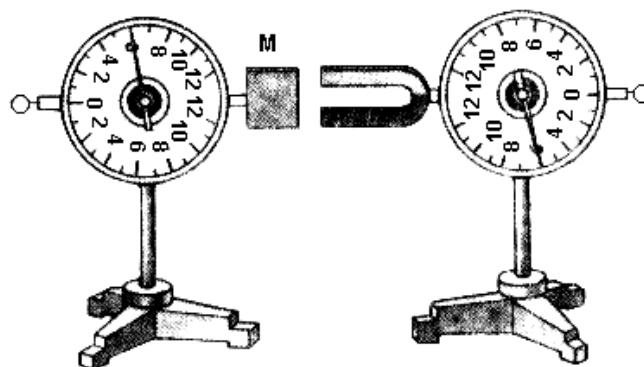


Fig. 1

Interaction of magnet and metal body M. Here the action is equal to reaction, i.e. the third Newton law is valid.

It is considered to be that magnetic field, created by electric current, spreads with the velocity of light. If current impulse is short, then the magnetic field spreads independently from the conductor and no matter if there is current in the conductor at present, or not. If the distance up to the object is big, then the magnetic field remains between source and object for some time, and has no influence upon the object. In this sense the portion of magnetic field, placed on the path between source and body, can be considered as moving independent “entity”, i.e. the space by means of itself carries its changed state (magnetic properties) from one place to another. In this period magnetic properties in the form of quantum can influence neither on the source, from which the magnetic quantum is already detached, nor on the object, which the magnetic quantum still does not reach.

But having reached the object, magnetic field changes the state of this object. If as the result of influence the object becomes a source of magnetic field, then the part of the field is reradiated in the direction of source, i.e. the object itself becomes the source for some time, and by this it is able to influence on the first primary source. In this situation the principle of action and reaction works, because the feedback takes place.

If the feedback does not appear during the period of influence of one body to another, then the action and reaction law is not valid in the system. Let's demonstrate it by the example of the mechanical experiments, in which there is a feedback between objects.

Let there is a device (Fig. 2), which throws off two water (air) streams in the opposite directions in such a way, that reactive forces completely compensate each other. At that the thrown down stream compensates the gravity too. In this case the device will fly without falling, i.e. it will have zero weight.

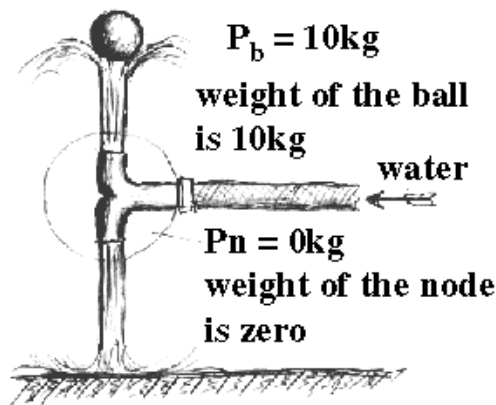


Fig. 2

The ball, suspended in the water stream, does not put pressure on the source. It happens because there is no feedback between the ball and the source. If you have such a device, then, lifting the ball by means of it, you will not feel the weight of the ball. The reason: the ball hangs due to the kinetic energy, which the stream passes to it and this ball can not influence on the source through the water stream.

The appearance of the ball with the weight P_b does not influence on the weight P_n of the device. And even in the case if we press the ball down, i.e. essentially displace its location in the stream, the device will feel nothing.

The absence of device weight is evident for us; therefore we can easily move the device if its original (vertical) orientation remains unchanged.

Let's change the situation and place the ball (body with the shape, which is steady for hanging) in the upper stream. This ball with the weight about 10 kg is placed in a way to be kept by this stream at some distance, for example at 0.5 m. Will the device react on the changed situation, i.e. on the ball appearance? Will the weight of the ball, hanging in the stream, be added to zero weight of the device (0 + 10 kg)?

The calculation shows that it will not: $\Sigma P = 0 + 10 = 0$ [kg]. There is only an illusion that the ball is supported by the stream and that it is a part of the system. As a matter of fact, the ball is detached from the system and hangs due to the water kinetic energy. It is easy to check it by making an experiment in a bathroom: "Remove the douche sprayer, then direct the stream up and holding it by the one hand with the aim of weighting, try to influence on the source by the other hand through the stream. You will be surprised to feel that the hand, which is supported by the stream or any object, which is hanging in the stream, does not influence on the source".

At first sight the situation seems to be a paradox, however it very illustrates the possibility of the force

action without reaction. So, the action can be one-way, i.e. calling no reply reaction in the form of pressure on the action source.

In such an unusual way it is possible to keep the ball of bigger weight (100 kg and more), at that to move it easily by means of the device and at the same time not to feel the presence of additional weight in the stream. **It is possible only in the case when there is no feedback between body and source**, i.e. the body, hanged in the stream, has no ability to act on the force source. Thus, we can both hold and move the heavy ball without additional efforts, and also lift it up to any height (for example, 100 m). As a matter of fact, we deal with the **new gravodynamic paradox**.

It is interesting then, how to solve the task of the following type: "Let the body with 100 kg weight is hanged in the water (air) stream in such a way, that it does not change the velocity and direction of liquid outflow from the source nozzle. How much energy the operator must spend to lift this body to the height about 10 m?" (Here it means that the operator must take the device, which supports the ball, and, moving upstairs, lift the body, which hangs in the stream, by means of this device to the height about 10 m). If to solve this problem correctly (the condition is that the operator lifts himself together with the device and the ball), we will find out, that operator's energy is spent only for lifting of the device, which creates water streams. The operator, lifting together with the device, will not even notice that in the stream there is a body with about 100 kg weight (**this is the sense of the paradox**).

The situation only seems to be absurd, and even paradoxical for theorists, but it is not a hopeless one.

We can also observe the effect of action without reaction in ultrasonic field of the source. If the source is fixed on scales (Fig.3) and body is hanged, as it was made in the stream, the scales will show only the precise weight of the source and will not react on the weight of the hanged body, no matter how heavy it is.



Fig. 3

The ball, made of the special absorbent material, hanged in the powerful ultrasonic field, does not put pressure on the scales. It happens because of the absence of feedback between the ball, which has changed its state, and the radiation source. If you have such ultrasonic device in your hands, then lifting the ball by means of this device you will not feel the ball weight.

The experiment of such type was made in one of the secret institutes. Water was used as an acoustic environment. The heavy ball easily floated up from the vessel bottom i.e. it behaved as if it had no weight.

The similar phenomena but such of the other organizational level, sometimes become apparent in nature. The phenomenon has its very name because the event happens unexpectedly and is not analyzable through laboratory research [3].

"A spherical ball lightning about the size of a football ball flew over a village Galtsovka of Altaisky Krai at a height of twenty to thirty meters. The first shed in its way, with ferroconcrete poles, was crushed and collapsed. Flying over a slated house, the ball lightning tore away the roofing slate together with nails, raised it into air and pulled it along, scattering its parts all over the village. Flying over a tractor station, the ball lightning crushed a frame, welded of metal angles and covered with tarpaulin. On the approaching of the ball lightning to another frame, it was at first dragged along the ground, and after the ball lightning had passed it, the frame was lifted and carried at a distance of 300 meters. The weight of the frame was no less than 100 kg".

Further the author analyzes the situation from point of view of the known physical laws: "The frame of hundreds kilograms weight was carried by fields of the flying ball lightning. However, for some reason the ball lightning kept on flying straight and did not note that some metal frame was caught to it. If the ball lightning, as it is usually considered, has a density of air and it is a weightless formation, then why the frame with the weight not less than 100 kg could not change its flight trajectory even in some extent?"

It draws attention that in some cases the ball lightning field pushed objects away, and in other cases it attracted them. It can be explained only by fact that in each case the ball lightning field specifically influenced on internal properties of objects, and then objects themselves somehow reacted on their new state (they changed their motion). The feedback absence (in other way it happens between magnet and iron object) allows the ball lightning not react upon the things, which take place in its field. If these objects themselves became sources of similar field, i.e. reradiated it, they would influence on the ball lightning trajectory. **Most likely, in the given case, there was realized the situation when action caused no reaction.**

Conclusions

In the context of known physical laws the particular problem of direct action without feedback was formulated and solved. The solution of this problem provides deep understanding of how to control weight characteristics of material objects in open systems. As it was shown by the example with water (which is only an illustration of more fundamental processes) we can

"deceive" the nature, but only through the deep understanding of the processual character of the concerned events.

By the example of ultrasound we show, that in principle there can exist such field flows, which are able to influence on bodies without the feedback effect. There were defined some conditions and criteria of bodies and methods of influence, at which the third Newton law is not directly valid (it is not published in this article).

The described type of influence can be called as pressure. But during consideration of processes at atomic or deeper level, i.e. from the position of rhythmodynamics, we find out something of another kind, that is phase-frequency one. It prompts to us, what kind of technologies will exist and how our aircrafts will look in nearest future. But not everyone is able to understand it at once.

Moscow 15.05.2002

For sponsors: mirit@yandex.ru

Our website: <http://www.mirit.org>

References

1. Physics textbook for the 9th class of secondary school // M., Prosveschenie, 1982
2. Ju.N. Ivanov, Rhythmodynamics // M., Noviy Tcentr, 1997
3. G.V. Nikolaev, Scientific vacuum // Tomsk, Kursiv, 1999

Comment

In the gravitation field we have a balanced open system, in which appearance of the new body at first sight must cause this system reaction such as weight increase. However, this is not the case.

The given problem is solved in two independent steps:

- 1) examination of interaction between water source and water (reactive effect, which is compensated by counter flow);
- 2) examination of interaction between water, detached from the source, and the body (unit time impulse per unit area).

It is impossible to examine the interaction between the source and the body because water has no rigidity. There are no means to influence on the source through the intermediate stream, therefore the principle of action and reaction is valid for each step individually, but not for both! But in this case the third Newton law must be developed as following: "If there is a 100% feedback between two bodies, their interactions are equal and inversely directed. And if there is no feedback, the action of one body to another causes no reaction, i.e. the action is not equal to reaction". And this is already another law!

New Possibilities of Vortex Electric Power Devices



Stanislav A. Lisnyak

Prospect Stoletiya Vladivostoka, 112-37
690069, Vladivostok, Russia
Tel/Fax: (7-4232)310-554
Email: Stasvladcomru@mail.ru

The earlier published article [1] was devoted to the explanation of the excess energy output at the rotation of flow medium in vortex tube (VT). The researches on VT demonstrated by the real examples that the excess energy output is a real fact, which is determined by natural physical processes. These processes take place in the fluid at its vortex (rotational) motion in the closed volume by means of phase transformations (skips) of the fluid state. However, the practice shows that for obtaining of patents and benefits for the real vortex devices, which are made for heat generation, it is necessary to write a little about their real technical characteristics, though technical and constructive possibilities of vortex devices can be much better. Temperature of water of these devices could not be higher than 120°C, and value of fluid pressure is confined within 5...6 kg/cm². Circulation pumps of pressure over 6 kg/cm² are used to increase thermal power output of vortex heat generators (VHG). It causes the discredit of VHG since at such a method their generative possibilities reduces to 100% value and less! We set a problem to discover the ways and engineering solutions for the essential increase of the coefficient of VHG energy conversion to not less than 200% value.

Our experience in development and exploitation of deep-sea physical devices has given some engineering solutions in this way. Actually, we have the opportunity to use the generally applicable circulation pumps, which have pressure not more than 4.0 kg/sm². At the same time we can raise the temperature of the heat carrier to 300°C and higher! and the pressure can be increased to 1000kg/sm²! Such fluid parameters allow to use this fluid as a heat carrier in powerful hot-water generators of steam engines, turbines etc. By the way, this method allows to make the value of temperature of water enough to supply its PYROLESIS! The main point of the method is the following: all the closed system of water-filled VHG works at pressure with the value under 1000kg/sm². It is provided by means of the special device, the so-called automatic pneumohydraulic block (APHB). This lets to raise the

temperature of working fluid to 1000°C with no change in its aggregative state. The practical functional scheme of such a device is shown in Fig.1.

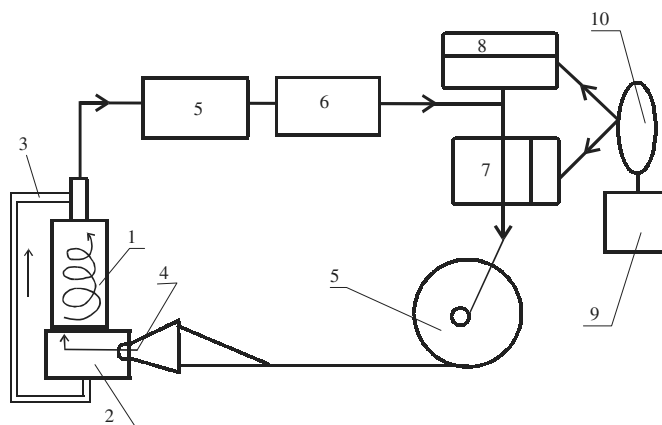


Fig. 1

- 1 – vortex tube; 2 – entry vortex chamber; 3 – by-pass;
- 4 – upstream end; 5 – circulation pump; 6 – heat-exchangers;
- 7 – APHB; 8 – volume of fluid leakage compensation;
- 9 – compressed-air flask; 10 – gas pressure regulator

The device works in the following way. The whole device is filled with working fluid without entrapped gas. At the operation of the circulation pump (5), fluid through the upstream end (4), placing in the entry vortex chamber (2), swirls, accelerates and gets into the vortex tube (1), where its "energy saturation" is realized. Then heated fluid gets into the heat-exchangers (6) for heating or for other purposes. After passing through the heat-exchangers, fluid gets into the pneumohydraulic device (7), where there is kept up the proper level of fluid pressure in the whole system. To prevent the system breakdown at the accidental fluid leakage, there is a device (8), which compensates such leakages. Compressed-air flask (9), with the volume under 1000kg/cm², and gas pressure regulator (10) keep up the selected level of the pressure in the system. The use of blocks (7,8,9,10) excludes evaporation in the system and prevents the breakdown of the circulation pump (5).

This VHG scheme allows to double the effectiveness of YUSMAR devices [2] only at the expense of rise in working fluid temperature in 2...3 times.

Observation of any fluid swirls and film documents of windspouts arrive to conclusion that all vortex structures are rotation bodies, created by the lines of the second order: $Y = aX^2$. In other words, as a result of the rotation in the swirl, air or fluid mass gets the acceleration of the second order. Taking into account the aforesaid, it is evident that in order to form the classical swirl in the VT, the very VT should be a tubular body of rotation. This body is created by the curve (see below Fig.2).

In YUSMAR and similar devices the vortex fluid motion take place in straight cylinder and 1/3 of this area is used for fluid deceleration that causes vortex flew

disruption. This results in the impossibility to increase additional heat in the straight tube in more than 1.54 times. It is caused by the fact that the main vortex formation takes place only in the vortex chamber and the flows separation does in the tube itself. Then, this vortex formation is right away disrupted by different plate brakes! It suggests itself that output part of VT should be made in the spiral form, expanding at the flow passage.

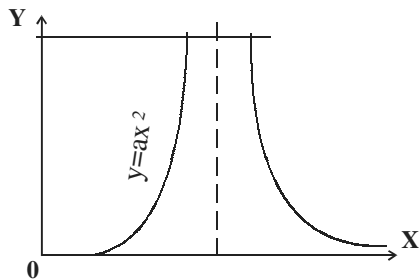


Fig. 2
Generatrix of the wall of vortex tube




Fig. 3
Upper part of the tube

Such section, made on the outlet of the vortex tube, helps to slow down the flow avoiding its disruption, since axial-cold flow, placed along the tube axis, should stay intact. Two of such engineering solutions allow raising the level of the additional VHGE energy up to 180...200%.

YSMAR devices are designed for one tube with the assigned heat output. However, if to take into consideration and to use the aforesaid conclusions, then we can raise energy conversion coefficient (ECC) above 200% at the series connection of two and more VT. The scheme of such a device is shown in Fig. 4.

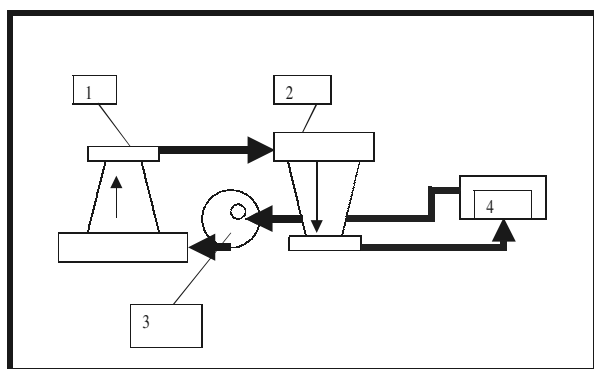


Fig. 4

Where: 1 – the first VT; 2 – the second VT; 3 – circulation pump; 4 – heat exchanger

According to Fig.4, the total energy output of the presented device is:

$$Q=K^2$$

Where: Q is the total output of the device; K is energy conversion coefficient of one VT; 2 – quantity of serially connected VT; P – the assigned power of the circulation pump.

In our earlier article [1], concerning VT application, we supposed that there is a straight transformation of vortex motion of ionized fluid into electric current. Under studying of many articles, devoted to the methods of water ionization, we discovered a significant one. It demonstrates that at the determined temperature, pure water increases its ionization capacity up to 3 orders without changing in the aggregative state [3]. The diagram in Fig.5 shows such dependence.

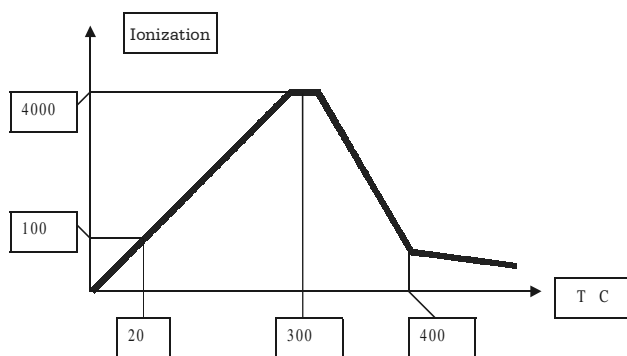


Fig.5
Diagram of the dependence of pure water ionization from temperature

The diagram demonstrates that water at 300°C temperature increase the quantity of ions in 4000 times as compared to 0°C and in 40 times as compared to 20°C. If to take into consideration that first experiments on VHGE modernization help us to find the ways of fluid heating up to the practically any temperature without changing of its phase state, then on using the dependences (see Fig.5) it seems possible to create vortex fluid electric generators of the forward transformation. The aforesaid pneumohydraulic block, which is used for VHGE functioning, allows to keep up water temperature at 300°C and pressure at about 90kg/cm² without threat of water evaporation! Presence of any rotation of fluid medium always causes appearance of two vortex flows. **These flows always move and rotate in opposite directions and if we do not put obstacles for their motion then they transform into each other and can exist without energy supply for an indefinite period of time.**

The presented VT form (see Fig.6) provides the producing of two fluid flows in the tube. These flows do not influence to each other and there is only their reciprocal overflow without disruption of the flows in the central part of VT. The tube presents a tubular body of rotation, which is created by hyperbola. There is positive angular acceleration of fluid in the lower part

of the tube; maximum speed of rotation of the axial and peripheral flows is in the middle part and negative angular acceleration, i.e. deceleration and transfer of kinetic energy into heat energy, is in the upper part of VT.

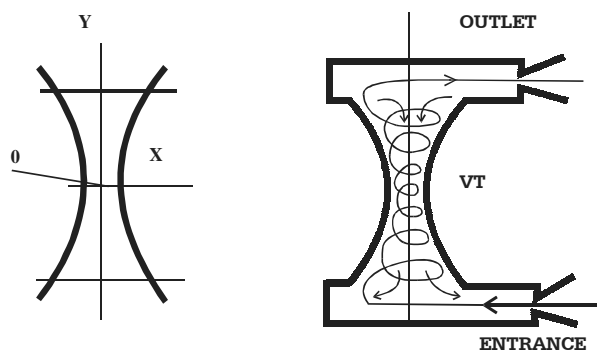


Fig.6

The maximum heating of fluid and its polarization is in the point $Y=0$. The polarization potential in the point can reach 10.000 V at 5m/sec flow speed for 10 cm diameter in the point. The cold flow, which comes along VT axis, is opposite to the peripheral hot flow. These flows close into one system in lower and upper chambers of VT. Thus, the presented VT classically modeled "rolling" and "unrolling" of water area.

There are no single vortices in nature. Two vortices, rotating in opposite directions, always appear while fluid mediums rotation! Science is not still able to describe energy overflows from one vortex center to the center of another one by means of mathematics. However we believe that this moment is close. There are maximum energy transformations of rotating water in the point $Y=0$.

The potential of the inner flow is equal to the outer flow by its value but is opposite by its sign. Potential difference is maximum in the point $Y=0$, in which removal of electric charges is the most effective.

It is appropriate mention here the name of Romanian engineer and researcher Henry Koanda, who in 20th of the last century discovered the so-called "Koanda effect" (attachment of fluid jet to the surface of usual kettle at pouring of it out the cups). Basing on this effect he suggested to make new type of aircrafts, which could have advanced bearing capacity and maneuverability. Unfortunately, money and conservatism of aircraft-industrialists did not allow realization of these engineering solutions.

At the same time, Koanda charged his disciple Patrick Flanagan with the job to research all **water properties**. The result was amazing! It was turned out that water actually has infinitely many phase states and when it is moving, then it can trap energy from the environment by some way. The publications on the point appeared in our press in the early eighties, late nineties of the last century. Most likely, they had become the basis of the invention, made by Potapov, i.e. vortex tubes for water!

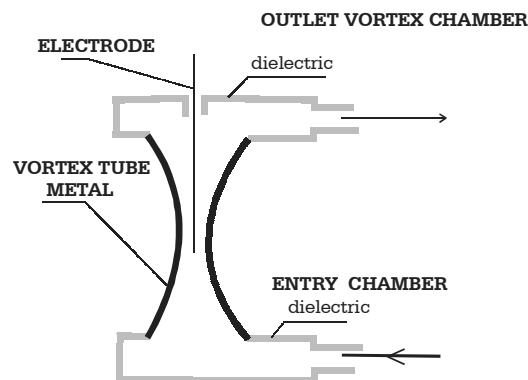


Fig.7
Scheme of vortex electric generator

In the presented scheme of electric generator the entry and outlet vortex chambers are made of dielectric material in the spiral form. This material certainly should withstand not less then 300°C of fluid temperature and about 100kg/sm² of pressure. Fluoroplastic or ceramic can be used as such a material.

From aforesaid it seems to be possible to submit the new scheme of electric generator for readers' consideration (see Fig.8).

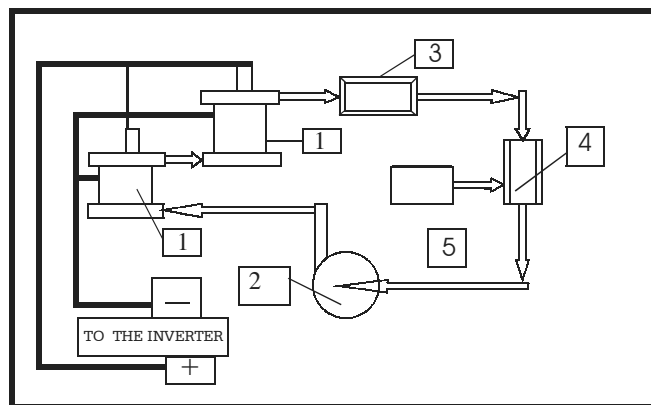


Fig.8
Generalized scheme of vortex electric generator
1 - vortex tubes; 2 - circulation pump; 3 - heat exchanger; 4 - automatic pneumohydraulic block; 5 - compressed-air flask

Actually we could finish the article if it were no disputes about excess energy, which is released at vortex motion of fluid in tubes. Having used a simple experiment, which any inquisitive person can repeat, we found the positive solution (see the scheme of the experiment in Fig. 9).

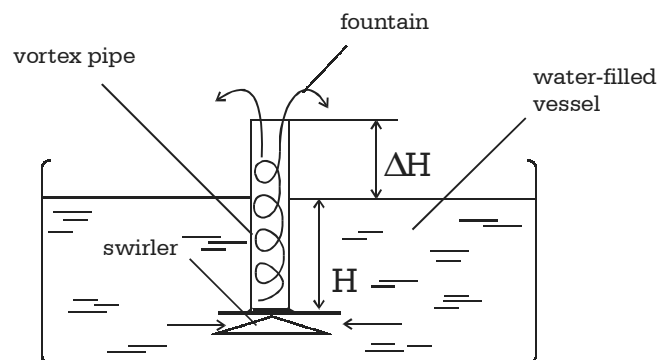


Fig.9
Demonstration of energy increase of fluid, rotating in vortex tube

A pipe with not less than 60 cm length and about 1-inch diameter is placed in a reservoir with not less than 50 cm depth. The lower part of the pipe is formed as an arm circular generator with about 15...17cm diameter. The gap width is about 2 cm. If we place the pipe with closed top end, which then will be open, into the reservoir, then water is splashed out above 20 cm of the reservoir level. Thus at the least 20% energy increase of energy mgH is observed.

By the way, we suggest orthodoxies of physics and other who have doubts to make one more simple experiment. Try to boil water in a can. When water starts to boil, swirl it with a spoon to the right or to the left. Then you will suddenly discover that all water surface is calm and only in the center of the can there is a water-steam mixture, which is about 20% higher than the level of water surface. You will also see that water is absolutely calm at walls of the can. This

experiment can be reproduced anytime and anywhere, even in space, since it is a demonstration of **vortex** fluid motion and its actual influence on everything, which is around!

All presented engineering solutions are practically reproducible in any laboratory. The authors of the article would welcome the opportunity to co-operate with science and industry representatives for realization of the ideas in real serial production devices.

References

1. O.V. Gritskevitch, S.A. Lisnyak, On possibilities of vortex energetics //New Energy Technologies. 2002, #1(4), p.2-3
2. Patent RF #2045715, 1993
3. Chemical and Engineering News. 2000 #1, p.26

Investigation of Electric Energy Transmission Processes in non-Metallic Conducting Channels

D.S. Strebkov, A.I. Nekrasov, S.V. Avraamenko

All-Russian scientific Research Institute of Electrification of Agricultural Economy
2 Vishnyakovsky passage, 1 Moscow, 109456, Russia,
energy@viesh.msk.su



D.S. Strebkov

(Editor's notes by Alexander V. Frolov)

It has been found that at low frequency (1-25 kHz and higher) electric power can be transmitted with low losses from generator to receiver along single channel made of non-metallic conductive media such as water in plastic tube carbon thread, layer of damp soil, ITO films on glass substrate, laser and electronic beams.

Transmitted power, as well as for traditional three phase lines, is limited by natural power of the transmission line and line capacity may reach at high voltage and pulse and operation modes the value 10^9 Wtt.

Introduction

The well-known methods of electric power transmission are based on transmission of active energy by means of conductivity currents in closed circuit. Electromagnetic energy spreads along power transmission lines (PTL) as progressing waves of electromagnetic field or field of charge [1]. Line wires made of aluminum or copper are conductive (guide) channels. Electromagnetic energy stream moves along these channels from generator to energy receiver and backwards to the generator. Maximum transmission possibility of 3-phase PTLs is limited by losses on the line resistance, by peak voltage (which is determined by electric strength of the insulation) and by electromagnetic stability of the line.

The modern approach to provide the electromagnetic stability consists in rigid regulation of line parameters by means of high-speed shunt reactor and consequence capacitive compensation for the purpose to except changes of electromagnetic power flows and to suppress resonant properties of a line [2].

In Tesla works [3] and in the researches of Russian scientists [4] a method of active power transfer was offered. This method supposes to transfer active power by means of electromagnetic capacitive current assisting with resonant properties of a single-wire line (SWL), made of a metal conductor. The purpose of the present work is a research of an opportunity to use non-metal conducting mediums for transmission of electric energy.

A pipe with not less than 60 cm length and about 1-inch diameter is placed in a reservoir with not less than 50 cm depth. The lower part of the pipe is formed as an arm circular generator with about 15...17cm diameter. The gap width is about 2 cm. If we place the pipe with closed top end, which then will be open, into the reservoir, then water is splashed out above 20 cm of the reservoir level. Thus at the least 20% energy increase of energy mgH is observed.

By the way, we suggest orthodoxies of physics and other who have doubts to make one more simple experiment. Try to boil water in a can. When water starts to boil, swirl it with a spoon to the right or to the left. Then you will suddenly discover that all water surface is calm and only in the center of the can there is a water-steam mixture, which is about 20% higher than the level of water surface. You will also see that water is absolutely calm at walls of the can. This

experiment can be reproduced anytime and anywhere, even in space, since it is a demonstration of **vortex** fluid motion and its actual influence on everything, which is around!

All presented engineering solutions are practically reproducible in any laboratory. The authors of the article would welcome the opportunity to co-operate with science and industry representatives for realization of the ideas in real serial production devices.

References

1. O.V. Gritskevitch, S.A. Lisnyak, On possibilities of vortex energetics //New Energy Technologies. 2002, #1(4), p.2-3
2. Patent RF #2045715, 1993
3. Chemical and Engineering News. 2000 #1, p.26

Investigation of Electric Energy Transmission Processes in non-Metallic Conducting Channels

D.S. Strebkov, A.I. Nekrasov, S.V. Avraamenko

All-Russian scientific Research Institute of Electrification of Agricultural Economy
2 Vishnyakovsky passage, 1 Moscow, 109456, Russia,
energy@viesh.msk.su



D.S. Strebkov

(Editor's notes by Alexander V. Frolov)

It has been found that at low frequency (1-25 kHz and higher) electric power can be transmitted with low losses from generator to receiver along single channel made of non-metallic conductive media such as water in plastic tube carbon thread, layer of damp soil, ITO films on glass substrate, laser and electronic beams.

Transmitted power, as well as for traditional three phase lines, is limited by natural power of the transmission line and line capacity may reach at high voltage and pulse and operation modes the value 10^9 Wtt.

Introduction

The well-known methods of electric power transmission are based on transmission of active energy by means of conductivity currents in closed circuit. Electromagnetic energy spreads along power transmission lines (PTL) as progressing waves of electromagnetic field or field of charge [1]. Line wires made of aluminum or copper are conductive (guide) channels. Electromagnetic energy stream moves along these channels from generator to energy receiver and backwards to the generator. Maximum transmission possibility of 3-phase PTLs is limited by losses on the line resistance, by peak voltage (which is determined by electric strength of the insulation) and by electromagnetic stability of the line.

The modern approach to provide the electromagnetic stability consists in rigid regulation of line parameters by means of high-speed shunt reactor and consequence capacitive compensation for the purpose to except changes of electromagnetic power flows and to suppress resonant properties of a line [2].

In Tesla works [3] and in the researches of Russian scientists [4] a method of active power transfer was offered. This method supposes to transfer active power by means of electromagnetic capacitive current assisting with resonant properties of a single-wire line (SWL), made of a metal conductor. The purpose of the present work is a research of an opportunity to use non-metal conducting mediums for transmission of electric energy.

Methods

For realization of the experiments a single-wire energy system (SWES) was used. Its electric circuit is shown in Fig. 1 a,b. SWES consists of the following parts: high-frequency generator (1) of 28V voltage AC and 1 kWtt power; transmitting (2) and receiving (3) Tesla transformer with conductive channel (4) between them; rectifier (5) and electric load (7) as an incandescent lamp or electric motor (220V, 1 kWtt power). High-voltage winding of Tesla transformer is made in the form of cylindrical winding on the ferrite core with 50-100mm in diameter, 4000-6000 turns. The internal end of a high-voltage winding is connected to the conducting channel, and the external end is not connected at all (free end). A low-voltage winding that consists of 40-60 turns provides power supply of Tesla transformer. At the submission of electric power from the high-frequency generator to the winding of power supply zero potential appears on the free end of the high-voltage winding, and voltage with corresponding to the generator 1-25 kHz frequency is formed on the conducting channel. Besides, Tesla transformer as the spiral antenna generates electromagnetic waves of 5-10 cm length, which corresponds to the turn length of a high-voltage winding. Current resonance mode is formed in a supply circuit of Tesla transformer. At the same time, voltage resonance mode (of frequency equal to the generator frequency) is formed both in the reception and transmitting circuit of high-voltage windings and in the conducting channel (1).

The following materials were used as the conducting channels: filled with water or sea water polythene tubes with 10 mm diameter and 1,5 m long; plastic tray with soil layer of 150×10×400mm; film of tin dioxide – indium oxide (ITO) on 0,3 micrometer thick and 300 Ohm resistant glass substrate; graphite thread of 0,1 mm diameter, 500 mm long and with 100 Ohm resistance. For comparison steel and copper wire of 0,1 mm diameter and 5 m long was used also.

The voltage on the conducting channel changed in limits 1-10 kV, generator frequency changed from 1 up to 25 kHz. Voltage, current and capacity were measured on SWES output and on the load by standard electric measurement equipment.

Results and discussion

The replacement of the metal conductive channel to the channel made of non-metallic conductive materials does not effect to any reduction of possibilities of transmitting SWES or heating of a material of conducting channels. The consecutive connection of the channels did not resulted in reduction of transmitted power. Circuits break in the conducting water channel by the creation of an air gap led to the occurrence of arc discharge of reactive capacitor current. However this discharge did not cause increase of water temperature at transmitted power 300 Wtt and voltage 4,5 kV within 1 hour, that confirms the absence of energy losses in the conducting

channel. The increase of water temperature did not result in decrease of transmitted power. Water PH reduction from neutral value up to 4 was detected.

The increase of sea salt concentration in water up to the level of 5-7 g/l did not increase transmitted power in comparison with tap water. However the replacement of tap water to dionized water with 16 MOhm resistances resulted in 100 % decrease of transmitted power.

Thus, it is experimentally shown, that conducting channels, produced from non-metal materials, have quasisuper-conductive properties in SWES at resonant mode. Possible explanation of this effect is the absence of active conduction current in the channel and the dominant role in the process of energy transfer belongs to displacement current, for which Joule Lentz law is not valid [11]. In the supply circuit of Tesla transformer current is practically reactive, and in resonance conditions active values of inductive and capacitive currents are equal. Vectors of these currents are opposite in their phases. Current of the high-frequency converter is spent for losses (component less than 2 %) in supply circuit wires and in the core of Tesla transformer and also for creation of reactive current in the conducting channel. In the mode of voltage resonance we have measured voltage active values of high-voltage inductance windings and conducting channel, interturn capacitance of windings and the capacities of the conducting channel. **We have discovered that they were equal and their phases were opposite to each other.** Losses from transmission of capacitive current through active resistance of the conducting channel are insignificantly small. Corona discharged losses and leakage current could be decreased by isolation of conducting channel. In this case active current and magnetic field of the line are equal to zero. Electric field of the line has maximum value. As well as in usual PTLs, maximum transferred power is limited by charge power of the line. Angle between vectors of voltage is equal to zero in the beginning and at the end of a line. Quality factor of SWES at frequency 5 kHz is in 100 times above than usual PTLs at frequency 50 kHz. In the conditions of resonance it leads to the significant increase of voltage along the conducting channel and it also leads to transmission power.

In usual PTLs voltage changes along the line are insignificant. The angle between vectors of voltage in the beginning and in the end of PTL constitutes the value, which is proportional to the wavelength of line.

On the basis of the researches the methods and devices are offered for transmission of electrical energy through plastic water guide, electro-insulated from ground, through irrigational channels and through isolated pipelines, which are used for gas, oil, hot and cold water transportation. Also the energy can be transferred through fiber-optic cable with conducting film on the surface, through all-carbon composite cable and

through electro-insulated part of a ground and water surface, including highway parts. There are also methods and devices, designed for the following transmissions. These methods can be applied for transfer of power to stationary and mobile units. There are also generated requirements to electrical safety and to restriction of use of drinking and hot water from pipelines, which are under electrical voltage. These requirements and restrictions are generally the grounding of pipeline parts, which are located on certain distance from the generator. This distance is equal to the whole number of half-waves and for it SWES voltage is equal to zero. In the case of a side pipeline it is necessary to ground the parts of the pipeline that are placed on the distance of odd number of quarter-wavelength from the main pipeline. For 5kHz frequency the quarter-wavelength is equal to 15000 m.

N. Tesla grounded one end of high-voltage windings of his transformer on the receiving and on the transmitting end of SWES. Tesla considered this condition as the necessary one for the transfer of power along the Earth. The results of our researchers demonstrate that it is not necessary to use metal self-closed conductor (and current lines in the Earth) for transmission of electric energy on low frequency (1-25 kHz).

For this frequency energy could be transferred from the generator to the receiver if we have single-wire guide system created as non-metal conducting channel. By the similar way electromagnetic energy is transferred by laser beam or microwave-beam. But in our case we can obtain high degree of efficiency that is caused by slight losses on energy absorption and energy emanation. Thus one of the ends of high-voltage winding at the energy generator will have zero potential and remain free. The symmetric end of a high-voltage winding on the reception end should be connected to some natural capacity 6 (Fig. a), which can represent the case of a balloon or frame of a tractor. In our experiments we used metallic safe-box as such natural capacity.

Editor's note: In 1887, October 11, the famous Russian scientist Pavel Yablotchkov got the France Patent #120684, which described the method to increase efficiency of electrical circuit by means of "atmosphere electricity". It was confirmed in many experiments that output power can be twice more than power provided for the circuit from primary electric generator. For that it is necessary to use a single-plate capacitor. The special feature by Yablotchkov, that provides maximum efficiency, is the high degree of air ionization. For this Yablotchkov proposed to use the special capacitor, which consists of a big number of metallic needles. By its view this construction reminds of a hedgehog. Thus we can assumed; that above described natural capacity (balloon or frame of a tractor) serves as a collector of free electrons. By Yablotchkov the efficiency of such systems can be increased by means of maximization of ionization process. It will not lead to the increase of losses if the second end of the high-voltage winding is not grounded.

In the other method of energy transfer, a condenser-diode block 8 was connected to the conducting channel on the receiver end. This block is one of the known circuit of voltage doubling, Fig.1 (b). On the condenser 8 electric energy is transferred through electronic switch 9 to load 7. In this case the entire length of conducting channel 4 and Tesla transformer winding 2 at generator must be equal to odd number of quarter wave-lengths.

Non-metal conducting channel (for instance, fiber-optic or coal-plastic cable) can be used for transfer of electric energy not only along but also as perpendicular to the Earth (for example, to relay aerostat or sounding balloon).

SWES conducting channel can be also created by ionization of air ions with laser beam [13]. Neodymium laser with double frequency and with energy 1 Joule in impulse is able to create 10^{15} cm^{-3} ion concentration in air. This concentration is sufficient for streamer initiation and for transfer of electric energy through the conducting channel. Ionization potential, time of ion existence and of excited molecule state, coefficient of multiquantum absorption, all these determine the limiting length of conducting channel in atmosphere that is equal to 300 km and its wave resistance at 200-400 Ohm. Voltage which is necessary for SWES comes to the quantity 0,5 MV – 15 MV, that depends on the length of a channel.

We suggest to use relativistic electron bunches of high energy as the conducting channel out of the atmosphere. As distinct from laser bunches they do not have divergency. In this connection the Moon or artificial conducting body, where the energy receiver is placed, can be used as natural capacity 6. Whereas energy generator can be installed on the Earth or on its satellite. Transmission range of electric energy is determined by the length of the generated conducting channel. The entire length of the conducting channel in the beginning and in the end must be equal to the whole number of half-waves. Here the length of high-voltage windings of two Tesla transformers must be taken in considerations. Electric energy, transmitting through the conducting channel, can exceed the energy of electron and laser beams generators in 10-100 thousand times. These generators play the role of a directing system (of usual SWEG wires), along which the transfer of electric energy proceeds.

It was offered to use colliding and crossing electron and laser beams with conducting transitional bodies as conducting channels for transfer of energy from the Space to the Earth and back. On the heights up to 30 km compositional coaly and fiber-optic cables can be used. To create the global energy system of the Earth it was also suggested to apply single-wire energy system and conducting layers of the Earth ionosphere as the conducting spherical channel [14].

Thus for electric energy transfer at the frequency 1-25 kHz and higher in the resonance mode a single-wire channel from the following non-metal conducting

mediums can be used: water, damp soil, coal-plastic, oxide film, ionized air channels, that are created by laser beams in the atmosphere, ionosphere conducting layers, and also beams of relativistic electrons out of the atmosphere. These non-metal conducting channels in the resonance mode have negligibly small resistance losses especially if to be compared with metal conductors, which are used in the known non-resonance methods of energy transfer by means of active conduction currents in the closed circuit. Electric energy in the resonance mode can be transferred with small losses from the generator to the receiver along the single-wire channel, made of non-metal conducting materials. The transfer can be realized at the frequency 1-25 kHz and higher, to any distance and to any direction relatively to the Earth. The transmission capacity is limited by charge power of a line as well as in the usual PTL. At high voltage the transmission capacity can reach the quantity from 10 Wtt to 10^9 Wtt in the pulse and streaming modes.

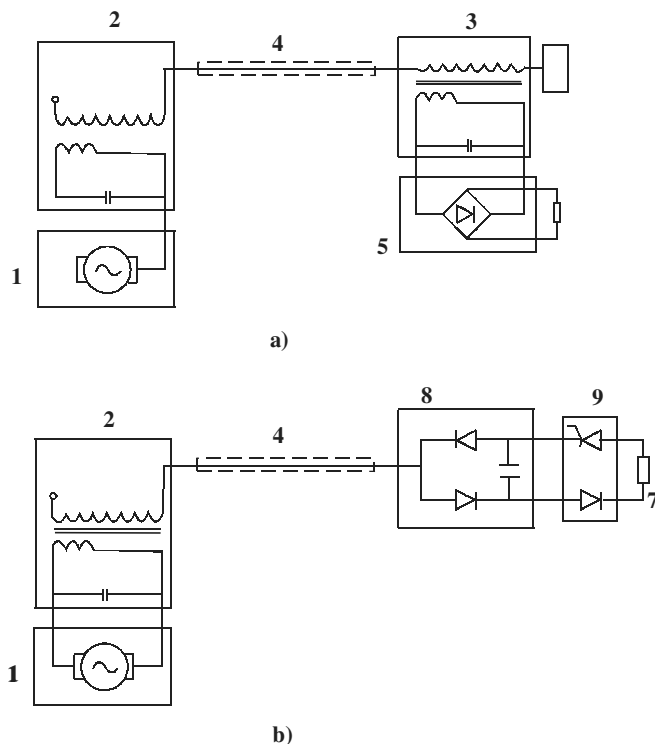


Fig. 1

Electric circuit of single-wire energetic system with non-metal conducting channel

a) SWES with symmetric array of Tesla generators

b) SWES with diode-capacitor block in the end of conducting channel

References

1. A.M.Kalashnikov, Ya.V Stepuk. Bases of radio engineering and radiolocation. Oscillating systems. M: Department of USSR Defense 1965, - p.127-158.

2. G.N.Alexandrov, S.V. Smolovic, Flexible lines for electric energy transmission over long distances. V Symposium "Electrical Engineering-2010", October 12-22, 1999, Moscow Region P, 35-42.
3. N.Tesla Apparatus for transmission of electrical energy. US Pat #349621, 15.05.1900.
4. S.V. Avraamenko Mode of electric devices supply and device for its realization. Pat. RF #210649 11.04.1995. Publ. 10.04.1998. Bulletin #10.
5. D.S.Strebkov, S.V.Avraamenko, A.I. Nekrasov Device for power supply of mobile electrical aggregation. Pat. RF #2158206, 15.04.1999. Publ. 27.10.2000. Bulletin #30.
6. D.S.Strebkov, S.V.Avraamenko, A.I. Nekrasov Mode of supply of electric transport devices and device for its realization. Pat. RF #2136515, 26.08.1998. Publ. 10.09.1999. Bulletin #25.
7. D.S.Strebkov, S.V.Avraamenko, A.I. Nekrasov One-trolley system of power supply of mobile electrical aggregations. Materials of the international scientific and technical conference on automation of agricultural manufacture. Minsk 6-8 July 2000, - p. 65-66.
8. D.S.Strebkov, S.V.Avraamenko, A.I. Nekrasov Research on single-wire system of electric energy transmission. International conference Ecology and agriculture. Technique. - Saint-Petersburg, 2000, - p.50-55.
9. D.S. Strebkov, S.V. Avraamenko, A.I. Nekrasov. Single-wire electric system for renewable-based electric grid. Third European Solar Congress "Eurosun 2000", June 19-22, 2000, Copenhagen, Denmark p., 10.
10. D.S. Strebkov, S.V. Avraamenko, A.I. Nekrasov. SWEPS - a novel electric power transmission technology. Planetary Association for Clean Energy Newsletter, 2001. - vol. 11, - 3, - p. 7-11.
11. I.E. Tamm. Bases of electricity theory. - M.Science, 1976. - p. 133, 397-400.
12. D.S. Strebkov, S.V. Avraamenko, A.I. Nekrasov. Mode and device for electric power transmission. Pat. RF #2172546, 24.01.2000. Publ. 20.08.2001. Bulletin #23.
13. D.S. Strebkov, S.V. Avraamenko, A.I. Nekrasov. Mode and device for electric power transmission. Pat. RF #2143775, 25.03.1999. Publ. 27.12.1999. Bulletin #36.
14. D.S. Strebkov, S.V. Avraamenko, A.I. Nekrasov. Mode and device for electric power transmission. Pat. RF #2161850, 14.07.1999. Publ. 10.01.2001. Bulletin #1.

Microcosm, Universe, Life



Alexey G. Shlienov

Budapeshtskaya, 66-1-77, Saint Petersburg, 192286 Russia



Ernest L. Petrov

Marshala Zaharova, 50-809, Saint Petersburg, 198330 Russia,
Fax.: (812) 587-9349

The authors of this article have prepared the 3rd edition of the book "Microcosm, Universe, Life" and now they are looking for a publisher to edit Russian and English version. In particular, the mechanism of energy transformation in the Universe (Fig.1) is described in the book. Matter radiates energy in the form of photons (as well as neutrinos). In general this energy is observed in the form of Cosmic Microwave Background Radiation (CMBR). Photons and neutrinos transfer the most of energy to de Broglie longitudinal photons. Matter absorbs energy mainly in the form of longitudinal photons. Thus, a cycling process of energy

transformation (as well as matter transformation) occurs in the Stable Universe.

The 3rd edition is devoted to the description of 6 World Systems (Table 1), at that the 6th System is based on Unified Field Theory, which is developed by the authors, and proceeds from the following:

(Editor's: The understanding of the energy transformation mechanism allows to develop new fuel-less energy sources based of mutual transformations: longitudinal photons $\leftrightarrow$ transverse photons).

Table 1

System	Principal Ideas
The 1 st – Geocentric (Ptolemaic system)	Geocentrism and Anthropocentrism
The 2 nd – Classic (Copernicus – Newton's system)	Description of the Universe on basis of Newton's Law of Gravity
The 3 rd – Compromise (Tycho Brahe's system)	The compromises between two first systems
The 4 th – Fractal (Charlie's system)	Non-heterogeneity of Large-Scale distribution of matter in the Universe
The 5 th – Relativistic (Einsteinian system)	Description of the Universe on basis of gravitational field equations. Anthropol principle
The 6 th – based on Unified Field Theory	Electromagnetic nature of all physical interactions. Irreversibility of all elementary micro-processes in combination with circular character of transformations in Large Scale of space ($c/H=R$ order) and time ($t_H=I/H$ order).

1. For theoretical results, which agree with the facts, it is necessary to use assigned inertial system (as Lorentz did), which, as we have known, is connected with CMBR. Obtained by this way decisions can be applied to the other systems, in particular, with use of Lorentz transformation for mass, energy, momentum, time and length.

2. Theory must agree with the whole known collection of facts, starting with such established

empirical generalizations as basic principles of Natural science (Giordano Bruno, Lyell) and conservation laws (Mayer, Joule, Helmholtz, Faraday, Newton, Huygens, Vernadsky).

3. All physical objects could be presented as the systems, consisting of quanta of positive electric charge (protons), quanta of negative electric charge (electrons in fermions or boson states, which are part of neutrons

and atomic nuclei) and quanta of energy, impulse, moment of momentum (apeirons).

4. The leading role in the Universe energetic belongs to de Broglie longitudinal photons (of the first class, i.e. with the spin $I=0$), energy of which is twice as much as apeiron energy and is equal to hH , where h – is Plank's constant, H – is Hubble's constant.

5. Longitudinal photons, polarizable and depolarizable by matter particles, are the carriers of gravitational, magnetostatic and strong interaction. Electromagnetic interaction is carried by photons with spin $I=\pm 1$ and weak interaction is carried by neutrinos and apeirons with spin $I=\pm 0.5$.

6. All elementary microprocesses are irreversible, that correlates with circular character of transformations in Large Scale of space and time.

7. In particular, there is an irreversibility of the process of photons and neutrinos motion. At each segment, equal to the length of de Broglie wave, photons and neutrinos lose energy hH , which is equal to longitudinal photon energy. In such a way, Hubble's law can be presented as the following:

$$\lambda = \lambda_1 \exp\left(\frac{r}{R}\right) = \lambda_1 \exp(Ht),$$

$$Z = \frac{\lambda}{\lambda_1} - 1 = \exp\left(\frac{r}{R}\right) - 1 = \exp(Ht) - 1,$$

where λ, λ_1 – are observable and laboratory wave lengths, r – is distance, R – is radius of gravitation interaction, which is equal to the radius of Metagalaxy, t – is time, Z – is cosmological red shift.

8. As resulted upon this process, the excess of longitudinal photons is absorbed by matter. At that, mass is considered as measure of capacity, which is absorbed by matter in form of longitudinal photons. Thus, energy of the matter should be increased according to the law:

$$E(t) = m_0 c^2 \exp\left(\frac{\varepsilon' t}{c^2}\right) \approx m_0 c^2 + m_0 \varepsilon' t,$$

at that,

$$\frac{\varepsilon'}{c^2} = \frac{H}{137^2},$$

where ε' – is the capacity, which is absorbed by unit mass in form of longitudinal photons, c – is velocity of light. In particular, electron of the 1st Bohr orbit in hydrogen atom (i.e. in this case at de Broglie wave length) absorbs energy hH at 1 period.

9. Being in ionization state, intergalactic matter is the general portion of average density of matter in the Universe ρ_{av} , besides, the average value of absolute velocity of baryon component is close to $c/137$. Let's consider this correlation to be exactly executed.

CMBR is the most powerful cosmic radiation. Its specter is close to that one of black body at temperature

$T_F=2.726K$, i.e. its spectral density is maximal at frequency $\nu=160GHz$. Cosmological red shift causes the increase of spectral density in radio-region ($\nu<160GHz$) and the decrease of it in microwave region ($\nu>160GHz$). Each of these processes is compensated by the inverse Compton effect, i.e. by the dispersion of radio-photons at matter corpuscle, first of all at protons. Calculations demonstrate, that average energy of absorbent radio-photons is equal to $0.45 \cdot 10^{-15} \text{erg}$ ($\nu=68GHz$) and average energy of radiated microwave photons is equal to $2.17 \cdot 10^{-15} \text{erg}$ ($\nu=330GHz$). There is one re-radiated microwave photon per one absorbed radio-photon. At that, the concentration of photons and CMBR spectrum remain unchangeable. Syunyaev and Zeldovich concerned the close inverse Compton-effect of CMBR dispersion on electrons in clusters of galaxies. Actually such an effect was discovered in 2 clusters of galaxies.

Thus, on transferring of energy to photons, matter corpuscles must fill the deficiency of energy by receiving it from longitudinal photons. In fact, there are observed demonstrations of longitudinal photons, they are "static fields". In this case it is a cosmic magnetic field, which accelerates charged particles of matter (Alfven). More detailed consideration let us to find a virial correlation between 4 main components of energy density:

$$\frac{\rho_{av} c^2}{137^2} = E_F = 2E_M = 2E_{kin},$$

where $\rho_{av} c^2$ – is an energy equivalent of mass density of matter; E_F – is energy density of CMBR; E_M – is average energy density of magnetic field; E_{kin} – is average density of kinetic energy. Thus, some kinds of energy circularly transfer to another, which are interrelated (Fig. 1).

$$\frac{\varepsilon_{av} \rho_{av} V}{1.26} = E_F HV = 2E_M HV = 2E_{kin} HV =$$

$$= \frac{(\varepsilon_{av} - \varepsilon') \rho_{av} V}{0.26} = \varepsilon' \rho_{av} V,$$

where ε_{av} – is average capacity, radiated by unit mass in form of photons; V – is volume of 10^{81}cm^3 order, according to which the averaging is made.

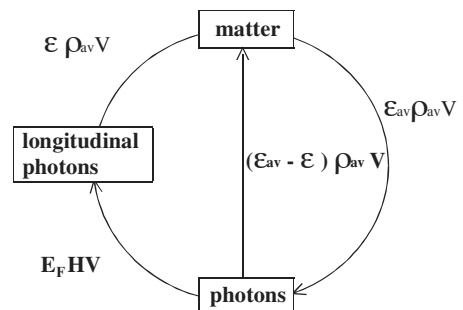


Fig.1

Energy transformation in Large Scale $\varepsilon_{av}=0.0942 \text{erg gr}^{-1}\text{sec}^{-1}$ – is average energy, which matter unit radiates in unit time; $\varepsilon'=0.07476 \text{erg gr}^{-1}\text{sec}^{-1}$ – is energy, which matter unit absorbs in form of de Broglie longitudinal photons in unit time; $\rho_{av}=0.8730 \cdot 10^{-29} \text{gr cm}^{-3}$ – is average matter density in the Universe; $E_F=4.18 \cdot 10^{-13} \text{erg cm}^{-3}$ – is energy density of cosmic microwave background radiation (CMBR); $V \approx 10^{81} \text{cm}^3$ – is volume at which the averaging is made; $H=1.562 \cdot 10^{-18} \text{Hertz}$.

10. These correlations include pressures, densities and temperature T_F , i.e. we have the equation of the state of intergalactic matter, and thus of Metagalaxy and the Universe. Let us present this equation in simple form:

$$E_F = \frac{\varepsilon' \rho_{av} R}{c} \approx \frac{\varepsilon_{av} \rho_{av} R}{c}$$

and let us compare it with correlation for density of radiant energy on surface of a star * or of star system

$$E_* = \frac{\varepsilon_* \rho_* R_*}{3c} \approx \frac{\varepsilon_* \rho_* R_*}{c}.$$

It is an especially amazing analogy between Metagalaxy (and the Universe) and large-scale cosmic system g , for which

$$E_g \approx \frac{\varepsilon_g \rho_g R_g}{c},$$

at that $E_g \approx E_F$, $\varepsilon_g \approx \varepsilon_{av} \approx \varepsilon'$.

This equation agrees with the whole observed data of globular clusters, galaxies, groups and clusters of galaxies, in particular, with empirical correlations, which are magnitude - angular diameter.

11. The stated approach lets to determine the values of many fundamental constants by different ways. As a case in point, the results of definite values ε_{av} and ε' , erg $g^{-1} c^{-1}$ are presented in the Table 2.

Table 2

#	Data	ε_{av}	ε'
1.	The boarder between two parts of the Main Sequence of stars	of 0.1 order	of 0.1 order
2.	The results of recalculation of observed star characteristics as respects to their centers	of 0.1 order	of 0.1 order
3.	The local minimum of star luminosity function near the Sun (according to G.A. Starikova's data)	of 0.1 order	of 0.1 order
4.	The correlation: mass - luminosity of white dwarf stars	of 0.1 order	of 0.1 order
5.	The correlation: mass - luminosity of neutron stars	of 0.1 order	of 0.1 order
6.	The correlation: mass - luminosity of globular clusters	less than 0.5	less than 0.5
7.	The correlation: mass - luminosity of elliptic galaxies	more than 0.06	more than 0.06
8.	The correlation: mass - luminosity of spiral galaxies and irregular galaxies <i>Ir I</i>	less than 0.5	less than 0.5
9.	The correlation: mass - luminosity of galaxies as a whole	of 0.1 order	of 0.1 order
10.	The correlation: mass - luminosity of clusters of galaxies	of 0.1 order	of 0.1 order
11.	Empiric values of H , ρ_{av} , E_F constants	of 0.1 order	of 0.1 order
12.	The most exact values of h , e , G , E_F constants	0.0942	0.07476

12. Uncontradictory description of Microcosm and the Universe promotes the better understanding of Life, which is inseparably unified with them. The statistical data manipulation of more than 100 catalogues of microphysics and cosmic objects let us to get more than 1000 empirical correlations and diagrams, and to determine, that they agree with theoretical correlations, which were received according to the ideas on circular character of energy transformations (Fig. 1) and of matter in the Universe.

The Russian edition of the book is mailed out: the 1st edition (1995) at the cost of \$3; the 2nd edition (1998) at the cost of \$6.

The authors are thankful for valuable discussions to Yaroslav G. Klyushin and to Alexander V. Frolov.

HYPOTHESIS OF A THEORY OF EVERYTHING

Jack P. Gibson

www.crikcriter@infoave.net

This work grew out of an interest in curious occurrences, physical, mathematical and metaphysical. Many things just do not fit normal knowledge or are of unknown origin. Items such as gravity, time, mathematical equations of higher order, ghosts, e.s.p., etc. After a number of years, the problem began to appear to be not of this physical dimension but of a grander scale. A multi-dimensional space-time format seems to offer solutions to understanding most of the problems. In the following hypothesis all known physics and mathematics are considered to be valid. Metaphysical aspects, while not accounted for by physics and mathematics, are considered to be present in nature, either real or as a defect in physical processes, simply because they are experienced by so many people. The hypothesis will be kept simple because the details require the work of many specialists beyond my abilities and there is an endless list of speculative problems to which the hypothesis could be applied. To save time and distractions to the reader the following is stated as fact, knowing full well it may not be so, in order to present the most concise statement of the hypothesis.

The Universe, from the smallest to largest unit, is a quantum probability based fractal illusion. All matter exists in three-dimensional space, both internal and external. Any grouping can be considered a fractal space. It is both real and imaginary at the same time acting according to Eulers equation:

$$(e^{i\pi}) + 1 = 0$$

more useful in this instance is the general form:

$$e^{ix} = -1 = \cos x + i \sin x = -\tan 45 \text{ deg}$$

which allows use of a variable where π , a constant, is used in the original. The key to understanding of multi-dimensional space time is the realization that π is a variable! As we know π is the lock on three-dimensional space. Because of its mathematical nature it can neither grow nor diminish, thereby locking in the three dimensional form of the fractal unit under consideration. Such a fractal unit is considered to be at rest. But Einstein's equation $E=mc^2$ includes speed or movement. When objects are moving relative to a fixed point, the moving object is foreshortened in the direction of movement. A circle becomes an ellipse and π becomes indeterminate letting the circumference fluctuate, according to its relative speed, between two and π in a circle of unit diameter. If one goes beyond the value π the Universe grows out of bounds without

limit becoming unstable. If the value goes below two then the Universe blinks out. I.e., one has exceeded the value of the constant c . Since all matter moves relative to a fixed fractal point and there are infinitely many points in the Universe of constantly changing velocities, the Universe is constantly adjusting its reality to the relative speeds of its components. Thus you get at times some weird things. Since not only time changes but the structure and observable mass also, one finds such things a matter appearing and disappearing as the small units of chaos move through the Universe. Changes in the local probability structure cause matter or reality to change in the image structure of the Universe.

To delve further into the aspects of what is happening, let us consider the following. Einstein's familiar formula gives the relationships for our three-dimensional fractal space. The inverse of the formula gives the speed with which any fractal space can change, including the Universe. There is both a positive and negative component to the change. If we consider our fractal space to be positive then we may consider any other point to be negative. There are an infinite number of such points and while the effect on our space may be small from any one point; the effect adds up. Any moving or changing of mass must effect the entire Universe. Mass and inertia are tied together in such a system. Measured mass is the attempt of the mass to return to zero relative speed in its associated fractal space according to the laws of physics, i.e. return to its lowest energy state. Inertia is the same effect of the changing state of the mass from one-dimensional state to another. Both are the result of efforts to change the dimensional state of mass. The positive aspect of the square root of the ratio of energy/mass is the view we behold from our position in space while the negative is the view from the opposite position.

In addition to the view of the Universe as being made up as fractal space, all moving at different relative speeds to any other fractal space, one must consider the make up of space having at the same time dimensional space, according to Euler's formula given above. There are at any moment an infinite number of spatial dimensions, defined by the relative speed of the fractal units involved, extending throughout the Universe. Each fractal unit is constantly changing its position in dimensional space. There are thus constantly changing energy states throughout the Universe both in relative position in real space and in dimensional space. While on one hand the distances across the Universe are immense in relative space, many points across the Universe are present in the same dimension at the same moment, possibly allowing for instance travel across space without the time penalty. This results in what might be considered a tuned circuit for the Universe or its components.

If we consider the structure of the relative Universe to be stored energy analogous to magnetic fields and the dimensional fields to be capacitive, then we can plot the results on a conventional two-dimensional chart

where x is the horizontal axis and the vertical is the imaginary axis. A well-known construction in electrical physics and which is known to very often follow relativity closely. That throws the negative side of i into the second quadrant and the positive into the fourth quadrant, if we consider the Universe to be reflective and x to be negative when i is positive. Euler's equation does not reflect a totally positive or negative result. One wonders at this point as to other equations where unity is set to one or higher dimensional equations where the three dimensional components are factored out leaving another component. The fourth is considered to be time but how do the remaining fit into a Universe as this hypothesis describes? The line of thought can be followed further into electrical analogy, which I leave to the reader. The important result is that there should be a resultant Q , figure of merit, of the Universe resulting in nodes, or peaks, of probability. The resultant tuned frequencies of the Universe can be calculated from known factors of the Universe. Such an effect should show nodes of reality where matter occurs.

Properly applied the above hypothesis gives speculative answers to most of the problems facing science today. Questions such as:

Is the Universe open or closed?

Both. At each fractal component of the Universe there is a separate universe each reaching limits beyond which it cannot exist. At the same time there is somewhere a top Universe that must ever remain open.

What is the structure of time?

Time results from the ever changing fractal Universe and goes forward because all justification of the Universe causes a corresponding change in reality. Time moves slower at higher relative speeds and as all time is perceived to be slower in other fractal units, changes in our time are perceived to always go forward.

What are such phenomena as ghosts, spirits, apparitions, etc?

Events such as these are fragments of probability left behind due to sudden changes in the probability of the illusion we perceive to be reality. Having little energy they are perceived but are not able to interact with the more forceful real reality. They float free in probability space interacting at random intervals with the more forceful realities of the real world.

Where is the missing matter of the Universe?

There may be clouds of matter floating about in deep space, however, most of the approximately 90% of matter missing will be found in the layers of dimensions making up space and which, though interacting, do not appear in our reality. Calculations show only about ten dimensions are active in any one reality. The rest curl up in a ball or knot. While an essential part of space or reality they are not perceivable from the fractal Universe of which they are a part.

Parapsychology?

Events of this type can be attributed to interconnections on the dimensional, or imaginary, level where there can be interactions between fractal units though not directly associated with each other in relative space. The manifestation varies or is temporary due to the constantly changing and adjusting due to interactions of the probabilities of the Universe. Due to the innate probabilities of each individual, one may be more susceptible or sensitive than other individuals.

Bible, prophecies, angels, demons, aliens, etc.

If one takes the Bible at face value, with some leeway for its age and many translations, it pretty well describes what it purports to describe. Historic predictions and conditions of today. If we assume this hypothesis has any value then the passage in which God says "Let us make man in our image." takes on new meaning. If we assume the probability basis of the Universe and the constant changing due to justification of reality and time then the miracles listed do not seem so in violation of the physical world. The miracles only require some ability to control reality. Certainly well within the providence of a creator. It speaks of heavenly beings capable of traveling through the Universe in real time and some who interfered with mankind on the Earth and that they are still doing so today. If this hypothesis is correct then it is readily seen how such events could occur. Creation events closely compare with the way today's computers are made and organized. If man can do it, why could not the original creator? If one ignores a creator, then one is hard pressed for an answer as to how the Universe was created.

UFOs

If one accepts any part of the above then the functioning of UFOs begins to be understandable. They move through space by making spatial jumps through fractal nodes. Their appearing around magnetic and electrical sources maybe due to some, on our part unrealized, easy entry and exit to other space at those points. They are able to make right angle turns at high speeds because the speed is only from our viewpoint. From the viewpoint of the craft it is simply changing locations in space. The turning on edge may be only a different orientation of space at that point.

Particles "Out of the Vacuum"

As we shoot atomic matter at higher and higher speeds into nuclei we are able to fracture the construction of the building blocks of matter. The high speed fractal construction of probabilities of the unit used smashes into the target with enough speed to mix the probabilities resulting in new nodes from the total probabilities present. Various probabilities are ejected resulting in short lived particles in unstable nodes. At times fragments of probabilities appear out of nowhere as they form up to combine into larger nodes. Travel distance and speed observed may give a clue to the basic frequency of the Universe.

Black Holes

The midpoint of the tuned circuit of the relative structure and dimensional structure of the Universe. As matter spirals in, from the relative structure, to be torn apart into its basic probabilities it passes through to the dimensional structure of space which holds 90% of the matter. There it is available for recollection and use by the relative space.

Probability. Basic structure of the energy of space.

Everything operates at random but within preferred patterns set by the frequencies involved. If you look long enough anything can be found. As a result we find odd bones of prehistoric creatures that may have never existed. Weird things can happen. Odd pieces of structure can occur such as metaphysical events. The Q of space is sometimes sharp and sometimes rounded, spreading out to include things not really meant to be in the overall scheme of the Universe. Christ said "If you had the faith of a mustard seed, you could say to the mountain move and the mountain would move". (For those not of the Christian faith, this may be considered not as any proof but as a representative statement of the meaning of this paragraph.) That is in keeping with the quantum statements that nothing exists until it is seen and that we have some control over the probabilities. If the structure of space is based on probability then the next important question is 'What is a probability'. We look to probability as a simple mathematical work. But, what makes probability work?

.....



JACK P. GIBSON

About the Author:

EDUCATION: University of North Carolina at Raleigh (Nuclear & Electrical Engineering), Air University, Gunter Air Force Base (Radio Fundamentals, Motorized Equipment) Western Electric Co Engineering Center

The entire Universe is based on mathematics but we have no idea what is underneath the mathematics. Are dimensional planes perhaps better represented by other number bases? Are some of the unsolvable mathematical problems solvable in other number bases?

Gravity

All forces in the Universe are the same. Gravity happens to be the one that works on our fractal space. Others, molecular, atomic, and nuclear are the same but work in different fractal space. All are the result of matter trying to reach its lowest potential.

The above are only random questions chosen without any order. Most other problems can in some way be answered in line with the hypothesis, if not in detail. Too many questions can be fitted to the hypothesis not to take a serious look at it even though it may seem a little far out. The number of answers from one simple statement of the structure of the Universe defends the idea better than details.

One possible proof, and a relatively simple one, occurs to mind. Einstein's theory of relativity was proved when NASA flew a clock in space and then determined that time did slow down. To test the above hypothesis I would like to see four clocks used in the following manner.

Four atomic clocks in sets of two each. Two to be left on the Earth and two to be placed in space for an appropriate time. At the end of that time one of the clocks on the Earth to be taken into space and compared to the two already in space. Bring one of the clocks in space down to the Earth and compare to the clock left on the Earth.

The clock taken to space should read slower compared to the clocks in space because the ones in space were at rest compared to the one on the Earth.

The clock brought back from space should read slower, the same as the first one flown by NASA, because the clock on the Earth was at rest compared with the one in space.

The two clocks left in space should be returned after an appropriate time and compared to the ones on the Earth. The original in space should now be slower than the original on the Earth and its mate from space. The fourth clock is unpredictable.

The author apologizes for any errors in theory, mathematics, etc. There was no one to consult on the hypothesis which is an original work of my own and drawn on many references of others from the past. If it has any value I am indebted to the work of all the others whose work I relied on. Any errors are entirely my own and not attributable to others. This work is freely published in the public domain to be used by any and all who wish to do so. It is not to be copyrighted or patented in any manner so as to restrict others rights to the hypothesis or its use.

The Charge and Mass of a Photon

Dzabrail Kh. Baziev

Sirenevsky blv., 65 building 4, apt.55
105484, Moscow, Russia
(095) 461-9398, (866-22)-5-10-11

Abstract

The discovery of true elementary particle named **electrino**, which has a constant mass and constant positive charge and which is a material carrier of magnetic field, electric current and all kinds of emanation, was firstly practically applied at the modernization of wireless telephone. In the review V. Anpilogov writes: "The question on the influence of low intensity microwave radiation on human health still remains open for discussion for more than 50 years" [3]. Discussion on this question has been already inappropriate still it was definitely proved in the patent application "Device, which is made to put away the charged particles flux from the head of the user of mobile wireless phone". During the talk on mobile wirelessphone $2,6 \cdot 10^{22}$ particle/sec pass through user's brain, whereas their energy is $7,65 \cdot 10^{-19}$ Joule, and the energy of binding of molecules in protein polymers ranges at $4,3-7,6 \cdot 10^{-19}$ Joule according to L. Poling. From that we can conclude that microwave radiation of the radiotelephone with top antenna leads to the destruction of user's brain tissue. The author of the patent application D. Baziev (#2001105456, 28.02.01. in Russia and #PCT/RU02/00054 of the international application) offers to fix the antenna on the low part of the radiotelephone and to produce radiotelephones with minimal length within 10 cm. In this case the diagram of the directional radiation pattern is on the level of the user's chin and the brain is out of the direct exposure area. This harmless of the microwave radiation could not be proved before the discovery of "electrino".

Introduction

A systems analysis of all experimental and observation material gathered in physics, astronomy, and astrophysics from the times of Galileo let us reveal the following:

1. Experimental materials do not agree with the existing physical theory.
2. There is a certain fundamental disadvantage of the experimental material, which prevents to build a consistent theory.
3. This fundamental disadvantage consists in the absence of a charge antipode of electron, which is in the form of a true elementary particle with a positive charge and finite mass.
4. The proton and positron are not true elementary particles and neither of them can be a charge antipode of the electron because they are subjected to splitting.

5. Discovery of the second true elementary particle with a positive charge could restore the charge symmetry in physics, thus leading to a radical revision of the existing theoretical physics and resolving its current crisis state.

Searching for this particle required to ascertain physical nature of Planck's constant. This became possible only after the structure of a light beam had been understood. Namely, it was the photon sector velocity, known as Millikan constant μ , rather than the speed of light c , that proved to be a constant, viz.:

$$\mu = \lambda_i^2 \nu_i = 119.916984 \text{ m}^2/\text{s} = \text{constant}, \quad (1)$$

where λ_i and ν_i are the wavelength and frequency of the *ion* monochromatic beam in the light beam.

This new quantity elucidated the physical nature of Planck's constant:

$$\begin{aligned} h &= m_e \mu \frac{\sqrt[3]{4\pi/3}}{2} = \\ &= 6.6262681 \cdot 10^{-34} \text{ kg m}^2/\text{s} = \text{constant}, \end{aligned} \quad (2)$$

where m_e is the mass of the second (after electron) true elementary particle to be called "electrino". From this expression we have

$$\begin{aligned} m_e &= \frac{2h}{\mu \sqrt[3]{4\pi/3}} = \\ &= 6.85575729963 \cdot 10^{-36} \text{ kg} = \text{constant}. \end{aligned} \quad (3)$$

The electrino has a positive charge ε determined by

$$\begin{aligned} \varepsilon &= \frac{m_e n_e e}{m_u - n_e m_e} = \frac{-3.229526609098 \cdot 10^{-54}}{1.6578584539 \cdot 10^{-27}} = \\ &= 1.98764431671 \cdot 10^{-27} \text{ C}, \end{aligned} \quad (4)$$

where $m_u = 1.66057 \times 10^{-27} \text{ kg}$ is the mass of an elementary atom accepted as a mass equivalent of one atomic unit; $n_e = 3$ is the number of electrons in one elementary atom; $e = 1.6021892 \times 10^{-19} \text{ C}$ is the charge of an electron; $m_e = 9.038487 \times 10^{-31} \text{ kg}$ is an improved value of electron mass; $n_e = 2.418198867 \times 10^8$ is the number of electrinos in an elementary atom.

Thus, it is obvious that Planck's constant is the angular momentum of the electrino. Moreover, it was Planck's constant that concealed the second true elementary particle, which is the charge antipode of the electron discovered by J.J. Thompson as far back as in 1897.

The solution of Planck's constant has become a basis for the synthesis of the new theory of physics [1]. This theory in particular shows that the electrino is the carrier of the magnetic field and electrical current. It is a photon of radiation of all ranges, and serves as a universal carrier of energy and information. The electrino plays the role of a neutrino in moving along the first order trajectories.

The first experiment

An extraordinary importance and novelty of the new theory required **an experimental proof of the electrino**. For that several experiments were made in the Institute of General and Inorganic Chemistry, Moscow. The experiment was based on the following effects predicted by the theory.

1. If assume that electrino exists and that light beam is a flux of particles having positive charge and finite mass [1] we can conclude the following. At the discharge of the dc source through an incandescent lamp in which the current is converted to light and irreversibly emitted, the source weight in charged state must differ from its weight in discharged state. If we prove this difference experimentally we may say that light does consist of material particles of finite mass and a dc charge carried away by light is positive because an incandescent lamp ($W=15\text{ Wtt}$) does not emit electrons, which are the carriers of negative charge.
2. The second effect to prove was that the weight of a discharging dc source is *increasing* whereas its weight when charged is *decreasing*.

To prove the validity of these predictions, several sealed containers with different dc sources inside were fabricated. The electrodes were brought out through glass insulators. The batteries were discharged through an electric lamp radiating in the visual and infrared ranges. The weight of containers was measured before and after discharge process with accuracy $\Delta W = \pm 0,02\text{ mg}$; balance error was equal to $\Delta = \pm 0,05\text{ mg}$ the standard deviation of the measurements was within $\sigma = \pm 0,03\text{ mg}$; the buoyancy was calculated for each measurement of weight. In this paper, we present test results of only one container with four generally marketed GP rechargeable cells connected in series. The total battery voltage reached 5400 mV at 6000 mA/h charge capacity. The discharge was interrupted when the voltage dropped to 4000 mV, the duration of the discharge was measured accurate to one second. Two series of experiments were run: one in air, the other, under argon. Each series had ten charge-discharge cycles (Table 1 and Fig. 1). The total amount of the experiments and detailed discussion of results have been summarized in a recently published brochure [2].

The results of the above tests allow us to make the following conclusions:

1. Both galvanic and rechargeable cells during a discharge through an electric lamp show sufficient changes in their weight and charge thus proving that photons have a finite mass and a positive electric charge.
2. A new elementary particle, named electrino, derived from Planck's constant in August 1982, and published in May 1994, thus gets a complete and absolute experimental confirmation.

The second experiment

One of the concepts of the new theory is that the speed of light in vacuum is a function of photon frequency along the beam axis, according to the proportions:

$$c_i = \sqrt{\mu v_i} \quad [\text{m/s}], \quad (5)$$

$$v_i = \mu / \lambda_i^2 \quad [\text{s}^{-1}]. \quad (6)$$

According to the new theory, for the velocity of monochromatic light (solar light or mercury-discharge lamp, but not a laser) with a wavelength of $\lambda_r = 6.8 \times 10^{-7}\text{ m}$ (mid-point of the red spectral line), we have

$$v_r = \mu / \lambda_r^2 = 2.59336038 \cdot 10^{14} \text{ s}^{-1}, \quad (7)$$

$$c_r = \sqrt{\mu v_r} = 1.76348505882 \cdot 10^8 \text{ m/s}, \quad (8)$$

which is 58.823% of the speed $c_v = 2.9979246 \times 10^8 \text{ m/s}$ of a violet beam with a wavelength of $4 \times 10^{-7}\text{ m}$.

We have to account that, according to this theory, the laser beam is not a true light beam though it is created of electrinos. The speed of laser beam is equal to the speed of beam plus the speed of current in the conductor, viz.,

$$v_0 = 2.8992629 \cdot 10^8 \text{ m/s} = \text{const} \quad (9)$$

If we select a monochromatic beam of ultra-violet light with a wavelength of $\lambda_1 = 4 \cdot 10^{-8}\text{ m}$ then its velocity will be $c_1 = 10\text{ C}$:

$$c_1 = \mu / \lambda_1 = \frac{119,916984 \text{ m}^2 / \text{sec}}{4 \cdot 10^{-8} \text{ m}} = 2,9979246 \cdot 10^9 \text{ m/sec}$$

$$v_1 = \mu / \lambda_1^2 = \mu / 16 \cdot 10^{-16} \text{ m}^2 = 7,4948115 \cdot 10^{16} \text{ sec}^{-1}$$

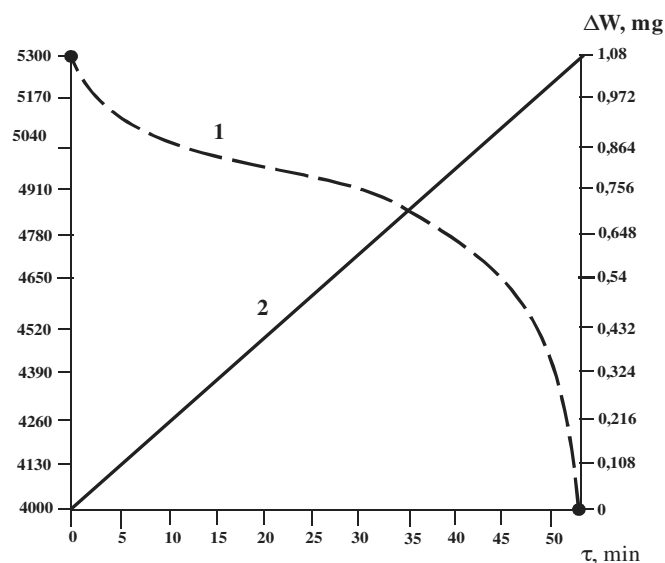


Fig. 1

Voltage drop [mV] of a battery and (2) weight increment [mg] of container #6 in an argon atmosphere during the second discharge cycle [minutes]. X-direction – is spark duration in minutes; Y-direction – is voltage of a battery; auxiliary Y-direction – is weight incensement (mg).

$$c_1 = \sqrt{\mu \cdot v_1} = \sqrt{8,987551907 \cdot 10^{18} m^2 / c^2} = 2,9979246 \cdot 10^9 m / sec$$

This experiment has been run yet, and it is offered for experimental verification with further publication of experimental results.

Table 1

Weight of container #6 (under argon) in charge-discharge experiments

Run	Measured value $W \pm \sigma$, mg	Charged battery		Discharged battery			Charge weight $\Delta W_z = W_1 - W_0$, mg
		Buoyancy Gmg	Real weight $W_0 = W + G$	Measured value $W \pm \sigma$, mg	Buoyancy Gmg	Real weight $W_1 = W + G$	
1	126825.13±0,02	85.031	126910.166 ±0.02	126825.901 ±0.01	85.002	12691.903 ±0.01	0.737
2	126825.107±0.02	86.572	126911.679 ±0.02	126826.221 ±0.01	86.538	126912.759 ±0.01	1.080
3	126825.21±0.01	86.782	126911.992 ±0.01	126826.279 ±0.01	86.560	126912.839 ±0.01	0.847
4	126825.187±0.01	86.563	126911.749 ±0.01	126826.493 ±0.02	86.385	126912.878 ±0.02	1.128
5	126825.65±0,04	86.290	126911.941 ±0.04	126826.65 ±0.01	85.836	126912.941 ±0.04	0.770
6	126827.28±0.00	85.187	126912.467 ±0.00	126827.990 ±0.01	85.204	126913.194 ±0.01	0.727
7	---	---	---	---	---	---	---
8	126826.98±0.00	86.182	126913.162 ±0.00	126827.897 ±0.02	86.308	126914.205 ±0.02	1.042
9	126826.95±0.00	86.307	126913.257 ±0.00	126827.757 ±0.01	86.402	126914.159 ±0.01	0.902
10	126827.25±0.00	86.294	126913.544 ±0.00	126828.35 ±0.00	85.729	126914.079 ±0.00	0.535

References

1. D.K. Basiev, Osnovy obyedinyonnoy teorii fiziki (Foundations of Unified Theory of Physics), Pedagogika, Moscow, 1994
2. D.K. Basiev, Zaryad i massa fotona (The charge and mass of a photon), Pedagogika, Moscow, 2001
3. V.P. Anpilgov, "The century of quality", #3, 2001, p.60

About the Author



When a child Dzabrail Kh. Baziev became a political exile along with all Balkarian people; in 1956 he was rehabilitated and in 1957 graduated from the secondary school with steady purpose to become an outstanding chemist. His first higher education is biological and chemical (two-profile department of Kabardino-Balkarian State University). In 1965 Baziev also completed his post-graduate study in Biological Department of Moscow State University.

At 1979 Dz.Kh. Baziev had published 25 scientific articles on ornithology and ecology, however, this period became a sudden turn in his scientific work. In order to elaborate the basis of theoretical biology, he came to the conclusion that biological process could not be described without understanding of its physical essence. On the other hand, it had become evident that there was no any solution for physical phenomenon, which is the basis of biological process.

In 1983 the scientist gave descriptions of his first fundamental discoveries. He found the solution of the physical essence of Plank's constant and pioneered the use of it in gases analysis. It was a revolutionary step in science since the synthesis of science was realized at the fundamental level for the first time.

As the result of this considerable work there was a new interdisciplinary theory of physics. The author created new thermodynamics of real gases and new electrodynamics, which differs from maxwellian one and it considers *electrino* as the carrier of magnetic field and electric current.

Dzabrail Kh. Baziev has succeeded in the systematic analysis of the vast experimental material and discovered that ***electrino*, as the true elementary particle with positive charge, is able to provide the connection of physics with biology, chemistry and other parts of the fundamental science. Thus it leads us to the radical reconsideration of all conceptions, existing in natural science.**

The Homopolar Motor: A True Relativistic Engine

Jorge Guala-Valverde

Norpatagonica-R&D Dept. S.Fe 449 Neuquen, Argentina
Q8300BG1, Confluencia Tech University Neuquen, Argentina
gual@ieee.org

Pedro Mazzoni

Fundación Julio Palacios Neuquen, Argentina
fundacionjulioalacios@usa.net

Ricardo Achilles

Confluencia Tech University Neuquen, Argentina,
RA Biosystems Neuquen, Argentina
achilles@ieee.org

This article discusses experiments, which enable the identification of the seat of mechanical forces in homopolar-machines. Authors provide a suitable variation on a recent work "The Unipolar Dynamotor: A Genuine Relational Engine" [3], where "relational" implies "absolutely relativistic". The authors' view agrees with both Weber's recognition in the 19th century of the importance of relative motion in electromagnetic phenomena [4] and Einstein's 1905 statement concerning electromagnetism [5].

The Faraday disk: a reversible engine

The essential components of the homopolar machine, first conceived by Faraday in 1832, are shown in Figure 1. A conducting disk, free to rotate in the neighborhood of a permanent magnet, is attached to the end of a shaft. A closing wire provides a conducting path between two arbitrary points of the disk. Such a device exhibits *reversible* behavior.

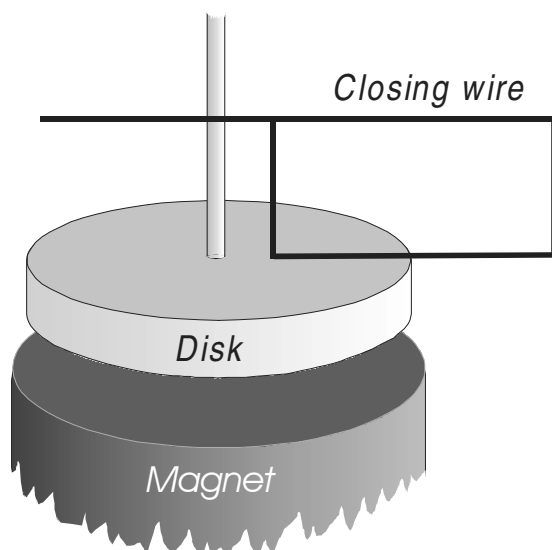


Fig.1

Faraday's setup magnet, disk and closing wire

A radial current path of length L takes place in a region of the disk when direct current (dc) from an external source is injected into the closing wire. The interaction of the current with the magnetic field produces a Laplace force [6]

$$\mathbf{F} = \int_a^{a+L} I(d\mathbf{r} \times \mathbf{B})$$

causing the rotation of the disk. This

set-up is the *motor configuration*.

When the disk is spun by an external source of mechanical energy, an *emf* appears in it. The displacement of free charges is produced in this case by the Lorentz force $\mathbf{f} = q(\mathbf{v} \times \mathbf{B})$, converting the conducting disk into an *emf* source able to drive dc through the whole disk plus closing-wire circuit. This set-up is the *generator configuration*.

A seemingly curious fact occurs in the motor configuration, when dc is injected into the circuit with the disk attached to the magnet. Both disk and magnet turn together.

Two rival theories, a relativistic and an absolutistic one, have been applied to understand the observed facts:

In relativistic view, generator configuration makes sense only when there is relative motion of the magnet with respect to either the disk or the closing wire. Also, a motor configuration will only take place if the *possibility of relative motion* between magnet and either disk or closing wire is enabled.

Thus, in the relativistic framework, with the magnet attached to the disk, the closing wire becomes the "active" part for the production of mechanical forces or *emf*. In this case the disk itself behaves as a "passive" element providing a closing-circuit current path.

Conversely, in the eyes of an absolutist, a generator configuration is enabled only because of the disk or closing-wire *absolute* motion. Here, absolute means "relative to a frame where the preponderance of the mass of the universe is at rest" [7,8]. In our case, the lab frame acts as an acceptable absolute-motion reference. Thus, from an absolutistic view, the magnet's rotation with $\partial B/\partial t = 0$ in each point of the surrounding space is unable to produce an *emf* on nearby conductors. When in a motor configuration, dc is injected in the circuit, and the absolutist assigns the observed rotation to the magnet "dragging" by the conductor. Here, the closing wire acts as a "passive" circuit element.

New experimental work, complementary to that currently known on the subject, introduces arguments in favour of the relativistic viewpoint. The related experiments, whose underlying physics rests upon a modified version of the original Faraday setup, are described in the following sections.

The asymmetrical rotor

Figure 2 shows the disk-shaped ceramic permanent magnet creating the axial magnetic field B . The removal of a 12° sector introduces a field-reversion region. Outgoing and ingoing B field lines are represented by the $\odot$ and $\otimes$ symbols, respectively.

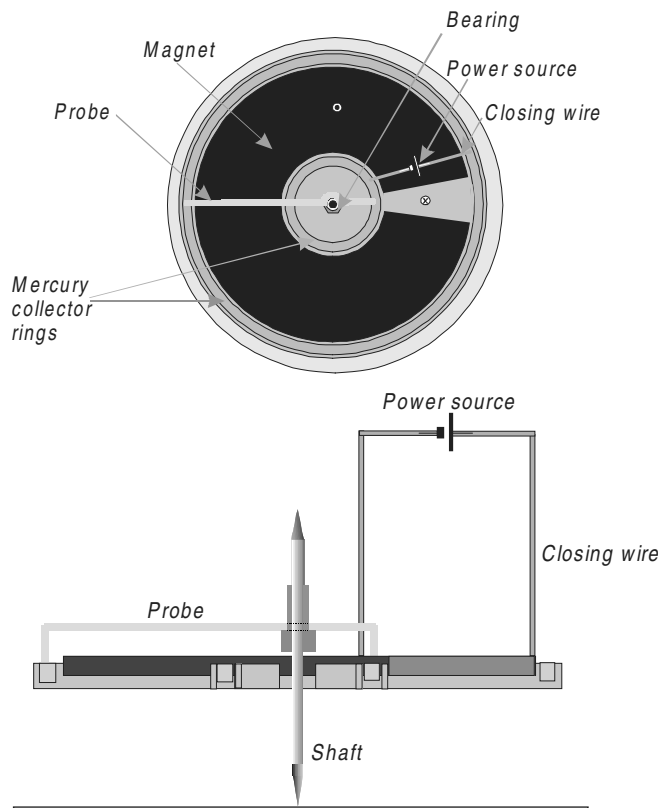


Fig.2

Layout of the Asymmetrical Rotor applied to the experiments

Two mercury collector rings are embedded in a wood cylinder. One is located close to the hollow-disk magnet inner rim and the other in the proximity of the outer rim. The magnet's inner and outer radii are 25 and 75 mm, respectively, and its height 25 mm. Its average flux density 2 mm above the magnet has been estimated to be 0.05 T based on a generator experiment with a rotating copper disk. The magnet-and-wood-cylinder body (the asymmetrical rotor from here on) is firmly anchored to a vertical shaft terminated in sharp points at both ends. While the lower one lays on a hard-polished surface, a conical bearing, enabling its almost frictionless rotation, centers the upper one.

Unlike the series-connected conductors diametrically anchored to the shaft in the Guala-Valverde case [3], only one radial conductor wire, a probe located 2 mm above the magnet's face, was considered. By mounting it on a bearing, its free rotation is permitted with its ends remaining in contact with both collector rings. A 12V lead-acid battery applied to the closing wire feeds the probe through the collector rings. In the first four experimental cases presented the closing wire remains firmly anchored to the lab. In two complementary experiments, rotation of the closing wire mounted on two shaft-centered bearings is allowed. Its behavior as

a probe occurs by the injection of dc from an additional closing-circuit wire anchored to the lab.

Experimental

Six experiments performed are described below:

1. Rotor anchored to the lab, probe free to rotate above the magnet's upward magnetic-field region: A radially-ingoing injected dc in the 0.2 A range was enough to overcome conductor-bearing and mercury-wire contact friction. A net *counterclockwise* rotation of the probe took place.
2. Probe anchored to the rotor above the magnet's upward magnetic-field region, with both free to rotate: A radially-ingoing injected dc in the 5 A range was enough to overcome conductor-plus-rotor inertia and friction. A net *counterclockwise* rotation of the probe took place.
3. Rotor anchored to the lab, probe free to rotate above the magnet's downward magnetic-field region: A radially-ingoing injected dc in the 0.2 A range was enough to overcome conductor-bearing and mercury-wire contacts friction. A net *clockwise* rotation of the probe took place.
4. Probe anchored to the rotor above the magnet's downward magnetic-field region, both free to rotate: A radially-ingoing injected dc in the 5 A range was enough to overcome conductor-plus-rotor inertia and friction. A net *counterclockwise* rotation of the probe took place.
5. Rotor anchored to the lab, closing wire free to rotate above the magnet's upward magnetic-field region: A 0.4 A dc injected in the inner collector ring was enough to overcome conductor-bearing and mercury-wire contacts friction. A net *clockwise* rotation of the closing-wire took place.
6. Rotor anchored to the lab, closing wire free to rotate above the magnet's downward magnetic-field region: A 0.4 A dc injected in the inner collector ring was enough to overcome conductor-bearing and mercury-wire contacts friction. A net *clockwise* rotation of the closing-wire took place.

Discussion of results

Experiments (1) and (3) can be explained using either absolutist or relativistic viewpoints because of the coincidence of the probe motion relative to the lab with the probe motion relative to the magnet.

Experiment (2) can be explained by a trivial absolutist argument founded on a hypothetical probe "dragging effect" on the magnet. A relativistic viewpoint recognizes the "active" rotational torque on the closing wire rather than on the probe where, hinging on Newton's third law, the whole action may be split in two:

Magnet-probe. The magnet produces a counterclockwise torque on the probe, and the probe exerts an equal but opposite torque on the magnet.

Magnet-closing wire. The magnet exerts a clockwise torque on the closing wire, and the wire exerts an equal but opposite torque on the magnet.

With the probe attached to the magnet, there is no chance for relative motion between them. Consequently, due to the action-reaction cancellation, rotation is forbidden. Conversely, with the closing wire mechanically decoupled from the magnet, relative motion of the latter is permitted. The torque exerted by the closing wire on the magnet is responsible for the observed rotation.

Experiment (4): Due to its similarity with (2) a trivial relativistic explanation is applicable to the counterclockwise torque exerted by the closing wire on the magnet. There is no known plausible absolutistic explanation for it. As quoted above, the hypothetical dragging effect would produce a clockwise rotation in this case. The consideration of the experiments (2) and (4) suffices to reject the dragging hypothesis.

Complementary experiments (5) and (6) confirm the short-range extension of the field-reversion region founded on the closing-wire *clockwise* rotation (6). Briefly speaking, the closing wire is not sensitive to the field reversion and the magnet's *counterclockwise* reaction explains at once the outcome of (4). Clearly, experiments (5) and (6) show that the torque on the closing wire is independent of its location on the magnet.

Figure 3 depicts the two rotational torques involved in (2) and (4).

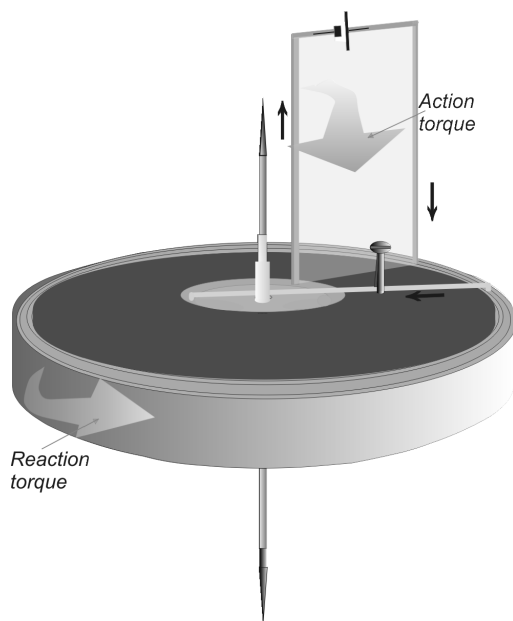


Fig.3
Rotational torques acting on the magnet and on the closing wire

Topological and miscellaneous considerations

One of the keys to the success of the above described experiments lies in the dynamotor's magnet design (see Fig.4). The short-range field reversion region allows the inversion of the Laplace force on the probe, making the force on the closing wire insensitive to that *B-field* reversion.

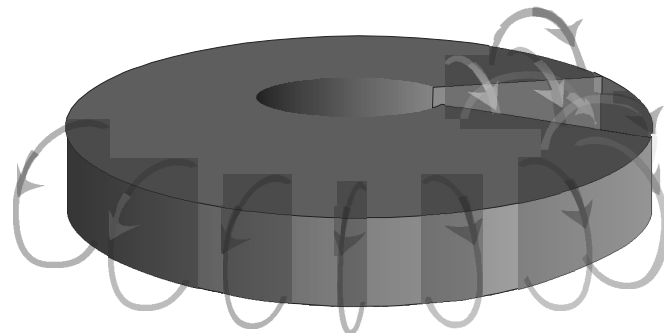


Fig. 4
The magnet's field-reversion region

In all the above cases the electromagnetic forces between probe and closing wire were neglected because of its small magnitude compared to the predominant magnet-wire interaction forces.

The observed torques became, in all the experiments, independent of the location of the contact points between closing wire and collector rings. Also, the closing wire shape exhibited no noticeable influence on torques. These observations can be easily explained using the $\text{div}\mathbf{B} = 0$ fundamental law, Laplace force, and some elementary topological considerations.

Kennard [1], Bartlett [1], Panosky [7,8], Muller [9], Wesley [10] and some of this article's authors took absolutistic viewpoints when dealing with homopolar phenomena [11,12]. On the contrary, Weber [4], Assis [13], and Kelly [14] adopted a relativistic framework on the issue from the beginning.

By attaching the magnet to the disk in the original Faraday setup, the relative rotation between disk and closing wire remains unchanged. Therefore, in a generator configuration, the disk plus magnet rotation at with the closing wire at rest in the lab is entirely equivalent to the closing-wire rotation at – with the disk plus magnet at rest. This fact introduced a correct but physically “colorless” weak relativism to the homopolar generator description: the “unipolar generator really has three components, the magnet, the cylinder and the meter (including the contacts). A relative motion of the last two, not the first two, is required” [1].

A growing interest in basic electromagnetism [15,27] can not be ignored, and from time to time some authors, attempting to catch “free energy” from the space, have

claimed the design of homopolar engines with efficiency greater than unity, as can be checked by searching for *homopolar motor* on the Internet. The strict application of Newton's third law precludes the above non-physical possibility.


It is worthwhile to stress that the homopolar machine is a famous example where Faraday's flux rule fails. This fact worried Faraday himself and is clearly discussed by Feynman [28] who emphasized that the correct physics is always given by the Lorentz force law and the Maxwell fundamental equation $\text{curl } \mathbf{E} = -\mathbf{B}/t$. Homopolar induction is fully understood using only the Lorentz force. Our experiments enhance the relativistic structure of the Lorentz force because the only relevant velocity is the velocity of the conductor relative to the magnet.

Acknowledgments: To Profs. C.N. Gagliardo and A. Ipohorski-Lenkiewicz for the conceptual comments on this development.

References

1. J. Guala-Valverde and P. Mazzoni, "The principle of relativity as applied to motional electromagnetic induction". Am. J. Phys 63, 228-229 (1995).
2. J. Guala - Valverde, P. Mazzoni and Ro Blas, The quasilinear generator and $\omega = 0$. Am. J. Phys. 65, 147-148 (1997).
3. J. Guala-Valverde and P. Mazzoni, "The unipolar dynamotor: a genuine relational engine". Apeiron 8, 41-52 (2001).
4. A.K.T. Assis, Weber Electrodynamics (Kluwer, Dordrecht, 1994).
5. A. Einstein, "Zur elektrodynamik bewegter körper". Annalen der Physik 17, 891-921 (1905). See also The Principle of Relativity. A.Einstein, H.A. Lorentz, H. Weil and H. Minkowsky, pp. 35-65 (Dover, New York, 1952).
6. G. Cavalleri et al. "Experimental proof of standard electrodynamics by measuring the self-force on a part of a current loop". Phys. Rev. E 58, 2505-2517 (1998).
7. W. K. H. Panofsky. Private communication (letter to J.Guala-Valverde, dated Jan 30, 1995).
8. W. K. H. Panofsky and M. Phillips, Classical Electricity and Magnetism. (Addisson Wesley, NY, 1955).
9. F. Müller, "Unipolar induction experiments and relativistic electrodynamics". Galilean Electrodynamics 1, N°3, 27-31 (1990).
10. J.P. Wesley. Private communication (letter to J.Guala Valverde dated Nov 01, 2001). See also "Progress in Space-Time Physics", Benjamin Wesley, Blumberg (1987).
11. J.Guala-Valverde and P. Mazzoni, "The motional electromagnetic induction revisited". Russian Academy of Sciences, 3rd Conference, pp.186-188. St. Petersburg (1995).
12. J. Guala-Valverde and P. Mazzoni, "The unipolar Faraday generator revisited". Galilean Electrodynamics, 4, 107-108 (1993).
13. A.K.T. Assis and D.S. Thober, "Unipolar induction and Weber's electrodynamics". Frontiers of Fundamental Physics, Plenum Press, NY, pp. 409-414 (1994).
14. A.G. Kelly, "Experiments on unipolar induction". Physics Essays 12, 372-382 (1999).
15. A.E. Robson and J.D. Sethian, "Railgun recoil, Ampere tension, and the laws of electrodynamics". Am. J. Phys. 60, 1111-1117 (1992).
16. A.K.T. Assis, Relational Mechanics (Apeiron, Montreal, 1999).
17. P. Graneau, "Electromagnetic jet-propulsion in the direction of current flow". Nature 295, 311-312 (1992).
18. T. E. Phipps and T.E. Phipps Jr., "Observation of Ampere forces in mercury". Phys. Lett. A 146, 6-14 (1990).
19. P.Graneau and N. Graneau, Newtonian Electrodynamics (World Scientific, Singapore, 1996).
20. V.F. Mikhailov, "The action of an electrostatic potential on the electron mass". Annales de la Fondation Louis de Broglie 24, 161-169 (1999); 26, 33-38 (2001).
21. A.K.T. Assis, "Comment on experimental proof of standard electrodynamics by measuring the self-force on a part of a current loop". Phys. Rev. E 62, 7544 (2000).
22. P. Graneau and N. Graneau, "Electrodynamic force law controversy". Phys. Rev.E 63, 058601-2 (2001).
23. T.E.Phipps and J. Guala-Valverde, "Simulation of amperian current elements by magnetic toroids". 21st Century Science & Technology 11, 55-65 (1998).
24. M. Bueno and A.K.T. Assis, Inductance and Force Calculations in Electrical Circuits (Nova Science Publishers, Huntington, N.Y. 2001).
25. H. Aspden, "Anomalous electrodynamic explosions in liquids". IEEE Trans. on Plasma. Sc. 14, 282-285 (1986).
26. G.M. Graham & D.G. Lahoz, "Observation of static electromagnetic angular momentum in vacuo". Nature 285, 154-155.
27. V. Dvoeglazov, "Essay on the nonmaxwellian theories of electromagne-Tism". Hadronic Journal Suppl. 12, 241-245 (1997).
28. R. Feynman, The Feynman Lectures on Physics, II. (Addisson Wesley, NY, 1964).

LAB REPORT ON SmCo RING MAGNET EXPERIMENTS



Experiments conducted by:
William C. Simpson

New Horizons Research 600 Meridian Street Extension,
#302 Groton, CT 06340
Tel. (860) 405-1157

The following experiments were conducted at the *Coastal Environmental Laboratory* (CEL) at Avery Point, Groton, Connecticut. (41° 19' 0.17" N. latitude x 72° 3' 50.27" W. longitude x 35 feet elevation above mean sea level) I wish to thank the personnel at the CEL for their generosity for providing the use of their *Mettler Toledo*® Model AG104 electronic scale for the measurements taken in the proceeding experiments. The AG104 electronic scale is an enclosed pan unit with a maximum mass range of 101-grams with 0.0001-gram readability.

The purpose of these experiments was to see if there is any detectable weight change when permanent magnets are forced together with their like-poles facing each other. The magnets were weighed individually, in both directions, with their field poles oriented vertically. The sums of the two individual magnet weights (magnet #1 and magnet #2) in each vertical orientation were compared to the weight measurements taken when they were assembled using the nylon bolt and wing nut depicted in **DIAGRAM 1**. The specifications for the two Samarium Cobalt magnets used in the following experiments are shown in **DIAGRAM 1**.

The first set of experiments with the SmCo Ring magnets were conducted January 14, 2002. An inverted paper cup was used to raise the test sample magnets 2.75" above the AG104 electronic scale pan in order to minimize possible magnetic interaction with the scale-sensing element, as depicted in **DIAGRAM 2**. The tare adjustment was used to set the scale readout to 0.0000-gram with the cup in place. The magnets were weighed individually. Magnet #1 weighed 9.9450-gram with the N pole facing up and 9.9397-gram with the S pole facing up. Magnet #2 weighed 9.9520-gram with the N pole facing up and 9.9443-gram with the S pole facing up.

The second set of experiments with the SmCo Ring magnets were conducted February 4, 2002. These experiments were shielded with Mu 80 magnetic


DIAGRAM 1

Editorial: This article is one more link between magnetism and theory of aether, to my mind. It is possible to assume that in his experiments the author creates small but detectable changes in density of aether, that demonstrates itself as the weight changes.


Alexander V. Frolov.

RARE EARTH MAGNET SPECIFICATIONS:

Samarium Cobalt (SmCo mixed) ~ SCIENTIFICS Cat. #B30307-30
Ring type. OD = 0.75", ID = 0.43", Thickness = 0.25"
Gauss = 8,000
density = 8.7-gram/cc



NYLON RETAINER BOLT AND WING NUT:

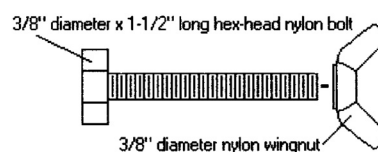

mass of nylon bolt plus nylon wing nut = 5.1610-grams

shielding material as depicted in **DIAGRAM 3**. The scale was tare adjusted to 0.0000-gram with the entire set of Mu 80 shield pieces in place. Then the magnets were weighed individually. Magnet #1 weighed 9.9483-gram with the N pole facing up and 9.9486-gram with the S pole facing up. Magnet #2 weighed 9.9527-gram with the N pole facing up and 9.9542-gram with the S pole facing up. The Nylon bolt and wing nut were placed in the Mu 80 shield can (without the magnets) and the scale was tare adjusted to 0.0000-gram. Therefore, the readouts would only be reading the weight of the bucking magnets.

The first column in **TABLE 1**, the vertical measurements, is the distance of separation d , or air gap, of the magnets. The second column shows the January 14, 2002 weight measurements of the two magnets, as shown in **DIAGRAM A**. The third column shows the January 14, 2002 weight measurements of the two magnets, as shown in **DIAGRAM B**. The fourth column

shows the February 4, 2002 weight measurements of the two magnets, as shown in **DIAGRAM C**. The fifth column shows the February 4, 2002 weight measurements of the two magnets, as shown in **DIAGRAM D**.

The horizontal measurement, as depicted in **TABLE 2**, **TABLE 3**, **TABLE 4** and **TABLE 5**, are through the four basic magnetic compass headings; North, East, South, and West respectively. They are referenced to **DIAGRAM E** and **DIAGRAM F** for the January 14, 2002 experiments and **DIAGRAM G** and **DIAGRAM H** for the February 4, 2002 experiments. The corresponding graphs of the force change plots, **GRAPH 1**, **GRAPH 2**, **GRAPH 3**, **GRAPH 4**, and **GRAPH 5** accompany each table. The forces were converted from the mass readings, which are a scalar measurement, to dynes. The convention used for the force vector was chosen as plus (+) for up, or a weight reduction, and minus (-) for a weight increase.

DIAGRAM 2

01/14/2002 EXPERIMENTS

CUP HEIGHT: 2.75" above
scale pan. 1.75" upper diameter,
2.5" lower diameter

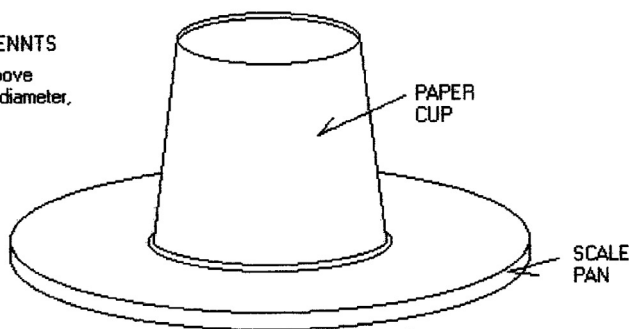


DIAGRAM 3

02/04/2002 EXPERIMENTS

MU METAL SPECIFICATIONS:

Source: NATIONAL ELECTRICAL ALLOYS
Oakland, NJ
SPECIFICATION: MIL N 14411C COMP 1
GRADE: HY MU 80 SHIELDING ALLOY
COLD ROLLED BRIGHT

DESCRIPTION: COIL
HEAT # 982011207
CHEMICAL ANALYSIS:

Ni: 80.16%

Mo: 4.6%

S: 0.0007%

C: 0.010%

P: 0.004%

Mn: 0.486%

Si: < 0.010%

Fe: BALANCE

MECHANICAL PROPERTIES:

HARDNESS: HV1 = 159

GRAIN SIZE: 8.5

COERCIVE STRENGTH:


HC = 0.0080 Oe

PERMEABILITY: MUMAX = 355000


SATURATION: 7900 Gauss

THICKNESS: 0.010"

DENSITY: 8.747-gram/cc

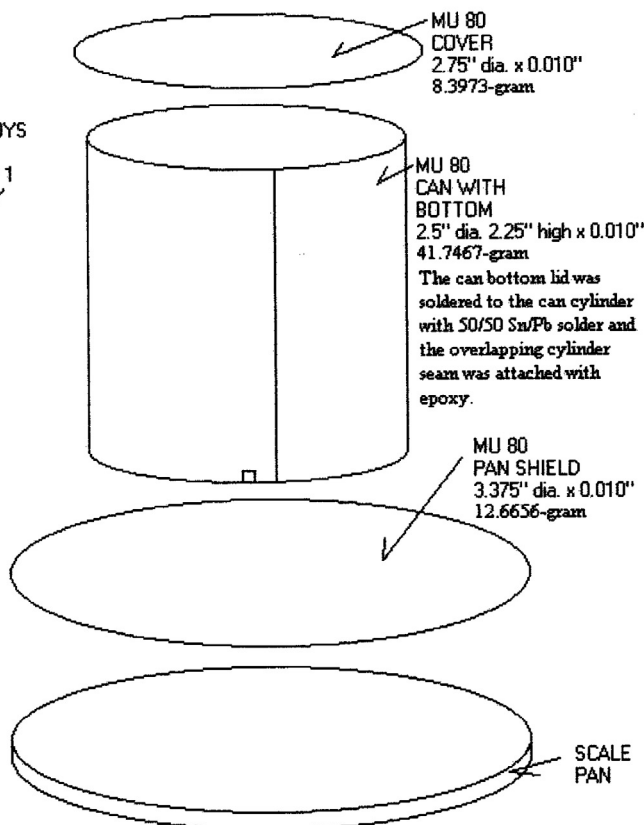

ELEVATION VIEW OF THE VERTICAL EXPERIMENTS

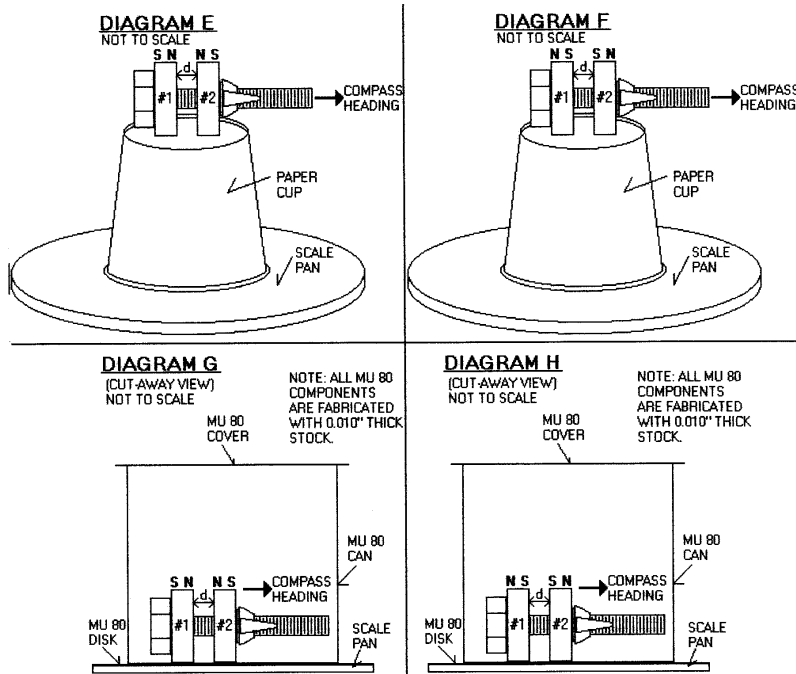

NOTE:

January 14, 2002 Experiments: Start time: 13:27 hours EST, End time: 15:40 hours EST.

February 4, 2002 Experiments: Start time: 13:18 hours EST, End time: 14:50 hours EST.

TABLE 1:

	01/14/2002 EXPERIMENTS OPEN, WITH PAPER CUP		02/04/2002 EXPERIMENTS WITH MU 80 SHIELDING	
Air gap d	Diagram A N to N vertical 19.8893-gram (Sum of 1 & 2)*	Diagram B S to S vertical 19.8917-gram (Sum of 1 & 2)*	Diagram C N to N vertical 19.9025-gram (Sum of 1 & 2)*	Diagram D S to S vertical 19.9013-gram (Sum of 1 & 2)*
0.0 Inch	19.8759-gram 0.0134-gram weight reduction (0.06737%)	19.8757-gram 0.0160-gram weight reduction(0.08045%)	19.8760-gram 0.0265-gram weight reduction(0.13324%)	19.8758-gram 0.0255-gram weight reduction(0.12821%)
1/8 Inch	19.8761-gram 0.0132-gram weight reduction(0.06637%)	19.8751-gram 0.0166-gram weight reduction(0.08346%)	19.8760-gram 0.0265-gram weight reduction(0.13324%)	19.8763-gram 0.0250-gram weight reduction(0.12570%)
1/4 Inch	19.8763-gram 0.0130-gram weight reduction(0.06536%)	19.8748-gram 0.0169-gram weight reduction(0.08497%)	19.8760-gram 0.0265-gram weight reduction(0.13324%)	19.8768-gram 0.0245-gram weight reduction(0.12318%)
3/8 Inch	19.8765-gram 0.0128-gram weight reduction(0.06436%)	19.8753-gram 0.0164-gram weight reduction(0.08246%)	19.8760-gram 0.0265-gram weight reduction(0.13324%)	19.8777-gram 0.0236-gram weight reduction(0.11866%)
1/2 Inch	19.8774-gram 0.0119-gram weight reduction(0.05983%)	19.8753-gram 0.0164-gram weight reduction(0.08246%)	19.8757-gram 0.0268-gram weight reduction(0.13475%)	19.8809-gram 0.0204-gram weight reduction(0.10257%)
5/8 Inch	19.8776-gram 0.0117-gram weight reduction(0.05883%)	19.8754-gram 0.0163-gram weight reduction(0.08195%)	19.8779-gram 0.0246-gram weight reduction(0.12368%)	19.8806-gram 0.0207-gram weight reduction(0.10408%)
11/16 Inch	19.8777-gram 0.0116-gram weight reduction(0.05832%)	19.8748-gram 0.0169-gram weight reduction(0.08497%)	19.8773-gram 0.0252-gram weight reduction(0.12670%)	19.8832-gram 0.0181-gram weight reduction(0.09100%)

* Magnets #1 and #2 were individually weighed in the orientation used in each experiment and their separate weights were added together.

The following equation was used to calculate the weight changes, in dynes, in the proceeding graphs.

$$\rightarrow \Delta F = k \cdot \Delta \text{mass} \cdot g$$

where

$$k = 980.665 \cdot \text{dyne} \cdot \text{gm}^{-1}$$

and

$$g = 9.80665 \text{ m} \cdot \text{sec}^{-2}$$

which is the local rate of gravitational acceleration.

The product of the measured changes in mass, Δmass , and g is denoted as follows on the graphs:

$$\text{NNopen}_{n,1} = \Delta \text{mass} \cdot g$$

for N-to-N pole facings in the open (or unshielded).

$$\text{SSopen}_{n,1} = \Delta \text{mass} \cdot g$$

for S-to-S pole facings in the open (or unshielded).


$$\text{NNshield}_{p,1} = \Delta \text{mass} \cdot g$$

for N-to-N pole facings shielded with Mu 80 shielding.


$$\text{SSshield}_{p,1} = \Delta \text{mass} \cdot g$$

for S-to-S pole facings shielded with Mu 80 shielding. In the subscripts, $_n$ and $_p$ refers to the respective number of data points per plot. The subscript $_1$ refers to the vertical change in force (weight change) axis and $_0$ refers to the horizontal distance d axis. In **GRAPH 1**, $_n = _p$.


GRAPH 1:

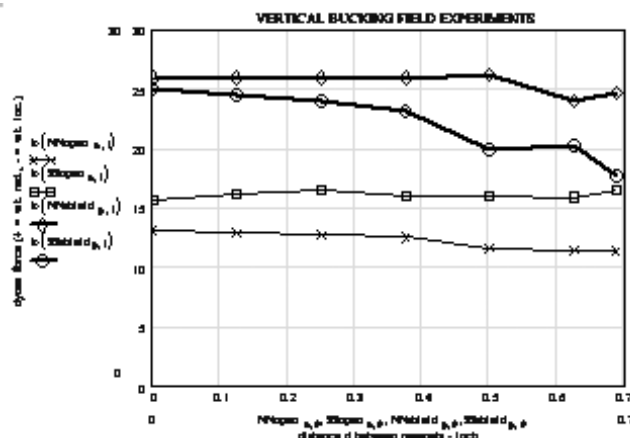

ISOMETRIC AND ELEVATION VIEW OF THE HORIZONTAL EXPERIMENTS

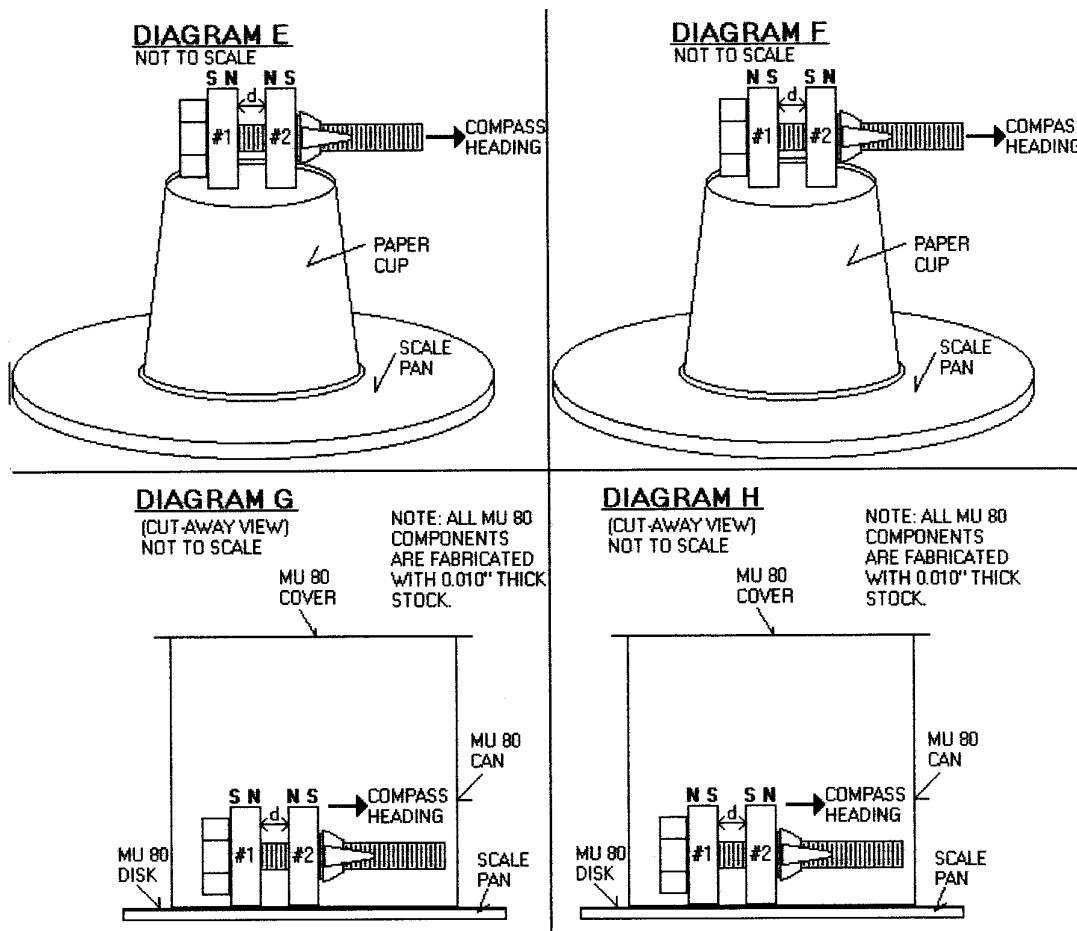

MAGNETIC DECLINATION FROM THE LOCAL TOPOLOGICAL MAP:

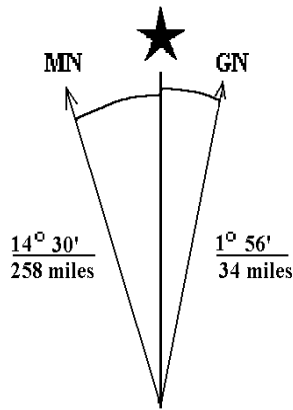

1984 Magnetic Declination ~ U. S. Geological Survey
New London, Connecticut Quadrangle Topological Map

TABLE 2


<u>North #</u> <u>Heading</u>	01/14/2002 EXPERIMENTS OPEN, WITH PAPER CUP		02/04/2002 EXPERIMENTS WITH MU 80 SHIELDING	
Air gap d	Diagram E N to N horizontal 19.8905-gram (Sum of 1 & 2)*	Diagram F S to S horizontal 19.8905-gram (Sum of 1 & 2)*	Diagram G N to N horizontal 19.9019-gram (Sum of 1 & 2)*	Diagram H S to S horizontal 19.9019-gram (Sum of 1 & 2)*
0.0 Inch	19.8735-gram 0.0170-gram weight reduction (0.08547%)	19.8778-gram 0.0127-gram weight reduction(0.06385%)	19.8890-gram 0.0129-gram weight reduction(0.06479%)	19.8810-gram 0.0209-gram weight reduction(0.10497%)
1/8 Inch	19.8728-gram 0.0177-gram weight reduction(0.08899%)	19.8790-gram 0.0115-gram weight reduction(0.05782%)	N/A **	N/A **
1/4 Inch	19.8721-gram 0.0184-gram weight reduction(0.09251%)	19.8798-gram 0.0107-gram weight reduction(0.05379%)	N/A **	N/A **
3/8 Inch	19.8705-gram 0.0200-gram weight reduction(0.10055%)	19.8800-gram 0.0105-gram weight reduction(0.05279%)	N/A **	N/A **
1/2 Inch	19.8698-gram 0.0207-gram weight reduction(0.10407%)	19.8811-gram 0.0094-gram weight reduction(0.04726%)	N/A **	N/A **
5/8 Inch	19.8693-gram 0.0212-gram weight reduction(0.10658%)	19.8818-gram 0.0087-gram weight reduction(0.04374%)	N/A **	N/A **
11/16 Inch	19.8696-gram 0.0209-gram weight reduction(0.10508%)	19.8827-gram 0.0078-gram weight reduction(0.03921%)	19.9190-gram 0.0171-gram weight increase(0.08588%)	19.9029-gram 0.0010-gram weight increase(0.00502%)

Compass Heading is approximate

* Magnets #1 and #2 were individually weighed with pole faces oriented vertically, with N up then with S up, and the results were averaged and added.

** Due to time constraints, these measurements were not taken.

GRAPH 2:

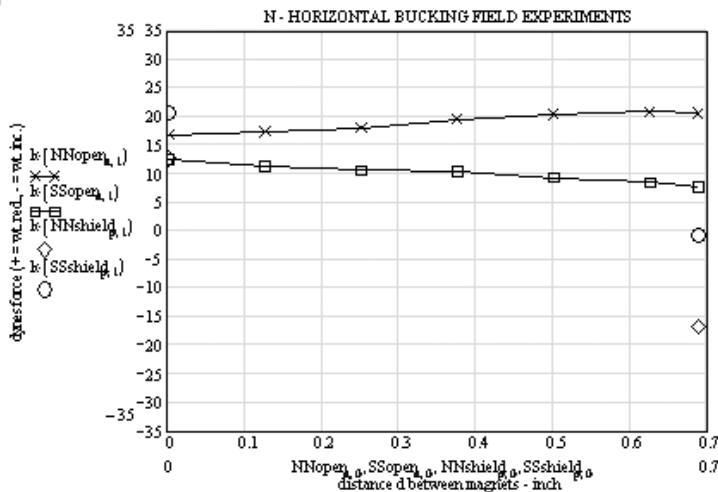

$$\text{volume} := \pi \cdot \left[\left(\frac{0.75 \cdot \text{in}}{2} \right)^2 - \left(\frac{0.43 \cdot \text{in}}{2} \right)^2 \right] \cdot \left(\frac{1}{4} \right) \cdot \text{in}$$

$$\text{volume} = 1.214963 \text{ cm}^3$$

$$\text{density} = 8.7 \cdot \text{gm} \cdot \text{cm}^{-3}$$

$$\text{mass} = \text{density} \cdot \text{volume}$$

$$\text{mass} = 10.570177 \text{ gm.}$$

This is higher than the magnetized mass of each magnet.

However, some tables give a lower density for the SmCo magnet, 0.300lb/in³, which equals:

$$\text{density} = 8.303971 \cdot \text{gm} \cdot \text{cm}^{-3}$$

$$\text{mass} = 10.089017 \text{ gm.}$$

This is still higher than the magnetized mass of each magnet. Does the SmCo material become slightly lighter in weight when it is magnetized?

TABLE 3

East # Heading	01/14/2002 EXPERIMENTS OPEN, WITH PAPER CUP		02/04/2002 EXPERIMENTS WITH MU 80 SHIELDING	
Air gap D	Diagram E N to N horizontal 19.8905-gram (Sum of 1 & 2)*	Diagram F S to S horizontal 19.8905-gram (Sum of 1 & 2)*	Diagram G N to N horizontal 19.9019-gram (Sum of 1 & 2)*	Diagram H S to S horizontal 19.9019-gram (Sum of 1 & 2)*
0.0 Inch	19.8763-gram 0.0142-gram weight reduction (0.07139%)	19.8755-gram 0.0150-gram weight reduction (0.07541%)	19.8928-gram 0.0091-gram weight reduction (0.04570%)	19.8731-gram 0.0288-gram weight reduction (0.14464%)
1/8 Inch	19.8777-gram 0.0128-gram weight reduction (0.06435%)	19.8750-gram 0.0155-gram weight reduction (0.07793%)	N/A **	N/A **
1/4 Inch	19.8782-gram 0.0123-gram weight reduction (0.06184%)	19.8743-gram 0.0162-gram weight reduction (0.08145%)	N/A **	N/A **
3/8 Inch	19.8779-gram 0.0126-gram weight reduction (0.06335%)	19.8722-gram 0.0183-gram weight reduction (0.09200%)	N/A **	N/A **
1/2 Inch	19.8792-gram 0.0113-gram weight reduction (0.05681%)	19.8715-gram 0.0190-gram weight reduction (0.09552%)	N/A **	N/A **
5/8 Inch	19.8814-gram 0.0091-gram weight reduction (0.04575%)	19.8712-gram 0.0193-gram weight reduction (0.09703%)	N/A **	N/A **
11/16 Inch	19.8815-gram 0.0090-gram weight reduction (0.04525%)	19.8720-gram 0.0185-gram weight reduction (0.09301%)	19.9338-gram 0.0319-gram weight increase (0.16021%)	19.9030-gram 0.0011-gram weight increase (0.00552%)

Compass Heading is approximate

* Magnets #1 and #2 were individually weighed with pole faces oriented vertically, with N up then with S up, and the results were averaged and added.

** Due to time constraints, these measurements were not taken.

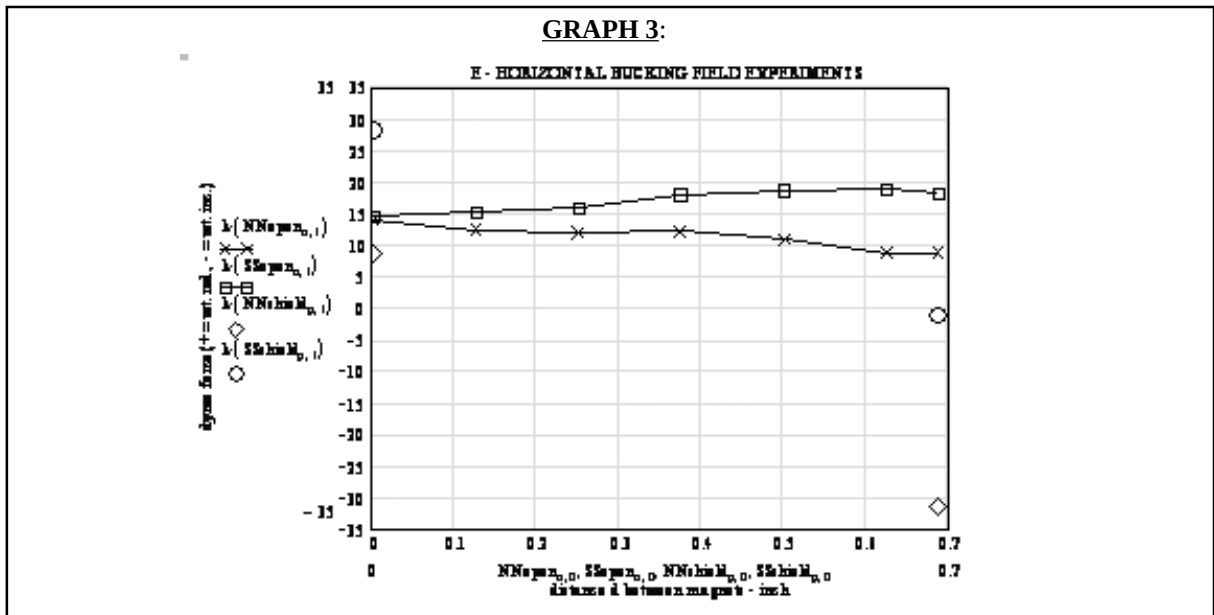


TABLE 4

East # Heading	01/14/2002 EXPERIMENTS OPEN, WITH PAPER CUP		02/04/2002 EXPERIMENTS WITH MU 80 SHIELDING	
	Diagram E N to N horizontal 19.8905-gram (Sum of 1 & 2)*	Diagram F S to S horizontal 19.8905-gram (Sum of 1 & 2)*	Diagram G N to N horizontal 19.9019-gram (Sum of 1 & 2)*	Diagram H S to S horizontal 19.9019-gram (Sum of 1 & 2)*
Air gap D				
0.0 Inch	19.8746-gram 0.0159-gram weight reduction (0.07994%)	19.8769-gram 0.0136-gram weight reduction (0.06837%)	19.8896-gram 0.0123-gram weight reduction (0.06178%)	19.8660-gram 0.0359-gram weight reduction (0.18030%)
1/8 Inch	19.8720-gram 0.0185-gram weight reduction (0.09301%)	19.8788-gram 0.0117-gram weight reduction (0.05882%)	N/A **	N/A **
1/4 Inch	19.8709-gram 0.0196-gram weight reduction (0.09854%)	19.8797-gram 0.0108-gram weight reduction (0.05430%)	N/A **	N/A **
3/8 Inch	19.8704-gram 0.0201-gram weight reduction (0.10105%)	19.8803-gram 0.0102-gram weight reduction (0.05128%)	N/A **	N/A **
1/2 Inch	19.8711-gram 0.0194-gram weight reduction (0.09753%)	19.8814-gram 0.0091-gram weight reduction (0.04575%)	N/A **	N/A **
5/8 Inch	19.8698-gram 0.0207-gram weight reduction (0.10407%)	19.8825-gram 0.0080-gram weight reduction (0.04022%)	N/A **	N/A **
11/16 Inch	19.8703-gram 0.0202-gram weight reduction (0.10156%)	19.8817-gram 0.0088-gram weight reduction (0.04424%)	19.9423-gram 0.0404-gram weight increase (0.20290%)	19.8810-gram 0.0209-gram weight reduction (0.10497%)

Compass Heading is approximate

* Magnets #1 and #2 were individually weighed with pole faces oriented vertically, with N up then with S up, and the results were averaged and added.

** Due to time constraints, these measurements were not taken.

GRAPH 4:

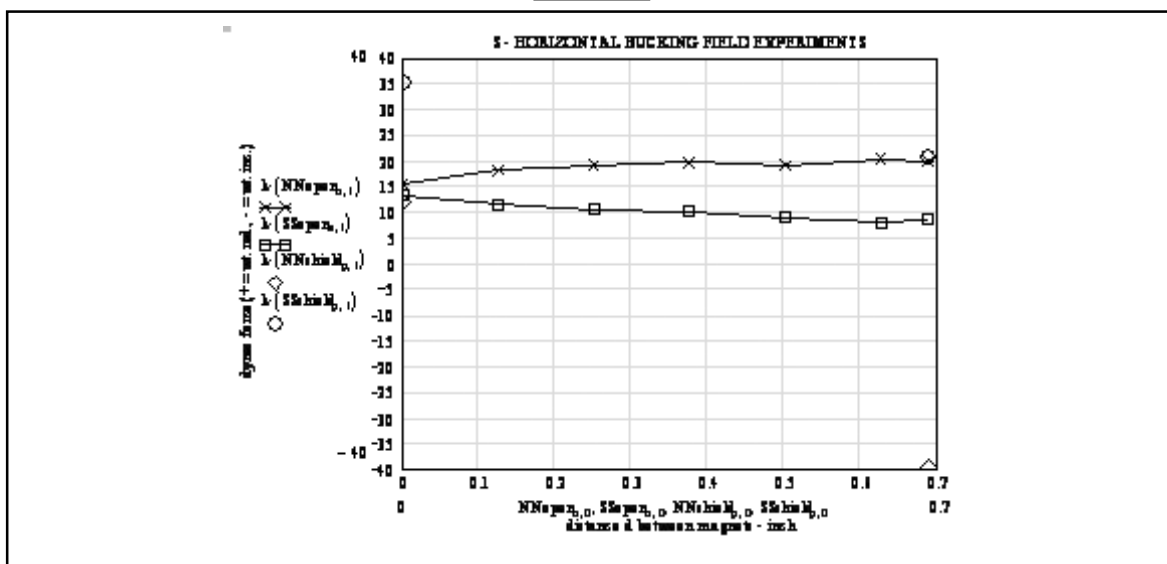


TABLE 5


West # Heading	01/14/2002 EXPERIMENTS OPEN, WITH PAPER CUP		02/04/2002 EXPERIMENTS WITH MU 80 SHIELDING	
Air gap D	Diagram E N to N horizontal 19.8905-gram (Sum of 1 & 2)*	Diagram F S to S horizontal 19.8905-gram (Sum of 1 & 2)*	Diagram G N to N horizontal 19.9019-gram (Sum of 1 & 2)*	Diagram H S to S horizontal 19.9019-gram (Sum of 1 & 2)*
0.0 Inch	19.8777-gram 0.0128-gram weight reduction (0.06787%)	19.8748-gram 0.0157-gram weight reduction (0.07893%)	19.8933-gram 0.0086-gram weight reduction (0.04319%)	19.8724-gram 0.0295-gram weight reduction (0.14816%)
1/8 Inch	19.8767-gram 0.0138-gram weight reduction (0.06938%)	19.8737-gram 0.0168-gram weight reduction (0.08446%)	N/A **	N/A **
1/4 Inch	19.8777-gram 0.0128-gram weight reduction (0.06435%)	19.8733-gram 0.0172-gram weight reduction (0.08647%)	N/A **	N/A **
3/8 Inch	19.8783-gram 0.0122-gram weight reduction (0.06134%)	19.8727-gram 0.0178-gram weight reduction (0.08949%)	N/A **	N/A **
1/2 Inch	19.8806-gram 0.0099-gram weight reduction (0.04977%)	19.8722-gram 0.0183-gram weight reduction (0.09200%)	N/A **	N/A **
5/8 Inch	19.8811-gram 0.0094-gram weight reduction (0.04726%)	19.8715-gram 0.0190-gram weight reduction (0.09552%)	N/A **	N/A **
11/16 Inch	19.8803-gram 0.0102-gram weight reduction (0.05128%)	19.8723-gram 0.0182-gram weight reduction (0.09150%)	19.9427-gram 0.0408-gram weight increase (0.20491%)	19.8976-gram 0.0043-gram weight reduction (0.02160%)

Compass Heading is approximate

* Magnets #1 and #2 were individually weighed with pole faces oriented vertically, with N up then with S up, and the results were averaged and added.

** Due to time constraints, these measurements were not taken.

GRAPH 5:

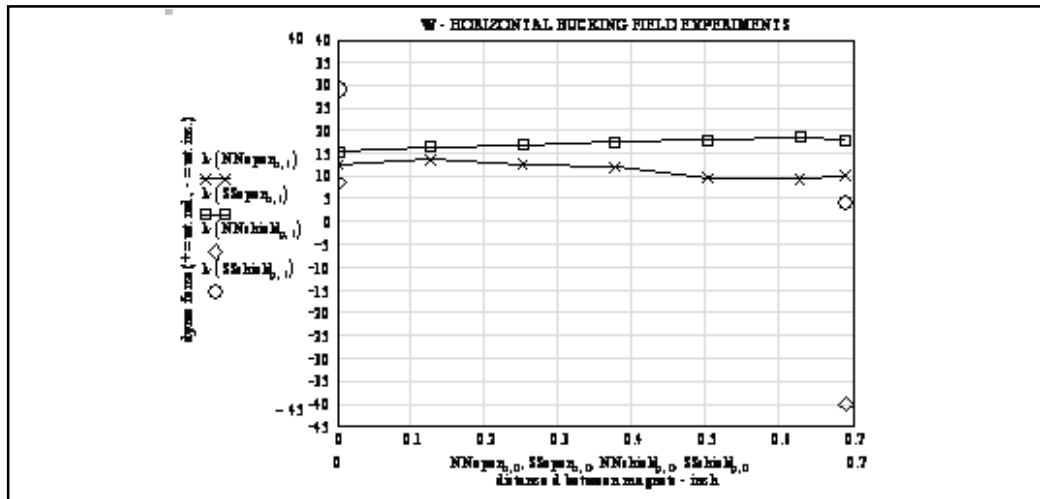


RING MAGNET #1, N UP: 9.9483-grams

RING MAGNET #2, N UP: +9.9527-grams

TOTAL WEIGHT: 19.9010-grams

WEIGHT INCREASE WITH OPPOSITE POLES ATTRACTING, AS DEPICTED IN **DIAGRAM 1**, IN MU 80 SHIELD where 19.9861-grams was the measured value:

19.9861-grams – 19.9010-grams = 0.0851-gram weight increase.

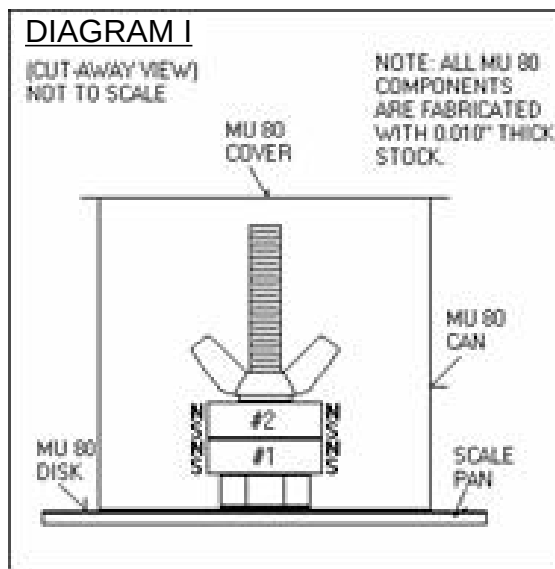

**THREE RIVERS COMMUNITY COLLEGE,
THAMES VALLEY CAMPUS
LAB REPORT ON SmCo RING MAGNET
EXPERIMENTS**

The following experiments were conducted at the *Thames Valley Campus* (TVC) of the *Three Rivers Community College*, Room #207 Chemistry Laboratory, in Norwich, Connecticut on March 8, 2002. (41° 30' 34.62" N. latitude x 72° 6' 13.63" W. longitude x 115 feet elevation above mean sea level) I wish to thank the instructors at *Three Rivers* for their generosity for providing the use of their *Sartorius*® Model # 2442 analytical balance for the measurements taken in the

proceeding experiments. The *Sartorius* Model # 2442 analytical balance is an enclosed pan unit with a maximum mass range of 200-grams with 0.0001-gram micrometer readability and a precision of 0.05-mg standard deviation.

The purpose of these experiments was to compare the Avery Point vertical measurements conducted on the *Mettler Toledo*® Model AG104 electronic scale, in **TABLE 1**, with the *Sartorius* Model # 2442 analytical balance measurements recorded in **TABLE 6**. The same two Samarium Cobalt magnets (magnet #1 and magnet #2) weighed individually in each vertical orientation were compared to the weight measurements taken when they were assembled using the nylon bolt and wing nut depicted in **DIAGRAM 1**. The specifications for the two Samarium Cobalt magnets used in the following experiments are shown in **DIAGRAM 1**.

The first column in **TABLE 6**, the vertical measurements, is the distance of separation *d*, or air gap, of the magnets. The second column shows the weight measurements of the two magnets, as shown in **DIAGRAM A**. The third column shows the weight measurements of the two magnets, as shown in **DIAGRAM B**. An inverted paper cup was used to raise the test sample magnets 2.75" above the *Sartorius* Model # 2442 balance scale pan in order to minimize possible magnetic interaction with the balance, as depicted in **DIAGRAM 2**. The fourth column shows the weight measurements of the two magnets, as shown in **DIAGRAM C**. The fifth column shows the weight measurements of the two magnets, as shown in **DIAGRAM D**. These experiments were shielded with

Mu 80 magnetic shielding material as depicted in **DIAGRAM 3**. The resultant data of **TABLE 6** is plotted on **GRAPH 6**. The results of the previous experiments at *Avery Point*, from **GRAPH 1**, and the recent *Thames Valley* experiments, from **GRAPH 6**, are plotted on **GRAPH 7** for comparison. The Mu 80 magnetically shielded experiments on the *Sartorius Model # 2442* analytical balance at *Thames Valley* are in close agreement with the data collected with the AG104 electronic scale at *Avery Point*. However, the *Thames Valley* data collected for the unshielded experiments is somewhat smaller in weight reduction. I attribute this to external interference. The *Thames Valley* setup

included a nonferrous tabletop, as did the *Avery Point* setup. However, the *Thames Valley* balance table consisted of a steel frame and legs, which may have altered the readings. The Mu 80 shielding provided a more intrinsic method for accurate data collection.

The horizontal measurements were not taken in this set of experiments due to time constraints. A final experiment was attempted to replicate the relative weight increase with the opposite poles of the ring magnets "stuck" together, as depicted in **DIAGRAM I**; however, the magnets shattered during assembly!

TABLE 6

	03/08/2002 TRCC EXPERIMENTS, @ TVC: OPEN, WITH PAPER CUP		03/08/2002 TRCC EXPERIMENTS, @ TVC: WITH MU 80 SHIELDING	
Air gap d	Diagram A N to N vertical 19.8734-gram (Sum of 1 & 2)*	Diagram B S to S vertical 19.8726-gram (Sum of 1 & 2)*	Diagram C N to N vertical 19.8912-gram (Sum of 1 & 2)*	Diagram D S to S vertical 19.8929-gram (Sum of 1 & 2)*
0.0 Inch	19.8699-gram 0.0035-gram weight reduction (0.01761%)	19.8696-gram 0.0030-gram weight reduction(0.01510%)	19.8691-gram 0.0221-gram weight reduction(0.11110%)	19.8706-gram 0.0223-gram weight reduction(0.11210%)
1/8 Inch	19.8699-gram 0.0035-gram weight reduction(0.01761%)	19.8699-gram 0.0027-gram weight reduction(0.01359%)	19.8688-gram 0.0224-gram weight reduction(0.11261%)	19.8707-gram 0.0222-gram weight reduction(0.11160%)
1/4 Inch	19.8695-gram 0.0039-gram weight reduction(0.01962%)	19.8695-gram 0.0031-gram weight reduction(0.01560%)	19.8687-gram 0.0225-gram weight reduction(0.11312%)	19.8712-gram 0.0217-gram weight reduction(0.10908%)
3/8 Inch	19.8695-gram 0.0039-gram weight reduction(0.01962%)	19.8699-gram 0.0027-gram weight reduction(0.01359%)	19.8692-gram 0.0220-gram weight reduction(0.11060%)	19.8730-gram 0.0199-gram weight reduction(0.10004%)
1/2 Inch	19.8689-gram 0.0045-gram weight reduction(0.02264%)	19.8699-gram 0.0027-gram weight reduction(0.01359%)	19.8695-gram 0.0217-gram weight reduction(0.10909%)	19.8738-gram 0.0191-gram weight reduction(0.09601%)
5/8 Inch	19.8686-gram 0.0048-gram weight reduction(0.02415%)	19.8699-gram 0.0027-gram weight reduction(0.01359%)	19.8702-gram 0.0210-gram weight reduction(0.10557%)	19.8746-gram 0.0183-gram weight reduction(0.09199%)
11/16 Inch	19.8680-gram 0.0054-gram weight reduction(0.02717%)	19.8699-gram 0.0027-gram weight reduction(0.01359%)	19.8707-gram 0.0205-gram weight reduction(0.10306%)	19.8756-gram 0.0173-gram weight reduction(0.08697%)



* Magnets #1 and #2 were individually weighed in the orientation used in each experiment and their separate weights were added together.

NOTE:

March 8, 2002 Experiments: Start time: 12:12 hours EST, End time: 13:47 hours EST.


GRAPH 6:

**MAGNETIC DECLINATION FROM THE LOCAL
TOPOLOGICAL MAP**

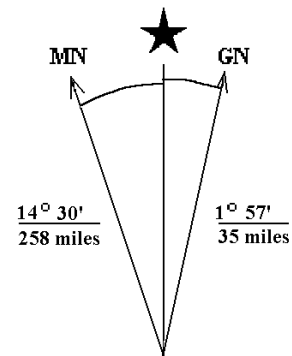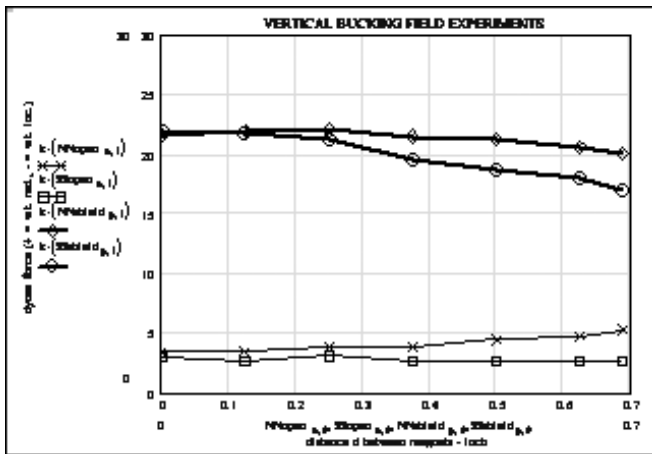

1983 Magnetic Declination~ U. S. Geological Survey
Norwich, Connecticut Quadrangle Topological Map

GRAPH 7:

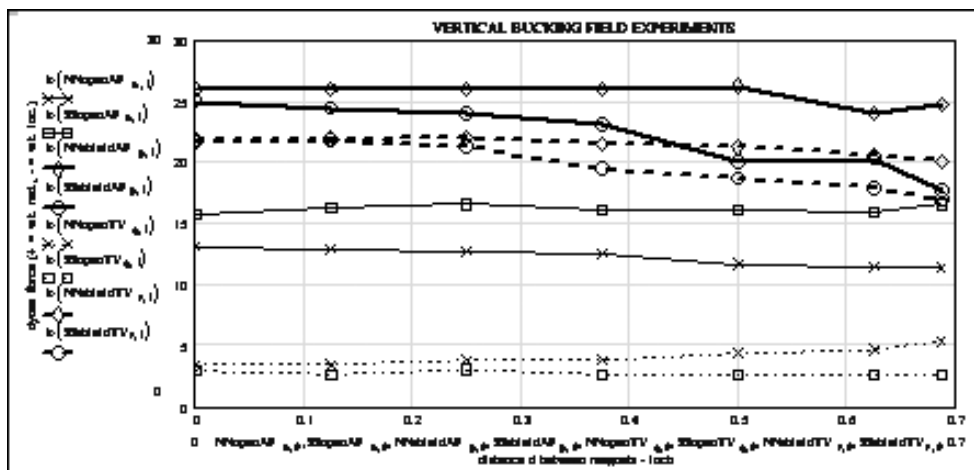

KEY TO GRAPH 7:

- For N-to-N pole facings in the open (or unshielded) at Avery Point (AP):
NNOpenAP
- For S-to-S pole facings in the open (or unshielded) at Avery Point (AP):
SSOpenAP
- For N-to-N pole facings shielded with Mu 80 shielding at Avery Point (AP):
NNshieldAP
- For S-to-S pole facings shielded with Mu 80 shielding at Avery Point (AP):
SSshieldAP
- For N-to-N pole facings in the open (or unshielded) at Thames Valley (TV):
NNOpenTV
- For S-to-S pole facings in the open (or unshielded) at Thames Valley (TV):
SSOpenTV
- For N-to-N pole facings shielded with Mu 80 shielding at Thames Valley (TV):
NNshieldTV
- For S-to-S pole facings shielded with Mu 80 shielding at Thames Valley (TV):
SSshieldTV

The subscripts for the data points $n = p = q = r = 7$ are all the same value in **GRAPH 7**.

Advanced Nuclear Waste Decontamination Technologies

Mark Porringa

Zeropoint Techtonix Inc, 430 Bass Lake Road, R R # 1,
Deep River, Ontario K0J 1P0, Canada
(613) 584-2960 fax: (613) 584-4616 porringam@aecl.ca

It is a review of nine alternative, peer-reviewed techniques as candidates for the global clean-up of nuclear waste.

The following is a reasonably comprehensive list of potentially effective nuclear waste treatment methods that might be employed to treat the entire range of radioactive wastes that have proven to be such a daunting and horrendously expensive problem for the nuclear industry (in all its forms) with major, long term implications for the environment.

A wide variety of methods will probably be required to accommodate the many different radioactive waste sources including high and low level, solids, liquids and gases. Process names used here are in some cases just convenient labels used to categorize and set them apart from each other.

Theories on several of these processes are still quite speculative and solid evidence that would pass conventional peer review is still lacking. This is after all a very new field of science.

Some of these technologies are already well protected by international or national patents, with additional US and international patents pending, and further patents may be obtained on new developments as they are made.

The Brown's Gas-Metal Matrix Process:

The BG-MMX process utilizes a patented electrolysis cell of the Australian Prof. **Yull Brown's** design that is said to produce a stoichiometric mixture of monatomic hydrogen and oxygen or possibly a quasi-stable water molecule raised to a high-energy state. This gas has some very peculiar properties including the ability to sublime tungsten (6000°C) with an implosive flame that burns cool in air with a temperature of only 130°C.

The gas is used to heat a proprietary mixture of metals and/or metal oxides including the radwaste to be neutralized. A highly exothermic radiant reaction appears to result in the immediate reduction of radioactivity approaching 95% of the original levels judging from preliminary tests, within seconds of treatment. The process is conjectured to be effective with high level solid wastes and possibly gasses, but probably not liquids. The high temperatures involved may also preclude the processing of more volatile wastes.

Since 1991, this technology has been successfully demonstrated, on a small scale, at least 50 times to US, Chinese, Japanese and United Kingdom officials on a variety of nuclear waste products including Americium, Cobalt, Uranium, and Plutonium. The technique can be applied for the immediate decontamination of stockpiles of nuclear waste materials being held near nuclear power plants. The process is very simple, safe, and inexpensive to develop further into robotics application for on-site treatment with no foreseen environmental effects.

Photoremediation

The *Photoremediation* process of the American Dr. **Paul Brown** is essentially conventional physics, *albeit* applied in a new and novel way. The process involves the use of a high-energy electron beam impinged on a target, which in turn produces a monochromatic gamma radiation that is tuned to induce *Photofission* and *Photoneutron* reactions in the target material causing rapid neutralization of radioactive isotopes. The efficiency claimed exceeds 500% due to the high cross-section reactions in the Giant Dipole Resonance region. The 10 MeV electron beam produces typical fission reactions in the 200MeV range effectively turning high level solid wastes such as spent fuel into an energy source. The process is apparently intended for on-site treatment with some waste-partitioning required, an aspect which may not be desirable in certain countries.

While this idea is similar in topology to a system being developed by **Los Alamos National Labs**, Dr. Paul Brown's approach offers several advantages: no need for extensive chemical pre-processing and the energy required to effect transmutation is greatly reduced. No new technology needs to be developed, yet the engineering of such a photon reactor must be completed and it could itself become a practical method for generating power.

ZIPP Fusion

The ZIPP fusion process, identified by **Mark Porringa**, induces a wide variety of fusion reactions, resulting from the radial compression of individual diatomic and other simple molecules dissolved or suspended in a light

water, carbon arc electrolysis cell. A variety of other cell configurations are envisioned.

The process appears to produce only stable isotopes, which should therefore make it capable of stabilizing a wide variety of radioactive waste materials. The theory on the process draws from Condensed Charge phenomena, Brown's Gas implosion, cavitation bubble collapse and sonoluminescence - all variations of the Casimir effect - which is believed to cohere the Zero-point energy of Quantum Vacuum Fluctuations. Transmutations using variations of this basic process may be applicable to a wide variety of nuclear wastes and appears capable of operating with an efficiency exceeding 100%.

A major implication of this process is that the Strong force of the nucleus is understood as an ultra close range Casimir effect. **Oakridge** Nuclear Laboratories in the US in conjunction with several international collaborators have just (this month, in fact) announced a deuterium cold fusion process based on the essential elements of the ZIPP Fusion process first reported in 1998. The process is very simple and inexpensive to develop.

RIPPLE Fission

The RIPPLE Fission process is an adaptation of existing potential technology utilizing a supersonic ionized gas to aerosol a counter flow heat exchanger that envelopes the radioactive waste aerosol in a vacuum induced plasma vortex which appears to disrupt the matter stabilizing influence of the Quantum Vacuum fluctuations resulting in "gentle" low recoil fission reactions which produce only stable fission products, with excess neutrons being prompt converted to protons via quenched Beta emissions. The process is apparently proven with conventional non-radioactive wastes and is believed applicable to the entire spectrum of radwaste without the need for waste partitioning. This process is also conjectured to operate with over-unity efficiency.

The LENTEC Processes

The Low Energy Nuclear Transmutation Electrolytic Cells of the Cincinnati group produce a variety of transmutation reactions using a variety of exotic electrolysis cell designs that generally produce condensed charge clusters composed primarily of up to 10^{11} electrons each. These electron charge clusters produced with the use of special electrodes can penetrate the nuclei of larger atoms in solution and transmute these atoms into stable elements.

The range of design and operating protocols and potential applications are essentially limitless provided for the waste that is dispersed in the electrolyte. The reported transmutation of thorium to stable titanium and copper by the Cincinnati Group and by the Salt Lake City group is one of the most dramatic examples

of this type of treatment process. Application to other high-level liquid transuranic fissionable wastes such as surplus Plutonium seems likely. The glaring absence of normal fission yield energies is perplexing but probably explicable as another form of low recoil fission reaction, similar to RIPPLE fission.

The Plasma Induced/Injected Transmutation - PIT Processes (also known as HDCC)

Plasma Induced/Injected Transmutation processes run include a gamut from recent achievements dating back to the **Oshawa-Kushi** cold plasma transmutations reported in 1964. The patented high-density charge cluster process (HDCC) was first discovered by **Kenneth Shoulders** and added on to by **Harold E. Puthoff**. Later, the late **Stan Gleeson** discovered HDCC in properly processed solutions. Still later, **Alexander Ilyanok** of Belarus discovered HDCC, followed by **Vasilii Baraboskin** in Russia.

The production of Condensed Charge Clusters and various plasma glow discharge phenomena in a variety of gaseous atmospheres is again implicated as the underlying cause with what should be by now an obvious connection with the coherence of Zero-point energy from the Quantum or Stochastic vacuum.

Desk-top high energy particle accelerators have also been envisioned, based on the "piggy back" principle, in which the clusters permit acceleration of "piggy-backed" heavier ions to extremely high energies capable of causing fusion and transmutations in target materials including those in solution and the materials of which the electrodes are composed. Brown's Gas implosion and cavitation bubble collapse reactions are also believed to be prevalent in these types of cells due to the prevalence of electrolysis.

A high-density charge cluster technology was discovered and used by Stan Gleeson to stabilize radioactive liquid wastes and has been developed further in the last 4 years by a group led by **S-X Jin** and **Hal Fox**. Best results for radioactive liquids have been demonstrated in the processing of thorium for a 30-minute period and achieving a reduction of radioactivity of about 90% from a liquid sample.

Kervran Reactions

The very compelling evidence compiled by French Nobel Candidate Dr. **Louis Kervran** has identified a wide range of nuclear transmutations in biological systems that have not been adequately explained. Coherence of Zero-point energy via Casimir effects within the *Somatid* particles identified by the Canadian **Gaston Naessens** is implicated as a possible cause. A wide variety of *in vitro* and *in vivo* reactions are believed to be possible as proven in nature and numerous experiments typically involving a reaction medium composed of a dielectric fluid such as water. Highly radiation resistant microorganisms have been found

thriving in the core of nuclear reactors indicating the possibility of microorganisms being capable of transmuting some bioactive nuclear wastes in the course of the normal metabolism of such organisms.

The Monti Process

The Italian **Roberto A. Monti's** process involves confined explosions involving proprietary mixtures of materials that include radioactive waste. Ignition of such mixtures causes nuclear transmutations resulting in reduced radioactivity (to near-background levels) following combustion, gradually over 1 to 4 days.

This technique has been confirmed by the Italian **ENEA** and is supported by the French CEA scientists as a serious candidate for treatment of waste stockpiles. The system, as currently designed, required waste to be inserted into a chamber.

Higher group symmetry electrodynamics

Extremely weak, non-classical, higher group symmetry electromagnetic fields were found during a 1991 experiment made by **Glen Rein** to alter significantly the level of radioactivity in materials, even those in the environment. The experiments suggest that higher group symmetry electrodynamics modulate the quantitative and/or qualitative properties of radioactive species. If the non-classical fields directly affect the radioactive species, it is likely that the appropriate field parameters will be discovered to neutralize radioactive emissions. In 1999, a theoretical basis for the phenomenon was developed by the Welsh physicist, **M. W. Evans**, with the participation of Lt. Col. (retired) **Thomas E. Bearden**.

The technology is extremely simple and could be applied with minimum logistics for treating massive structures, *in-to* outdoors, such as the Chernobyl disaster site.

Psitronics Group Systems, International

Robert "Paul" LeBreton, 2901 Hwy. 6, HC 77 Box 42, Laguna, NM 87026 USA

E-mail: wizzard9@earthlink.net Phone: 1-(505)-836-7534

Psi/Group's Magnetic Motor - Funding for New Prototype Sought:

As the engineer who designed the self-sustaining magnetic motor being advertised by Psitronics Group Systems, International. It perhaps falls upon me to explain (as well as I am able) the methods used by me in this motor's design:

The actual "picture" description is totally Intellectual Property; Protected as a Trade Secret.

However: This magnetic motor is a "perpetually imbalanced configuration" of permanent magnets; an unequal number of magnets on the rotor & stator; that revolves in a "self-sustaining" manner as the magnets seek balance... There are no electrical components in the design unless one wished to insert alternator windings in the stator to provide an electrical output...

We have discovered: through a prior unsuccessful prototype that using a paramagnetic material (we used aluminum) for the rotor & stator was self-defeating; as with the powerful rare earth magnets used in the design aluminum destroyed the magnetic

fields... On further analysis of the failed prototype it was deduced that a "latch up" condition would occur between rotor & stator magnets; unless the rotor magnets were canted or skewed at an angle from the stator magnets... The plastic prototype contemplated corrects both of these problems....

We are seeking an investor willing to put up \$4000 (DUS) for the prototype and who can offer \$40,000 return on investment "if it proves successful" ...We have a Global Distribution 'ready to go' as well as a pledge of \$ Millions towards Manufacturing & Marketing from EarthTech, International on submission of a running motor...

Very Respectfully Yours,
Paul LeBreton

<http://home.earthlink.net/~wizzard9>
(Psi/Group Website)

Inquiries should be emailed to:
wizzard9@earthlink.net

Experimental Investigations of the Radioactive Isotope Half-Value Period Changing in the Local Volume of Cause-Effect Relations

Igor A. Melnik

Pr.Frunze 232, Tomsk, 634021, Russia, Ph. (3822) 244555
breg@mail.ru

Nuclear-design methods of the elemental analysis are based on the property of the radioactive isotope decay rate constant. Half period as a constant quantity is defined by the time feature (the time flow is uniform in the every space point). The given postulate is confirmed by the long-term results and raised no doubts. But in last years some researches, investigating enough fine effects by change of the registered radiation intensivity, came to the conclusion about influence of space cycles on the time flow [1]. In his turn, N. A. Kozyrev during the investigation of active physical properties of time came to the conclusion about violation of its uniform flow in the local volume of the cause-effect relations, created by the cyclic motion (rotation, oscillation) of bodies [2,3,4].

Thus, the author get an idea to use a radioactive isotope cesium-137 as a "sensor", measuring the changes of time flow uniformity in the certain local volume of cause-effect relations. In basis there are following arguments: owing to a conception of time uniformity and considerable cesium-137 half-value period, the source activity must be permanent during the experiment time. By the time flow (period) change, i.e. changes of uniformity in the local volume of cause-effect relations, the half-value period – T is changing in the direct proportion. Source activity, respectively, is changing in the inverse proportion according to the law $\exp(1/T)$ in relation to the external space volume. Hence, registered gamma-quantum intension (amplitude impulse distribution) in the absence of the cause-effect relations is proportional to the function $N_0 \sim \exp(\ln 2/T_0)$. Then the proportion $N_0/\Delta N$, where $\Delta N = N_0 - N$ is made, and by means of it a half-value period difference is defined by the formula

$$1/\Delta T = |1/T_0 + \ln(\Delta N/N_0)/\ln 2| \quad (1)$$

N_0 – selective average amplitudes of impulses at the case of static liquid (in the absence of the cause-effect relations);

N – selective average amplitudes of impulses at the case of rotation of liquid.

In this case, there were investigations of the determination of the gamma-quantum intension change (i.e. change of a half-value period) dependence on the angular velocity of the activator rotation, and also on the coordinates location and amount of cause-effect relations (Fig. 1).

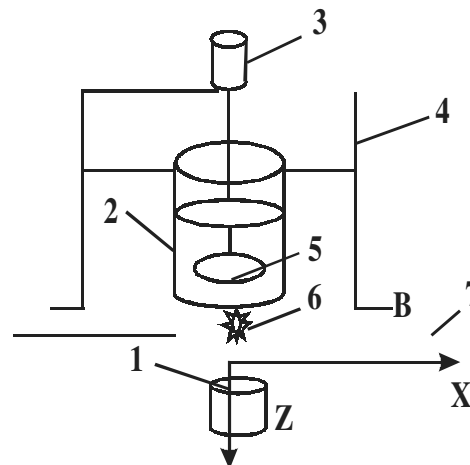


Fig.1

The following devices were used as measurement equipment: semi-conducting detector (SCD-63V) (1), preamplifier (PAG-2K), amplifier (BAI-3K) and analyzer (AMA-02F1). Energy gamma-line of 662 KeV was measured with the resolution 4 KeV. The gamma-quantum source was glued to the detector housing at the distance of 100 mm from its surface; so, any spatial change through coordinate axes was executed together with the detector to avoid even a tiny change of the source-detector geometry.

The vessel with a liquid (2) was placed above the source (6), vortex fluid motion was created by an activator (5), placed on the rod of electric motor (3). The glass with a liquid, connected with the motor and frame (4), was displaced regarding to the center of the revolved activator, what was the reason of the glass vibration in horizontal line, and, hence, one of frame sides vibration in vertical line (v). In its base, the frame was a square with the side of 200 mm. To assign the direction of the space cause-effect relations, one of frame sides was vibrating, and the opposite one (on the X axis) was fixed on the table (7). An experiment was made in such a way, that vibrating parts did not adjoin with the detector. The radius of glass is 50 mm, the distance from central axis up to the vibrating frame part is 100 mm. N-selection of the every value on the diagram (Fig. 2) corresponded to twenty measurements, roots from the average variance of numbers distribution $D \approx 160$ impulses.

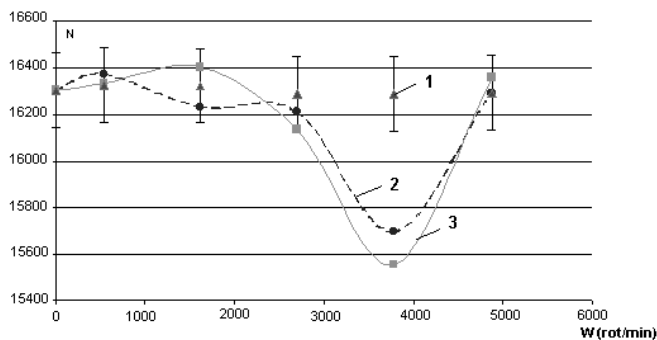


Fig. 2

Dependence of photopeak-N area from the angular velocity of rotation – W , where 1 – is photopeak area at static liquid, 2 – is photopeak area at clockwise rotation, 3 – is photopeak area at anticlockwise rotation

During two months eighteen experiments were made (at the one geometry) of the given effect fluctuation study, and there were no considerable deviation. An effect of the time deceleration always appeared at the angular speed of the activator rotation $W=3780$ r/min (during the vibration of the whole perimeter of the frame base). If there was a vibration on the only one side of the frame base (on the X axis), then this effect appeared at the higher speed of rotation. Unfortunately, the maximum motor speed of rotation $W_{\max}=4880$ r/min did not let to define the precise position for the next rotation point. During the experimental results extrapolation $W_2 \approx 5930$ r/min ($W_2 \approx \pi W/2$) was obtained.

In the table there are selective middle amplitudes of impulses $-N = \sum N_n/n$ roots from the numbers distribution average variance D , dispersion of the simple average G at the different directions of the liquid rotation (for the rotation point $W=3780$ r/min). The half period is estimated by the equation (1) and formula $T=T_0 + \Delta T$ where $T_0=30.2$ year (the cesium-137 half-value period).

Liquid motion	N, imp.	D	G	T, year
Static liquid	16304.0	160.7	35.9	30.200
Clockwise	15696.0	162.0	36.2	30.412
Anticlockwise	15553.0	165.0	36.9	30.423

During the investigation of the activator angular speed of rotation dependence on the registered gamma-

quantum intension, **there was discovered the time deceleration effect in the fixed point of ambient space of the glass with the liquid.** The effect was versatile, during the further study of the reasons of the effect disappearance, the following regularities were found:

1. Intension change appeared only at the case of asymmetrically fixed glass, when there appeared horizontal oscillations, transmitted to the vertical oscillations of the frame;
2. An effect disappeared, if the gamma-quantum source was placed in the glass center (– $2 \div 3$ mm down from the glass bottom);
3. At the same speed of rotation but without liquid, with an eccentric activator, the time deceleration effect disappeared.

Will consider the system with liquid, its internal chain consisted of three cause-effect relations:

1. Activator-liquid;
2. Liquid-glass (frame);
3. Frame-table.

Glass oscillations were transmitted to the frame through the hard cohesion. There was only one cause-effect relation – an activator (a frame) – a table. Thus, amplitude of the time flow changing was, most likely, influenced on by the amount of cause-effect relation, and also, there was observed a quantum effect, dependent on the activator and liquid rotation frequency.

The time deceleration maximum amplitude appeared during the source displacement from the central axis of glass along the X coordinate to the distance ~ 5 mm. There appeared the necessity to check the given effect on space points along the all coordinate axes in the radius $R \approx 100$ mm from the central point of the glass bottom (an extreme vibration point along the X axis was placed on this distance).

On this purpose there were made some experiments, results of which are shown on the (Fig. 3), (Fig. 4).

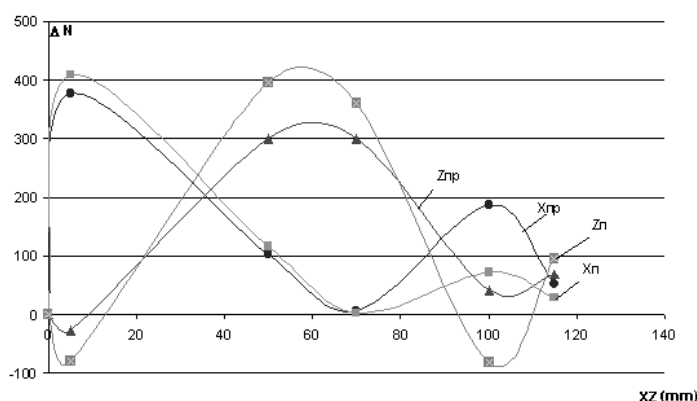


Fig. 3

Dependence of the increase of photopeak $-\Delta N$ area from the spatial interval in Cause-Effect Relations by X and Z coordinates, where $X_c Z_c$ – is clockwise rotation, $X_{ac} Z_{ac}$ – is anticlockwise rotation

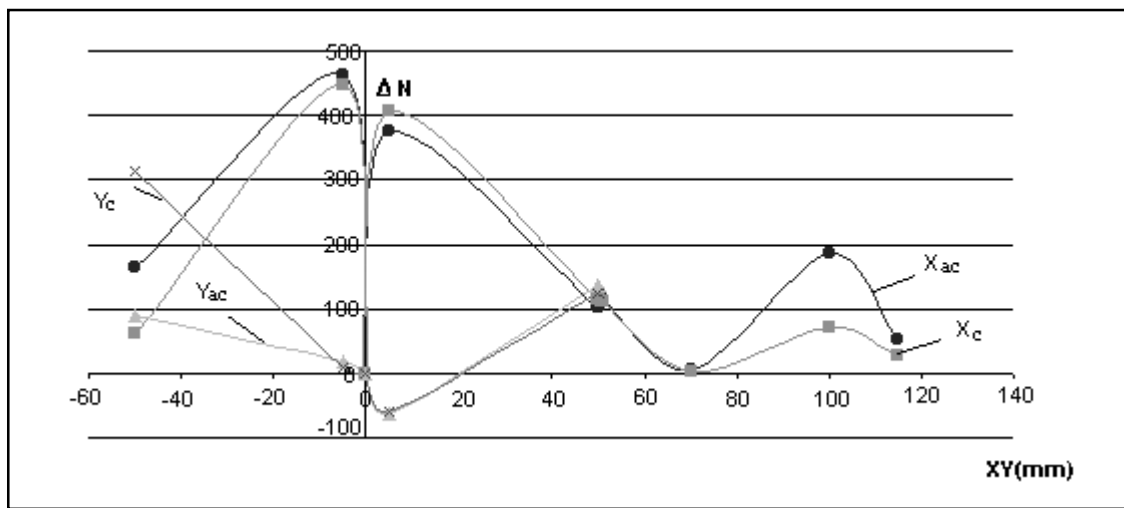


Fig. 4

Dependence of the increase of photopeak $-\Delta N$ area from the spatial interval in Cause-Effect Relations by X and Y coordinates, where $X_c Y_c$ – is clockwise rotation, $X_{ac} Y_{ac}$ – is anticlockwise rotation

Let us suppose that positive axis Z is directed from the glass bottom center to the ground and axis X – from the central axis of glass to the vibrated part of the frame (North-West), in this case Y is directed to the North-East. Along the all coordinates, in every adjusted space points on the distance R_i from the glass bottom center ($R_i = 5; 50; 70; 100; 115$ mm), there were forty measurements. At that in every point after ten measurements connected with the rotation there were measurements at the static liquid. It was made to avoid any systematic errors. The amplitude of the sample average impulses at the static liquid - $N_0 = 10550$ imp. In this case the root from the dispersion $\Delta = 120$, dispersion of the simple average $G = 19$. Amplitude increment was calculated by the formula $\Delta N = |N_0 - N|$. Following regularities were found:

1. If considering the difference of impulse amplitude (in the positive coordinate space) in the first cause-effect relation evidence (activator-liquid), i.e., to put the difference between the initial (5 mm) and final (50 mm) points of amplitude registration (their middle evidence between "clockwise" and "anticlockwise") $\Delta N_5^{50} = |N_5 - N_{50}|$ into the formula (1), then relations $\Delta T_z / \Delta T_x = \Delta T_x / \Delta T_y \approx 1.11$ ($\pi/2\sqrt{2} \approx 1.11$)
2. Change of impulse amplitude difference along X is the antiphase of changes along Z and Y;
3. At the rotation clockwise and anticlockwise there takes place a periodical inversion of amplitudes difference relation;
4. At the liquid rotation clockwise and anticlockwise, there appears an obvious distinction in evidences of the increment ΔN in negative region of coordinate axes;

5. Along Y and Z-axes in points (5; 100 mm) there is observed insignificant time acceleration.

The whole cause-effect relation system was defined as an internal (activator-table), as an external one (ground - system center of gravity). **In the internal space volume time at the certain conditions breaks its own uniformity, at that the time period change is nonlinear and is defined by its quantum nature.** Therefore, standard clocks in causal relations must be considered regarding to the center of gravity and location of the measurement point in the internal system space.

References

1. Shnol S.E., Zenchenko T.A., Zenchenko K.I., Pozharsky E.V., Kolombet V.A., Konradov A.A. Regular change of the statistical distributions thin structure as a result of cosmophysical causes. Kushnirenko E.A., Pogozev I.B. Comment to the article of Shnol S.E. and Co. Progress of physical sciences. Vol. 170, #2, p.213-218, 2000.
2. Kozyrev N.A. Causal or asymmetric mechanics in the linear approximation. Pulkovo, 1958, p. 90.
3. Kozyrev N. A. Astronomic observations by means of time physical properties. Symposium transactions, Erevan, 1977, p. 209-227.
4. Kozyrev N.A. About possibility of bodies mass and weight under the influence of time active properties. Eganova I.A. Analytical survey of modern time-keeping ideas and experiments. Novosibirsk, 1984, p. 92-98.
5. Melnik I.A. Experimental researches of the time flow local deceleration. VINITI 5.02.92, N1032-mg92, #4, p.70.

UP-TO-DATE INVENTION

TILLEY ELECTRIC VEHICLE

Tilley Foundation, Inc.

131 Hiwassee Road
Lebanon, TN 37087, USA

615-443-5315

E-mail: cktilley@bellsouth.net

Nowadays there stays urgent the development of technologies, which could possibly be combined into a reliable, commercially successful advanced self powered vehicle with additional desirable but currently commercially unavailable features.

The advantages of electric vehicles seem to be evident – they are clean, quiet, powerful, require much less maintenance than gasoline or diesel-fueled vehicles, and are inherently much simpler and easier to manufacture. Their drawbacks have been a short range, long battery recharging time, and a heavy, bulky battery pack.

After several years of personal accomplishments in the alternative energy industry, **Carl B. Tilley, the inventor from USA**, was convinced that it was possible to build an electric car that could be powered without the help of external power to keep the battery charged.

The concept to produce a useful electric performance car that would last more than a few hours and would be economical to run, safe to drive around town or across the United States and never use a drop of fuel challenges the future of transportation as we know it today.

With the establishment of the **Tilley Foundation, Inc.**, in the year 2001, Carl Tilley set out to prove it could be done. It was an ambitious project and it broke ground on the facility in Tennessee that would build the first self-generating electric car.



Construction of a 1,800 square foot building, that was powered with another recently developed electric device, began in the year 2002. Electricity for this car is provided from a different energy invention, which was void of any outside power supply. It is ironic that one alternative energy device actually built the invention to power and build the electric car.

The **Tilley Electric Vehicle (TEV)**, converted from a 1981 DeLorean, energizes the imagination and defies what has been accepted as a standard in the area of transportation for years.

From the selection of the proper car to be converted, to the advanced technology, which is on board, the **TEV** performs comparably to gasoline-powered vehicles. The difference is you have no need for fuel and you do not have to stop the vehicle to charge it after driving. There is no pollution and you can cruise the highways at the same speed as any other vehicle.

There is a new car on the road today. A car built with technology that defies the concept of fossil fuel powered cars, and can run coast to coast without ever relying on the battery being charged from an outside source.

The long awaited transportation revolution and the end of our reliance on fossil fuel has now begun**the Tilley Electric Vehicle.**

The demonstration of a DeLorean powered by an electric motor and 12-volt standard car batteries is supposed to be on September 7, 2002, at the Nashville Superspeedway, USA. The battery bank is kept in a charged condition by the "on board" charger which is the device invented by Carl B. Tilley. Racing legend Bobby Allison is one of the guest drivers for this demonstration.

**Details and results of the
demonstration read in
our next issue**

The Problem of Time: Force as the Cause of Change of the Course of Time

Valentin P. Oleinik

Department of General and Theoretical Physics,
National Technical University of Ukraine "Kiev Polytechnic
Institute", Prospect Pobedy 37, Kiev, 03056, Ukraine;
e-mail: yuri@arepjev.relc.com
Internet: <http://temporology.bio.msu.ru/OLEINIK/oleinik.htm>.

Abstract

*Material processes occurring in a physical system under the action of a force field necessarily influence the course of time along the trajectory of motion of particle. A general relationship is obtained which relates the course of time on one path section of a particle when moving in a force field to that on the other path section in the same inertial reference frame. According to the results obtained, the force in relativistic mechanics is not only the cause of acceleration of particle relative to an inertial frame of reference, but also the cause of change in the course of time along the particle's trajectory. **Therein lies the physical content of the dynamical principle underlying the special theory of relativity (relativistic mechanics).** The applications of the theory developed to homogeneous fields - to the field of gravity and electromagnetic field, and to the gravitational field produced by a point mass particle are considered. Physical properties of the state of imponderability of particle in an external force field are investigated. It is noted that the change in the course of time in a force field is in no way connected with the change in space-time metric and is a direct consequence of the causality principle of relativistic mechanics. **The existence of dependence of the course of time on the state of motion of particle in a force field points to the feasibility of controlling the course of time using force fields.***

Time is among the most common concepts, which are used constantly both in everyday life and in science. This is because all the events and material processes in the world happen in space and develop in time and, hence, the laws that govern space-time connections are the most general and hold for all the forms of matter. Nevertheless, time remains one of the most mysterious concepts of physics; its physical essence is not adequately revealed up till now [1-4]. The concept of time with difficulty yields to logical analysis.

From the point of view of common sense the essence of time is that time characterizes the duration of events and processes, indicates their natural sequence, at which the present, going away to the past, gives place to the future.

Isaac Newton gave a clear-cut characteristic of the concept of time, to which the majority of physicists

adheres: "The absolute, true, and mathematical time in itself and by virtue of its nature flows uniformly and regardless to any other object". Though, according to Newton, time flows equally and uniformly and does not depend on the processes, occurring in the world, the daily experience speaks in favour of the fact that the course of time is not uniform. Depending on circumstances in our history, it seems to us that time either flies swiftly or hangs heavy on our hands; sometimes it even changes suddenly, by leaps. In connection with these speculations the question arises of whether the subjective sensations of non-uniformity in the course of time familiar to everyone have an objective basis.

In Newtonian mechanics time is of an absolute character, it does not change as one passes from one inertial reference frame to another and represents merely a parameter, whose change at the will of explorer results in the change of state of a mechanical system in accordance with the equation of motion.

In relativistic mechanics time remains a parameter describing the development of system. But now time and space are intimately linked with each other to form a single system, i.e. the 4-dimensional space-time. In going from one inertial frame of reference to another time gets entangled with spatial coordinates, so that time in one reference frame represents a "mixture" of time and coordinates in the other. Time ceases to be universal, the same in all inertial reference frames; it takes on a relative character.

The indissoluble association of time and space takes on special importance in the light of the concept of physical field, which was called by Einstein the most important discovery in physics after Newton. According to this concept, the occurrence in space of a force field means that space turns into a physical environment, which is capable to interact directly with other bodies and gains, thus, physical properties, becoming an active participant of physical processes. In view of the fact that **space and time are indissolubly related to each other, the presence of a force field in some area of space must necessarily result in the appearance of physical properties of time caused by the motion of body in this area.**

Thus, from the synthesis of the notion of space-time and of the idea of physical field it follows with necessity that **the course of time in a given region of space should depend on physical processes in this region, i.e. time, as well as space, should have physical properties [5-8].**

It should be emphasized that in special theory of relativity (STR) time and spatial coordinates are independent and formally equal in rights quantities, which determine the position of elementary events in space-time. On the other hand, time stands out in relation to spatial coordinates. The special role of time is due, from the viewpoint of geometry, to the

pseudoeuclidity of geometry of the 4-dimensional space. From the physical point of view, it is associated with the dynamical principle (causality principle), according to which the state of motion of a physical system at an instant of time t uniquely defines its behaviour at the next instant of time $t + 0$. The significance of dynamical principle lies in the fact that it relates the temporal evolution of system to the physical processes caused by force fields and in doing so it allows one to determine the course of time in the system, its possible dependence upon the character of physical processes, and not just the sequence of events and their duration.

The idea about the existence of the physical properties of time belongs to N. Kozyrev [9]. By introducing into mechanics an additional parameter taking into account the directivity of the course of time, Kozyrev has formulated causal (asymmetrical) mechanics from which it follows that time has physical properties. According to the results of theoretical and experimental investigations conducted by Kozyrev and his followers [9-13], events can proceed not only in time, but also with the help of time, **information being transmitted not through force fields, but via a temporal channel, and the transfer of information happens instantaneously. The appearance of additional forces, associated with the physical properties of time and capable to fulfill work, testifies that time can serve as a power source.**

In the papers by I. Eganova [12] and M. Lavrent'ev and I. Eganova [13] it is stated the problem of direct experimental research of the physical properties of time to ascertain the relations of a new type between phenomena and to discover new methods to change the state of substance. In [14] O. Jefimenko investigated the dynamical effect of the slowing-down of time.

According to [6-8], the conclusion that physical properties of time exist follows strictly from relativistic mechanics, without introducing any additional hypotheses. The physical properties of time are of purely dynamical nature: their existence results from dynamical principle. **The availability of physical properties of time is manifested in that time has a local inhomogeneity: its course along the trajectory of motion of a point particle in a force field is continuously changed, and this change in the course of time is a result of the action upon the particle of a force field in the inertial reference frame, in which the motion is considered.**

Editor's note: The author gives a detailed consideration of the physical content of the local dynamical inhomogeneity of time. Considering the motion of a classical point particle under the action of a force field in the inertial reference frames, that moves relatively to each other, Valentin P. Oleinik derives 73 equations, that help him to obtain the following conclusion (mathematical details and physical reasoning may be found in <http://temporology.bio.msu.ru/OLEINIK/oleinik.htm>.)

The elucidation of the physical nature of time is one of the most important problems of theoretical physics. The purpose of research on the problem of time is to study the physical properties of time, i.e. to ascertain the possible interrelation between time and material processes. In particular, it is of interest to find out

- whether the flow of time depends upon physical processes and whether the back influence exists (i.e influence of the change of the time course on physical processes);
- what mechanisms of the change of the course of time are available;
- what factors are capable to speed up or to slow down the flow of time.

In papers [5-8] on the basis of Lorentz transformations relating to coordinates of points, lying on the trajectory of motion of particle in a force field, the phenomenon of local dynamical inhomogeneity of time is predicted. The main result consists in the proof that material processes occurring in a physical system under the action of a force field necessarily influence the course of time along the trajectory of motion of particle. The case in point is the change of the course of time along particle's trajectory in one inertial reference frame as compared with that in the other.

In this paper the next step is made: the relationship is obtained which relates the course of time on one path section of a particle when moving in a force field to that on the other path section in the same inertial reference frame. The main idea underlying the approach developed results from the analysis of Lorentz transformations and consists in that **the course of time of a particle moving by inertia, i.e. of a particle being not exposed to force, should be uniform.**

As is well known [17,18], the existence of dependence of the course of time upon the gravitational field potential is predicted with the general theory of relativity (GTR). According to GTR ([17], p.303), time flows differently at the different points of space in one and the same reference frame. Since "gravitational field is nothing more nor less than a change of the space-time metric" ([17], p.313), one can assert, apparently, that the change in the course of time is due, in the view of GTR, to the change of the 4-space metric. It should be emphasized that in the present paper gravitational field is considered as an ordinary force field, and the particle motion is supposed to occur in pseudo-Euclidian space-time. The main formulas of the article, (22) and (25), describe the change in the course of time in an arbitrary force field at different spatial points in one and the same inertial reference frame. As is seen from the results received, the change in the course of time in a force field is in no way connected with the change of space-time metric. It is conditioned by the force field action on particle in inertial reference frame and is a direct consequence of the dynamical principle underlying relativistic mechanics.

It should be emphasized that the existence of dependence of the course of time on the state of motion of particle in a force field points to the feasibility of controlling the course of time using force fields.

Note an important peculiarity of the non-inertial reference frame, in which the imponderability state of a particle is attained: **there is such a space-time region in which the reference frame at hand can be approximately considered as inertial.** In connection with the fact that such reference frames (it is natural to call them **quasiinertial** in contradistinction to the **true inertial** reference frames) are, generally speaking, not equivalent to each other (see previous section), the derivation of a rigorous criterion for inertial reference frame acquires especial significance. The dynamical criteria for defining the inertial and non-inertial states are considered in the papers by B. I. Peschevitsky [19]. The heliocentric reference frame seems to be among the quasiinertial reference frames, being inertial with adequate accuracy only in a restricted region of space (for example, within the limits of our Galaxy) [16].

The author is grateful to Yu.D. Arepjev for his interest to the paper and stimulating discussions.

References

1. Blokhintsev D.I. Space and Time in the Microworld (Nauka, M., 1970) (in Russian).
2. Prigogine I. From Being to Becoming: Time and Complexity in the Physical Sciences (W. H. Freeman & Co., San Francisco, 1980).
3. Prigogine I. and Stengers I. Order Out of Chaos (Bantam Books, New York, 1983).
4. Logunov A.A. Lectures on the Theory of Relativity and Gravitation: Modern Analysis of the Problem (Nauka, M., 1987) (in Russian).
5. Oleinik V.P. The Newest Development of Quantum Electrodynamics: Self-Organizing Electron, Superluminal Signals, Dynamical Inhomogeneity of Time, Physical Vacuum and Nature, 4, 3-17 (2000).
6. Oleinik V.P., Borimsky Ju.C., Arepjev Ju.D. New Ideas in Electrodynamics: Physical Properties of Time. Semiconductor Physics, Quantum Electronics & Optoelectronics, 3, #4, 558-565 (2000). E-print: quant-ph/0010027.
7. Oleinik V.P. Superluminal Signals, Physical Properties of Time, and Principle of Self-Organization, Physics of Consciousness and Life, Cosmology and Astrophysics, 1, 68-76, (2001); Borimsky Yu.C., Oleinik V.P. The Course of Time in Classical and Quantum Systems and Dynamical Principle, Physical Vacuum and Nature, 6, (2001) (in print).
8. Oleinik V.P. The Problem of Electron and Superluminal Signals. (Contemporary Fundamental Physics) (Nova Science Publishers, Inc., Huntington, New York, 2001).
9. Kozyrev N.A. Selected Transactions (Leningrad University Press, Leningrad, 1991) (in Russian).
10. Lavrent'ev M.M., Eganova I.A., Medvedev V.G., Olejnik V.K., and Fominykh S.F. On Scanning of Celestial Sphere by Kozyrev's Sensor, Doklady AN SSSR, 323(4), 649-652 (1992) (in Russian).
11. Akimov A.E., Kovaltchuk G.U., Medvedev B.P., Oleinik V.K., Pugatch A.F. Preliminary Results of Astronomic Observations of Sky by the Kozyrev Procedure. Academy of Sciences of Ukraine, Central Astronomic Observatory. Preprint CAO-92-5P, 1992, p.16 (in Russian.).
12. Eganova I.A. The World of Events Reality: Instantaneous Action as a Connection of Events through Time, Instantaneous Action-at-a-Distance in Modern Physics (Nova Science Publishers, Inc., New York, 1999).
13. Lavrent'ev M.M. and Eganova I.A. Physical Phenomena Predicted and Revealed by N.A.Kozyrev, in the Light of Adequacy of Space-Time to Physical Reality, Philosophy of Science, 1(3), 34-43 (1997) (in Russian).
14. Jefimenko O.D. Electromagnetic Retardation and Theory of Relativity (Electret Scientific Company, Star City, 1997).
15. Khaikin S.E. Forces of Inertia and Imponderability (Nauka, M., 1967).
16. Sivukhin D.V. The General Course of Physics. Mechanics (Nauka, M., 1979).
17. Landau L.D. and Lifshits E.M. The Classical Theory of Field (Pergamon Press, Oxford. 1985).
18. Pauli W. Theory of Relativity (Nauka, M., 1983).
19. Peschevitsky B.I. Dynamical Criteria for Inertial and Noninertial States, p.1 and 2. Philosophy of Science, 1(7), 79-84 (2000); 1(9), 99-109 (2001) (in Russian).

EAGLE-RESEARCH

*Energy Solutions
since 1984*

A Research Organization
that Develops & Distributes
Practical Energy-Saving
Methods & Devices

4 Energy Way, P.O. Box 118
Porthill, Idaho 83853
FAX: 250/492-7480

Technical questions to:
wiseman@eagle-research.com

Raum&Zeit

EhlersVerlag GmbH, Geltinger Str.
14e, 82515 Wolfratshausen

Telefon: 08171/41 84-76, 08171/41 84-66

Internet: <http://www.raum-und-zeit.com>

**Institut für Raum-Energie-Forschung (IREF)
i.m. Leonard Euler**



Global Scaling Theory
Gravitation theory
Mathematic Biology
Gravitation energetics
Hydrogen-Helium Energetic
Information technologies
Telecommunication technologies
Transport technologies

Time and its Physical Relationships

Andrew Michrowski

President, The Planetary Association for Clean Energy, Inc., 100
Bronson Avenue, # 1001, Ottawa, Ontario K1R 6G8 Canada.
(613) 236-6265; fax: (613) 235-5876
pacenet@canada.com

*Time cannot be absolutely defined, and there is
no inseparable relation between time and signal velocity.*
Albert Einstein [1]

Time does not exist by itself

The phenomenon of time emerges in relationships – as an expression of properties of physical bodies and changes that occur to them.

Time is a factor of energy. Time has to do with the *increase* and *decrease* of energy. For example, as energy is brought down to a “zero level”, time is “eliminated”, so in a sense, time cannot be “compressed” - only eliminated. In the zero-energy level, electrons occupying this level in unlimited numbers are available through state transitions for the building of matter and the vacuum [2]. So it is the extent and the nature of energy flow that determines the characteristics of time.

How do we know all this?

In his seminal foundations of physics work of the early 1900s, **Sir Edmund T. Whittaker** demonstrated by canonical quantization that there exist physical, time-like and longitudinal photons *in vacuo* [3,4,5]. The 2 scalar potential functions, F and G which completely characterize an electrodynamic field due to electrons in the ether are:

$$F(x, y, z, t) = \sum \frac{e}{4\pi} \sinh^{-1} \frac{\bar{z}' - z}{\left\{ (\bar{x}' - x)^2 + (\bar{y}' - y)^2 \right\}^{1/2}}$$

$$G(x, y, z, t) = \sum \frac{e}{4\pi} \tan^{-1} \frac{\bar{y}' - y}{\bar{x}' - x}$$

In these equations, for the fundamental case in which a field is due to any number of electrons moving in any way, we observe that time emerges only through the displacement of energy. Another way of putting it would be that time emerges through change in energy.

These photons have an independent physical existence. Whittaker himself observed, after computation that the “total disturbance at any point, due to this system of waves, is independent of the time, and is everywhere proportional to the gravitational potential due to the particle at the point” [6]. **A. D. Sakharov** admitted that

the gravitational field is a “conglomerate of loose things and not a fundamental field of nature at all [7].

Everything electromagnetic, and probably gravitational, starts from these potentials, not fields, and under certain circumstances, there may exist photons without fields being present at all. In the *vacuo*, the longitudinal light photon travels in the direction of the beam, like an energy capsule, as a scalar four-potential-function energy standing-wave field, with many different frequencies, with an internal symmetry based on circular polarization [8,9], an energy field or nexus that “has an end, but no beginning”. The time-like and space-like parts of the four potential are photons with spin -1 , 0 and $+1$ that are longitudinally directed, and which are observed in the **Compton** and the photoelectric effect [10].

Movement of light affects time

Philip S. Callahan designed an elegant experiment that shows how variations in the movement of light affect time [11]. Changes in exposure settings of photographs of same objects, including coherent light laser spots results in shift of position of images. The more coherent the light, the less apparent is a shift in time. He suggested that time is neither absolute nor independent of photon activity of space.

We can also state, as a corollary, that the *movement* of light generates time. After all, the electrodynamics is associated with photons. This is particularly significant in time engineering, as will be seen later.

Time and life

Now, it is well known that the ability of cells to sense the presence of light is a primary function of life itself. If a cell can sense light, it is alive; if it cannot, it is dead [12]. Callahan was able to observe that time increments were detected on light-detecting surfaces of living organisms such as the cuticles of leaves.

The Russian time researcher, **Nikolay A. Kozyrev** considered that living systems “consume” time for their life-energy [13]. **Velimir Abramovich** suggests that living organisms are naturally-driven “time machines”. They each have an inbuilt time that serves as a “code” to structure their own physical totality and to regulate their own functioning. Thus their “local time” acts as a “time operator” (“time condition”) frequency [14]. The nature and level of electromagnetic fields in living systems could therefore be considered as indicators of their “energy level” and how it affects and adjusts the inherent rate of time-flow.

Time and consciousness

We append to these statements the notion that, yes, time is “consumed” by living organisms – but only if they are conscious. Essentially, time can be perceived by measurement, which always requires a conscious observer.

When we measure, we observe the differentials of energy flow. It is the measurement of these differentials - as we note from the Whittaker equations of scalar fluxes - that allows us to measure the equivalence of time. When we measure differentials, we are effectively creating our notion of time.

It is difficult for humans to conceive that time does not exist when humans think about it. **Saint Augustine** speaks for all humans with his observation:

*While I do not think about time, I know that time exists.
When I begin to think about it, I stop understanding
what it is.*

With such conditioning, humans cannot come to grips with the notion that the Universe has no beginning and no end. It is like the paradigm of absolute nothingness - people cannot deal with the concept of no time because, effectively, consciousness, like life, consumes time. One could advance the notion that thought itself is time in motion. When we think, we are creating time. Life is movement - and the brain registers energy differentials and their associated fluxes of scalar potentials.

Time and causal mechanics

Since time is the result of movement of energy (and accordingly, light), then time is associated with the cause-effect processes linked to a first position of energy to the next. In other words, time is innate to causal mechanics.

Variations in energy flow, logically, lead to variations in the characteristics of time. They also permit variations in causality.

Conversely, changes in time lead to changes in physical structure [15]. This phenomenon was proven by Kozyrev and has been labelled as the **Kozyrev effect** [16]. He demonstrated that changes in the course of time affect the performance of electronic components. Figuratively speaking, a transistor is like a corral in which light behaves in a certain way. By changing the way that light behaves, a transistor becomes valueless.

To create an extra-temporal causality (with linkages to another level/dimension) one must change the light movement. Changing the light patterns means changing the behaviour of a wave, and its concordant photonic reality. By altering the photons, we make them go to another dimension.

Changes in time can effect change in living systems [17]. The engineering of "time-polarized" waves has the promise to target and amplify natural healing procession in living organisms. It is these natural activities that would restore diseased cells to their original and healthy condition [18]. Such time engineering may also include the reversal of the effects of AIDS, smallpox, anthrax, and most bio warfare agents, with treatment times of only a few minutes per week, with no more than 3

treatments required in all. Eventually it may also be possible to reverse the effects of genetic disorders, effect limb regeneration, and cure spinal cord injuries [19].

Engineering causality

Variation in the density of energy determines variation in the "the course of time". By the "speed of course of time" is meant the rate of causal transformation and the input of additional forces into systems (including mechanical tensions). According to Russian scientists [20, 21, 22] there are interesting possibilities in deploying engineering for causal mechanics.

In preventive time engineering, one could delay the approach of a known cause and to artificially close the consequence loop, and thereby annulling it from ever achieving an effect. In other words, one can make the effect "happen" before its normal time, disrupting space structure with its related "speed of the course of time". One can also make it "happen" after its expected deadline. This technology could have interesting implication in strategic situations (preventing a extra-planetary body from attaining a collision course).

According to the Russian experience, when the spatial structure is disrupted by time-engineered causal mechanics, the affected region undergoes relative greater entropy (or, less order). The volume of space is forced out to somewhere else, generating torsion fields, much like a balloon will drift away from denser air. A similar phenomenon occurs when the velocity of a mass increases, the force emerges against it, called "inertia" [23]. Now, to increase velocity, the energy of the mass increases. In the case of time, as the movement of energy increases, interaction or reaction with another dimension ensues to compensate for that primary change [24].

The boundary layer between the two states of space can then act as a mirror and the approaching agent may be reflected back to its source. For example, a light beam may be reflected back to its emitter, in full, or in part, depending on the engineering.

With space-time engineering, we could develop teleportation systems [25]. The course of time goes from the past to the future, in the direction of greater disorder. Going back to the past represents deceleration. The etheric continuum is perceived by Kozyrev is containing variations of "density" of structural elements. The "denser" the etheric region, the slower is the course of time. A zone of accelerated time course would be forced out into "rarefied" ether. A zone of slowed time would be forced into denser ether, hence the basis for a teleportation technique.

In vivo experiments with a Time Machine

For over 15 years, a Russian association of scientists has conducted experiments with acceleration and deceleration of time with 4 prototypes of time machines

[26]. Light-heartedly, the units are called “muskrat traps” since the experiments conducted in remote forest were disguised as a high-tech electromagnetic technology for trapping muskrats. The time machine units are spheres ranging in diameters of 30cm, 1 meter and 2.1-meter. The shells are encased with coils designed to produce convergent waves.

Team leader **Vadim A. Chernobrov** describes converging electromagnetic waves as moving from a periphery to a central point. They are observed when a hoop is thrown into the water and inside the hoop the waves converge. If a potential is applied to do work and to initiate the energy differential process, the other reverse direction scalar (the reverse-time energy flow) must react. Thus, compensation of time - in the form of the deceleration or acceleration of the rate of time - can take place [27].

The first trials involved mice, in which most (25 out of 31) died. Eventually, there were successful 2-hours runs of time travel. An experiment with a dog that was clearly frightened also showed no ill effects. This led to experiment with humans, the first being **Ivan Konov** who, on August 26, 2001 decelerated into the past by 3% of planetary time during a half-hour trial. Dozens of others have experienced the phenomenon and report such sensations as: quicker pulse, giddiness, itching skin, body twisting, numbness at extremities and a case of an out-of-body experience. Harmful effects on living systems do not appear to be linked to the change of the rate of time, but rather to the variations of the time rate value among regions of a living organism.

Some individuals reported visual experiences such as “starry sky”, “luminous vortices” and colour spots. Individuals observing outside of the time travel machine noted headaches. The most interesting phenomena occurred just before the start-up: significant presence of ozone for several hundreds of meters around the machine, which was located in a forest. Also noted were strange lighting effects in the sky above the apparatus, accompanied by sounds that inexplicably appeared to generated from inside.

Factors affecting the rate of time

The experiments yielded interesting observations: the phenomenon of the rate of change of time varies according to the hour of the day and according to the lunar phase. The rate can be influenced by a variety of external inputs, including mechanical vibration.

The transition into the future differs from than into the past. It is like movement from any point in a tree – where downwards represents past time. There are many paths possible towards the future – upwards, along the branches, but only one towards the past – downwards to the trunk. The return from the past time is possible only if the time traveler does not interfere with occurring events – or the possibility of returning to another branch of the tree. However, a return move from any variant of

future time is possible regardless of the behaviour of the traveller.

The Russian time-travel experiments point to a relationship between inertia and time. In changes of rates of time, the region adjacent to the spheres develops a boundary layer effect, appearing as an aura of “white mist”. The greater the time differential, the denser is the mist.

A similar phenomenon has been observed, and captured on film, with some experiments conducted by **John Hutchison** involving remote-controlled lifting and disruption of objects [28,29]. It may be that the **Hutchison effect** involves causal mechanics.

Time and frequency

Time may be viewed as a process – or “change-of-space” in any direction that does not exist in our dimension [30,31,32]. In physics, new properties are commonly acquired as the result of change in some property: charge, current, induced magnetic field, etc. Here, the new property becomes a new dimension. For the frequency of oscillations, the formula is $f = 3/\lambda$ [1/s], where λ is wavelength in [m]. Here, the velocity of light is equal to 3 (the 10^8 mathematical degree is omitted since it is a question of scale of measurement only).

Therefore, the analogy between our dimension and frequency gives us a new notion, which is curvature ρ : $\rho = 3/r$ [1/m] and $f = 3/\lambda$ [1/s]. The 3-dimensional radius is represented by $R = \lambda/\rho = r/3$ [m] and time as a period of oscillation has the relationship: $T = \lambda/f$ [s]. **Time can be considered to be equivalent to the radius of curvature ρ if the linear radius r and the wavelength λ are the same. This is a condition for the spatial resonance effect.** Note that in this analysis, “m” and “s” are unlike when length is measured in meters in our dimension. However, for a new dimension it is possible to use equal units for (m) of 4th dimension and conventional “second”. Furthermore, light (photons) is possible in our dimension only as a process in such a spatial resonator.

Experiencing time dilation

Based on the above discussion, it is proposed that we experience changes in rate of time in our daily life. During sleep, as our energy level decreases, so it can be argued that time decreases and we “go” into another dimension. Aspects of what is observed during the dream-state do not obey the rules of our familiarity of physical existence, and conventional causality - because the rate of time is different. As we start our dreaming, and as we emerge from dreaming, the recalled experiences resemble more our regular experiences. Before and after sleep, our brain frequency tends to resemble the daytime's. In effect, understanding our dream state's sense of time may be a reference key to comprehending the physics and causality mechanics of time engineering.

The Earth's mass appears to be in continual growth. 250 to 350 million years ago, our globe may have been half size - with all of the continents as one landmass [33]. In ancient sediments, the natural angles of slope in sand beaches greatly exceeded those of today, indicating that gravity has on our planetary surface has increased 8-fold, several times, during the last 1.5 billion years. Yet the planet's average density may not have changed – only the acceleration of free fall [34,35].

There could also be another explanation possible for the change of slope of beaches. The pull of the moon may have been different in the past.

Also, the planetary magnetic fields could have increased over the millions of years, through interactions with the solar flux of hydrogen atoms. The sun is in constant explosion – production of energy differential. Earth and other planets could be responding with harmonics to compensate for the solar activity, leading to an overall increase in magnetic fields. Such a phenomenon may give the illusion that the physical body is growing larger. In other words, with time, the force of gravity would alter planetary mass and energy.

Assuming that the Earth's density has not increased, it is possible account for, mathematically, the relative increase – growth processes - of the nuclei of terrestrial atoms, including the doubling of mass of nucleons and of electrons [36]. Such calculation also accounts for the emission of 2 different photons by hydrogen atoms (also known as the “red shift” described by **E. Hubble**).

The phenomenon can be explained with the time-like and longitudinal photons described by the bi-directional 2 scalar potential functions [37,38]. Could it be suggested that matter is gravity minus time? In other words, gravity is related to accumulation of energy differential (time) in mass.

The value of gravity varies throughout the planet, in part because of the poles and in part due to local density of matter. **Kirill P. Butusov** has noted a correlation between places of civilization and regions of greater gravity. A faster rate of evolution may be associated with such gravity zones. In these zones there would be a greater influx of scalar potentials. Time would be more “authenticated” by these energy flows into conscious beings. Butusov reminds us that time has a “positive energy” and flowing into nuclei of atoms or a “negative energy” flowing out of the nuclei of atoms [39].

The outflow would be representative of gravitational energy. Longitudinal waves are known to be able to enter and to leave nuclei. Such flows of time must come from other dimensions. After all, the surface of any elementary particle separates our dimension from another. This leads to an interesting possibility in which all time-associated processes between dimensions are synchronized.

Arguments have been laid that suggest that time is equal to energy differential (including movement of light). Living systems “consume” time as part of their consciousness and measuring processes.

It is possible to engineer causality. An understanding of higher-order electrodynamics is required. Techniques exist for the generation of scalar potentials. Causality technology has many applications. They include: therapeutics, energy generation, consciousness technology, inter-dimensionality, defence systems, teleportation, and of course, “time travel”.

Appreciation is expressed for guidance in this discussion by Thomas E. Bearden and Bernard de Montréal.

References

1. Einstein, Albert. How I created the theory of relativity. [Translation by Yoshimara A. Ono.] /Physics Today. Volume 35 (8), August, 1982. p. 45-7. [Lecture given by Einstein in Japan, on learning of his Nobel Prize.]
2. Phipps, Jr. Thomas E. Heretical Verities: mathematical themes in physical description. /Classic Non-Fiction Library, Urbana, 1986. p. 397-405
3. Whittaker, Edmund T. On the partial differential equations of mathematical physics. /Mathematische Annalen. Volume 57, 1903. p. 333-355.
4. Whittaker, Edmund T. On an expression of the electromagnetic field due to electrons by means of two scalar potential functions. / Proceedings of the London Mathematical Society. Volume 1, 1904. p. 362-372.
5. Whittaker, Edmund T. A history of the theories of aether and electricity. Volume 1 and 2. London: Thomas Nelson & Sons, 1953.
6. Whittaker, Edmund T. On the partial differential equations of mathematical physics. /Mathematische Annalen. Volume 57, 1903. p. 354.
7. Sakarov, A. D., Vacuum fluctuations in curved space and the theory of gravitation. /Soviet Physics Doklady. Vol. 12, 1968. p. 1040-1. [English translation.] Original in: Doklady Akad. Nauk. USSR, Vol. 177, 1967. p. 70-1.
8. Evans, Myron W., Physica B. Volume 182, 1992. p. 227
9. Evans, Myron W., and S. Kielich (editors). Modern nonlinear optics. [Special topical issue of Ilya Prigogine and Stuart A. Rice: Advances in Chemical Physics. Wiley, New York 1992, 1993, 1997, and 2001] Volume 85 (2).
10. Institute for Advanced Study (Budapest). On Whittaker's F and G fluxes, Part III: the existence of physical longitudinal and time-like photons. // Higher symmetry electrodynamics: a collection of AIAS papers. [Special Issue. Journal of New Energy.] 2000. p. 7-1 – 7-5.
11. Callahan, Philip S. and Kevin. Sinewaves of spacetime. / Newsletter of the Planetary Association for Clean Energy. Volume 9(2&3), April 1997. p. 8-9.
12. Jibu, et al. Evanescence (tunnelling) photon and cellular “vision”. /Biosystems. Vol. 43, 1997. p. 65-73.
13. Kozyrev, Nikolay. A. Selected works. University of St. Petersburg. 1991. [In Russian]. Also: On the way to understanding the time phenomenon: Construction of time. A. P. Levich, editor. World Scientific Press. 1995.
14. Abramovich, Velimir. Experimenting with Time. /New Energy Technologies. Volume 3, November-December, 2001. p. 13-5
15. Frolov, Alexander V. Practical application of time rate control (TRC) theory. /New Energy Technologies. Volume 3, November-December, 2001. p. 15-18.
16. Kozyrev, Nikolay A. The possibility of experimental study of the properties of time. /National Technical Service, US

Department of Commerce, Springfield, Virginia. (JPRS 45238). [Undated.]

17. Bearden, Thomas E. Renaissance healing, a concept whose time has come. /Proceedings of the United States Psychotronics Association. Volume 9, 2000. p. 1-2.
18. Bearden, Thomas E. Vacuum engines and Prioré's methodology: the true science of energy-medicine. I and II, /Explore! For the Professional. Volumes 6 (1), and (2) 1995.
19. Bearden, Thomas E. Private communication. February 2002.
20. Frolov, Alexander V. Practical application of time rate control (TRC) theory. /New Energy Technologies. Volume 3, November-December, 2001 p 15-8.
21. Kozyrev, Nikolay. A. Selected works. University of St. Petersburg. 1991. [In Russian]. Also: On the way to understanding the time phenomenon: construction of time. A. P. Levich, editor. World Scientific Press. 1995.
22. Kozyrev, Nikolay A. and V. V. Nasonov. On some properties of time found by means of astronomical observations. / Collection: Problems of research of the universe. Volume IX, M-L, 1980.
23. Puthoff, Harold E. The energetic vacuum: implications for energy research. /Speculation in science and technology. Volume 13 (3). p. 247.
24. Frolov, Alexander V. Trilateral spacetime effect. / Newsletter of the Planetary Association for Clean Energy. Volume 9(2&3), April 1997. p. 10-13.
25. Frolov, Alexander V. Practical application of time rate control (TRC) theory. /New Energy Technologies. Volume 3, November-December, 2001 p 15-8.
26. Chernobrov, Vadim. Experiments with a man in the Time Machine. /New Energy Technologies. Volume 3, November-December, 2001 p. 6-8.
27. Frolov, Alexander V. Trilateral spacetime effect. / Newsletter of the Planetary Association for Clean Energy. Volume 9(2&3), April 1997. p. 10-13.
28. Calante, Pelayo and Andrew Michrowski (compilers). The Hutchison File. The Planetary Association for Clean Energy, 1996. p. 16-7.
29. Hathaway, George D. The Hutchison effect – a lift and disruption system. /New Energy Technology. The Planetary Association for Clean Energy, 1990. p. 77-103.
30. Frolov, Alexander V. Trilateral spacetime effect. / Newsletter of the Planetary Association for Clean Energy. Volume 9(2&3), April 1997. p. 10-13.
31. Ouspensky, Pavel D. A new model of the universe. New York, 1971.
32. Frolov, Alexander V. The application of potential energy for the creation of power./ New Energy News. Volume 2(1), May, 1994.
33. Kirilov, I. V. Increase in volume of rocks is one of the reasons of tectonic deformations. /Academy of Science of the USSR Geologist. Volume 1, 1963.
34. Smirnov, L. S. and Ju. N. Lubina. On the possibility of studying the change in gravity together with geological time. /Reports of the USSR Academy of Science. Volume 187, Number 4. 1964.
35. Maxlow, James. Earth expansion – the definitive proof. / Nexus. Volume 8 (3), May 2001. p. 47-51.
36. Butusov, Kirill P. Time is a physical substance. /New Energy Technologies. Volume 3, November-December, 2001. p. 8-13.
37. Bjerknes, K. A. Vorlesungen ueber hydrodinamische fernkraefte. Leipzig, 1900-2.
38. Yarkovsky, I. O. Universal gravitation as a result of formation of ponderable matter inside heavenly bodies. Moscow, 1889.
39. Butusov, Kirill P. Time is a physical substance. /New Energy Technologies. Volume 3, November-December, 2001. p. 8-13.

New Energy Technologies

PRINT EDITION ADVERTIZING RATES

Full Page Ad

B/W - \$400

Color - \$800

Half Page Ad

B/W -
\$200

Color -
\$400

Quarter Page Ad

B/W - \$100

Color- \$200

Ask about discounts for multiple ads

New Energy Technologies is distributed to scientific laboratories in 20 countries
around the world.

To advertise contact us:

**Faraday Labs Ltd, Phone/fax 7-812-3806564,
<http://www.faraday.ru>, office@faraday.ru**

Time as Phenomenon of the Expanding Universe

Michael H. Shulman

7 (095) 357-80-33, 7 (095) 421-11-31
E-mail: shulman@dol.ru

Preface

In 1992 the author of this words, having been stimulated by Kozyrev's book [1], started to reflect on Time meaning and Time and Space asymmetric roles during the Universe Expanding. The development of these ideas has led to the work [2], it is available now (the Russian version only) on the website of the Institute of time nature explorations (grant #00-07-90211 of the Russian fund of basic research).

I would like to thank the Chairman of the Russian Interdisciplinary Temporology Seminar Dr. A. Levich from Moscow State University for his constant support and friendly interest. Also I would like to thank A. Moskovsky for the 20-year discussion of the physics history and philosophy.

The said work [2] pretends to revise radically a number of basic physical concepts of the Space - Time, Motion and Energy nature. It includes a detail analysis and mathematical calculations. Only a brief account of the main part of this work is presented below.

Introduction

The nature of time is not yet enough clear for natural science. In Newton mechanics time was presented as some universal formal parameter. Its value rises steadily at every point of the Universe by unknown for us reason. Each physical process occurs in space in correspondence with the time course.

In the Special Relativity (SR) time and space are integrated to the common 4D-continuum. However, in this theory the time component having imaginary factor seems also to be "exotic". In this concept the increase of time is also implied in each reference frame.

The General Relativity (GR) allowed linking the time properties with gravitational fields and the space geometry. The time currency started to be associated with a spatial expansion of the Universe.

The theoretical physics traditional approach to the process description is based upon the considering of time course as primary (original) one. There are also in the modern physics [3] several attempts to deduce the time concept as secondary one from different fundamental (microscopic) concepts.

However, the third way (inverse to the first one) is possible and forms the basis of this paper. A starting point of this way is the following question: "Does any universal process exist which could generate physical time?"

(Editor's note: The same question was formulated and the answer was proposed by Alexander V. Frolov in 1996, report "Matter as process", Scientific congress "New Ideas in Natural Sciences". It was assumed that similar process can be produced by special technical methods also.)

Such fundamental cosmic process really exists and it is well known in the modern science. **It presents the Universe expansion** and was opened at the first third of the 20th Century by the American astrophysicist E. Hubble and others [4]. It means the general increase of distances between all 3D-bodies. The same scattering of two-dimensional-figures happens on the surface of some spherical balloon during air incoming. The centre of this sphere does not belong to the surface; all points of the sphere (the Universe) are equivalent.

Some time earlier the theoretical physics had come to the same results. As it is well known, the Einstein's GR was published in the 1916. After that Friedmann (1922) proposed the concept of the expanding Universe. For example, in the book [5] a description of the basic cosmic model is given. Hereinafter this model is called "Einstein-Friedman model", or "EF-model". In this model the Universe is presented as 3D- hyper surface of a 4D- sphere with increasing radius. Of course, the curvature of the 3D-hyper surface increases with time too.

Basic hypothesis relative to time nature

Some simple and pictorial views consist a basis of the new concept. Hereinafter it is called briefly as "The Spherical Expanding Universe Theory (SEUT)".

In the SEUT, as well as in the EF-model, in every time the Universe represents the 3D-hyper surface of a 4D-sphere. However, there is one very important difference. In the Einstein's theory the spatial components of the metric tensor are opposite in sign to the time's one. For example, we may consider time as imaginary quantity, then spatial coordinate as a real one. On the contrary, in the SEUT the 4D-continuum is considered as purely

Euclidean, all the four coordinates are real quantities. The usual spherical geometry can be used on a surface of the 4D-sphere.

As it is well known, in the GR the Age of the Universe can be *calculated* using the EF-model or a similar one. Usually, the radius-age dependence is not a direct proportionality in such GR models. However this result may be deduced if to neglect the global pressure of matter that fills the Universe. In [2] it is demonstrated, that an account of the static pressure of matter follows to the Universe radius linear dependence on its age (see below).

On the contrary, in the SEUT the time universal course is *manifested*. The Universe age is *identified* with a current Universe radius divided by the velocity of light. Numerous important consequences may be deduced from this statement. On the other hand, it allows avoiding many other arbitrary postulates in the model.

Mechanical motion and maximum velocity in the SEUT

The SEUT states, there is no unlimited set of independent mechanical motions. Only world lines of moving bodies exist. Each of them has some inclination relative to the time line, which presents a normal to the hypersurface of the 4D-sphere. It is an *inclination angle that defines the spatial motion velocity*. At the increase of sphere radius the intersection point of word line and current hypersurface “moves” with exact correspondance with a modern physics prediction.

In particular, immovable objects (stars) have zero inclination, their world line are normal to the hypersurface. Hence they “scatter” according to the Hubble law, their mutual velocity is proportional to mutual distance. If a body world line has some inclination relative to normal, the angle is more than zero. But it can't exceed 90°, therefore *maximum mechanical motion velocity appears naturally*, it is equal to the velocity of light.

Let us consider three variants of motion (see Fig.1).

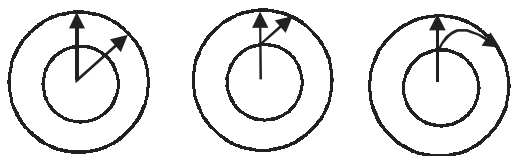


Fig. 1

Phenomenon of a “motion” of point on a sphere surface for immovable (at the left), uniformly moving (at the centre) and non-uniformly moving (at the right)

The left picture illustrates the Hubble effect. The right picture presents a general case of motion with acceleration. The central picture corresponds with an inertial motion; its world line is direct. In this case the moving body displacement increases proportionally to

the Universe radius increment. So, *inertial* motion is not postulated in the SEUT, it appears as natural model consequence.

At a large 4-sphere radius values all the relationships of SR and usual mechanics laws are applicable approximately in the SEUT. A Special Relativity light cone transforms to all the hyper surface of the 4D-sphere. But the analogy is not complete, because an absolute remote SR area degenerates to this 3D- hyper surface in the SEUT (see Fig. 2).

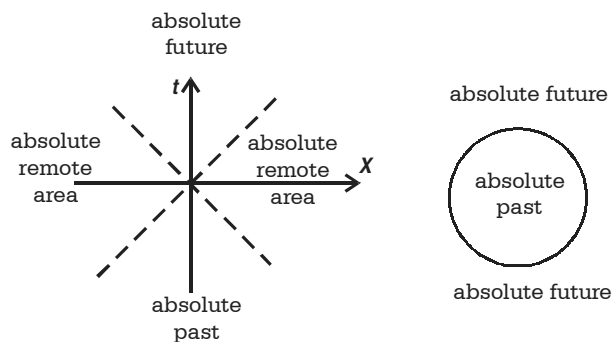


Fig. 2.

4D- continuum areas in the SR (at the left) and in the SEUT (at the right)

SEUT and Minkowski geometry

Let us consider small increments of time and space coordinates along body world lines during the Universe expanding. It is enough to consider a small area of the Universe, so we can neglect its curvature. Then it is acceptably to replace approximately concentric hyper surfaces (“isochrones”) by parallel hyper planes. The space-hold corresponds with a representative point “drift” perpendicularly to isochrones, an inertial motion corresponds with displacement along inclined direct lines between isochrones.

At each time the Universe is represented by a certain isochrone that contains all the real spatial points. Let us accept that 4D-sphere radius increment divided by velocity of light presents invariant measure of (absolute) time increment. We will also state that this quantity has the same value in each *inertial* reference frame, i.e. at a motion along each *direct* world line.

Let the angles of world line inclinations from normal direction are enough *small*. Then metric relationships like Minkowski geometry ones appears in our purely Euclidean 4D-continuum. In particular, well known relationship

$$c^2 ds^2 = c^2 dt^2 - dr^2$$

can be deduced from the Pythagorean theorem. It connects a spatial component dr with a time component dt (at moving reference frame) through velocity of light c . Here ds is an absolute time interval (between two 4D-events at a immovable reference frame). **Hence, if velocities aren't very high, the Lorentz transform is correct in different inertial reference frames.**

On the Einstein's relativity principle

If the world lines inclinations from exact normal direction cannot be accepted as small, then Minkowski geometry relationships are correct approximately only. It means that Einstein's relativity principle is correct (in the SEUT) only for reference frames that move with velocities enough small relative to *selected* reference frame. Such reference frame is linked hardly with a body at (absolute) rest, i.e. drifting along radial world line.

The selected reference frame existing reminds of old ether theories that contradict to the Special Relativity views. It seems, these theories became a thing of the past irretrievably. In fact, the velocity of light in vacuum is constant everywhere and everywhen. However, the reference frame existing can be detected in principle as a light signal frequency bias, i.e. with the help of Doppler effect. Well, this phenomenon is really detected by the modern astrophysics!

The temperature diagram of the Cosmic Microwave Background Radiation (CMBR) coming to the Solar system from all the sides of the Universe is presented on Fig.3. The data was registered during 4 years by the Cosmic Background Explorer (COBE) satellite (NASA Goddard Flight Centre, COBE Science Working Group).

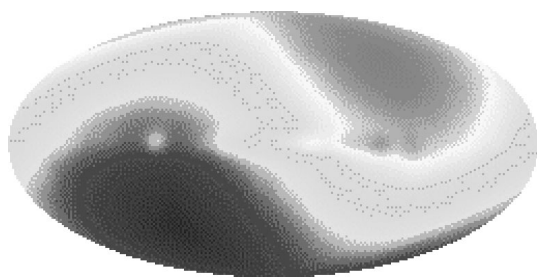


Fig. 3
The anisotropy of the Cosmic Microwave Background Radiation (CMBR)

The well-known Russian scientist J.B. Zeldovitch in the Editorial Addition to [6] in connection with earlier experiments notes that careful measurements **allowed to find out some anisotropy of CMBR**. An antenna oriented to the Lion constellation detects that the radiation temperature is 0.013% more, than mean temperature. The radiation temperature in the opposite direction is 0.013% less, than mean. **Generally, a temperature varies continuously between these two values.** The isotropy presents only for some imaginary observer. **The Solar system, Earth move to the Lion constellation relative to this observer having velocity 390 ± 60 km/s.** Hence, as a result of the Doppler effect, a incoming radiation seems to be more hot, and an overtaking radiation seems to be more cold. This example shows that for observer of any point of the Universe this CMBR is isotropic. We may consider this observer and the connected reference frame as selected one. The selected reference frame existence at the Universe every point looks like the physicists commonly

held view preceding to Relativity. They thought that the light presented ether oscillations occupying whole the Universe. They thought also that a reference frame connected with ether was preferable, or selected. They tried to detect the Earth motion relative to ether. We know that these experiments gave the negative result: any ether doesn't exist. But the Universe evolution follows that when CMBR is observed (and only in this case!), the selected reference frame (called sometime "new ether") appears. **The new ether or CMBR just realises the motion according to Hubble's law.**

The modern NASA's data allows to put the relation of the Solar system velocity to the velocity of light equal to 0,15%. It is enough small value justified Special Relativity and Minkowski geometry relationships application. But can we believe this phenomenon to be an exhaustive proof of the SEUT accuracy?

To test it we propose a not complicated observational experiment. If the CMBR anisotropy is due to the real selected frame existence, then it may be detected for any electromagnetic radiation. In particular, an anisotropy of solar radiation has to exist at the different year periods. It has to be detectable in August, when the both solar radiation and CMBR come to the Earth from the Lion constellation side (see Fig. 4). In February these sources are opposite in disposition relative to the Earth, therefore the solar radiation anisotropy direction has to be opposite. The expected effect value (with account of the Lion constellation straight ascendancy and obliquity of the ecliptic) is approximately equal to 300 km/s, i.e. nearly 0,1% of the velocity of light. In November and May the anisotropy has to be practically absent.

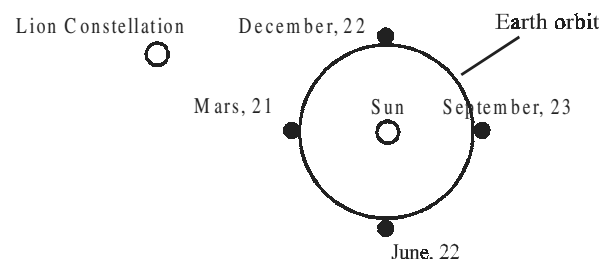


Fig. 4
The Sun and Lion constellation disposition relative to the Earth

Probably, an analogous SEUT test in a laboratory is realizable with help of artificial radiation sources.

Particle mass, energy and impulse

So, we consider the Universe as expanding 3D-hypersurface of a 4D-sphere. Mass localisation places in the Universe present the points of the hypersurface intersection by world lines. So, **these world lines have a real physical meaning, not abstract illustrative** this one. We may expect this physical meaning to be more essential than simple word expression.

Particularly, while the Universe global analysis is making, we may suppose that such fundamental

particle feature as its mass at rest presents some *relative* value. Such relation (some kind of a quantum number) may include, for example, 4D-sphere (the Universe) diameter and some characteristic size like de Broglie wave period that is inversely proportional to the mass. This hypothesis may make clear *inertia* nature as two characteristic times *relation*. It may also explain the *rest-energy* notion.

Meanwhile, the Universe radius increases with time. Well, what happens to mass? If a de Broglie wave period increased proportionally to time, we couldn't generally detect the Universe expansion, including famous "red shift". But if particle wave periods are constant, then *matter mass has to rise proportionally to the Universe age and size*.

In the Relativity (like Minkowski geometry) we use vectors having imaginary projection to time axis and real projections to space ones. Particularly, it is true for velocity, acceleration, and energy-impulse 4-vectors. As against, vectors having all the real components are only used in the SEUT. At that, a 4-interval value (length in pseudo-Euclidean space) of some relativistic vector answers the absolute time axis projection of a corresponding SEUT-vector, and imaginary component of a relativistic vector (time of motion) answers the corresponding vector length in purely Euclidean continuum of the SEUT. For example, the energy-impulse vector module presents such quantity. Its projection to absolute time axis is energy at rest divided by velocity of light, and its projections to spatial axis are impulse components. This quantity is *constant* while the particle movement is *inertial* one.

A jump to *non-inertial* motion in the SEUT is connected with a corresponding state vector *changement* law. So, if particle motion velocity changes, its *energy at rest* doesn't change, therefore full acceleration at a time interval can be calculated using the difference between new and old impulse values. Thus, the non-uniform motion equation in the SEUT can be found like SR as time derivative of an impulse expression.

The force-acceleration relation depends on a mutual orientation of force and velocity vectors in the both SR and SEUT. But in Relativity a reference frame velocity can be choised arbitrary, for example it can be zero, then the relation will be equal to one.

On the contrary, in the SEUT an *absolute* velocity is presented, it is defined by the world line inclination relative to the normal. Let the Earth move with any velocity relative to the immovable (selected) reference frame. Then we will be able to detect the absolute velocity using two measurements, the first one along the world line, and the second one in a perpendicular direction.

If this absolute velocity is really defined by direction and value following from CMBR anisotropy effect, then we can expect a relative difference near $2,25 \cdot 10^{-6}$ between longitudinal acceleration and transversal one.

Local gravitational fields of particles

What does the SEUT talk about body gravitational fields? Let us imagine all the bodies as immovable and drifting exactly along the *radial* world lines. If there is a mutual gravity attraction effect between two bodies in such Universe, an observer will detect some curvature of their world lines. They will seem to be bending one to another instead of a radial divergence. In essence, in this case we may replace a world line by a gravitational field line. Then the analogy allows us to identify an Universe isochronous intersection with an equal potential surface that these field lines have to be *normal* to this surface. So, we arrive to a presentation that a Universe isochronous intersection is not strictly concentric hypersurface. It is perturbed by some kind of craters (see Fig.5), that centres correspond with gravitating bodies.




Fig. 5
Local body gravitation field

The inclination angle of a crater profile relative to non-perturbed sphere hypersurface is equal exactly to the inclination angle of a normal relative to strict radial direction. Hence, a local gravitation field intensity measure agrees practically in each point with body velocity measure that we used earlier. It authorizes energy concept using for both mechanical motion and gravitation phenomenon.

SEUT and General Relativity

Let us discuss some GR's aspects. Is it acceptable to neglect pressure of matter? When Einstein searched for his early cosmological static model solution, he had to introduce a cosmic constant in his equation. This constant answered a **negative matter pressure**, that Einstein could not determine a meaning. In a non-stationary model a solution exists independently on cosmic constant presence, therefore it may be put often as zero. As rule, bodies' velocities may be put as zero too; therefore (*dynamic*) pressure is usually neglected.

However, we insist on necessity to account a *static* pressure of gravitating matter. Really, it can be ignored in the case when Einstein's relativity principle is applicable. Accordingly with it a gravitation field can be *always* replaced by reference accelerated frame. In this case a purely kinematical side is only accounted. However, *not every* field may be considered (even locally) as uniform one (see Fig. 6). Let the radius of a field source (or a *probe particle*) have the same order that the mutual distance. Then the Einstein's equation connecting space geometry with matter physical features seems to be incomplete. More precisely, it is incorrect to put exactly equal to zero a static pressure

in the matter density tensor, it is necessary to introduce its (unknown, calculable) value accounting the **continuum deformation energy**.

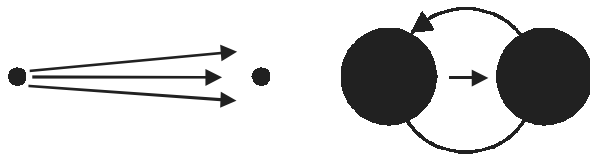


Fig. 6

At the left a locally uniform gravitation field is presented, the right field can't be considered as uniform one even locally

Are the proposed amendments important? Specialists know, that the Metagalaxy gravitation radius is *in fact* comparable with its real size. **In [2] we have showed that the Universe radius was less than its gravitation radius.**

It is shown also in the same work [2], that a resulting gravitational pressure in the Universe is *negative* and it is responsible for the Einstein's cosmic constant. This fact seems to be evident because a gravitation force aims to *gripe* any matter accumulation. **But it is possible to conclude it by a non-trivial way.** Let us consider a matter pressure as a reactive force operating within a uniform sphere of incompressible liquid. A pressure dependence on internal density is presented in [7]. We can see [2], **that if the sphere gravitation radius exceeds its geometric radius not more than approximately 1% (or it is still less), then a sudden negative change of the pressure appears at the internal abroad. This phenomenon may be explained as a volume "expansion" due to a metrics perturbation.**

The consideration of static pressure allows not only to find out a *new* (linear in time) cosmologic solution, but also to calculate a dependence of the Universe gravitational pressure on the radius of the Universe. This *negative* value has the representation like that one for a non-relativistic sphere (a star or a planet, for example). Also we would like to note, the formulation of density-Universe radius in the SEUT is exactly the same that the formulation of so-called *critical* density in the EF-model.

Two very important circumstances are clarified for all that. First, the **Universe mass was turned out as linearly increasing function of the 4D-sphere radius, and it is not a constant. A famous Einstein's programme is realized unexpectedly in the SEUT: a matter features (density) are reduced to a space features (curvature).** In other words, a necessity to introduce a mass distribution in the equations externally ("by hands") is eliminated in the SEUT. This operation is need in the GR to find out a spatial metrics changement law.

Secondly, the seeming paradoxicality of University mass (and energy!) non-conservation make us to reflect on conditions that the *accomplishment* allows to the energy conservation law correctness (see Fig.7).

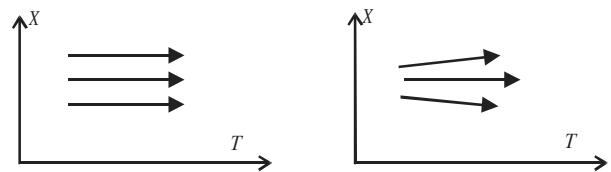


Fig. 7

If space features *do not depend* on time, then the closed system energy is *constant* (at the left). But if space features *evolve* in time, then the isolated system energy *have not to be constant*.

It is evident, we believe, that the energy can be exactly constant only in such physical system (or in whole the Universe) for which space features (in particular, a curvature) are strictly constant in time also. However, the both modern physics and SEUT issue from the opposite concept. Hence, this state can only be accomplished approximately, moderately of a bit of the modern rate of a relative space curvature evolution. This rate has order 10^{-10} per year for the modern Universe.

N.A.Kozyrev [1] basing on astrophysical observations stated the common star radiation origin that has to be due to the time-energy transformation. Accordinly with the SEUT, the relative increment of star mass (and its rest energy) is equal to the Universe age relative increment. It is interesting that the Sun mass relative lost due to the radiation consists in 10^{-15} per year, i.e. five orders less than mentioned above energy increment.

Universe origin and closed geometry

The cosmological EF-model could not say anything on the Universe origin. On the contrary, the work [2] approach allows an obvious way to study the problem.

As it is noted in [7], the metrics of any sphere area having a non-zero density is perturbed relative to Euclidean one, its geometry agrees with 4D-sphere hypersurface geometry. For non-collapsing sphere its gravitation potential relief is like a very small "*pit*" that gravitation radius is much less than its geometric size. However, when the density rises, the metrics perturbs more and more, and the pit transforms to some kind of "*crater*". The crater is connected with the external surface by a narrow neck. Only this neck or its part is visible for an external observer, and the gravitation insurmountable barrier transmutes an object central area into "a lost world".

From the point of view of the external world, the central area presents a "black hole" absorbing irreversibly all the matter and radiation. On the other hand, for our Universe inhabitant the "navel-string" connecting with the external world has to seem a spherical "white hole", to which a matter and radiation are coming continuously (and, may be, carry out an information on the external world features). There is an old Russian fiction science book called "Sannikov Land", where an internal gigantic

trench concerning central small star is described. Our model seems to be like this picture.

Is it possible that we live in such a black hole? The present hypothesis answers affirmatively this question. The negative sign of the matter pressure due to continuously increasing of our world size allows to such conclusion. And the Universe self-closing can be physically explained by the way.

On the other hand, as it is shown in [2], in spite of matter average density negligibly small, the Universe gravitation radius is more than its geometrical radius; hence, it presents a black hole. This condition accomplishment agrees the Universe self-closing, the boundary absence in spite of its finite volume. Also, this fact confirms our assumption that the Universe rest energy localisation area does not exceed the gravity operation area.

A specific model of star collapse is created in the modern General Relativity. In general, it can study in *three* different reference frames. As a rule, the "point mass" models are used. *The first* model is linked with an external observer; the *second* one accompanies a matter falling to the black hole. *The third* model presents an internal reference frame, i.e. an observer within collapsing object.

From an external observer's point of view the matter falling time to the black hole is infinitely large. However, in an accompanying reference frame it is finite. Since in the accompanying reference frame time and space coordinates are expressed through the both types of external reference frame coordinates. What is more, in the internal reference frame the time and space coordinates quite trade places, the metrics tensor components are depending on time. Further, any matter point history in this accompanying reference frame starts at the zero moment and finishes after same universal time period in a special (singular) point, after which nothing exists ("time barrier").

As we believe, another lacing between internal and external collapse pictures will be possible, if we consider a non-point collapsing object. Nobody wonders now at a situation, when a time period can be finite in one reference frame and infinite in another one. **Therefore, we can believe, unlimited black hole collapse in the external Super-Universe may seem to present unlimited expansion of our Universe observing inside.** This expansion seems to *start* from a singular point, and the same point is the history end of all the matter of the external Super-Universe that fall to the black hole. I would like to note especially, it does not mean that internal time pass in opposite to external one. **Rather, it is possible to state, time within a black hole passes ortogonally to external one.**

References


1. Kozyrev N.A. Selected works. - Leningrad University, 1991.
2. Shulman N.H. Site of the Institute of time nature exploration

(Russian-language version): www.chronos.msu.ru , Project of Chair-laboratory of time as phenomenon of expansion, 2001.

3. Vladimirov Yu. S. Relational theory of space-time and interactions. Part 2. Theory of physical inarctions. Moscow university, 1998.
4. Sharov A.S., Novikov I.D. A man, who discovered the Univerce explosion. Edwin Hubbl's life and work. Moscow, Science, 1989.
5. Einstein A. The essence of Relativity. Moscow, IL, 1955.
6. Wineberg S. First three minutes. The modern approach to the Univerce origin. Moscow, Energoizdat, 1981.
7. Tholmen R. Relativity, thermodynamics and cosmology. Moscow, Science, 1974.



INFINITE ENERGY
Cold Fusion and New Energy Technology
Including Conventional and Renewable Energy



Infinite Energy Magazine

- * Cold Fusion * New Energy
- * New Science
- * New Technology

Subscriptions, 6 Issues Per Year

\$29.95 North America
\$49.95 Foreign

Single Sample Copy

\$5.95 North America, \$10.00 Foreign

Infinite Energy Magazine
P.O. Box 2816-FV
Concord, NH 03302-2816
Phone: 603-228-4516 Fax: 603-224-5975
<http://www.infinite-energy.com>



an online and published magazine about Electric, Hybrid, Fuel Cell Vehicles, advanced batteries, ultra capacitors, fuel cells, microturbines, free energy systems, events and exhibitions worldwide

63600 Deschutes Mkt Rd, Bend Oregon, 97701
541-388-1908, fax 541-388-2750
etimes@teleport.com
www.electrifyingtimes.com
Subscription \$13/3 issues

Institute for Planetary Synthesis

P.O. Box 128, CH-1211 Geneva 20,
Switzerland

Tel. 41-022-733.88.76, Fax 41-022-733.66.49

E-mail: ipsbox@ipsgeneva.com

website: <http://www.ipsgeneva.com>

The Experiments on Thermo-Gravitation

This review of the article by Alexander P. Schegolev, the scientist from Saint Petersburg, was received by NET editors from our reader vladrim@mail.ru and presents his own view about Schegolev's experiment [1]. The opinion of our editorial board is not fully in agreement with the author's conclusion. Also we have no information who is vladrim@mail.ru.

It is known from the science history that the very experiment gives a push to revising of old knowledge; it also checks the new designs and conclusions. The knowledge of physical theories is based on the experiment; the experiment confirms hypothesizes or refuses them. Making experiments, we ask questions to the nature. And it always answers us on the clear pointed question. However...

Michael Faraday was trying in vain to find out the relationship between gravitation and electricity. These experiments were repeated on the modern level. Further, there was made an attempt to screen gravity force, the influence of environment on gravity was also trying to be researched. Many efforts were spent on finding out of the gravitational radiation falling to the Earth from depths of the Universe, as well as artificial generation of gravitational waves.

The experimental studies of weight change must be under attention. In particular, the attempt to find the differences in weight after sharp turning of body from the quiescent state into the state of rotation around its own axis was undertaken. The experiments of the influence of strong magnetic field and temperature on the weight of a body were made.

But alas! No changes of weight were discovered in previous experiment (*Editorial: Perhaps, the author has no information about successful results. We reported about such results in our magazine*). Analyzing these experiments and theoretical premises, the author of the given article has made an unusual experiment imitating the heat motion in the Earth from core to peripheries. For that experiment there was used the steel ball with 100 mm diameter. The cone hole was made in the ball up to its center. The ball was installed by the hole upwards on laboratory scales with 50 mg scale factor and laser beam was directed inside (into the hole). The directed heat flow outgoing from the center of the ball was created by this way. While the surface temperature increasing, the arrow of scales became to be rejected aside weight decrease. The temperature was measured by the contact thermocouple. After an hour and half, approximately, when the temperature was 300 degrees Celsius the laser was switched off. The difference (the decrease) in weight against initial value (in the cold state) was four grams per 4200 grams of the test body.

Further, the ball was getting cold slowly on the scales and its arrow was creeping to the initial position. For acceleration of this process, the ball was periodically




Fig. 1
The ball with cone hollow

blown on by pressure air. It was the check, if the air (heated by the ball) influences on scales or not. The stability of its data independently on actions of pressure air stream excludes such suggestion. When the temperature of the ball became the same with room temperature, its weight return to the value

nearly initial. However it is necessary to add, that this "nearly" is about 200 mg. This confirms that the change of the weight was not occurred because of the evaporations of metal from action of laser beam, and we were the witnesses of absolutely unusual phenomenon. (*Editorial: Perhaps, it is necessary to take into account the deformation*).

That is all concerning the question, which was given to nature by the author of the given article. However, one more doubt remains: did the heat radiation (coming from the ball) affect on mechanism of scales? To check this, the control experiment was made, under which the same ball was heated by usual way in the electrical furnace. In spite of its temperature was about 600 degrees Celsius and the ball was placed on scales for a long time (until full cooling down), the arrow did not move from the initial position. Thus, we have really turned out face to face with a phenomenon requiring an explanation.

If the weight change in this experiment has happened in consequence of gravitational interaction, then, therefore we must revise some fundamental concepts. Today it is difficult even to assume the consequences. The only thing, which is possible to say certainly, is **that divergent on radius uni-directional (single-vector) heat flow** is the object for observation, absolutely unknown to us or unnoticed before, which holds the ensemble of surprises. Up to now, we have dealt only with **chaotic** heat motion, which was researched by the thermodynamics and heat transmission.

For analogy, it is possible to give the example **of the electric current arising, which is possible to get only under directed electrons moving**. In general, more than ten experiments were made, and all of them have given the same result: the weight of the body was decreased. Who will solve this enigma?

Editor's note: The question is presented above. The answer is the aetherodynamics theory. Any directed (unidirectional) heat flow is also a flow of aether. The mass changes are the demonstration of natural mechanism of existence of this mass as aether vortex (Alexander V. Frolov).

References

1. Collected reports "Untraditional scientific ideas about nature and its phenomena", #1, club FENID, Gomel, 1991.

UP-TO-DATE INVENTION

The RotoVerter from arkresearch



Editor's: The description of this invention was received from Hector D. Perez Torrez, designer of the "RV" Rotoverter and TV transverter OU "transformation" devices.

Here is the first prototype, used to test a 3PH generator. Light bulb was a 100W 120V, AC generator required 380W for excitation to 120VAC plus the light bulb load for a total of 480W. Input to rotoverter was 240W for a total of 200% efficiency from the prime mover. Friction loss and prime mover loss was not calculated, PF unity, 120VAC unto a purely resistive load excitation pure DC120VDC3.1666667A (380W) + 100W = 480W. - 240W=240 excess.

It is a common 3PH dual winding 230/460V motor wired to 480V run at 120v as a ROTOPHASE converter. That's the beauty of it, OFF the shelf components preferably totally enclosed motors (so fan can be removed) low friction bearings, from 3HP to 7.5HP. Re-rating hp can be from 1/7 to 1/3 the original HP (some motors can run up to 1/2 HP capacity but will require extreme care and cooling.... and exact tuning to load).

System requires starting and running capacitance; the perfect starting capacitance is the one that gives same plate current value as 480V but running at 120V. The best running capacitance is the one that gives the lowest Amperage reading at programmed load. (ALL capacitors are AC 370V OIL "no electrolytic").

Some motors are better than others; also for generator use you must choose the over-unity generator and motor combination to obtain OU. It looks easy to gain it, but requires quite a good choice of items and common sense. In this Research we have found even a few turns or a run weld in stator can change drastically the results. Up to date best performance has being obtained from US (motors 7.5 HP, BALDOR 3,5, HP, GE 3HP totally enclosed, dual winding 230/460V). Higher HP will require professional expertise in industrial electricity and power eng. (not recommended for amateur experimenter). Anyone engaged in this experiments must be familiar with safety procedures and basic electric and mechanic knowledge. Voltages and rotating machinery must be handled with great care. SEE basic diagram and connection.

9 Lead 3HP Wye-Connected Motor


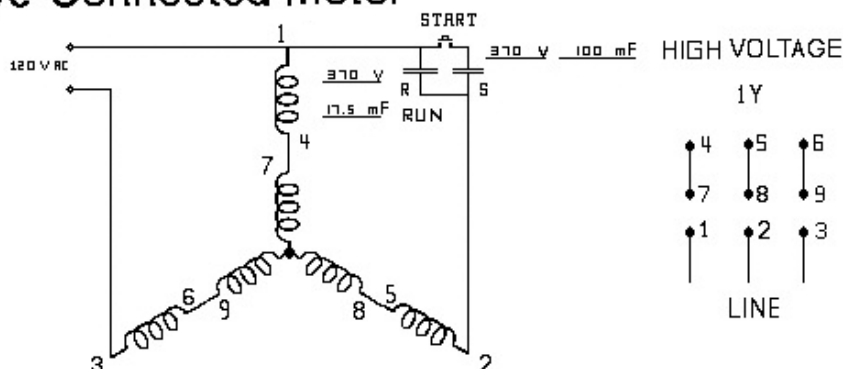


Fig. 1

Latest UPDATE BELOW 7-01-02

2002

EXPERIMENT ON MAGNETIC ROTO AMPLIFICATION



THERMAL & MECHANICAL LOSS WAS NOT CALCULATED

Fig.2

Subject: RV Basic level 1 Full MODEL Disclosure (Public domain)

This is the RV (Level 1) plan of a full looped RV system:

Battery provides primary power for 12VDC to 120VAC. As to run prime mover (Roto-converter), second motor acts as an squirrel cage self-excited generator, a triple flux-capacitor LC tank tuned to best Standing wave condition as to create standing wave current node internally in battery at 0 voltage to battery "negative resistor". At 0 volts "voltage" a negative current is created as to maintain a reverse flow (charge) to battery exceeding the forward drain of the inverter demand, detuning system with a forward charge at 10 amperes with a voltage rise of approximately 0.83333 V over the battery. Voltage charge produces OU transform from the 0 point standing wave component. System gains energy from stochastic resonance within the LC tank components draining energy from "thermal" signature of the Aether and K thermodynamic-thermoelectric ambient heat (Electron spin). This is a full disclosure of an operational and tested device. System is made of standard off shelf items. Tuning is made by changing capacitor values and the proper selection of standard items for its construction, 3PH motors, 10:1 12V or 5:1 24V transformers with the proper core and winding values (standard) off shelf, diode bridges capacitor (all standard).

Warning: System opens (NON standard) space-time anomaly as time is reversed due to aether energy transform....

Extreme warning: Do not exceed 10KW Nor use of trans-uranic elements near unit as they may reach critical mass by regressive "inversed" decay. PB 206, U235, U238 must be maintained as far as possible from unit.

Extreme Warning: Dangerous Toy, Eldridge, Event horizon and hell raiser effects may be created by protoplasmic fields at extreme potentials PK.

Use wisely. You Can create Paradise or open the gates to Armageddon.


The choice is yours now....

Hector D Perez Torrez

Lifter Project

by Jean-Louis Naudin
<http://www.jlnlabs.org>

The Lifters performances analysis by J L Naudin
Email: Jnaudin509@aol.com - Web: <http://www.jlnlabs.org>

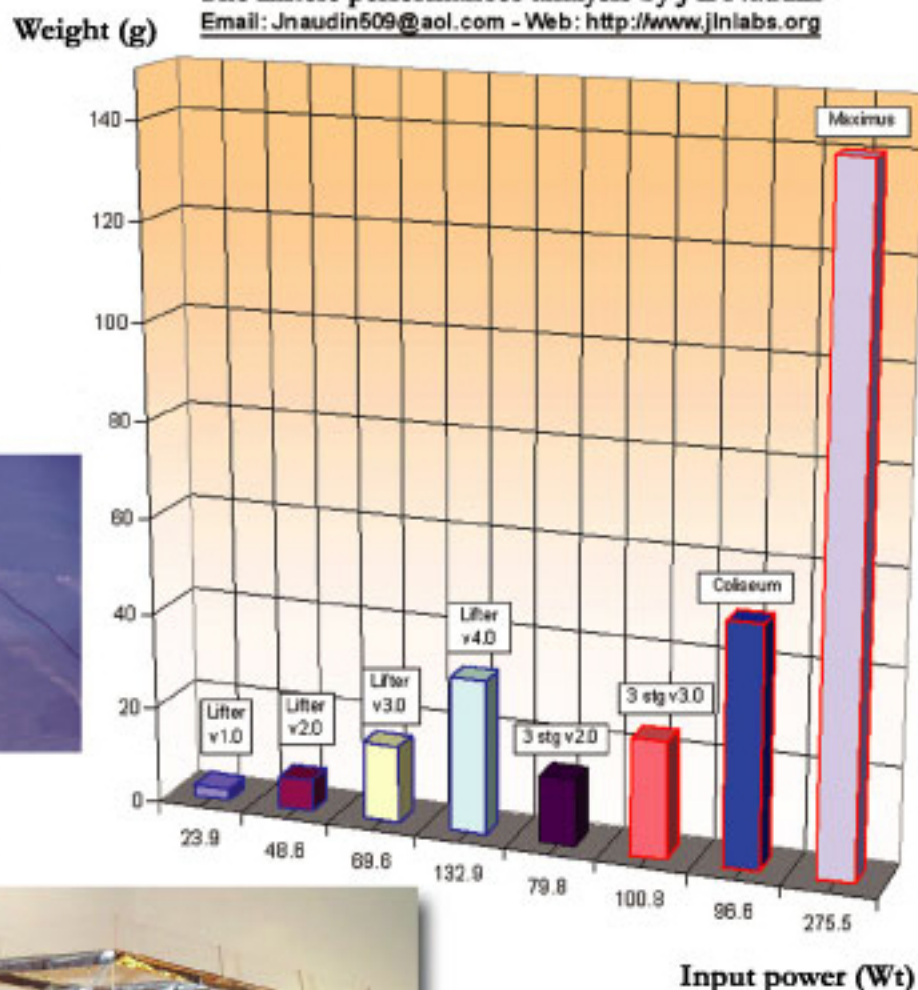

Mouse aboard!

The 1st Worldwide
Electronaut Lifter Project

ISSN 1684-7298



9 771684 728801

New Energy Technologies

Printed version ISSN 1684-7288

Online version ISSN 1684-9698

Published by Faraday Laboratories Ltd.

Issue #1 (10), 2003

Research on advanced aerospace systems and new energy sources

Single-Wire Electric
Power Transmission
20 kWt!



News from France
Electrostatic propulsion:
60g payload



Also in this issue:

- Cold Fusion by Plasma Electrolysis of Water
- News of Hydrogen Energetics
- Unusual Permanent Magnet Motors
- New Energy and Propulsion Systems

New Energy Technologies magazine

Back issues 2001-2002




Julia V. Sukhova
Translator




Kate M. Pomerantseva
Designer



Olga O. Leontyeva
Editor

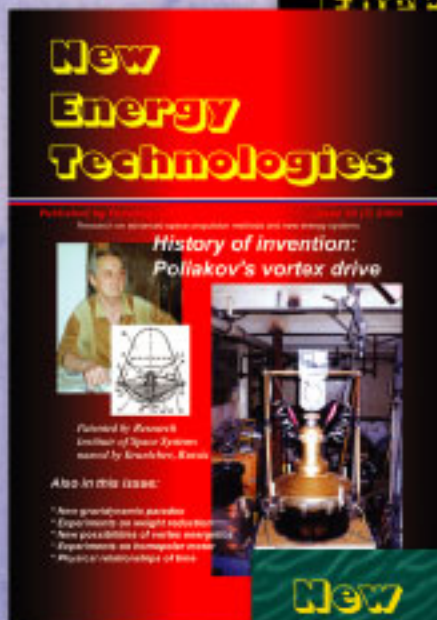

Kirill P. Butusov
Scientific Advisor





Alexander V. Frolov
General Director
"Faraday Laboratory" Ltd

Searl Effect Technology

<http://www.sisrc.com>



Experimental
craft construction
(self-rotating permanent
magnet system)

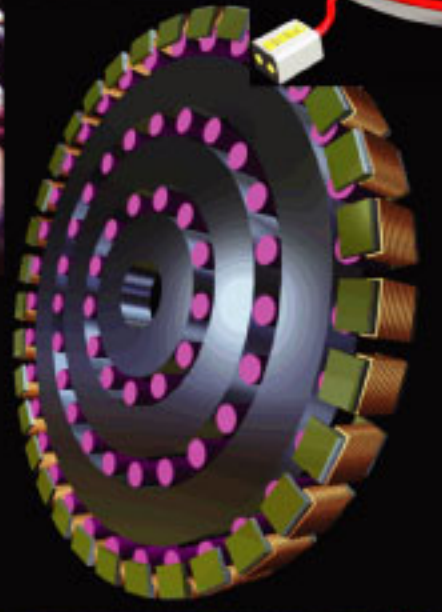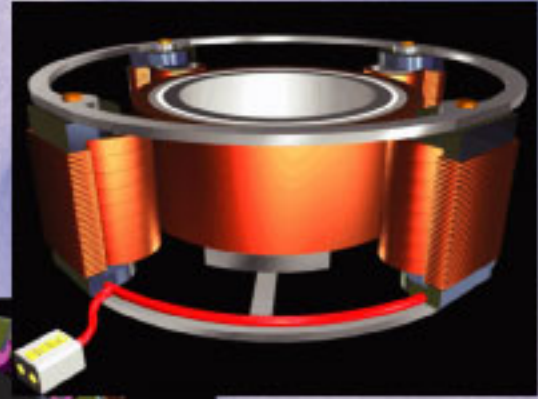


15 kWt
Searl Effect
Generator



LENR Experiments (Low Energy Nuclear Reactions) "Cold Fusion"

<http://www.lenr-canr.org>

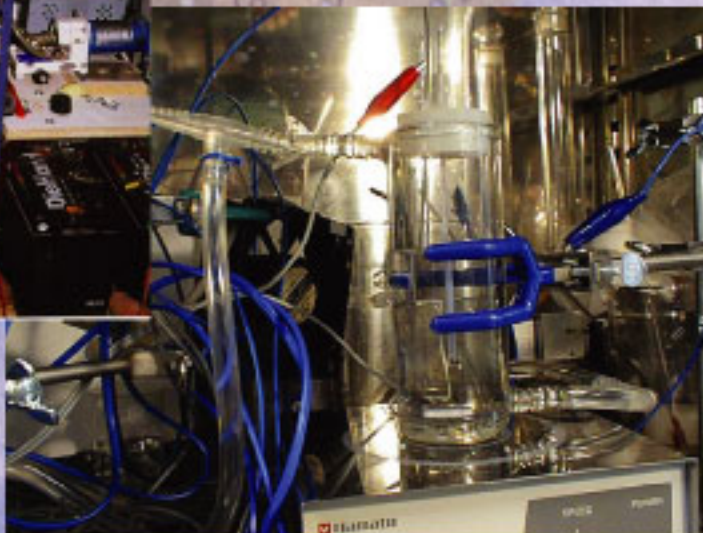

Read in this issue!

NEW ENERGY TECHNOLOGIES #10


1. Testatika. Review of well-known electrostatic system.
2. Cold Fusion by Plasma Electrolysis of Water. Ph.M. Kanarev, T. Mizuno
3. Cold Fusion: What is it and what does it mean to science and society? E. Storms
4. Technical Introduction to LENR-CANR (Low Energy Nuclear Reactions). E. Storms
5. It started in 1989... (History of Cold Fusion Development). P. Hagelstein
6. A Science Tutorial (Cold fusion). T. Chubb
7. LENR (Low Energy Nuclear Reactions) Experiments.
8. On Electrogravitation. A.V. Lemesko
9. Avalanchedrive Propulsion Device. M.L. Filho
10. Hydrogen-Powered Vehicles. P. Behr, G. Schneider
11. Unusual Permanent Magnet Motors. T. Valone
12. Hydrogen Energetics. A. Pashova
13. On the Longitudinal Electromagnetic Waves. A.V. Frolov
14. Space and Terrestrial Transportation and Energy Technologies. T.C. Loder
15. Commercialising the "Searl Effect".
16. Interesting Publications of the Last Year.
17. "Lifter" Project
18. New Electric Fire Technology. V.D. Dudyshev
19. New Effect of "Cold" Evaporation. V.D. Dudyshev
20. Conceptual Hurdles to New Millennium Physics. D. Reed
21. Resonant Phenomena Occurring in Alternating Current Circuit. A.V. Frolov
22. Books Review

TESTATIKA

Review of well-known electrostatic system

Editor comments by Alexander V. Frolov
General Director, Faraday Lab Ltd

A running "free energy" machine coming from Switzerland, Europe. It was developed over a 20 years Research period by a religious group called Methernitha. This group lives in Linden, Switzerland. The head engineer of this superb machine, Mr. Paul Baumann discovered its principles while observing nature. He claims its running principle was found by studying the lightning effects from nature. The documents being offered here shed light on this energy marvel.

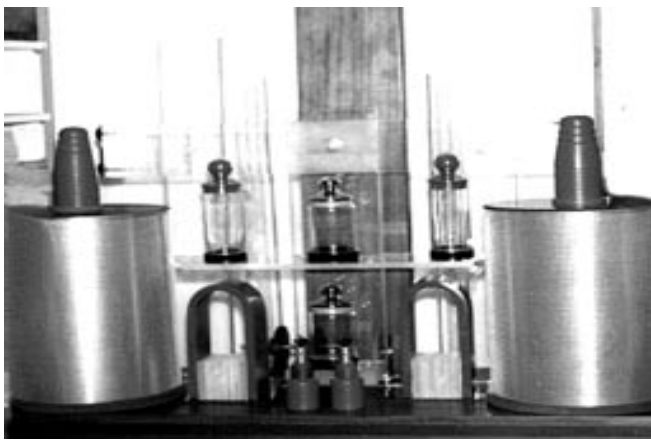

These documents are the result of work of people who have witnessed this wonder machine over the years... And here are the facts:


- The Testatika is a rotary-type machine that runs on it's own, once started by revolving it's two discs by hand!
- The machine not only runs on it's own energy, but produces also a huge amount of excess power, at least 3 KWtt of power! This is almost enough to supply a small house with one machine!
- The machine is about 70cm wide, by 40cm deep and is about 60cm in height!
- It delivers from 250 volts to about 320 volts direct current, depending on the humidity in the air! At this voltage it can supply at least 10 Amperes of pulsating direct current!
- Testatika is not a perpetual motion device, but an energy machine that collects it's huge amount of energy from the ions contained in air. However, there are some technological secrets implemented to overcome the normal drag-resistance of conventional generators. This is but one of it's secrets held by the Methernitha group.

There are many different sized Testatika machines, some of the smaller units deliver only about 200 to 300 watts, none of which are mass-produced. These devices are still laboratory prototype units.

Methernitha is a spiritual community (Christian Alliance) <http://www.methernitha.com>. They wrote: "We are fortunate in gaining the experience that paradoxically the most beautiful and useful results can be achieved by just using the most simple means. Never did we use any borrowed capital because we want to stay free Swiss citizens and do not want to be hindered or even bound in any way in the pursuance of our aims."

The two contrary-rotating discs generate an electrostatic charge. One disc represents the earth, the other the cloud. Using grid electrodes the charges are bound. After that they are collected by non-contacting so-called antenna keys and then sorted.

After being initially turned on by hand, the discs rotate by themselves according to the electrostatic laws about attraction and repulsion. A rectifying diode keeps the cycles in steady state. Otherwise the impulses of attraction and repulsion would accumulate and cause the discs to run faster and faster. The correct speed is of great importance and for optimal power generation the discs have to run quite steady and slow.

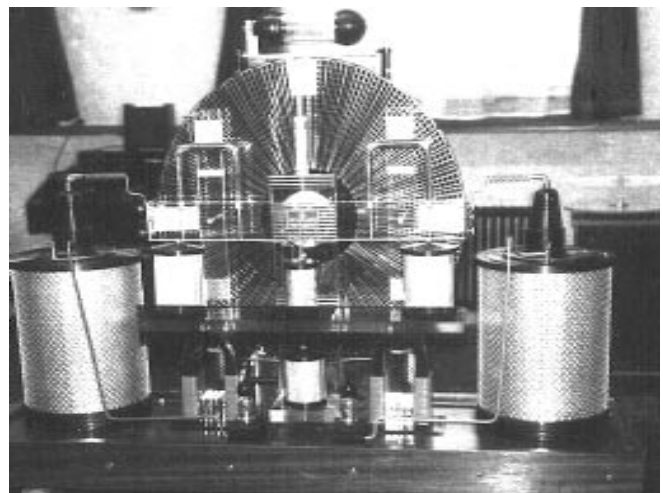

By means of grid condensers the energy is stored and then uniformly discharged, at the same time reducing the high voltage and building up power with additional devices. Finally the machine supplies a uniform direct current, which varies according to the size of the model. The machine furnishes about 3-4 kWt permanent output, depending on humidity, whereby the electric potential ranges from 270 to 320 Volt. High humidity of the atmosphere prevents the build-up of electric potential. The drier the air is, the better.

(Editor: It is necessary to note that the analogues method was used by Russian inventor Pavel N. Yablochkov who in 1877 take out a patent #120684 "The system of distribution and amplification of electrical currents by means of atmosphere electricity..." As it was shown by Yablochkov devices, power doubled in lamps, though current of consumption did not increase.)

No doubt, through the so far achieved results one main objective has been reached, namely to prove that it is possible to use Free Energy. Nevertheless the research work is not yet completed.

To the educated physicist many things of this machine may seem impossible, maybe even crazy. Maybe he is also offended by the conceptions used to explain the whole. Only partly we could use the concepts of conventional physical terminology to explain and define only approximately the functions and properties of the various parts of the machine.

After all it will be necessary to create some more new concepts like the one we have already used before, when we termed the non-contacting collectors of electric charges as antenna keys.

This machine puts experts, which are just trained in conventional physics to a very hard test, because its mode

of action is not explainable with the state of the art of officially accepted physical knowledge, or at the most only partially explainable. However also a trained specialist should remain free and independent in his thinking, and should avoid to be limited by the temporal framework of publicly admitted knowledge in any science.

It has to be noted that the established science was already many times forced to change or give up some of its very fundamental concepts. Think about Galilee, to name only one example. Our human society almost condemned this man as a sorcerer and magician, just because he investigated and discovered a truth that seemed unacceptable by the established science of the days.

The book knowledge of any times is not wrong, but it is incomplete, and therefore allows to draw wrong conclusions.

There was used information from the official web site:
<http://www.methernitha.com>

Official address of Methernitha: Methernitha
Genossenschaft Administration, Moosbuehlweg 2,
3517, Linden, SWITZERLAND

Official E-mail of Methernitha: info@methernitha.com

New Energy Technologies

PRINT EDITION ADVERTIZING RATES

Full Page Ad

B/W - \$400

Color - \$800

Half Page Ad

B/W -
\$200

Color -
\$400

Quarter Page Ad

B/W - \$100

Color- \$200

Ask about discounts for multiple ads

New Energy Technologies is distributed in the leading Scientific Laboratories in Russia and has subscribers in more than 20 countries all over the world

To advertise contact us:
Faraday Labs Ltd, Phone/fax: 7-812-380-3844
<http://www.faraday.ru>, office@faraday.ru

COLD FUSION BY PLASMA ELECTROLYSIS OF WATER

Ph.M. Kanarev

The Kuban State Agrarian University,
Department of Theoretical Mechanics
13, Kalinin Street, 350044 Krasnodar, Russia
E-mail: kanphil@mail.kuban.ru

Tadahiko Mizuno

Faculty of Engineering, Hokkaido University,
Kita-ku, North 13, West-8 Sapporo 060-8628, Japan

Abstract: It has been disclosed that transmutation of the atomic nuclei of alkaline metals and the atomic nuclei of the cathode material takes place during plasma electrolysis of water.

Key words: atom, nucleus, proton, neutron, electron, cathode, low-current.

INTRODUCTION

Cold nuclear fusion is the first hypothesis of a source of additional energy in heavy water electrolysis. Fleischmann and Pons, the American electrochemists, are the authors of this hypothesis [1]. They reported about it in 1989. Since that time a large number of experiments has been carried out in order to obtain additional energy from water [2], [3], [4], [5], [7], [8], [9], [10], [11], [12]. We continue to discuss this problem.

THE FIRST EXPERIMENTAL PART

In order to check this hypothesis, the following experiments were performed. Two cathodes were made of iron with mass of 18.10 g and 18.15 g. The first cathode operated during 10 hours in KOH solution; the second cathode operated during the same period in NaOH solution. Mass of the first cathode remained unchanged; mass of the second one was reduced by 0.02 g. The voltage by plasmaelectrolysis process was 220 V and the current (0.5-1.0) A (Fig.1). The indices of the consumption of the solution and the gases being generated were as follows (Table 1).

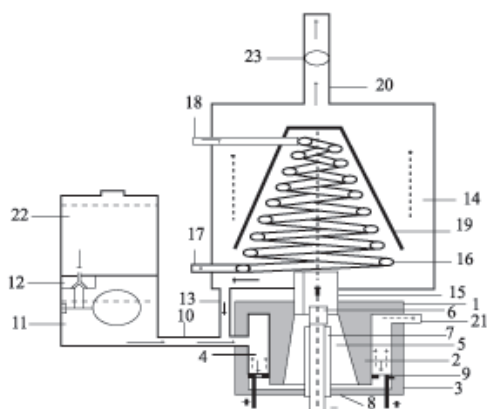


Fig. 1.

Diagram of gas generator. Patent # 2175027:

1 - lid of the reactor; 3 - body of the reactor; 6 - the cathode;
9 - the anode; 11 - solution dosing unit; 16 - cooler; 20 - pipe for
gas release; 23 - anemometer

Table 1
Experimental results

Indices	Water consumption, kg	Volume of gases, m ³	Energy expenses, kWh/m ³
KOH	0.272	8.75	0.28
NaOH	0.445	12.66	0.21

In order to increase safety of experimental results, the volume of the gases introduced with the help of anemometer is reduced twofold.

It is known that from one litre of water it is possible to produce 1220 litres of hydrogen and 622 litres of oxygen. Quantity of the gases generated by the plasma electrolytic process is much greater than it is possible to get from consumed water (Table 1) [6]. It gives the reason to think that not only water molecules, but also the nuclei of alkaline metals and the atomic nuclei of the cathode material serve as a source of these gases. The analysing experiment has been performed in order to check this fact.

Tadahiko Mizuno, the famous Japanese scientist (the co-author of this article), who works at the Division of Quantum Energy Engineering Research group of Nuclear System Engineering, laboratory of Nuclear Material System, Faculty of Engineering, Hokkaido University, Japan, kindly agreed to perform chemical analysis of the cathode samples with the help of the nuclear spectroscopy method (EDX). Here are the results of his analysis. The content of chemical elements on the surface of non-operating cathode is as follows (Table 2).

Table 2
Chemical composition of the cathode surface prior its operation in the solution

Element	Fe
%	99.90

The new chemical elements have appeared on the working surface of the cathode, which works in KOH solution (Table 3).

Table 3
Chemical composition of the surface of the cathode, which operates in KOH solution

Element	Si	K	Cr	Fe	Cu
%	0.94	4.50	1.90	93.00	0.45

The chemical composition of the surface of the cathode, which operates in NaOH has proved to be different (Table 4).

Table 4
Chemical composition of the surface of the cathode, which operates in NaOH solution

Element	Al	Si	Cl	K	Ca	Cr	Fe	Cu
%	1.10	0.55	0.20	0.60	0.40	1.60	94.00	0.65

Thus, the hypothesis concerning the participation of the nuclei of alkaline metals and the atomic nuclei of the cathode material in the formation of gases during plasma electrolysis of water has experimental confirmation. Let us carry out the preliminary analysis of the data being obtained (Tables 2, 3, 4).

THE FIRST THEORETICAL PART

In any of these cases, the atoms and the molecules of hydrogen are formed. The part of it is burned and the other goes out with the steam. We have already shown that the processes of fusion of the atoms and the molecules of hydrogen and its isotopes result in occurrence of additional thermal energy [6]. Numerous experiments show that up to 50% of additional thermal energy are generated during the plasma electrolysis of water, it is less than the results of the calculations originating from the existing cold fusion theories [6]. That's why it is necessary to analyse energetics of the particle creation process during the atomic nucleus transmutation.

Having considered the model of the electron we have found out that it can exist in a free state only when it has a definite electromagnetic mass [6]. Being combined with the atomic nucleus it emits a part of energy in the form of the photons, and its electromagnetic mass is reduced. But stability of its condition does not become worse, because the energy carried away by the photons is compensated by binding energy of the electron in the atomic nucleus [6].

If the ambient temperature is increased, the electron begins to absorb the thermal photons and to pass to higher energy levels of the atom reducing binding with it. When the electron becomes free, it interacts with the atom only if the ambient temperature is reduced. As this temperature is reduced, it will emit the photons and sink to lower energy levels [6].

If the electron is in a free state due to an accidental external influence on the atom and the environment has no photons, which are necessary for it to restore its mass, **it begins to absorb the ether from the environment and to restore its constants in such a way:** mass, charge, magnetic moment, spin and radius of rotation. The electron acquires the stable free state only after it has restored its all constants [6].

Thus, if an interchange of the free state and binding state with the atom takes place due to the accidental influences on the atom, **the electron restores its**

electromagnetic mass every time due to absorbing the ether. It means that actually it plays the role of a converter of the ether energy into the thermal photon energy.

The Japanese investigators Ohmori and Mizuno [4] registered neutron radiation during plasma electrolysis of water and reported that not only the nuclear process, but also the process of the electron capture by the free protons can be the source of this radiation.

As hydrogen plasma is generated during the plasma electrolytic process of water electrolysis, there exists a tendency of the capture of the free electrons by them.

It is known that rest mass of the electron is $m_e = 9.109534 \times 10^{-31} \text{ kg}$, rest mass of the proton is $m_p = 1.6726485 \times 10^{-27} \text{ kg}$, and rest mass of the neutron is $m_n = 1.6749543 \times 10^{-27} \text{ kg}$. The difference between the mass of the neutron and the mass of the proton is equal to $\Delta m_{np} = 23.058 \times 10^{-31} \text{ kg}$. It is $23.058 \times 10^{-31} / 9.109 \times 10^{-31} = 2.531$ of the mass of the electron. Thus, the proton should capture 2.531 electrons in order to become the neutron. The question arises at once: what will happen to the remained of electron mass $(3.0 - 2.531)m_e = 0.469m_e$? The disturbed balance of masses in this process is explained by modern physics in a simple way: a neutrino is created [6].

As the neutrino has no charge, it is very difficult to register it. If the neutrino takes the excess mass away or replenish the lacking one, can the elementary particles execute this process by themselves?

As the photons are emitted and absorbed only by the electrons, the proton, which absorbs the electrons, cannot convert the remainder of mass of the third electron into the photon. If the electron is absorbed by the third one and gives more than a half of its mass to the proton in order to convert it into the neutron, the remaining part of mass $(0.469m_e)$ of the electron, which has no possibility to become the photon, is converted into a portion of the ether, which "is dissolved" and mixed with the ether in the space. The fact that plasma has no photons with the mass corresponding to the part of mass of the third electron, which has not been absorbed by the proton during its conversion into the neutron, can serve as a proof of such affirmation. Let us calculate energy of such photon [6].

The difference the mass of the neutron and the proton is equal to $\Delta m_{np} = 23.058 \times 10^{-31} \text{ kg}$. If we subtract this value from the mass of three electrons, we'll get mass m_F , from which the photon should be formed [6]

$$m_F = 3m_e - \Delta m_{np} = 3 \times 9.109534 \times 10^{-31} - 23.05810^{-31} = 4.270602 \times 10^{-31} \text{ kg} \quad (1)$$

If the photon is formed from this remainder of mass m_F , its energy will be [6]:

$$E_{ph} = m_F \times C^2 = \frac{4.270602 \times 10^{-31} \times (2.997924 \times 10^8)^2}{1.602189 \times 10^{-19}} = 23.956126 \times 10^4 \text{ eV} \quad (2)$$

This value of energy corresponds to roentgen spectrum, that's why the creation of each free neutron should be accompanied by the creation of one roentgen photon. If it does not take place, we have two opportunities: the first one – we should think that in the case when the neutron is created, the neutrino was formed from mass $m_F = 4.270602 \times 10^{-31} \text{ kg}$ and flew away in the unknown direction; the second one – there were no conditions for the formation of the photons in the process being considered, and mass, which failed to be formed as a particle, “was dissolved” in the ether. Which variant is closer to the truth [6]? There is no exact answer, but it is known that the Japanese scientists registered only

neutron radiation with intensity of 50,000 neutrons per second, and they failed to register roentgen radiation [4].

If in this process the roentgen photons were created, they would not exceed heat efficacy of the plasma electrolytic process, because they would not be the thermal photons. The thermal photons are radiated and absorbed when the electrons make the energy transitions to the energy levels, which are the most remote from the atomic nuclei, where the infrared photons and neighbouring ones from the optical range of the spectrum with energies of $\approx (0.001-3.3) \text{ eV}$ are generated (Table 5) [6].

Table 5
Electromagnetic spectrum bands

Bands	Wave-length, m	Energy, eV
1. Low- frequency band	$\lambda \approx (10^7 \dots 10^4)$	$E \approx 10^{-15} \dots 10^{-11}$
2. Broadcast band	$\lambda \approx (10^4 \dots 10^{-1})$	$E \approx 10^{-11} \dots 10^{-6}$
3. Microwave band	$\lambda \approx (10^{-1} \dots 10^{-4})$	$E \approx 10^{-6} \dots 10^{-3}$
4. Relic band (maximum)	$\lambda \approx 1 \times 10^{-3}$	$E \approx 1.2 \times 10^{-3}$
5. Infrared band	$\lambda \approx (10^{-4} \dots 7.7 \times 10^{-7})$	$E \approx 10^{-3} \dots 1.6 \times 10^{-2}$
6. Light band	$\lambda \approx (7.7 \times 10^{-7} \dots 3.8 \times 10^{-7})$	$E \approx 1.6 \times 10^{-2} \dots 3.27$
7. Ultraviolet band	$\lambda \approx (3.8 \times 10^{-7} \dots 10^{-9})$	$E \approx 3.27 \dots 1 \times 10^2$
8. Roentgen band	$\lambda \approx (10^{-9} \dots 10^{-12})$	$E \approx 10^2 \dots 10^5$
9. Gamma band	$\lambda \approx (10^{-12} \dots 10^{-18})$	$E \approx 10^5 \dots 10^9$

Thus, the neutron fusion processes in plasma electrolysis of water will not generate additional thermal energy. But the appearance of the neutrons in plasma will promote the formation of the nuclei of deuterium and, possibly, of tritium. As the balance of masses remains almost unchanged, we have no reason to expect that **additional energy will take place** when deuterium and tritium are formed. But it is sure to appear during **fusion of the atoms of deuterium and tritium, i.e. the hydrogen atoms** [6].

In order to become a proton, the neutron should radiate something, which mass is $\Delta m_{np} = 23.058 \times 10^{-31} \text{ kg}$. Let us convert this mass into energy [6].

$$E_{ph} = \Delta m_{np} \cdot C^2 = \frac{23.058 \times 10^{-31} \cdot (2.998 \times 10^8)^2}{1.602 \times 10^{-19}} = 1.294 \times 10^6 \text{ eV} \quad (3)$$

This energy corresponds to the gamma range photons, i.e. not to the thermal photons, and this process does not give additional energy. Thus, if the process of the formation of the helium atoms takes place during plasma electrolysis of water, it should be accompanied by gamma radiation. If there is no such radiation, but the helium atoms are formed, the neutrino takes away the above-mentioned portion of mass Δm_{np} or this mass, which has no opportunity to be formed as the photon, “is dissolved” in the environment, i.e. it is transferred into the state of the ether [6]. As the roentgen photons and the gamma photons are not the thermal ones, this process gives no excessive thermal energy [6].

Another variant is possible. When the atoms of alkali metal bombard the cathode atoms, they are destroyed completely and destroy the atoms of the cathode materials. Under the notion “completely” we'll understand such state when both the atom and the nucleus are destroyed. In this case, the protons of the destroyed nuclei begin to form the hydrogen atoms. The process of fusion of the atoms and the molecules of hydrogen generate additional thermal energy [6]. But one should bear in mind that if plasma disintegrates water molecule into hydrogen and oxygen and if these gases contact plasma, hydrogen is combined with oxygen, and water is formed. Noise generated by plasma is hydrogen microexplosions. Taking into consideration the above-mentioned fact the larger the volume of hydrogen burnt in plasma, the smaller its volume in the gas-vapour mixture. It means that such reactor operation modes are required when quantity of burnt hydrogen is minimal one. Our theory allows us to have such results.

As iron is the cathode material, the nuclei of its atoms are the targets of the atomic nuclei of potassium, alkaline metal. During the transmutation of the iron nuclei (Fig. 2 b), the atomic nuclei of chromium (Fig. 2 a) and the atomic nuclei of copper (Fig. 2 c) are formed [6].

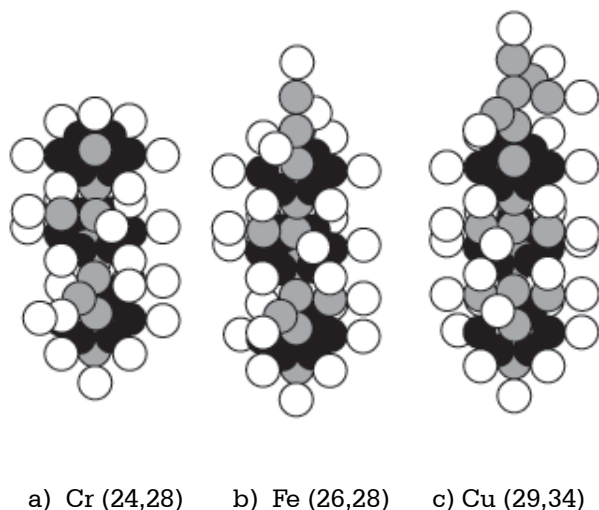


Fig. 2.

Diagrams of the atomic nuclei of: a) chromium, b) iron, c) copper

When the atomic nucleus of iron (Fig. 2 b) pass into the atomic nucleus of chromium (Fig. 2 a), two protons and two neutrons are released; two atoms of deuterium or one atom of helium can be formed from them. If the neutrons pass into the protons, four atoms of hydrogen are formed.

It is easy to see (Fig. 2) that the atomic nucleus of iron (Fig. 2 b) should lose two upper protons and two neutrons in order to pass into the atomic nucleus of chromium (Fig. 2 a).

Three additional protons and six neutrons (total 9 nucleons) are required for the formation of the atomic nucleus of copper (Fig. 2 c) from the atomic nucleus of iron. As on the cathode surface (Table 3) the number of chromium atoms, which probably are formed from the atomic nuclei of iron, four times more than the number of atoms of copper, then the solution is sure to have superfluous protons and neutrons of the destroyed atomic nuclei of iron, and we can determined their approximate relative quantity.

Let us suppose that four nuclei of the iron atoms pass into the nuclei of the chromium atom. The total quantity of free protons and neutrons (nucleons) is equal to 16. As one atom of copper falls on each four atoms of chromium, 9 nucleons are spent for the formation of one nucleus of the copper atom, and 7 nucleons remain free.

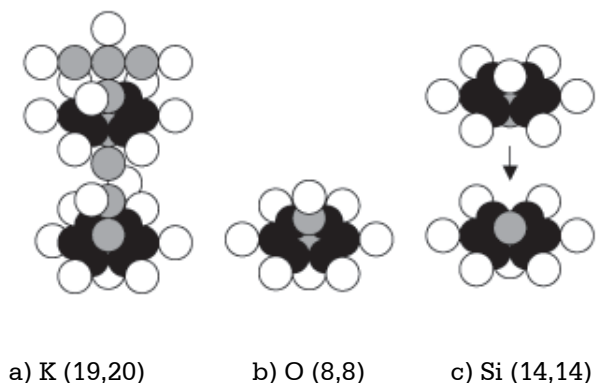


Fig. 3.

Diagrams of the atomic nuclei of: a) potassium, b) oxygen, c) silicon

Let us see what is formed when the nucleus of the potassium atom is destroyed. Potassium is situated in the first group of the fourth period of the periodic law. Its nucleus contains 19 protons and 20 neutrons (Fig. 3 a) [6].

In Fig. 3 a, we can see a weak link of the nucleus of the potassium atom [6]. It is situated in the middle of its axis neutrons. When the transmutation of the nuclei of the potassium atoms takes place, the nuclei of the oxygen atoms can be formed (Fig. 3 b) as well as its isotopes and the nuclei of the silicon atoms (Fig. 3 c).

The analysis of the structure of the nuclei of the potassium atom (Fig. 3 a) shows that it is the most probable source of the nucleus of the silicon atom (Fig. 3 c), which atoms appear on the cathode (Table 3).

It is easy to count that during the destruction of one nucleus of the potassium atom and the creation of one nucleus of the silicon atom 5 free protons and 6 free neutrons, i.e. 11 nucleons, are formed.

Thus, the transmutation of the nuclei of the iron atoms and the potassium atoms results in the formation of free protons and neutrons. As the protons cannot exist in free state, the hydrogen atoms are created from them. If the protons are connected with the neutrons after the destruction of the nuclei of the iron atoms and the potassium atoms, the formation of deuterium, tritium and helium is possible.

Let us pay attention to the main fact – absence of the sodium atoms in the cathode material. It is natural that the potassium atoms have appeared on the cathode, which operated in KOH solution (Table 3). Why are no sodium atoms on the cathode, which operated in NaOH solution? The answer is as follows: the nuclei of the sodium (Fig. 4,a) atoms are completely destroyed during the plasma electrolytic process. The presence of potassium on the surface of the cathode, which operated in NaOH solution (Table 4), can be explained by insufficient ablation of the reactor after the operation with KOH solution.

As free protons and neutrons appear during the destruction of the nucleus of the sodium atom (Fig. 4,a), some nuclei of this element begin to form the atomic nuclei of aluminium (Fig. 4, b), chlorine (Fig. 4, c) and calcium (Fig. 5).

But not all free protons and neutrons are spent for the construction of the atomic nuclei of aluminium, chlorine and calcium. A part of them is spent for the hydrogen atom formation.

If we knew the total quantity of transmutating atomic nuclei of iron, potassium and sodium as well as the exact composition of the gases generated during the plasma electrolytic process, it would be possible to determine the atomic nuclei being formed from additional nucleons. Now we can only suppose that the majority of new nuclei are the protons, i.e. the nuclei of the hydrogen atoms. The increased volume of the gases generated during the plasma electrolytic process is explained by it [6].

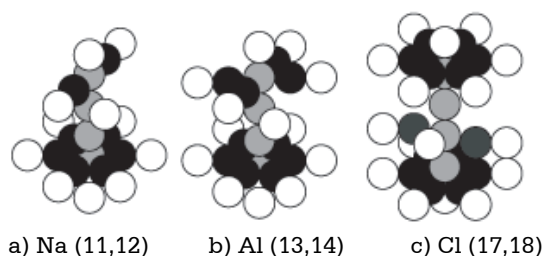


Fig. 4.

Diagrams of the atomic nuclei of:
a) sodium, b) aluminium, c) chlorine



Ca (20,20)

Fig. 5.

Diagram of the nucleus of the calcium atom

The analysis of these Tables shows that transmutation of the nuclei of iron, of which the cathodes are made, results in the formation of chromium and copper in both cases. Apparently, aluminium, chlorine and calcium are formed from the destroyed sodium nuclei. In any case, free protons and neutrons are formed.

But not all free protons and neutrons are spent for the formation of the atomic nuclei of copper, aluminium, chlorine and calcium. A part of them is spent for the formation of the hydrogen atoms. In any case, the atoms and the molecules of hydrogen are formed. The analysis has shown that plasma electrolytic process extracts not more than 0.005 kg of alkaline metal from one litre of the solution. It appears from this that if all neutrons of the atomic nuclei of the molecules of water and alkali metals are transferred into the protons and the atoms and the molecules of hydrogen are formed, the formed volume of gas will be considerably less than the one registered during the experiment (Table 1). A question arises: where do additional gases come from? In order to get the answer on this question we made the next experiment.

THE SECOND EXPERIMENTAL PART

First of all we take into account, that high temperature of plasma forms the conditions when a set of various processes takes place at the cathode. First of all, water is boiled and evaporated. At the same time, one part of water molecules is disintegrated with a release of the atomic hydrogen; another part of the molecules forms the orthohydrogen molecules. A part of water molecules is disintegrated completely and is released at the cathode together with hydrogen and oxygen. A part of hydrogen is combined with oxygen again generating microexplosions (noise) and forming water.

During plasma electrolysis of water, water vapor, hydrogen and oxygen are released simultaneously. If vapor is condensed, gas mixture is released. In order to measure gas flow rate the electronic anemometer have been used. Diameter of the electronic anemometer was equal to internal diameter of the gas make tube (23, Fig. 1). Its readings were registered and processed by the computer. The experiment was performed dozen times, and each time its readings were reproduced with small deviations [11]. But we had no hydrogen analyzer, that's why the results being obtained cannot be considered as final ones. We admonished it in all editions of the book *Water is a New Source of Energy* with such a phrase: "We abstain from lending an official status to these results with the hope to get necessary financing and to repeat them with a complete set of the necessary devices" [12, page 176].

In the middle of the year of 2002 we received small financing, which allowed us to make a new reactor and to buy some measuring instruments, in particular the scales with the measurement limit up to 600 g and accuracy of 0.02 g. Careful preparation allowed us to increase duration of continuous operation of the reactor (to 10 and more hours) and to register solution consumption for gas production.

The main difficulty of operation with the hydrogen is in the fact that its mixture with air (4-74)% or oxygen (4-94)% is combustible, and the fact was emphasized more than once during the experiments that made the researches be very careful. The second difficulty during hydrogen quantity measurements generated by the plasma electrolytic reactor is in the fact that its molecule has the smallest dimensions, that's why it penetrates easily to the places where the molecules of other substances do not penetrate. Molecular hydrogen diffuses easily even into metals. For example, one volume of palladium absorbs up to 800 volumes of hydrogen.

Gas flow speed was measured with the help of various anemometers, its readings being registered with the help of the computer. Numerous measurements and numerous analysis of gas flow speed measurement accuracy with the help of the anemometers showed that error of a conventional anemometer can be 100%.

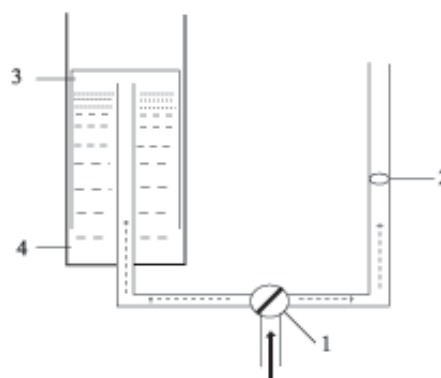


Fig. 6.

Diagram of measurement of flow rate of the gas and its volume:
1 - tap for gas flow movement direction switching,
2 - anemometer, 3 - graduated tank, 4 - water tank

It is known that it is possible to produce 1220 litres of hydrogen and 622 litres of oxygen from one litre of water. Quantity of the gases generated by the plasma electrolytic process is much greater than it is possible to get from consumed water (Table 1). It was a strong reason for a search of the measurement error. For this purpose, the diagram of measurement of flow rate of the gases and their quantity was used (Fig. 6).

The results of the measurements were as follows. The anemometer showed that 200 litres of gas mixture penetrated through it during 10 minutes. Nearly one litre of gases was in the graduated tank during this period.

Thus, the measurement of gas flow with the help of the anemometers distorted the result 200 fold. It should be mentioned that the reactor operated in the production mode of hydrogen and oxygen in the cathode zone. As a result, their mixture burst. The pulses of these explosions increased the readings of the anemometer.

It has become necessary to return to the reactor operation modes when no oxygen is released in the cathode zone. Our theory allows us to do this easy.

PROTOCOL

of tests of the first model of low-current Electrolyzers

It is known that it is possible to produce $1.22 \text{ l of } H_2 + 0.622 \text{ l of } O_2 = 1.843 (H_2 + O_2)$ from 1 ml of H_2O

Table 6
Experimental results

Indices	1	2	3	Average
1-duration of experiment, hour	1	1	1	1
2-voltage, V	70	70	70	70
3-current, A	0.038	0.080	0.098	0.072
4 – power, W	2.7	5.60	6.44	4.91
4-volume of consumed solution, ml	1.67	3.98	4.32	3.32
5-density of the solution, kg/l	1.04	1.04	1.04	1.04
6-volume of consumed water, ml	1.60	3.83	4.15	3.19
7-volume of the gas mixture being produced, l	2.95	7.06	7.85	5.95
6-volume of hydrogen being produced, l	1.95	4.67	5.07	3.80
7-energy consumption per 1 l of hydrogen, W·h/l	1.38	1.20	1.27	1.28
8-energy consumption per 1m ³ of hydrogen, kWh/m ³	1.38	1.20	1.27	1.28
9-existing energy consumption for production of 1 m ³ of hydrogen from water, kWh/m ³	4.00	4.00	4.00	4.00

CONCLUSION

Transmutation of the atomic nuclei of alkaline metals and the atomic nuclei of the cathode material during plasma electrolysis of water existed. Plasma electrolytic process opens new prospects in study of matter on the nuclear, atomic and molecular levels. The low-current electrolysis allows us to get the inexpensive hydrogen from water.

REFERENCES

1. M. Fleischmann, S. Pons and M. Hawkins. Electrochemically Induced Nuclear Fusion of Deuterium. J. Electroanal. Chem. 261, 301 (1989),
2. ICCF-7 ACCEPTED ABSTRACTS. Infinite Energy. V. 4, Issue 20, p. 59...69.
3. Harold L. Fox. Cold nuclear fusion: essence, problems, influence on the world. View from USA. Production group SVITAX. M.: 1993, 180 pages.
4. T. Ohmori, T. Mizuno. Strong Excess Energy Evolution, New Element Production, and Electromagnetic Wave and/or Neutron Emission in Light Water Electrolysis with a Tungsten Cathode. Infinite Energy. Issue 20, 1998. Pages 14-17.
5. T. Mizuno. Nuclear Transmutation: The Reality of Cold Fusion. Infinite Energy Press. 1998. 151 pages.
6. Ph. Kanarev. Foundations of Physchemistry of Microworld. Krasnodar, 2002. 330 pages.
7. Kenneth R. Shoulders, "Method of and Apparatus for Production and Manipulations of High Density Charge", U.S. Patent 5,054,046, issued Oct 1, 1991.
8. Ken Shoulders & Steve Shoulders, "Observations on the Role of Charge Clusters in Nuclear Cluster Reactions", J. of New Energy, vol. 1, no 3, pp 111-121, Fall 1996, 7 refs, 22 figs.
9. Hal Fox, Robert W. Bass, & Shang-Xian Jin, "Plasma-Injected Transmutation", J. of New Energy, vol. 1, no 3, Fall 1996, pp 222-230, 23 refs, 4 figs.
10. Shang-Xian Jin & Hal Fox, "High Density Charge Cluster Collective Ion Accelerator", J. of New Energy, vol. 4, no 2, Fall 1999, pp 96-104, 47 refs, 4 figs., 3 tables.
11. Ph.M. Kanarev. Water is the Main Power Carrier of Future Power Engineering. Journal of New Energy. An International Journal of New Energy Systems. Vol. 6, No.2. Pag. 101-121.
12. Ph.M. Kanarev. Water is New Source of Energy. The Third Edition. Krasnodar 2002. 194p. (In English).



LENR

(Low Energy Nuclear Reactions)

<http://www.lenr-canr.org>

Editorial: There is a collection of some papers on LENR (Low Energy Nuclear Reactions), also known as Cold Fusion. CANR, Chemically Assisted Nuclear Reactions, is another term for this phenomenon. These original scientific papers are reprinted with permission from the authors and publishers.

Website <http://www.lenr-canr.org> features a growing library of scientific papers about LENR and an extensive bibliography of journal papers, news articles and books about LENR.

COLD FUSION: What is it and what does it mean to science and society?

Edmund Storms

Cold fusion is important because it promises to be a new source of pollution-free, inexhaustible energy. In addition, it is important because it reveals the existence of a new way nuclei can interact that conventional scientific theory predicts is impossible. What then is this phenomenon that suffers such promise and rejection?

Energy can be obtained from the nucleus in two different ways. On the one hand, a large nucleus can be broken into smaller pieces, such as is experienced by uranium in a conventional nuclear reactor and by the material in an atom bomb. This is called fission. On the other hand, two very small nuclei can be joined together, such as occurs during fusion of deuterium and tritium in a Hot Fusion reactor and in a hydrogen bomb. This process, called fusion, also takes place in stars to produce much of the light we see.

The fission reaction is caused to happen by adding neutrons to the nucleus of uranium or plutonium to make it unstable. The unstable nucleus splits into two nearly equal pieces, thereby releasing more neutrons, which continue the process. As every one now knows, this process produces considerable waste that is highly radioactive. The uranium used as fuel also occurs in limited amounts in the earth's crust. As a result, this source of energy is not ideal, although widely used at the present time.

The normal hot fusion reaction requires two deuterium or tritium nuclei to be smashed together with great energy. This is accomplished by raising their temperature. However, this temperature is so high that the reactants cannot be held in a solid container, but must be retained by a magnetic field. This process has proven to be very difficult to accomplish for a time sufficient to generate useable energy. In spite of this difficulty, attempts have been under way for the last

40 years and with the expenditure of many billions of dollars. Success continues to be elusive while the effort continues.

Cold fusion, on the other hand, attempts to cause the same process, but by using solid materials as the container held at normal temperatures. The container consists of various metals, including palladium, with which the deuterium is reacted to form a chemical compound. While in this environment, the barrier between the deuterium nuclei is reduced so that two nuclei can fuse without having to be forced together. Because the process causing this to happen is not well understood, the possibility is rejected by many conventional scientists. Difficulty in producing the process on command has intensified the rejection. While this difficulty is real, it has not, as many skeptics have claimed, prevented the process from being reproduced hundreds of times in laboratories all over the world for the past 13 years. As you will see by reading the reviews and papers in our Library (see <http://www.lenr-canr.org/LibFrame1.html>), the process continues to be reproduced with increasing ease using a variety of methods and materials.

What is the nature of this process and why has it been so hard to understand? To answer this question, a person needs to understand the nature of the barrier that exists between all nuclei. Because all nuclei have a positive charge in proportion to their atomic number, all nuclei repel each other. It is only the surrounding electrons that hold normal matter together, with the nuclei being at considerable distance from each other, at least on the scale of an atom. When attempts are made to push the nuclei closer, the required energy increases as the nuclei approach one another. However, when deuterium dissolves in a metal, it experiences several unique

conditions. The surrounding metal atoms produce a regular array that is able to support waves of various kinds. These waves can be based on vibration of the atoms (phonons), vibration of the electrons, standing waves of electromagnetic energy, or a wave resulting from conversion of the deuterium nuclei to a wave. In addition, the high density of electrons can neutralize some of the positive charge on the deuterium nuclei allowing a process called tunneling, i.e., allowing passage through the barrier rather than over it. The mechanism of this neutralization process is proposed to involve a novel coherent wave structure that can occur between electrons under certain conditions. All of these wave processes have been observed in the past under various conventional conditions, but applying them to the cold fusion phenomenon has been a subject of debate and general rejection.

While the debate based on wave action has been underway, people have proposed other mechanisms. These include the presence of neutrons within the lattice. Normally, neutrons are unstable outside of the nucleus, decomposing into a proton, an electron, and a neutrino. Presumably, this reaction can be reversed so that neutrons might be created in a lattice containing many free electrons and protons. Having no charge, the neutron could then interact with various atoms in the lattice to produce energy. These neutrons might also be hidden in the lattice by being attached to other nuclei in a stabilized form, to be released

when conditions were right. Several particles normally not detected in nature also have been proposed to trigger fusion and other nuclear reactions.

While search for a suitable mechanism has been underway, an understanding of the environment that triggers the mechanism has been sought, the so-called nuclear-active-environment. Initially, this environment was thought to exist in the bulk of the palladium cathode used in the Pons-Fleischmann method to produce cold fusion. It is now agreed that the nuclear reactions only occur in the surface region. Recent arguments suggest that this surface layer does not even require palladium for it to be nuclear-active. Nuclear reactions have now been produced in a variety of materials using many methods. The only common feature found in all of these methods is the presence of nano-sized particles of material on the active surface. If this observation is correct, four conditions seem required to produce the nuclear reactions. First, the particle must have a critical small size; second, it must contain a critical concentration of deuterium or hydrogen; third, it must be constructed of certain atoms; and fourth, it must be exposed to a source of energy. This energy can take the form of a sufficiently high temperature, a significant high flux of hydrogen through the particle, application of energetic electrons or charged particles, or application of laser light of the proper frequency. Until, the importance of these factors is understood, the effect will continue to be difficult to replicate.

Technical Introduction to LENR-CANR

Edmund Storms

At low energies, the Coulomb barrier prevents nuclei from coming together and fusing to form a single nucleus. To initiate a nuclear reaction, several methods are used. Nuclear reactions are normally initiated by pushing two atoms together with enough force to overcome the Coulomb barrier by brute force, or by using neutrons which penetrate the nuclei without seeing a barrier. (Neutrons have no electrical charge, so the Coulomb barrier does not stop them.) These forces are normally provided by high-temperature plasma or by accelerating ions to high energies. In contrast, LENR describes the mechanism and conditions that cause a variety of nuclear reactions to take place with relatively low activation energy. These unique conditions reduce the need for excessive energy. The normal method forces the nuclei together, while the new method encourages them to come together. The challenge has been to understand the unique characteristics of the necessary solid structure such that this structure could be generated at will.

Because the proposed method is unique, at odds with current nuclear theory, and is still difficult to reproduce, support for studies in many countries, but not all, has

been very limited. Nevertheless, considerable information has accumulated over the last 13 years since Profs. Stanley Pons and Martin Fleischmann showed the world the possibilities inherent in this phenomenon. Much understanding is buried in conference proceedings and reports that are not available to a serious student. This information will, as time permits, be made available on this site. Students of the subject are also encouraged to use this site to interact with other people in the field and provide objective critiques of the work published here.

PHENOMENA DISCUSSED IN SOME OF THE PAPERS

At least 10 ways have been demonstrated to produce anomalous heat and/or anomalous elemental synthesis. A few of these methods will be described here. For course, not all of the claims are worthy of belief nor are they accepted by many people. Nevertheless, the claims will be described without qualifications in order to provide the reader with the latest understanding.

conditions. The surrounding metal atoms produce a regular array that is able to support waves of various kinds. These waves can be based on vibration of the atoms (phonons), vibration of the electrons, standing waves of electromagnetic energy, or a wave resulting from conversion of the deuterium nuclei to a wave. In addition, the high density of electrons can neutralize some of the positive charge on the deuterium nuclei allowing a process called tunneling, i.e., allowing passage through the barrier rather than over it. The mechanism of this neutralization process is proposed to involve a novel coherent wave structure that can occur between electrons under certain conditions. All of these wave processes have been observed in the past under various conventional conditions, but applying them to the cold fusion phenomenon has been a subject of debate and general rejection.

While the debate based on wave action has been underway, people have proposed other mechanisms. These include the presence of neutrons within the lattice. Normally, neutrons are unstable outside of the nucleus, decomposing into a proton, an electron, and a neutrino. Presumably, this reaction can be reversed so that neutrons might be created in a lattice containing many free electrons and protons. Having no charge, the neutron could then interact with various atoms in the lattice to produce energy. These neutrons might also be hidden in the lattice by being attached to other nuclei in a stabilized form, to be released

when conditions were right. Several particles normally not detected in nature also have been proposed to trigger fusion and other nuclear reactions.

While search for a suitable mechanism has been underway, an understanding of the environment that triggers the mechanism has been sought, the so-called nuclear-active-environment. Initially, this environment was thought to exist in the bulk of the palladium cathode used in the Pons-Fleischmann method to produce cold fusion. It is now agreed that the nuclear reactions only occur in the surface region. Recent arguments suggest that this surface layer does not even require palladium for it to be nuclear-active. Nuclear reactions have now been produced in a variety of materials using many methods. The only common feature found in all of these methods is the presence of nano-sized particles of material on the active surface. If this observation is correct, four conditions seem required to produce the nuclear reactions. First, the particle must have a critical small size; second, it must contain a critical concentration of deuterium or hydrogen; third, it must be constructed of certain atoms; and fourth, it must be exposed to a source of energy. This energy can take the form of a sufficiently high temperature, a significant high flux of hydrogen through the particle, application of energetic electrons or charged particles, or application of laser light of the proper frequency. Until, the importance of these factors is understood, the effect will continue to be difficult to replicate.

Technical Introduction to LENR-CANR

Edmund Storms

At low energies, the Coulomb barrier prevents nuclei from coming together and fusing to form a single nucleus. To initiate a nuclear reaction, several methods are used. Nuclear reactions are normally initiated by pushing two atoms together with enough force to overcome the Coulomb barrier by brute force, or by using neutrons which penetrate the nuclei without seeing a barrier. (Neutrons have no electrical charge, so the Coulomb barrier does not stop them.) These forces are normally provided by high-temperature plasma or by accelerating ions to high energies. In contrast, LENR describes the mechanism and conditions that cause a variety of nuclear reactions to take place with relatively low activation energy. These unique conditions reduce the need for excessive energy. The normal method forces the nuclei together, while the new method encourages them to come together. The challenge has been to understand the unique characteristics of the necessary solid structure such that this structure could be generated at will.

Because the proposed method is unique, at odds with current nuclear theory, and is still difficult to reproduce, support for studies in many countries, but not all, has

been very limited. Nevertheless, considerable information has accumulated over the last 13 years since Profs. Stanley Pons and Martin Fleischmann showed the world the possibilities inherent in this phenomenon. Much understanding is buried in conference proceedings and reports that are not available to a serious student. This information will, as time permits, be made available on this site. Students of the subject are also encouraged to use this site to interact with other people in the field and provide objective critiques of the work published here.

PHENOMENA DISCUSSED IN SOME OF THE PAPERS

At least 10 ways have been demonstrated to produce anomalous heat and/or anomalous elemental synthesis. A few of these methods will be described here. For course, not all of the claims are worthy of belief nor are they accepted by many people. Nevertheless, the claims will be described without qualifications in order to provide the reader with the latest understanding.

The most studied method involves the use of an electrolytic cell containing a LiOD electrolyte and a palladium cathode. Current passing through such a cell generates D⁺ ions at the cathode, with a very high effective pressure. These ions enter the palladium and, if all conditions are correct, join in a fusion reaction that produces He-4. Initially palladium wire and plate were used, but these were found to form microcracks, which allowed the required high concentration of deuterium to escape. Later work shows that the actual nuclear reaction occurs on the surface within a very thin layer of deposited impurities. Therefore, control of this impurity layer is very important, but rather difficult. The use of palladium is also not important because gold and platinum appear to be better metals on which to deposit the impurity layer. This method is found, on rare occasions, to generate tritium within the electrolyte and transmutation products on the cathode surface. Different nuclear reactions are seen when light water (H₂O) is used instead of D₂O, although the amount of anomalous energy is less when H₂O is used. These observations have been duplicated hundreds of times in dozens of laboratories.

Application of deuterium gas to finely divided palladium, and perhaps other metals, has been found to generate anomalous energy along with helium-4. Both palladium-black as well as palladium deposited as nanocrystals on carbon have shown similar anomalous behavior. In both cases the material must be suitably purified. Palladium deposited on carbon can and must be heated to above 200/260°C for the effect to be seen. When deuterium is caused to diffuse through a palladium membrane on which is deposited a thin layer of various compounds, isotopes that were not previously present are generated with isotopic ratios unlike those occurring naturally.

A plasma discharge under H₂O or D₂O between various materials generates many elements that were not previously present. When the electrodes are carbon and the plasma is formed in H₂O, the main anomalous element is iron. This experiment is relatively easy to duplicate.

Several complex oxides, including several superconductors, can dissolve D₂ when heated. When a potential is applied across a sheet of such material, the D⁺ ions are caused to move and anomalous heat is generated.

If deuterium ions, having a modest energy, are caused to bombard various metals, tritium as well as other elements not previously present are generated. These ions can be generated in a pulsed plasma or as a beam.

When water, either light or heavy, is subjected to intense acoustic waves, collapse of the generated bubbles on the surrounding solid walls can generate nuclear reactions. This process is different from the fusion reaction claimed to occur within a bubble just before it disappears within the liquid because neutrons are not produced in the former case, but are produced in the latter case. This method has been applied to various metals in heavy water using an acoustic transducer and in light water using a rotating vane which generates similar acoustic waves...

HOW TO EXPLAIN THE CLAIMS

A major problem in deciding which model might be correct is the absence of any direct information about the nature of the nuclear-active-environment. At this time, two important features seem to be important, the size of the nanodomain in which the reactions occur and the presence of a deuterium flux through this domain. The domain can apparently be made of any material in which hydrogen or deuterium can dissolve. Until the nature of the nuclear-active-state (NAS) is known, no theory will properly explain the effect and replication of the claims will remain difficult.

When fusion is initiated using conventional methods, significant tritium and neutrons are produced. In addition, when other elements are generated, they tend to be radioactive. This is in direct contrast to the experience using low energy methods. These products are almost completely absent and, instead, helium-4 is produced. When radiation is detected, it has a very low energy. This contrasting behavior, as well as the amount of anomalous energy, has made the claims hard to explain using conventional models. This difficulty has been amplified by a failure of many skeptics to recognize the contrasting effect of the environment, a plasma being used in the older studies and a solid lattice of periodic atoms being present as the new environment.

Over 500 models and their variations have been proposed, some of which are very novel and some are variations on conventional ideas. Most models attempt to explain the nuclear reaction once the required environment has been created, without addressing what that unique environment might be like. These models involve conversion of a proton (deuteron) to a neutron (dineutron), creation of an electron structure that is able to neutralize the barrier, conversion of deuterium to a wave which interacts without charge, and the presence of otherwise overlooked neutrons and/or novel particles. Many of the models will have to be abandoned or seriously modified once the nature of the nuclear active environment is understood.

It Started in 1989 . . .

Peter Hagelstein

Many of us recall the controversy surrounding the announcement of claims of observations of fusion reactions in a test tube that were made in 1989. At the time, these claims were greeted with considerable skepticism on the part of the physics community and the scientific community in general.

The principal claim of Pons and Fleischmann

The principal claim of Pons and Fleischmann in 1989 was that power was produced in palladium cathodes that were loaded electrochemically in a heavy water electrolyte. The evidence in support of this was a measured increase in the temperature in the electrochemical cell. There was no obvious evidence for nuclear reaction products commensurate with the claimed heat production. Fleischmann speculated that perhaps two deuterons were somehow fusing to He-4 through some kind of new mechanism.

Rejection by the physics community

This claim was not accepted by the physics community on theoretical grounds for several reasons:

First, there was no mechanism known by which two deuterons might approach one another close enough to fuse, since the Coulomb barrier prevents them from approaching at room temperature.

Second, if they did approach close enough to fuse, one would expect the conventional dd-fusion reaction products to be observed, since these happen very fast. Essentially, once two deuterons get close enough to touch, reactions occur with near unity probability, and the reaction products ($p+t$ and $n+He-3$) leave immediately at high relative velocity consistent with the reaction energy released. To account for Fleischmann's claim, the proposed new reaction would seemingly somehow have to make He-4 quietly and cleanly, without any of the conventional reaction products showing up, and would somehow have to arrange for this to happen a billion times faster than the conventional reaction pathway. Most physicists bet against the existence of such a magical new effect.

Third, the normal pathway by which two deuterons fuse to make He-4 normally occurs with the emission of a gamma ray near 24 MeV. There was no evidence for the presence of any such high energy gamma emission from the sample, hence no reason to believe that any helium had been made.

Finally, if one rejects the possibility that any new mechanisms might be operative, then the claim that power was being produced by fusion must be supported by the detection of a commensurate amount

of fusion reaction products. Pons and Fleischmann found no significant reaction products, which, given the rejection of new mechanisms, implied an absence of fusion reactions.

An alternate explanation is proposed

The physicists decided in 1989 that the most likely reason that Pons and Fleischmann observed a temperature increase was that they had made an error of some sort in their measurements. When many groups tried to observe the effect and failed, this led most of the physics community to conclude that there was nothing to it whatsoever other than some bad experiments.

The claim of Jones

A second very different claim was made at the same time in 1989 by Steve Jones. This work also involved electrochemistry in heavy water and the observation of reaction products corresponding to the conventional dd-fusion reactions. The initial publication showed a spectrum of neutron emission that Jones had detected from a titanium deuteride cathode loaded electrochemically. The response of the physics community was skeptical, as the signal to noise ratio was not particularly impressive. Given the polarization of the physics community in opposition to the claims of Pons and Fleischmann (which were announced essentially simultaneously), the physicists were not of a mood to accept much of any claims that fusion could happen in an electrochemical experiment at all. Jones went to great lengths to assure fellow scientists that his effect was completely unrelated to the claims of Pons and Fleischmann, and was much more reasonable.

Also rejected

Physicists had reason to be skeptical. Theoretical considerations indicated that the screening effects that Jones was relying on were not expected to be as strong as needed to account for the fusion rates claimed. As this experiment could not seem to be replicated by others at the time, it was easy for the physics community to reject this claim as well.

Cold fusion, weighed and rejected with prejudice

Cold fusion, as the two different claims were termed, was dismissed with prejudice in 1989. The initial claims were made near the end of March in Utah, and the public refutation of the claims was made at the

beginning of May. It only took about 40 days for the physics community to consider the new claims, test them experimentally, and then announce loudly to the world that they had been carefully weighed and rejected.

Following this rejection, physicists have treated cold fusion rather badly. For example, Professor John Huizenga of Rochester University was selected to be co-chair of the DOE ERAB committee that met to

review cold fusion and issue a report. Shortly afterward, he wrote a book entitled *Cold Fusion, The Scientific Fiasco of the Century*, in which he discusses the claims, the experiments, and the extreme skepticism with which the new claims were greeted. Robert Park discusses the subject in his book entitled *Voodoo Science*. You can find many places where physicists and other scientists happily place the cold fusion claims together with claims of psychic phenomena.

A Science Tutorial

Talbot Chubb

First it is important to recognize that there are four distinct types of energy production:

- 1) chemical energy, that powers our cars and most of our civilization;
- 2) nuclear fission energy, as used to generate about 15% of our electricity;
- 3) hot fusion nuclear energy, which powers the sun and most stars;
- 4) cold fusion nuclear energy, which appears as unexplained heat in a few experimenter's laboratory studies and which most scientists believe is impossible.

The three types of nuclear energy produce 10 million times as much heat per pound of fuel than occurs with chemical energy. How do these types of energy differ? To understand this question you need to know some chemistry and physics.

Lesson 1

Nature has provided us with two types of stable charged particles, the proton and the electron. The proton is heavy, normally tiny, and has a positive charge. The electron is light, normally large and fuzzy, and has a negative charge. The positive charge and the negative charge attract each other, just like the north pole of a magnet attracts the south pole of a magnet. When you bring two magnets together with the north pole of one facing the south pole of the other, they pull together, bang! When they bang into each other they release a little bit of energy in the form of heat, but it is too small an amount to easily measure. To pull the magnets apart you have to do work, which is another way of saying you have to use up energy. It's almost like pulling a rock back up a hill. Rolling the rock down a hill actually creates a little heat, and pulling the rock back up the hill takes energy. In the same way the positive charge of the proton pulls on the negative charge of the electron and they stick together releasing energy in the process. The result is a hydrogen atom, designated H. A hydrogen atom is nothing but a fuzzy electron hugging a compact proton. The proton is the nucleus of the hydrogen atom. If you knock the electron off the hydrogen atom you

get a positive ion H^+ , which is nothing more than the original proton. An ion is the name applied to an atom or molecule that has lost or gained one or more electrons, hence is no longer electrically neutral.

Lesson 2

As you know, nature has provided us with more than one type of atom. We have oxygen atoms, nitrogen atoms, iron atoms, helium atoms, etc.. How do these atoms differ? The answer is that they all have different types of nuclei (plural of nucleus, from the Latin). And these different nuclei all have different numbers of protons inside them, which means they all have different plus charges. The nucleus of the helium atom has 2 protons inside it, hence has plus 2 charge, and requires 2 electrons to neutralize its charge. When 2 electrons stick to it, it becomes a helium atom. The oxygen nucleus has 8 protons and has charge 8. When 8 electrons stick to it, it becomes an oxygen atom. The nitrogen atom has 7 electrons, and the iron atoms something like 26. But all the atoms are built more or less the same way, with a compact positively charged nucleus embedded in a cloud of fuzzy electrons. The difference in size between the compact nucleus and the fuzzy electrons is enormous. The sun has a diameter only about 100 times that of the earth. The electron cloud on an atom has a diameter which is about 100,000 times that of the nucleus. Cube these numbers to get the difference in volumes.

Lesson 3

We now are in a position to understand what chemical energy is. The atoms, all electrically neutral, can actually join with each other and release more energy. This is another way of saying that they can join into more stable configurations. The electrons in an atom try to configure themselves so as to get as close as possible to their nucleus, but their fuzzy nature requires that they take up a certain volume of space. However, if they join together with the electrons of another atom they can usually find a tighter configuration that leaves them closer to their beloved

beginning of May. It only took about 40 days for the physics community to consider the new claims, test them experimentally, and then announce loudly to the world that they had been carefully weighed and rejected.

Following this rejection, physicists have treated cold fusion rather badly. For example, Professor John Huizenga of Rochester University was selected to be co-chair of the DOE ERAB committee that met to

review cold fusion and issue a report. Shortly afterward, he wrote a book entitled *Cold Fusion, The Scientific Fiasco of the Century*, in which he discusses the claims, the experiments, and the extreme skepticism with which the new claims were greeted. Robert Park discusses the subject in his book entitled *Voodoo Science*. You can find many places where physicists and other scientists happily place the cold fusion claims together with claims of psychic phenomena.

A Science Tutorial

Talbot Chubb

First it is important to recognize that there are four distinct types of energy production:

- 1) chemical energy, that powers our cars and most of our civilization;
- 2) nuclear fission energy, as used to generate about 15% of our electricity;
- 3) hot fusion nuclear energy, which powers the sun and most stars;
- 4) cold fusion nuclear energy, which appears as unexplained heat in a few experimenter's laboratory studies and which most scientists believe is impossible.

The three types of nuclear energy produce 10 million times as much heat per pound of fuel than occurs with chemical energy. How do these types of energy differ? To understand this question you need to know some chemistry and physics.

Lesson 1

Nature has provided us with two types of stable charged particles, the proton and the electron. The proton is heavy, normally tiny, and has a positive charge. The electron is light, normally large and fuzzy, and has a negative charge. The positive charge and the negative charge attract each other, just like the north pole of a magnet attracts the south pole of a magnet. When you bring two magnets together with the north pole of one facing the south pole of the other, they pull together, bang! When they bang into each other they release a little bit of energy in the form of heat, but it is too small an amount to easily measure. To pull the magnets apart you have to do work, which is another way of saying you have to use up energy. It's almost like pulling a rock back up a hill. Rolling the rock down a hill actually creates a little heat, and pulling the rock back up the hill takes energy. In the same way the positive charge of the proton pulls on the negative charge of the electron and they stick together releasing energy in the process. The result is a hydrogen atom, designated H. A hydrogen atom is nothing but a fuzzy electron hugging a compact proton. The proton is the nucleus of the hydrogen atom. If you knock the electron off the hydrogen atom you

get a positive ion H^+ , which is nothing more than the original proton. An ion is the name applied to an atom or molecule that has lost or gained one or more electrons, hence is no longer electrically neutral.

Lesson 2

As you know, nature has provided us with more than one type of atom. We have oxygen atoms, nitrogen atoms, iron atoms, helium atoms, etc.. How do these atoms differ? The answer is that they all have different types of nuclei (plural of nucleus, from the Latin). And these different nuclei all have different numbers of protons inside them, which means they all have different plus charges. The nucleus of the helium atom has 2 protons inside it, hence has plus 2 charge, and requires 2 electrons to neutralize its charge. When 2 electrons stick to it, it becomes a helium atom. The oxygen nucleus has 8 protons and has charge 8. When 8 electrons stick to it, it becomes an oxygen atom. The nitrogen atom has 7 electrons, and the iron atoms something like 26. But all the atoms are built more or less the same way, with a compact positively charged nucleus embedded in a cloud of fuzzy electrons. The difference in size between the compact nucleus and the fuzzy electrons is enormous. The sun has a diameter only about 100 times that of the earth. The electron cloud on an atom has a diameter which is about 100,000 times that of the nucleus. Cube these numbers to get the difference in volumes.

Lesson 3

We now are in a position to understand what chemical energy is. The atoms, all electrically neutral, can actually join with each other and release more energy. This is another way of saying that they can join into more stable configurations. The electrons in an atom try to configure themselves so as to get as close as possible to their nucleus, but their fuzzy nature requires that they take up a certain volume of space. However, if they join together with the electrons of another atom they can usually find a tighter configuration that leaves them closer to their beloved

nuclei. For example, 2 hydrogen atoms can join together into a more compact configuration if each hydrogen atom contributes its electron to a 2-electron cloud, which the separate protons share. In this manner they form a grouping of the 2 electrons in a single cloud, together with the 2 isolated protons spaced apart from each other but still within the electron cloud. The result is a heat-producing chemical reaction $H + H \Rightarrow H_2$. (The $\Rightarrow$ means "goes to" or "becomes".) The H_2 configuration is the hydrogen molecule, and when you buy a tank of hydrogen gas, H_2 molecules is what you get. Furthermore, the 2 electrons of the H_2 molecule and the 8 electrons of the O atom can find a still more compact configuration by combining their electrons to create the water molecule H_2O , plus heat. The water molecule is really a single cloud of electrons in which are embedded the three point-like nuclei to form a minimum energy configuration. So when we burn oil or coal we reconfigure the electrons to produce more stable configurations of point-like nuclei embedded in electron clouds, liberating heat. So much for chemical energy.

Lesson 4

We have slid over one point in the above discussion. How does Nature make a nucleus containing two or more protons in the first place. After all, each of the protons has a positive charge, and the positive charges repel each other very strongly when they are separated by a tiny distance, equal to the distance across a nucleus. The repulsion of like charges is just like the repulsion between the north poles of two magnets when they are pushed together the wrong way. Something must overcome this repulsion, or else the only kind of atoms we would have would be those of hydrogen. Fortunately, this is not what we observe. The answer is that there is a second kind of force which acts on protons. This is the nuclear force. The nuclear force is very strong but requires particles to almost sit on each other to have any effect. Also, there is a second kind of heavy particle, which is just like a proton, except that it has no positive or negative charge. It is not pushed away by the proton's plus charge. This other kind of particle is called the neutron, since it is electrically neutral. A peculiar fact of life is that it exists in stable form only inside a nucleus. When not in the nucleus it changes into a proton, an electron and a very light anti-neutrino in about 10 minutes. But it lasts forever inside a nucleus. Anyway, the neutron and the proton very strongly attract each other once they get close enough together, and then they combine to form a highly stable pair called a deuteron, which we designate D^+ . The single deuteron, when it combines with a single electron, forms the heavy hydrogen atom called deuterium, designated D . A second nuclear reaction occurs when two deuterons make contact. When they can be forced together so as to make contact, the 2 deuterons fuse,

making a doubly charged particle. The grouping of 2 protons and 2 neutrons is even tighter than the proton-neutron grouping in the deuteron. The new particle, when neutralized by 2 electrons, is the nucleus of the helium atom, designated He . Larger groupings of neutrons and protons exist in nature and serve as the nuclei of carbon, nitrogen, oxygen, and iron, etc. atoms. All of these groupings are made possible by the very strong nuclear force, which is felt between particles only when they are in contact or share the same nucleus-size volume of space.

Lesson 5

We can now understand normal nuclear energy, which is really nuclear fission energy. During the early history of the universe massive stars were formed. In the explosion of these massive stars, lots of different types of nuclei were formed and exploded back into space. Second and later generation stars and planets were formed from this mix, including the sun. In the explosion process probably every possible stable configuration of protons and neutrons was produced, plus some almost-stable groupings, such as the nucleus of the uranium atom. There are actually 3 different types of uranium atom nuclei, called uranium-234, uranium-235, and uranium-238. These "isotopes" differ in their number of neutrons, but they all have 92 protons. The nuclei of all uranium atoms can go to a lower energy configuration by ejecting a helium nucleus, but this process occurs so rarely that the Earth's uranium has already lasted over 4 billion years. But the uranium nuclei are unstable in another way. In general, groupings of protons and neutrons are happiest if they have about 60 protons-plus-neutrons. The uranium nuclei contain more than three times this number. So they would like to split in two, which would release a lot of heat. But nature doesn't provide a way for them to split apart. They have to first go to a higher energy configuration before splitting in two. However, one of the three forms of uranium nucleus found in nature called uranium-235 and designated ^{235}U , gains the needed energy if it captures a neutron. The energized nucleus that results from neutron capture then splits apart with the release of an enormous amount of energy, and incidentally with release of additional neutrons. The additional neutrons can then split more uranium-235 nuclei, keeping the reaction going. This is what happens in nuclear power plants, where the heat, which is the end product of the nuclear splitting process, is used to boil water, generate steam, and turn electrical generators. (One also gets lots of radioactive products, which are a nuisance to dispose of safely.)

Lesson 6

We are now also in a position to understand hot fusion nuclear energy. As mentioned in lesson 5, the groupings of protons plus neutrons is most stable when the numbers of neutrons and protons approximate those

found in the nucleus of an iron atom. Just as uranium has too many neutrons plus protons to be comfortable, so the light elements like hydrogen, helium, carbon, nitrogen and oxygen have too few. If the nuclei can be made to make contact under proper conditions, they can combine to create more stable groupings, plus heat. This is the process of fusion. Nature has found a way of doing this in stars like the sun. All Nature has to do is heat compressed hydrogen hot enough and wait long enough and hot fusion will occur. If Nature were to start with deuterium, which already has a paired proton and neutron, the task would be relatively easy in a star. Temperature is a measure of how much speed an atom of a given type has as it bangs around inside a cloud of such atoms. The higher the temperature, the higher the speed and the closer the atoms get to each other momentarily during a collision. In a star the temperatures are high enough that all the electrons quickly get knocked off the atoms, so one is really dealing with a mixed cloud of electrons and nuclei. At very high temperature the nuclei occasionally get close enough during collisions for the pulling-together short range nuclear force to turn on. Then the nuclei can stick together and go to a lower energy grouping of protons plus neutrons, releasing heat. Hot fusion nuclear energy is an attempt to carry out this process in the lab, using deuterium and mass-3 hydrogen (whose nucleus is a compact grouping of 1 proton and 2 neutrons) as the gas. Hot fusion requires that the gas be contained at temperatures of hundreds of millions of degrees, which can be done with the help of magnetic fields, but only for 1 or 2 seconds. The hope is to contain the gas for longer times. During the period of high temperature containment nuclear reactions occur during collisions. The main form of energy release is ejection of high energy neutrons and protons. The proton energy quickly converts to heat. The neutron energy can also be converted to heat but makes the equipment highly radioactive. It then becomes difficult to repair the equipment, which could make hot fusion a poor candidate for commercial power production. In any case hot fusion power is a dream that is still probably at least 50 years away. But most scientists view hot fusion as the only way to achieve fusion power. Hot fusion produces less radioactivity than fission power, is environmentally benign, and has a virtually limitless fuel supply on earth (many millions of years at present energy usage rates).

Lesson 7

So now we come to cold fusion. Cold fusion may provide an easier and non-radioactive way of releasing nuclear fusion energy. Cold fusion relies on a different way of letting the protons and neutrons in one nucleus make contact with those in another

nucleus, so that the nuclear force can bring them into a more stable configuration. The requirement for any nuclear reaction to occur is that the reacting nuclei occupy the same volume of space. This condition is called particle overlap. In hot fusion particle overlap is brought about briefly by banging the nuclei together so as to overcome momentarily the repulsion of the two positive charges which try to keep the particles apart. In cold fusion particle overlap conditions are achieved by making deuterium nuclei act as fuzzy objects like electrons in atoms, instead of like tiny points. When either light or heavy hydrogen is added to a heavy metal, each hydrogen "atom" occupies a position inside the metal where it is surrounded by heavy metal atoms. This form of hydrogen is called interstitial hydrogen. With interstitial hydrogen the electrons of the hydrogen atom become part of the pool of electrons of the metal. Each hydrogen nucleus oscillates back and forth through a negatively charged electron cloud provided by the electrons of the metal. They can be thought of as moving back and forth like the pendulum in a grandfather clock. This vibration exists even at very low temperature, due to a peculiarity of a branch of physics called quantum mechanics. The vibration is called zero point motion. The nucleus then becomes a fuzzy object, like the electrons in an atom. But this amount of fuzziness is not enough to permit a hydrogen nucleus to make contact with another hydrogen nucleus. To get two or more hydrogen nuclei to share the same volume one must go one step further. In a metal electrical current is carried by electrons that act more like vibrating matter waves than like point particles. If electrons did not become wave-like inside solids, there would be no transistors and no present day computers. This wave-like kind of electron is called a Bloch function electron. The secret of cold fusion is that one needs Bloch function deuterons. One needs wave-like deuterons inside or on the surface of a solid in order that two or more deuterons share the same volume of space. But once the Bloch function deuterons are created, the nuclear force comes into play and the protons and neutrons making up the deuterons can rearrange themselves into the more nuclearly stable Bloch function helium configuration, with release of heat. To study cold fusion the experimenter has to force deuterons to assume the wave-like form and keep them in the wave-like state. Cold fusion experiments demonstrating release of excess heat show that this can be done. But at present no one knows how to do it reliably. Since cold fusion promises millions of years of energy without the problems of global warming or radioactivity, a real effort should be made to learn how.

For more tutorials go to www.hometown.aol.com/cffuture1 and www.hometown.aol.com/cffuture2

LENR (Low Energy Nuclear Reactions) Experiments

Review from
<http://www.lenr-canr.org>

Have you ever wondered what a physics laboratory looks like? They are seldom spacious or organized the way they are shown in movies. Most LENR researchers work at universities or home laboratories, with tight budgets in a crowded space. They keep old, broken equipment on shelves to scavenge parts for new experiments. In this section we present some photographs of equipment provided by researchers, and close up pictures of equipment. The actual cells, cathodes and other equipment used in electrolysis experiments often have an ad-hoc, home-made appearance, because they are made by hand. They have to be; they are unique, one-of-a-kind prototypes. Nothing quite like them has ever been made before.

A visitor seeing a LENR experiment the first time may feel disappointed. It looks like any other electrochemical experiment. The heat or neutron flux produced by the experiment are so small they can only be detected with sensitive instruments. A null cathode that produces no effect looks exactly like an active cathode. The difference between one cathode and another is in the microscopic structure, or the traces of elements mixed in with the palladium. Only one kind of cold fusion looks dramatic i. e. the glow discharge reaction.

Here are a few photographs of cold fusion cells and devices (also see the cover page).


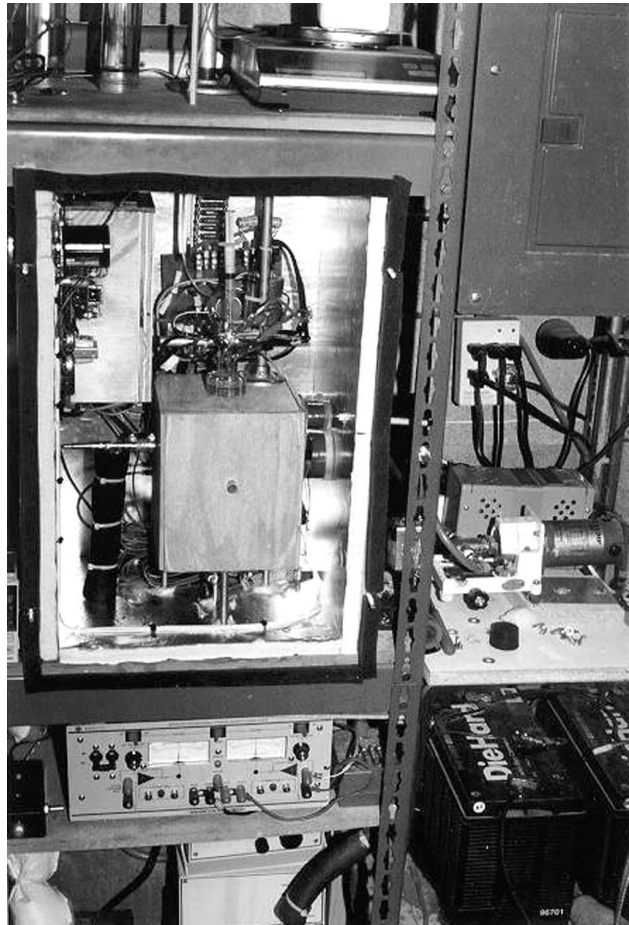


Fig.1
Box Calormeter

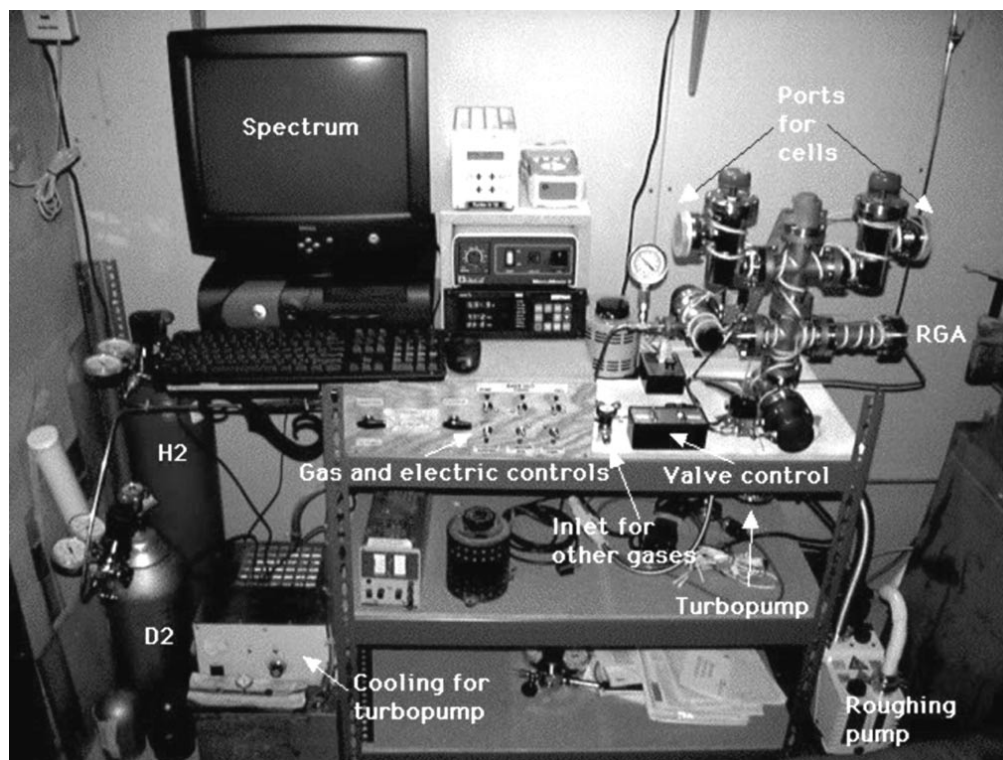

On Fig. 1 there is a calorimeter constructed by Edmund Storms. Note the DieHard® battery, lower right, that serves as an uninterruptable power supply. A power failure can ruin an experiment. Whenever possible, inexpensive, ordinary materials and instruments are used. However, experiments are never cheap, and they cannot be done on a shoestring. The equipment, arranged for another experiment (see Fig. 2), costs about \$40,000.

Fig.2 (On the left)

Vacuum system to prepare particles for gas loaded cold fusion cells, courtesy E. Storms.

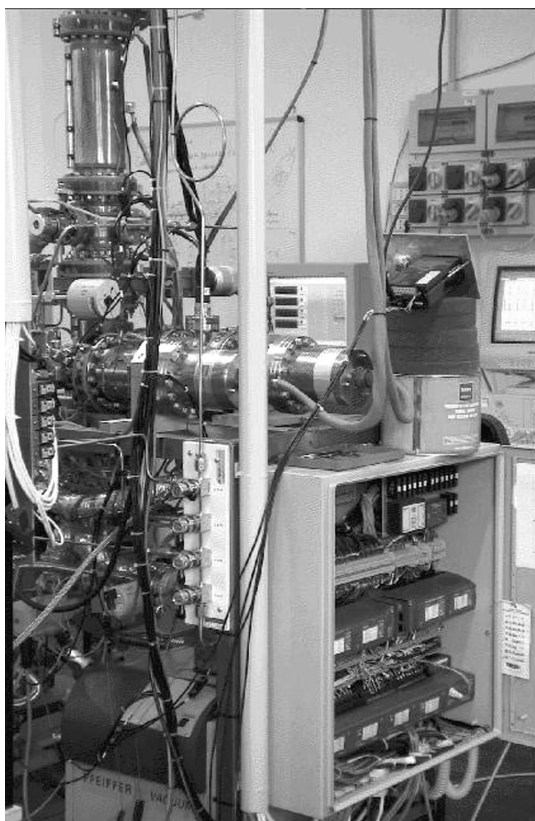


Fig.3

A high resolution mass spectrometer used for on-line helium detection during a cold fusion experiment at C. R. ENEA Frascati.
(<http://www.frascati.enea.it/nhe/>)



Fig.4

A cell at ENEA Frascati



Fig.5

A flow-type cell, courtesy E. Storms



Fig.6

Close up of a Miley-style cell, courtesy E. Storms

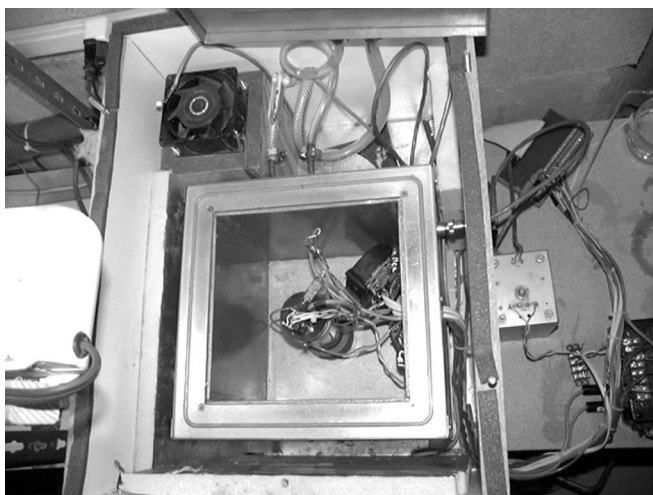


Fig.7

A cell installed inside a Thermonetics Seebeck calorimeter with the lid removed, courtesy E. Storms


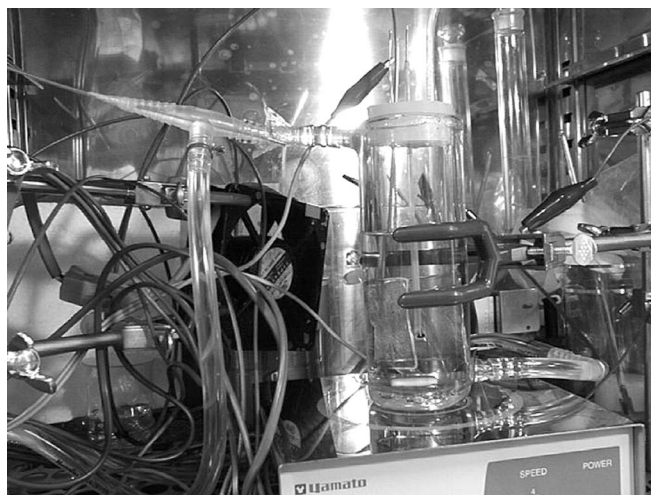


Fig.8

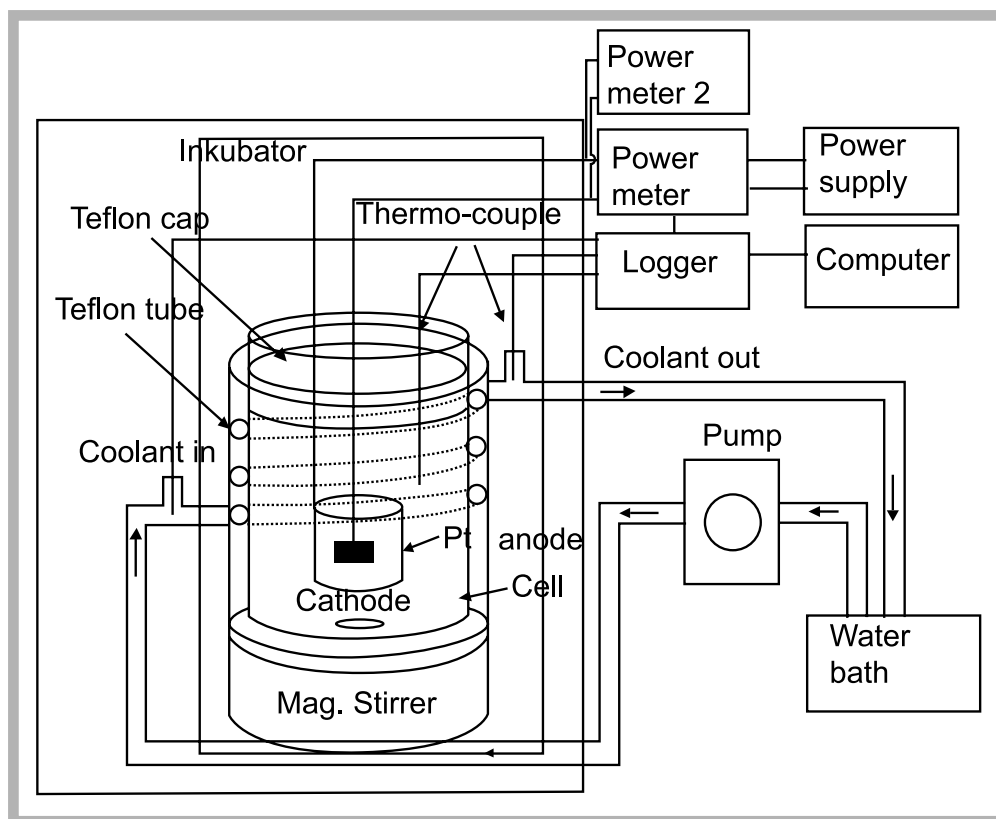

On the Fig. 8 you can see a glow discharge electrochemical cell at Hokkaido University, courtesy T. Mizuno. The cell is installed inside a crowded constant temperature air-cooled chamber. It placed on a magnetic mixer. Cooling water is pumped through the plastic tubes attached to the top and bottom. The muffin fan at the back circulates the air in the chamber

Fig.9

A schematic of the calorimeter shown above.

Hydrogen power engineering

Faraday Laboratories Ltd, Moscow, and Spectrum Investments Ltd, London, started joint R&D project on hydrogen power engineering. Photo: Alexander V. Frolov, Faraday Laboratories Ltd and Nicholas Moller, Spectrum Investments Ltd. The project includes designing and building of prototype to use hydrogen recombination process for heat generation.



On Electrogravitation

Andrey V. Lemesko

Krasnogvardeyskaya st., 14, apt.11
02094, Kiev, Ukraine
E-mail: jnet@ukr.net

Part I

"let's go to the Mars!"

Nowadays it becomes evident that exploration of deep space by means of rocket equipment is impossible. Aircrafts, which run on jet thrust, are too expensive and unreliable. Besides, they are too slow-speed if were considered on a scale of solar system. For example, the flight to the remote areas of our planetary system can drag on tens years. But the main disadvantage of rockets is their low load-carrying capacity. Thus, the most powerful transport system "Progress" can deliver less than 100 ton of load to the orbit of the Earth, and only 1 ton to the orbit of the Mars. Rather natural question arises as to whether any alternative ways of space exploration exist? Are there any transport systems, which can compete with rocket equipment on the interplanetary routs of future? Actually, at present there is only one technology, which is alternative to rocket ones – it is the so-called light sailers, using light pressure for acceleration. Laser and maser can be also used for their acceleration from satellites. However, there are also some disadvantages here.

There is also one more transport system, which is undeservedly consigned to oblivion. It uses electricity in acceleration aggregate. This transport system or the electric propulsion system is a result of researches and investigations of two little-known, but extremely talented American physicians and inventors, Thomas Townsend Brown and Paul Alfred Biefeld (the last one was also a professor of Astronomy).

Thomas T. Brown was the first who discovered electric principle of this propulsion system. Thus, in twenties of the XX century Thomas T. Brown, being the student of secondary school, became interested in X-rays. He wanted to reveal if the rays, outgoing the X-ray unit, could take positive effect. For his researches the inventor had got Coolidge Tube, the device, which radiates X-rays and consists of a glass tube. Deep vacuum is created in this glass tube. Anode and cathode are placed in the tube. Cathode radiates electrons and anode brakes them. X-rays are created at striking of electrons against anode. Brown used Coolidge Tube in the way nobody had done before. For ease of handling the researcher suspended the device on wires, which run to anode and cathode parallel to the Earth. During the operation of the device he noticed that every time when current fed to the tube, the tube was moved aside and tended to make slight progressive motion. Subsequent experiments demonstrated that the deviation value depended only on the value of voltage, which is between anode and cathode. The higher voltage is, the more deviation.

X-rays were neither here nor there. Much later at participation of Paul A. Biefeld, the same tendency to move was revealed at plane disc capacitors. The reason, which causes this motion, is the same, i.e. voltage, which exists between plates and not between anode and cathode as in Coolidge Tube.

Having run series of experiments, the researchers proved that electric energy could be directly transformed to mechanical. They also devised the physical principle, which were included in the scientific annals as Biefeld-Brown effect.

Editor's: Let us note that earlier Ampere and Faraday have been working on Electrokinetic effects which are easily detected at strong current. Modern researches on this point are known as "Sigalov's effect" (force appears in electric conductor which is bent at angle and at current impulse).

The essence of this effect lied in the fact that charged disc electric capacitors tend to move in the direction of their positive pole. At formulating of the essence of this effect the scientists consciously did not mention Coolidge Tube in order to demonstrate that according to their experimental observations, electron streams were not involved in generation of electromotive force. This effect of the direct transfer of electric energy to mechanic one (Biefeld-Brown effect) is observed, when current is fed to the Coolidge Tube or to the plane disc capacitor.

However, all this was realized much later, when in 1923 Brown became a student of Dennis University in Greenville, Ohio, where he met his teacher and later on a coauthor, Paul A. Biefeld. In school time the inventor came to the conclusion that the reopened by him phenomenon has nothing in common with X-rays and that high voltage, used for rays generation, is the basis of this phenomenon. Besides, Brown designed a device named "Gravitor". It looked like a usual bakelite box and was made as a simple construction, which consisted of several flat aluminum plates. The plates were placed as coins in a rouleau and separated with dielectric. It had only to place the box on the scale and connect it to some energy source with 100 kV voltage as the device either lost or put on about one percent of its weight that depended on polarity. An outside observer, who was not familiar with the essence of this effect, could think that mass was really changed. (*Editor's: Weight but not the mass is changed here. Weight is the force. There is a possibility of partial compensation of the weight by another force.*) But this was not the case. For better understanding of the processes, which take place at gravitor operating, let us make a mental experiment. Let us take a weight, put it on the scale and then raise it a little. The scale will certainly show that the weight has become lighter. After that let us press the weight then the scale will show that it has become heavier. However, in fact mass does not change. In the same way motive force, caused by high voltage, slightly raises the gravitor and at changing of polarity presses it. At that it seems that there is some change in weight. Thus, as if by chance, the scientist has discovered effect of direct transition of electric energy into mechanical one. (*Editor's: Let us specify the author's terminology. In T.T. Brown's Patent of 1927 it was mentioned that there*

was generated a force which partially compensated weight. The matter was always about the generation of x-force while gravitational field remained unchangeable).

Having graduated from the University, from 1926 up to 1952 Brown already by himself was being occupied with development of his electrical propulsion system. At the same time whether in chase of fame or in hope to obtain money for his researches, T.T. Brown began asserting that he had discovered something new in physics, viz "electrogravitation", i.e. some connecting effect between gravitation and electricity. (*Editor's: In my opinion, T.T. Brown has never posed a problem in such a way. The matter always concerned the fact that X-force appears while gravitational field does not change.*) As for the development of the invention, it came to the decrease of weight of the device and increase of DC voltage, which fed the plates of the "gravitor". As a result the devices could fly and lift weight which greatly exceeded their own. Thus in 1953 in his laboratory Brown demonstrated the flight of aircraft which had a disk form. The device made 51 m/c (180 km/h), flying at circular course of 6 m diameter. This device was nothing but very lightweight capacitor in which by means of the special construction electromotive force was redirected in two planes upward and sideward. It made the device rise in air and fly around the mast. Current of 50kWtt voltage was supplied to the central mast by the wire. Then speed of "flying disks" became higher, the payload capacity was increased but that was again resulted by decrease of weight and increase of the supplied voltage. T.T. Brown so succeeded in decreasing of the thickness of capacitor plates and in making his devices superlight, that the witnesses of these demonstrations called these devices as "air films".

Later on all works in this area were placed on secret list and then closed because of lack of prospects. Thus, accounts and experiments demonstrated that it was impossible to overcome terrestrial attraction entirely and go to outer space by means of the gravitor because there are no such natural materials which could take huge electric and heat loads. Besides, sufficiently massive electric power station would be needed to produce required currents. (*Editor's: Thereupon the following question appears: why the author looks for "currents" while the essence of the technology is in applying of high voltage but not of the currents?!*) Moreover some alternative was made, i.e. jet engines. Gravitor could not compete with them by above-mentioned and quite objective reasons. In time, since the mechanism of transition of electric energy into mechanical one was not disclosed and Brown's populist idea has received some publicity, this effect became surrounded with idle talks and guess-works. However the scientists who researched this very effect, has developed only three theory wh ich could explain its existence.

The first theory was suggested by T.T. Brown, the discoverer of this effect. To his dying day Brown asserted that he had discovered the effect which could connect gravitation and electricity, i.e. "electrogravitation". But this theory can be easily refuted by practice. It is enough to put Brown's bakelite box to the scale in such a way as to place the plates of the "gravitor" at right angle to the surface of the scales.

Then poles of the "gravitor" will be placed at the same level and parallel to ground and as a consequence electromotive force will influence in no way on the scale, since this force is directed sideward but not upward or downward. The scale will accurately show that there are no changes in weight and hence there is no **electrogravitation**. (*Editor's: The author will obtain propulsive force and it is directed not upward and downward but sideward. However the effect exists in any case. The changing of weight appears only when propulsive force generated by the device is directed against the weight force, i.e. upright.*)

The second theory was suggested by T. Brown's opponents. They asserted that electromotive force appears as a result of the so called "electron wind", i.e. electron streams which exist between the plates of the "gravitor". In their argumentations Brown's opponents rest upon the following facts which are well-known to every physicist. Fast electrons, as well as photons, have dual properties, i.e. interacting with matter and environment, they behave both as a wave and as a material particle. Since light or photons carry energy, then they heat bodies which are in their way and put pressure on the illuminated surface etc. Similarly electron streams carry heat or kinetic energy and hence they can put pressure on the anode of Coolidge Tube and get it moving forward. This theory seems to be interesting, however it explains appearance of electromotive force only in Coolidge Tube, but there is no explanation why discoid capacitors tend to move. Point is that there are no free electron streams in the capacitors. Usually between the plates of capacitors there is a dielectric which brings electron streams to nothing. If there is no electron wind, then what makes capacitors move?

Editor's: There is always a surface charge and reactive outflows of ions. But it is just a partial explanation of Biefeld-Brown's effect.

The third theory is based on the following fact. It is well known that electrons can have heat or Brownian chaotic motion. Free electrons, placed in a conductor, are in the similar chaotic heat motion before voltage is applied to this conductor. The higher temperature of the environment is the higher speed of this heat motion. According to school course of physics, heat energy or energy of chaotic motion of molecules (electrons) can be entirely transferred into mechanical one. If all molecules (electrons) start to move simultaneously and in the same direction, and if they push some piston toward this direction then heat energy of molecules (electrons) will be entirely transferred into mechanical work. In other ways, this piston will move until molecules (electrons) calm down. It is considered that this process is unrealizable in practice.

However, it seems that this is not quite the case, i.e. it is possible to regulate chaotic heat motion of electrons. Obviously this process takes place in the capacitor and in Coolidge Tube. It is no secret that when negative electrons try to move to the neighbor positive charged electrode, then dielectric layer which is placed between the plates of the capacitor prevents it. Electrons rest upon this layer and start to heat. Their internal energy is also increasing. The higher voltage is the higher heating of electrons, i.e. their capacity to have chaotic heat motion increases. However, chaotic motion of

electrons is not observed on the capacitor plates, since the directed force (voltage) influences electrons. Electrons tend to move upward, downward, to the right and to the left, but voltage prevents it. Thus they just are forced to move in space in one direction and with the same speed. Capacitor or gravitor has to move alongside with electrons because plates of the capacitor (gravitor) become a piston which is pushed by heated electrons. This piston is in progressive motion. It starts to move under the influence of electrons, or rather together with electrons. The higher voltage is, the higher temperature of electrons and hence the higher their speed. Therefore speed of capacitor (gravitor) increases at voltage increase. There is a usual chain, i.e. electric energy transfers into heat energy and heat energy transfers into mechanical one. Approximately the similar process takes place in Coolidge Tube, but there the heat of electrons is caused by thermoelectric emission on the cathode. Electrons evaporate from the cathode surface. Voltage, existing between anode and cathode, makes electrons move in one and the same direction. They move towards anode, which serves as piston and takes heat push upon itself, i.e. it transfers heat energy of electrons into mechanical work. It is clear that the higher voltage is the more intensively electrons are heated. Therefore electrons more intensively influence anode and the suspended tube is deviated to a greater extent. *(Editor's: Nowadays this very explanation is the most admitted one.)*

Resting upon Biefeld-Brown's theory and experimental results and at sufficient financing, already within the next few years it would be possible to create a unique electric engine which can operate on hot or quick electrons. Besides there will appear a possibility to orbit the first spaceship equipped with a propulsion system similar to gravitor one's. In near future scheduled cargo-and-passenger service could be organized within planetary system. First of all such transportations can be organized between the Mars, Moon and Venus orbits that will let to start active colonization of these planets.

Thus, more than 200 flights to the Moon and back and about 70 flights to the Mars are possible by means of the gravitor which is made of modern fusions and dielectric materials and which is placed on the Earth orbit. At that there is a minimum risk for its breakdown during the flight, because gravitor has no movable parts and no explosives are used. Negative consequences for the crew in an improbable emergency are insignificant. Even if high voltage causes disruption of dielectric layer between the electrodes and voltaic arc appears then the spaceship, equipped with such a propulsion system, will mechanically arrive its destination. The source of energy will be its only trouble spot and it will happen only if nuclear reactor instead of solar batteries is used. There is also an idea to attach dwelling capsules and cargo bays, equipped with such electric engine, one after another, like carriages are attached to a locomotive. It will let to equip this interplanetary vehicle in several stages by compactly packed modules which are delivered from the Earth. Unfortunately, this project exists only on paper and support of government or financial institutions is not expected in the near future. Faint hope is rested upon enthusiasts but there are too few of such people,

besides almost all of them are rather hardly related to space flights and science. Most of scientists even hear nothing about Biefeld-Brown Effect, because it has never become widely known, since all works of this field, except the very first experiments from the USA, were run and then closed in secrecy.

Part II

"...it's time to go to the stars"

Due to the theory of relativity there is an ingrained belief of several generations that it is impossible to move with more than 300 000 m/c speed, i.e. to move faster than light, since the postulates of this theory read that mass is directly depended on speed. Calculations demonstrate that while speed of some accelerated body verges towards light speed its mass will increase and in the point of equilibrium ($V=c$) it will unrestrictedly increase. Hence acceleration will tend to zero and speed will not virtually increase, no matter how long acceleration speed acts on the object. In other words, the accelerating mass dissipates speed. In principle it is correct but another conclusion can be also drawn from the dependence of mass and speed, for example, the following one: to accelerate an object to the speed which exceeds light speed, mass of the accelerated body should decrease and its speed should increase. Any physicist will say that this statement is correct. At first sight it is practically impossible to realize this idea therefore it was wrongly give to writers of science fiction. They added this idea to their armory and the hypothetical device, which realizes it, was named as gravitational engine. Let us realize this idea from the practical point of view and basing only on facts and logic.

Thus let us apply to the facts and give the description of one experiment. Professor of Pulkovo Observatory N.A. Kozyrev is the author of this experiment, he was also the first to discover the phenomenon of lunar volcanism. Kozyrev used a gyroscope, i.e. the device consisting of two rings of different diameter. These rings are placed athwart one in another and movably jointed. Top is attached to the inner ring through the cardan. The scientist put usual thermos filled with hot water near the beam scale. The top of the gyroscope was preliminarily spun up counterclockwise. At that balance indicator showed that gyroscope top at 90 gram weight became 4 milligram lighter in weight. Then Kozyrev started to pour water of room temperature inside the device through the vinyl chloride tube fixed into the hole, which was made in the plug of the thermos. Seemingly it is impossible to influence upon the gyroscope operating and its weight by a balloon filled with hot water, which is being cooled. Besides the thermos consists of a double-walled container which practically entirely excludes heat exchange with the environment. However balance indicator moved at one or two points, i.e. such connection existed.

This experiment can be divided into two steps. At the first stage the thermos filled with hot water is placed near the gyroscope and we can register the decrease of the top weight. At the second stage water of room temperature is poured into the thermos and the scale again shows that the weight has been changed. Somehow Kozyrev explained the second stage of this

experiment. He assumed that when we pour cold water in the thermos, then the equilibrium of the system is broken because some irreversible processes take place there. Cold water can not cause temperature increase of water in the thermos. Until the system come to equilibrium at a new level, i.e. until the same temperature is set in the whole volume of the thermos, this process will cause the condensation of time which “additionally” influences the top. However the scientist missed that the weight of the top had decreased long before the moment when cold water was poured into the thermos, i.e. before irreversible processes appeared there. (*Editor's: Evidently, the author of the article is not well familiar with Kozyrev's researches and with works of other experimenters who investigated this problem.*) In other words, at the first stage of the experiment there is nothing to condense time and that insignificant weight condensation, which was equal to 4 milligram, absolutely does not fall into his theory. Some other process is presented there.

It is quite possible that at the first stage of the experiment we deal with nullification of the top weight, i.e. mass of the top tends to zero. Some conclusion arises from this assumption, i.e. hot water can influence the mass of the top in some still incomprehensible way. (*Editor's: The point is not in water temperature but in the process of changing of the entropy.*) Thus there is a simplest and primitive model of the gravitational engine, viz there are hot water along with gyroscope and the required decrease of mass at the “outlet”. Certainly, it is very bold assumption but it can be easily checked. Near the gyroscope there should be placed thermos filled with not boiling water (of 100°C temperature) but with water of 50°C temperature. If the weight of the top decreased by one half (for example, by 2 milligram instead of 4 milligram), then we can surely ascertain that the hotter water in the thermos is the more decrease of mass. Besides, each 100°C of water heating will decrease mass of the top by 4 milligram. It is not very difficult to calculate the temperature at which mass of the top will verge toward zero and the top will start accumulating negative mass.

Let us now assume that our experiment was successful then water as well as any other matter cannot be heated to such high temperature. However it is possible to heat electrons. They are very compact and have insignificant mass and can be heated to very high temperature. It is necessary to take several plates then to place a dielectric between them and to apply voltage. Electrons rest on the dielectric and start heating. The top can be rotated anti-clockwise by means of electric engines, i.e. capacitor and gyroscope should be combined in one system with common center of gravity. It is not very difficult, as the saying goes, it is just an engineering problem. The higher temperature of electrons is the more decrease of the top mass. Finally there is a moment when mass of the capacitor-gyroscope system will reach zero and this electric machine will rise to the surface of the gravitational field of the Earth or any other planet. It will be Biefeld-Brown's force that will make our apparatus taking off the gravitational field of the Earth. This very force will start to accelerate our apparatus in the space vacuum and top of the gyroscope will lose its mass which appears at acceleration. Thus it is quite possible to reach speed, which is close to the light one, or even to overcome the threshold of light speed.

What is implied by gravitational waves? This question has been exciting the scientists from the half of the XX century. But still nowadays, in spite of all attempts of the scientists to dissolve the problem, these waves were not discovered. There is a standard way to discover them, which is based on general relativity. Basing on this theory, scientists assume that gravitational waves should change in some way the weight of material objects. According to this assumption the scientists suspend very heavy balls to very precision scale and then try to trace changes of their weight. There were only negative results. It seems that mass changes so quickly and to such short period of time that scale fails to react upon these changes. However there is another way which seems to be very promising.

Dependence of time and gravitation is a well-known fact. Thus speed of time course depends on force of the gravitational field of an object. Stars and planets can be considered as an example. The more intense attraction near them the more slowly time passes there. In other words, the greater mass of the planet the more slowly time passes near it. It is possible that oscillations of masses, which generate gravitational waves, in some way change speed of the time course along the whole way of the propagation of gravitational waves. In other words, gravitational waves are always attended with slight time fluctuations. Time starts to pass a little faster or a little more slowly as compared with its usual course. These changes can be traced by means of usual quartz plates. Let me remind of the fact that quartz plates are used at some models of clocks to keep time. Thus, oscillations of gravitational masses produce in space both gravitational waves and time fluctuations (chronowaves), which can be easily detected. Possibly these chronowaves are the part of gravitational waves. This assumption is already a scientific fact which is unfortunately ignored by more than one generation of researchers.

Professor N.A. Kozyrev was the first who surmised about the existence of time ways (chronowaves). He called them as “time flows”. The scientist worked out and run a simple experiment to confirm his hypothesis. Telescope and quartz plates were used. Quartz plates were placed in focus of the telescope, which was pointed to some bright star. Its objective lens was covered with black paper or tin plate in order to exclude the influence of light beams. At that quartz plates reacted upon the presence of chronowaves. Thus there was changed the frequency of oscillations of plates which were placed in focus of the telescope.

Besides the scientist discovered that in focus of the telescope there were changed electroconductivity and volume of some matters. It is explainable since some parameters of space as well as speed of passing of some physical processes and phenomena depend on the speed of time course. Outwardly it appears in change of electroconductivity and volume. In spite of the fact that during the experiments tin plate (thick metal cover) was used some skeptics insisting that the point is in infrared radiation which is produced by the heated cover. However they was silenced by Kozyrev's researches. Basing on the fact that we usually see stars not where they really are, but at the place they were at the moment

of emanation of light signal, the scientist calculated the location of Procyon star, which is the nearest to the Earth. Kozyrev pointed the telescope to this "clear" part of the sky zone that allowed to avoid the influence of infrared radiation and to fix the location of the star. Thus it is nothing but chronowaves generated by the star that can change oscillation frequency of quartz plates.

After Kozyrev's death this field of research is not considered by official science and the very existence of chronowaves is denied. Only some theorists warily impute the above-listed effects to the action of some torsion fields and waves the existence of which is rather questionable. However chronowaves exist and they can be used in practice, for example, to get information from any point of our galaxy in several seconds. **It is quite possible since chronowaves have no mass and thus they are propagated more quickly than light waves.** However it is still a question what will transmit this information to us because the transmitter of these waves yet has not been invented. *(Editor's: It is interesting what mass of light waves the author means. It is a pity that the author of the article did not read 9 previous issues of NET magazine! There was a detailed demonstration of the connection of Kozyrev's theory and experiments with the theory of longitudinal waves in aether. If to replace Kozyrev's notion of "waves of time density" by the notion of "waves of aether density" then we will get a real experimental approach which can help to solve the problem of antigravitation and time control.)*

Of course theoretically chronowaves can be also generated without participation of great gravitational waves (it seems that heat processes can also generate them). However no particular success was achieved in

this field. Thus by means of chronowave transmitter it is possible just to "listen" to remote stars the light of which will reach the Earth in many years. This receiver is very simple and it can be made by anyone who knows a little about radio engineering. *Under home conditions it is better to use a miniature incandescent bulb (lamp with filament tungsten) as a receiver and usual ohmmeter as measuring instrument.*

If in usual receivers radio waves are excited by weak electric currents existing in antenna then chronowave antenna is constantly under tension. Chronowaves do not excite current there but change some characteristics of it, influencing on electroconductivity of the matter which was used for the antenna (let us remember Kozyrev's experiments). Later on these insignificant changes are transferred in audio signal or fixed by any other means. That is the principle of operation of the device.

Editor's: These experiments on the registration of flicker effect in more detail are described in A.M. Mishin works which were published in previous issues of our magazine. As the reader could notice, the editors' opinion in many respects does not coincide with the author's point of view. (Alexander V. Frolov)

References

1. G.Ya. Myakishev, B.B. Buhovtsev, Physics, M.: Prosveschenie, 1991
2. A.S. Kuzovkin, N.N. Nepomnyaschy, What happened to torpedo-boat "Eldridge"? M.: Znanie, 1991, Series "Znak voprosa" #3, p.37
3. S.N. Zigunenko, How the time machine is made? M.: Znanie, 1991, Series "Znak voprosa" #5, p.35
4. A. Einstein and gravics, Collection of articles, M.: Mir, 1979
5. A.D. Chernin Physics of time, M.: Nauka, 1978
6. A.I. Veinik Thermodynamics of natural processes

Time Machine

Alexander V. Frolov gave this interview to the Spain magazine "Mas Alla de la Ciencia" ("Science"). The interview concerns some questions about scientific-research work on investigation of active properties of time. Let us remind that in 2002 Faraday Lab Ltd and Vadim A. Chernobrov (Moscow) started the join Time Machine Project.

Miguel Segui: How does it value the results obtained by the prototype of time machine?


Alexander V. Frolov: Usually it is about 3% changes, i.e. 3 sec per 100 sec of experiments.

M.S.: How other devices are preparing inside the project Time Machine?

A.F.: Now we have project with special electromagnets, which are emitters of the longitudinal waves. So, other devices are electronics parts to provide impulse current. But it is not the only one version of the system. If the emitters of the longitudinal waves are based on other principles so all device has other design.

M.S.: Do you believe that some day the time trips will be possible?

A.F.: Yes, sure. We have the clear theory for it and it is based on understanding of physical sense of the aether,



its relation with notion of time and with concept about existence of elements of matter in space-time. According to aether-vortex theory any element of matter is created from aether and its temporal parameters depend on density of aether.

M.S.: What practical applications can have the prototypes that are developing?

A.F.: Any change in the time course is the method of influence onto biological systems and the medical aspect is the main application. Also any physicist know relation between G (the gravity constant) and time course (rate of time). For example, time is slower on the surface of Earth than in space. So, local time changes (which are changes in density of aether or direction of aether wind) can be used to get propulsion force without reactive mass

flow. Also we can hope that some new materials can be produced in special area of slowed or accelerated time course.


M.S.: Which are the main difficulties of developing of these devices at the moment?

A.F.: For us now it is a part of the work that is related with designing of the powerful current electronics circuits. Also there are no known analogies for patent work, but we hope to complete our patent claim in March of 2003.

M.S.: Is it foreseen that they carry out experiments with human beings and the machine of modification of the time, just as V. Chernobrov carried out?

A.F.: We, i.e. Faraday Laboratories Ltd, are developing small unit for testing of the principles. In future we'll work with other design and with participation of the pilot (human passengers). But it will be the system of other kind. Let me explain: now we are working to get small local change of the aether density, so called "chronal charge". It is analogy with electric charge, which produces electric field in space. If the electric charge is

moving then it will produce magnetic field. According to our plans after confirmation of the principles we are going to create design with moving "chronal charge" to generate "chronal field". There are suppositions that this field can be used practically for antigravitation propulsion transport.

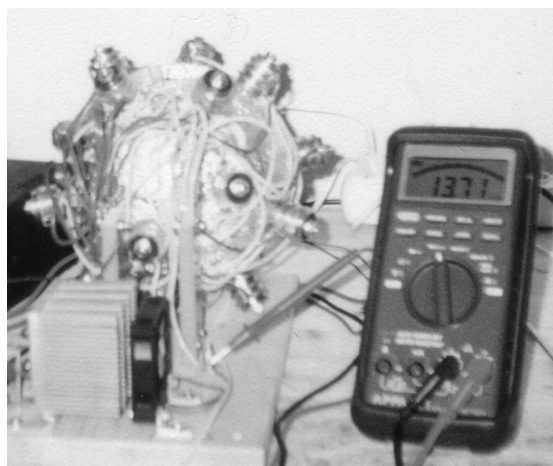

"FRCM" – Avalanchedrive **Fractioning and Replacement of a Constant Mass**

Murilo Luciano Filho, Brazil

murilo@intrumenti.com.br, avalanchedrive@hotmail.com

For the while, this project has only these two names, as above. There is still a lot to do upon this development that involves free energy and / or "over-unity". It is designated to be of free use and application by everybody and everywhere, without any royalties just like it was a very old idea, which is now opened for entire community use. The inventor has enough strong reasons for this will.

This is a kind of donation, a personal donation, for the very best future of the Earth. Pioneers are needed (late pioneers?) Any person may be involved in this development to make money since there are no barriers for that. This means that this is an open idea and in this way it must stay. The principles are new and original and the energy involved is quite huge. In the inventor's mind there is realized the possibility to create an expert hands-on group to finish the project. In this article there is a rough draw which seems to be enigmatic but in fact it can clear the understanding of the principle and show the situation at which body may offer controlled spatial variation of length for the same weight.

The short text and a schematic draw (see Fig.1) are the way to show the principles and a few possible construction solutions. The photo shows a part of the device which can clear the so called weight localized rarefaction. Possibly the understanding of capacity for an observer will be a little forced. If necessary author can send the full patent requirement text, which contains 54 pages and 32 figures, not in English but in Portuguese.

Understanding of **FRCM / avalanchedrive** is a challenge in itself. When you start to learn about FRCM you will find complete original problems to deal. **Free your mind basing on some mechanical and physics knowledge and then avalanchedrive will come to make a part of your life. Feel free to work.**

FRCM – "AVALANCHEDRIVE"

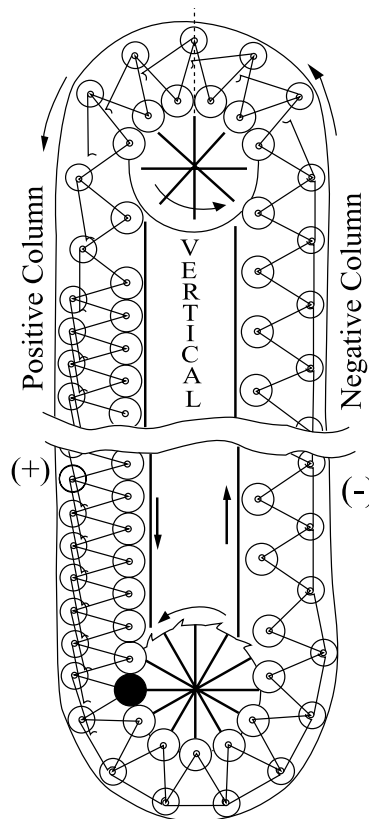


Fig. 1

PATENT REQUIREMENT RELEASE

This patent requirement is basically the application of a new physical principle which could be defined and found at least 400 years ago, so simple it is. Surely it is one of such things which was let behind by human mind and concern. FRCM is odd and amazing. The key for this project is a special body that can behave like a solid and like a fluid, at the same time, with combined characteristics just as designed and required.

The mass potential of a specially designed segmented body is hold and managed, and throughout proper means is sequentially fractured while suspension balance is kept. This causes, after start, a constant and cyclic movement, since arrangement goes, and the conducting and forcing form of the mass is not interrupted.

Also called "avalanchedriver", this principle work is based on just three main parts or components: 1st is the special segmented body – a chain; 2nd is the stationary and external assembling to hold and conduce the chain; 3rd is the straight vertical, in order to achieve the maximal weight storage position in the arrangement.

The chain is an endless repetitive zigzag construction with weights and defined angles that looks like an entire and elongated ellipse. Its design makes easy the change of its profile and form (mutant profile) that will be contracted or elongated, according to the way it is organized, supported and driven. When contracted or expanded, the chain assumes its maximal or minimal weight, in comparatively the same heights and level, but at different cross sections (tunneling?).

For distribution of the chain track the external assembling forms a kind of duct or rail, which is also elliptical. It allows to the chain to be contracted and expanded, to change direction, move, and pass away, as desired. The chain follows the way that the rail allows, in four different zones: mass-united zone, or positive column, or weight capacitor; the lower reversion input zone; the liberation zone, or negative column, with same height of the positive one; and the upper reversion zone, and its "zero point", or non-resistance top.

Both reversion zones are composed mainly of wheels. However, while the lower zone has to hang, open and bolt the chain, in order to change its profile and natural falling-down trajectory, the upper has a very passive function, that is just to let the chain cross over, and avoid any turn back possibility.

Fact is that in all circuit the chain follows with passivity the "voids" of trails, but assumes a very strong positive and pressure action in mass-united zone, especially in the button, where to the wheel there is applied all the active potential weight of the device, formed by the entire stack of the full contracted state, forcing movement.

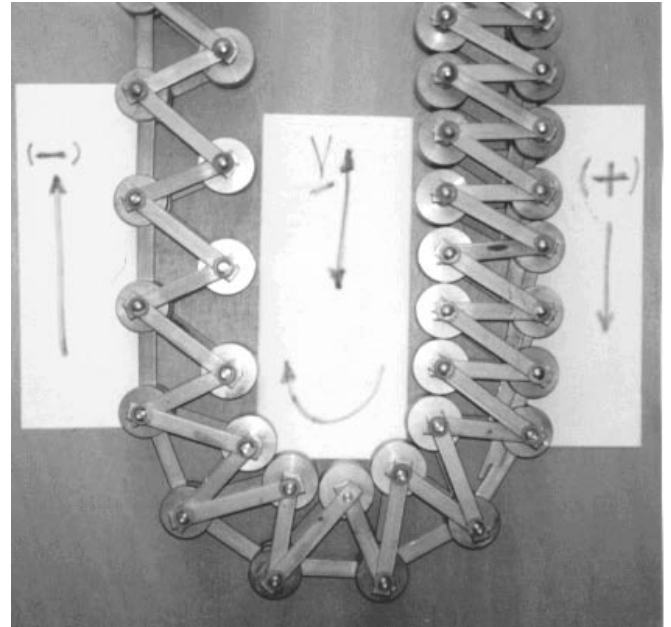


Photo of FRCM (Avalanchedriver)

It is easy to understand how and why FRCM works. Weight of the positive column is directly connected – as a compressed spring – against the relatively lighter negative column, through lower reversion wheel, where happens a kind of flux (the "solid flux") of the chain, that never can find a state of rest. Cycles of "breaking" of the chain can be considered as the instant of touch of each corner of the chain to the lower step wheel. To complete the circuitry, the chain excess, which is much lighter, passes over the upper wheel and turns back to the positive column top. It is impossible to turn the full subtracted potential to its source but mechanically the easier job to be done in FRCM.

FRCM manages and converts mass in energy..

The chain flows from the positive column, naturally finds changed profile and reverses to opposite way, and then it is pushed up to the negative column and to top. Finally it is collected, friendly, to restore the potential, at non-stop run! The only alternative to the chain is to move and move, and apply the positive surplus of weight to wrench under axle of the wheel.

This FRCM principle allows develop the equipment which is going to be able to take energy, work and force from gravity potential, so as it happens from wind and water at electrical generator machines, today. The potential is kept in such critical situation, that the only way for it is to escape and move. Besides in consequence of the suspending mass state the linear constant repetition of event will suffer. Water and other fluids do not offer "mutant profile" with fixed value of pressure, just as solid materials. There are many arguments for this view.

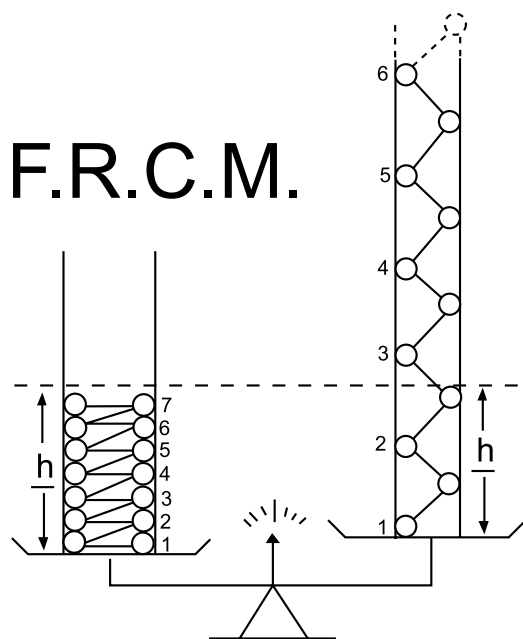


Fig. 2
Segment of a chain

Considering all mechanical losses, a part of the mass will be very active and applied in eccentric, or radial position to the wheel, even with the risk to cause too high speed. FRCM manages and converts mass in energy.

See a non-scale schematic draw (Fig. 2) and photo of a chain segment to compare densities between columns at right and at left.

A theoretical case can be calculated: at total chain weight - 100, general losses - 20, total negative resistance - 30, active or positive surplus is $50 - 30 = 20$. This surplus that may be of 2kg, 200kg or 2,000kg, depending on scale, will force and free edge of the wheel, while the total weight keeps confined in the device. In the above case the difference of balance is 1.66. This means that the flowing velocity of the negative pile is 1.66 times higher than the falling of opposite positive pile. Just like a "solid venture", this change and relation is fixed, and in other cases may be varied or calculated to 3, 4 or even more! In all cases the speed must be hold that is not very easy job while one faces gravity acceleration.


The author of FRCM conceptions feels like these ideas have been around for many centuries, and that they are now discovered just like old draws. And this can be the bigger and the best moment to release this. Many thousands of different designs and solutions are coming in the future at looking for the better performance, costs and durability. Author thinks it to be strange that previous guesses could not reach this macro-physical concept. To build FRCM circuits, even re-applied or used old pieces, for example from ships and trains, will be useful.

This is only a start to a "new-old" development and clue to the sources of the modern mechanical engineering. Certainly some oppositions should be overcome. It is expected that other names are also going to be created and proposed to FRCM, but "avalanchedrive" seems to be a good one.

Author expects to get the invention and concept credits but not royalties and would also be glad to keep working on this concern. So, this message is a kind of invitation...

Editor: Unfortunately we have no photo or video documents of the operative device. We wait for readers' comments on this invention.

Complete text of the patent is available in Portuguese only.

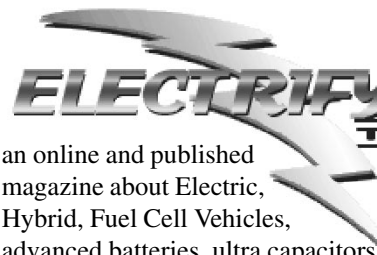


an online and published
magazine about Electric,
Hybrid, Fuel Cell Vehicles,
advanced batteries, ultra capacitors,
fuel cells, microturbines, free energy systems,
EEvents and exhibitions worldwide

63600 Deschutes Mkt Rd,
Bend Oregon, 97701
541-388-1908 fax 541-388-2750
etimes@teleport.com
www.electrifyingtimes.com
Subscription \$13/3 issues

Institute for Planetary Synthesis

P.O. Box 128, CH-1211 Geneva 20,
Switzerland
Tel. 41-022-733.88.76, Fax 41-022-733.66.49
E-mail: ipsbox@ipsgeneva.com
website: <http://www.ipsgeneva.com>

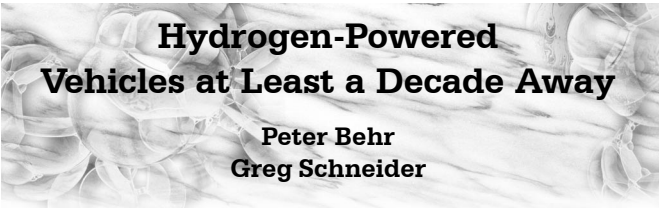

Hydrogen-Powered Vehicles at Least a Decade Away

Peter Behr
Greg Schneider

Washington Post

<http://www.washingtonpost.com/wp-dyn/articles/A635122003Jan29.html>
Thursday, January 30, 2003; Page A09

This information is forwarded as a courtesy from:
<http://www.integrityresearchinstitute.org>

President Bush's vision of a hydrogen-powered, non-polluting "Freedom" car for the next generation of American motorists pulled out silently from a Newport Beach, Calif., garage with Gregg Kelly at the wheel, bound for his office 10 miles away.

Kelly, president of a California robotics company, happens to drive a Toyota prototype of a hydrogen-fueled car, one of a handful in the United States today.

It will take at least a decade before a host of technological, economic and political barriers are overcome, permitting a fleet of these revolutionary vehicles to appear on U.S. highways, industry experts said. But by including the goal of hydrogen fuels in his State of the Union message Tuesday, Bush has opened the door to a fledgling movement that has already attracted a surprising coalition of supporters.

Environmentalists, automakers, oil companies and coal producers, engineering labs and strategists have seized on hydrogen as an almost too-good-to-be-true power source. It is abundant in water and air, it burns cleanly and it could free the nation from its dependence on Middle Eastern oil.

"For President Bush to frame the goal as he did is significant," said Jeremy Rifkin, consultant and author of a book advocating a transition from oil and gas to hydrogen. "How much is made of this, time will tell."

The president said he hoped that Americans born today would learn to drive in hydrogen-powered cars, a schedule that auto experts said could technically be met. But whether these vehicles will be commercially available depends on a huge array of variables.

First, the technology is still incomplete and unaffordably expensive. The specially equipped Toyota Highlander that Kelly drives has no price tag. The Japanese manufacturer, after investing millions of dollars in research, lent the vehicle to a University of California research project that Kelly's company supports. "My checkbook isn't fat enough," Kelly said.

The car is powered by electricity generated in a fuel cell by chemically combining hydrogen and oxygen. The engine spits out water drops instead of the carbon dioxide and other pollutants generated by burning gasoline.

With foreign manufacturers committed to press ahead, Detroit's carmakers have had to accelerate their research programs. In June, Ford Motor Co. will unveil a prototype car that uses hydrogen to power an internal combustion engine – part of a "bridging strategy" to help ease hydrogen into the marketplace until fuel cells are fully developed.

General Motors Corp. has developed a fuel cell-powered, car-sized "skateboard" – four wheels attached to a platform less than a foot thick, to which any kind of car body could be buckled.

Rather than use fuel cells, BMW has refitted 10 of its \$70,000 Model 745 sedans with hybrid engines that burn either gasoline or liquid hydrogen directly. It could be mass producing them by the end of the decade at a "reasonable" cost for its customers if there were enough hydrogen fueling stations to power them, said spokesman Gordon Keil. "We're trying to get [fuel suppliers] interested in hydrogen. We've not met with a lot of enthusiasm."

As daunting as the engineering challenge is the need for a national hydrogen fuel infrastructure – factories to produce the fuel, pipelines and trucks to distribute it and stations to store and sell it. Environmentalists dream of a totally "green" strategy in which solar or wind power is used to separate hydrogen from water – an approach whose costs now would be prohibitive. A nearer prospect is producing hydrogen from natural gas or coal, however in either case, the carbon dioxide byproduct would have to be injected underground to avoid a huge increase in greenhouse-gas emissions, experts say.

Rifkin argues that an eventual scarcity of oil and gas, decades ahead, will push prices of these fuels up to a point where hydrogen becomes cost-competitive. "It isn't a problem that will yield to technology alone," agreed David M. Nemtzw, president of the Alliance to Save Energy.

While all the major automakers are developing fuel-cell technology, most are cautious about hyping it. "We don't want to get too exuberant about it in that sense, overselling it," said Greg Dana, vice president for environmental affairs at the Alliance of Automobile Manufacturers.

Fresh in some minds is the experience of the Clinton administration, which launched a high-profile, \$1.5 billion research venture with the

Detroit automakers a decade ago to produce an 80 miles-per-gallon family car. No cars emerged, and the Bush administration halted the venture in favor of its hydrogen strategy.

Some of the president's political opponents contend the hydrogen option is a way of deflecting criticism over administration policies favoring energy production over conservation. "The president seems content with the auto industry's approach: 'Don't make us do anything today'," said the Sierra Club's Daniel Becker. Others say it does not go nearly far enough. Sen. Byron L. Dorgan (D-N.D), chairman of

the Democratic Policy Committee, said recently, "It's moving in the right direction. But his proposal is rather timid. I think we need a bolder plan."

Bush's spending plan for the hydrogen project, \$1.5 billion over five years, represents a \$500 million increase over his current budget. The administration proposes to earmark \$273 million for the 2004 fiscal year, but did not offer many specifics yesterday. The funding would support research on fuel cells, vehicle technology and distribution issues.

The magnitude of the goal demands an effort on the scale of the Apollo Moon project, Dorgan said yesterday. "You have to set benchmarks for five, 10 years out."

UNUSUAL PERMANENT MAGNET MOTORS

Thomas Valone

Integrity Research Institute,
www.integrityresearchinstitute.org
1220 L St. NW, Suite 100-232, Washington, DC 20005
Email: iri@erols.com

Abstract

Permanent magnet motors that try to achieve unusual overunity efficiencies with changes in wiring geometry, electronic switching schemes and magnetic configurations often are not successful. There are some designs that should be regarded as conventional and others as promising. Hopefully this article will help the reader to tell the difference before investing or accepting investment. Note: patents can be viewed for free at www.uspto.gov and also <http://gb.espacenet.com/espacenet>.

Introduction

An article about permanent magnet (PM) motors would not be complete without first reviewing the basic configurations that are present on the market today. Commercial PM motors are necessarily DC motors since their magnets are permanently polarized before assembly. Many PM motors which use brushes are switching to brushless motors that promise less friction and wear. Brushless motors include electronic commutation or step motors. A step motor, often used in the automotive industry, offers more continuous duty torque per unit of volume than any other electric motor but it is often a lower speed motor. The electronic commutation design is applicable to the switched reluctance (SR) motor. The SR motor substitutes soft iron in the place of higher cost permanent magnets for the outer stator and instead has an inner PM rotor.

Brushless motors in general produce torque from current in the armature by the application of Faraday's Law. The ideal PM motor has a linear torque vs. speed curve. There are both outer rotor and inner rotor designs that are standard in PM motors.

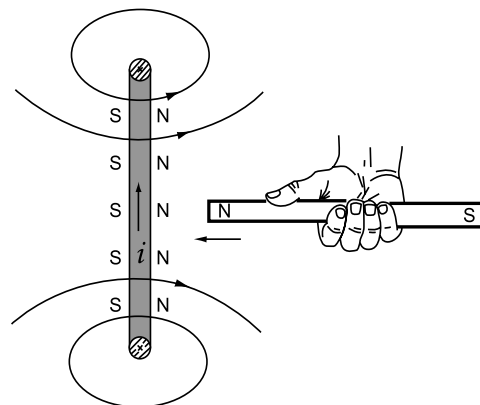


Fig.1

Lenz's Law
Induced B-field opposes motion.

To point out the focus of many of the problems with analyzing motors, the *Motion Control Handbook* (Designfax, May, 1989, p. 33) says that there is a "very important relationship between torque and back emf that is sometimes not understood." This relates to the electromotive force (emf) that is produced by the application of a changing magnetic field (dB/dt). In engineering terms, the "torque constant" (N-m/amp) equals the "back emf constant" (V/radian/sec). In physics, the motor terminal voltage

Detroit automakers a decade ago to produce an 80 miles-per-gallon family car. No cars emerged, and the Bush administration halted the venture in favor of its hydrogen strategy.

Some of the president's political opponents contend the hydrogen option is a way of deflecting criticism over administration policies favoring energy production over conservation. "The president seems content with the auto industry's approach: 'Don't make us do anything today'," said the Sierra Club's Daniel Becker. Others say it does not go nearly far enough. Sen. Byron L. Dorgan (D-N.D), chairman of

the Democratic Policy Committee, said recently, "It's moving in the right direction. But his proposal is rather timid. I think we need a bolder plan."

Bush's spending plan for the hydrogen project, \$1.5 billion over five years, represents a \$500 million increase over his current budget. The administration proposes to earmark \$273 million for the 2004 fiscal year, but did not offer many specifics yesterday. The funding would support research on fuel cells, vehicle technology and distribution issues.

The magnitude of the goal demands an effort on the scale of the Apollo Moon project, Dorgan said yesterday. "You have to set benchmarks for five, 10 years out."

UNUSUAL PERMANENT MAGNET MOTORS

Thomas Valone

Integrity Research Institute,
www.integrityresearchinstitute.org
1220 L St. NW, Suite 100-232, Washington, DC 20005
Email: iri@erols.com

Abstract

Permanent magnet motors that try to achieve unusual overunity efficiencies with changes in wiring geometry, electronic switching schemes and magnetic configurations often are not successful. There are some designs that should be regarded as conventional and others as promising. Hopefully this article will help the reader to tell the difference before investing or accepting investment. Note: patents can be viewed for free at www.uspto.gov and also <http://gb.espacenet.com/espacenet>.

Introduction

An article about permanent magnet (PM) motors would not be complete without first reviewing the basic configurations that are present on the market today. Commercial PM motors are necessarily DC motors since their magnets are permanently polarized before assembly. Many PM motors which use brushes are switching to brushless motors that promise less friction and wear. Brushless motors include electronic commutation or step motors. A step motor, often used in the automotive industry, offers more continuous duty torque per unit of volume than any other electric motor but it is often a lower speed motor. The electronic commutation design is applicable to the switched reluctance (SR) motor. The SR motor substitutes soft iron in the place of higher cost permanent magnets for the outer stator and instead has an inner PM rotor.

Brushless motors in general produce torque from current in the armature by the application of Faraday's Law. The ideal PM motor has a linear torque vs. speed curve. There are both outer rotor and inner rotor designs that are standard in PM motors.

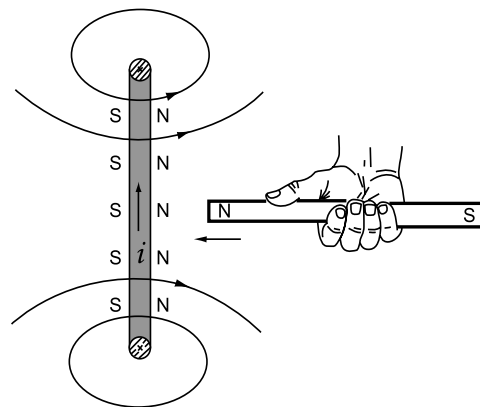


Fig.1

Lenz's Law
Induced B-field opposes motion.

To point out the focus of many of the problems with analyzing motors, the *Motion Control Handbook* (Designfax, May, 1989, p. 33) says that there is a "very important relationship between torque and back emf that is sometimes not understood." This relates to the electromotive force (emf) that is produced by the application of a changing magnetic field (dB/dt). In engineering terms, the "torque constant" (N-m/amp) equals the "back emf constant" (V/radian/sec). In physics, the motor terminal voltage

is equal to the back emf minus the IR drop due to internal resistance. (Example: $V = 8.3$ v, back emf = 7.5 v, IR drop = 0.8 v.) This physics principle, also referred to as **Lenz's Law**, was discovered by Friedrich Lenz in 1834, three years after Faraday invented the homopolar generator. The oppositional nature of Lenz's Law, and its back emf, is built into a physical law called **Faraday's Law**, which is at the root of motor drive. The back emf is the reaction of the changing current in the coil. In other words, the changing magnetic field naturally creates a back emf because they are equivalent.

Therefore, it is recommended that Faraday's Law be carefully reviewed first before proceeding. An article such as "Faraday's Law—Quantitative Experiments" (*Amer. Jour. Phys.*, V. 54, N. 5, May, 1986, p.422) will help convince the valiant new energy experimenter that the change in flux which causes a back electromotive force (emf) is INHERENTLY equal to the back emf. It cannot be avoided or circumvented for excess energy benefit, unless the amount of magnetic flux change per time is also altered. They are two sides of the same coin. The energy into an inductive coil style of motor will naturally equal the energy out. Also referred to as "electrical induction," the changing flux "induces" a back emf.

Switched Reluctance & Field Switching Motors

To explore an alternative method for inducing motion, the "Permanent Magnet Motion Conversion Device" by Ecklin, patent #3,879,622, uses rotatable shutters for alternately shielding the poles of a horseshoe magnet. Repeated again in the Ecklin #4,567,407 "Biased Unitized Motor Alternator with Stationary Armature and Field," the idea of switching the magnetic field with a "flux switch" is common to these types of motors. To illustrate the underlying principle, Ecklin states, "The rotors of most of today's generators are repelled as they approach a stator and are attracted back by the stator as soon as the rotor passes the stator in accordance with Lenz's law. Thus, most rotors face constant nonconservative work forces and therefore, present generators require constant input torque." However, "the steel rotor of the unitized flux switch alternator actually aids the input torque for half of each rotation as the rotor is always attracted and never repelled. This construction makes it possible for some of the current or power fed to the motor windings to magnetically feed through a solid magnetic path to the AC output windings ..." Unfortunately, Ecklin still to this day has not achieved a self-running machine.

Also related is the Richardson patent #4,077,001 which discloses a low-reluctance keeper physically

moving in and out of engagement with the ends of a magnet (p.8, line 35). Lastly, the Monroe patent #3,670,189 uses a related principle but accomplishes gating with the passing of rotor poles between permanent magnet stator poles. Monroe's claim 1, seems by its length and detail, to have almost guaranteed its patentability but of course its utility remains questionable.

It seems unlikely that as a closed system the Field Switching Motor can become self-running. In many examples, a small electromagnet will be necessary to help push the keeper into a synchronized rhythm. The Magnetic Wankel from Popular Science (June, 1979) can be compared in a basic manner to this type of invention. Also, the Jaffe patent #3,567,979 can also be compared (see abstract). The Minato patent #5,594,289 is also of a similar type as the Magnetic Wankel and quite intriguing to many people.

It has been found with inventions such as the Newman motor (U.S. Patent Application Serial No. 06/179,474), a nonlinear effect such as an impulse voltage is advantageous for overcoming the Lorentz force conservation effect of Lenz's Law. Also similar is the mechanical analog of the Thomson inertial propulsion device which uses nonlinear impact to transfer momentum along an axis perpendicular to the plane of rotation. A magnetic field contains angular momentum which only becomes apparent under certain circumstances such as Feynman's Disk Paradox, where it is still conserved. The impulse technique may possibly be used to advantage in this Field Switching Motor if the field switching can be done fast enough, with a rapid rise time, but more research is needed.

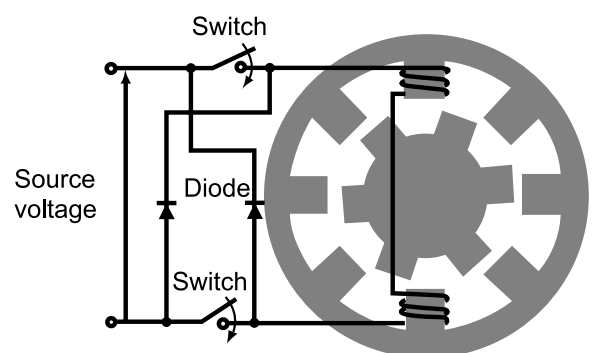


Fig. 2
Switched Reluctance Motor (*IEEE Spectrum* 1/97)

The best Switched Reluctance Motor that also has full commutation is the Dr. Harold Aspden patent #4,975,608 which optimizes the performance of the coil input and operating above the knee of the B-H curve. Switched reluctance motors are also explained and praised in *IEEE Spectrum* (1/97).

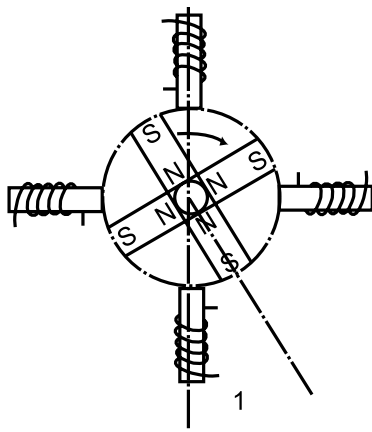


Fig. 3

Adams Motor

The Adams motor has attracted many followers including an endorsement from *Nexus* magazine as the best free energy motor they have seen. The performance of the machine, however, can be fully explained by Faraday's Law. The pulsing of adjacent coils which moves a magnetized rotor is actually following the same configuration as a standard switched reluctance motor. The delay that Adams speaks of in an Internet posting of his motor can be understood from the exponential voltage ($L \, di/dt$) of the back emf. The latest addition to this category, which gives credit to the Adams motor, comes from down under with PCT WO 00/28656 awarded to Brits and Christie in May, 2000. The simplicity of this motor is immediately obvious with the switchable coils and permanent magnet on the rotor. The patent also makes it clear that the "input DC current as supplied to the stator coil produces the magnetic repulsion force and is the only outside input to the overall system for total movement...." It is a well-known fact that all motors work on this principle. The key to their design is on p.21 of their patent where the inventors want to "maximize the influence of back EMF which tends to maintain rotation of the rotor/armature in a single direction." All of the motors in this field-switching category try to achieve this effect. Figure 4A of Brits and Christie disclose the voltage sources "VA, VB, and VC." Then, on page 10 it is stated, "At this time current is applied from the power source VA and continues to be applied until the brush 18 is no longer in contact with one of the contacts 14 to 17." There is nothing unusual about this design compared with the more sophisticated attempts listed previously in this section. All of these motors require an electrical power source and none of them are self-running.

When pulsing a coil with the passing of a permanent magnet, a suggestion that would help prove the claim for free energy is not to use

battery power for the coil current. Instead, the amazing Weigand wires are recommended (*Pop. Sci.*, May, 1979) that exhibit a huge Barkhausen jump of magnetic domain alignment and a very well-defined pulse shape. Having a coil wrapped around a Weigand wire produces a substantial pulse of several volts with a changing external magnetic field passing a certain threshold. No electrical input power is required for this pulse generator.

Toroidal Motor

As compared to motors on the market today, the unusual design of the toroidal motor is similar to the Langley patent #4,547,713 with a two-pole armature in the center of the toroid. If a single-pole design is chosen, with for example North poles at each end of the armature, this would resemble the radial magnetic field for the armature which the VanGeel patent #5,600,189 uses. The Brown patent #4,438,362 assigned to the Rotron company, utilizes varying magnetization segments for a rotor in a toroidal air gap. The best example of a carousel toroidal motor is the Ewing patent #5,625,241, which also resembles the Langley patent mentioned above. Based upon magnetic repulsion, the Ewing invention uses a microprocessor-controlled carousel, basically to try and take advantage of Lenz's law and get a jump ahead of the back emf. The Ewing invention may be seen in operation, with co-inventor David Porter, in the commercial video, "Free Energy: The Race to Zero Point." Whether it may be more highly efficient than other motors on the market remains an open question. As the patent states, "it is also possible to operate the device as a motor using a pulsed direct-current power source" (col. 7, par. 30). It also contains a programmable logic controller and power control circuit which the inventors thought would send it over the top of 100% efficiency.

Unless a prototype proves to be successful in achieving a torque or force conversion linkage, the internally propelled magnet may be left without a practical application. Commercialization of these types of motors may not be favorable, since many competing designs are currently available on the market, with high flux linkage.

Linear Motors

The area of linear induction motors is well known in the literature. Schaum's Outline Series, *Theory and Problems of Electric Machines and Electromechanics* (McGraw Hill, 1981), explains that these are the same as cutting the rotor and stator of a standard induction motor and laying them out flat. The late Dr. Laithwaite, author of

Motion Without Wheels, was famous for monorail designs for trains in England based on linear induction motors.

The Hartman patent #4,215,330 is an example of one that achieves a linear motor transportation of a steel ball up a magnetized incline of approximately 10 degrees. Another invention in this category is the Johnson patent #5,402,021, which uses permanent arc magnets on a four-wheel cart, exposed to a parallel track of alternating permanent magnets which are in a fixed position. An even more amazing permanent magnet patent is the Johnson #4,877,983 which an eye witness has seen operating at the Johnson home in a closed loop for hours. It is reasonable to assume that a pickup coil could be positioned nearby so that each trip would result in a pulse of electricity to charge a battery. The Hartman patent could also be arranged in such a circular track so that perpetual motion of the first kind can finally be demonstrated.

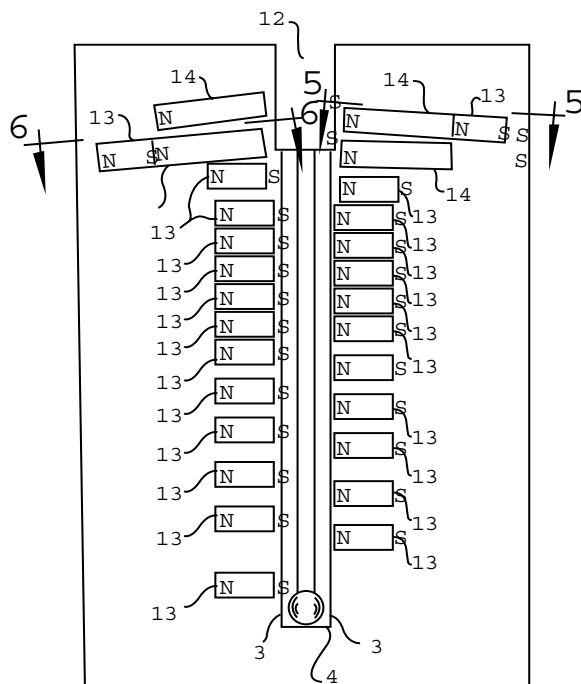


Fig. 4

Hartman patent #4,215,330

The Hartman patent is based upon the same principle as the famous electron spin experiment in physics called the Stern-Gerlach experiment. With an inhomogeneous magnetic field (one that is non-uniform) the force on an object with a magnetic moment is the gradient of the potential energy. Every physics textbook points out that this type of field, that is strong at one end and weak at the other end, will result in a unidirectional force on the magnetic object equal to $\frac{dB}{dx}$. That is exactly

what the Hartman patent possesses (note spacing of magnets). Therefore, the resulting force propelling the ball up a ten degree incline, in the x direction, is in keeping with the laws of physics.

With state-of-the-art magnets, including ambient temperature superconducting magnets which are now finishing the development stage, a demonstration of impressive cargo weight will be shown to be transportable without maintenance electricity costs. Superconducting magnets have the unusual property of retaining the initial magnetized field for years, without the need for periodic energization to restore the initial field strength. Examples of the state of development of the superconducting magnet market can be found in the Ohnishi patent #5,350,958 (lack of cryogenics and lighting system output) as well as the reprinted article from *IEEE Spectrum*, July, 1997 on magnetic levitation.

Static Electromagnetic Angular Momentum

In a provocative experiment with a cylindrical capacitor, Graham and Lahoz (*Nature*, V.285, No.15, May, 1980) have expanded upon the proof published by Einstein and Laub in 1908 that the Lorentz force needs an additional term to preserve action and reaction. The article they cite has been translated and published in my book, *The Homopolar Handbook* (described below). Graham and Lahoz emphasize that there is a "real angular momentum density to $\mathbf{r} \times (\mathbf{E} \times \mathbf{H})/c^2$ " and suggest how to see this energy effect in permanent magnets and electrets.

This is encouraging work, with an impressive source of Einstein and also Minkowski for its information. It is possible that it may have a direct application for the homopolar generator as well as the magnetic energy converter mentioned below since both have an axial magnetic field and a radial electric field like the cylindrical capacitor experiment of Graham and Lahoz.

Homopolar Motor

My book, *The Homopolar Handbook* (HH), covers experimental tests and history of the Faraday discovery, including Tesla's contribution to it. Recently however, there have been new developments into a multi-rotor design of a homopolar generator, similar to the invention of John R. R. Searl.

Recurring interest in the Searl device, as pictured on the cover of *Antigravity*, the biography of Searl by John Thomas, should also center on the

homopolar generator (HG). Preliminary analysis reveals that there are actually two separate HG phenomena occurring simultaneously, one which can be called the "revolution" effect (#1) and the second that could be called the "rolling" effect (#2). The first effect can be visualized as magnetized segments of an imaginary solid ring revolving around a common center. As suggested by drawings in HH, p.141-2, there are precedent designs that allow for segmenting an HG rotor.

With this model in mind, the #1 effect can be calculated, for 1 Tesla strength magnets, magnetized axially, adjacent to a single ring 1 meter in diameter, to produce more than 2 volts emf across each roller, (E-field directed radially from outer diameter of rollers to outer diameter of the adjacent ring) with say, 500 RPM. Note that this #1 effect is independent of any rolling of the magnet. The magnetic field in an HPG is tied to space and not to the magnet so rolling will not affect this large scale homopolar generator's Lorentz force effect (HH, p.10).

The #2 effect, located within each roller magnet, is the one noted in *Electric Spacecraft Journal*, Issue 12, 1994, (HH, p.160) where each roller, is a small homopolar generator. This effect is found to be somewhat weaker as it generates electricity from the center of each roller to its periphery. This design is like Tesla's HG (HH, p.81) where a rolling belt is contacting the outer edge of a circular magnet. With rollers in the vicinity of a tenth of a meter in diameter rolling, without slipping, around a 1 meter ring, approximately a half of a volt will be generated. The Searl design of ring magnetic material will normally strengthen the roller's B field.

It is important to realize at this point that the principle of superposition applies to these two effects. The #1 effect is a uniform E field across the diameter of the roller. The #2 effect is a radial effect as stated above (see HH, p.6-8). However, only the emf in the section of a roller between the two contacts, say at the center of the roller and its edge which contacts the ring, will actually cause current flow in any external circuit. This realization means that the effective voltage from the #1 effect will be half of the available emf, or a little more than 1 volt, which is still about double of the #2 effect. Upon applying superposition in the limited region indicated, we also find that the two effects oppose each other and the two emfs must be subtracted. The result of this analysis is that approximately one half of a volt of regulated emf will be present to generate electricity from a single set of rollers and one ring about 1 meter

in diameter. As current is drawn, a Ball Bearing Motor effect will also take place (HH, p.54) that actually pushes the rollers along, assuming the roller magnets have a reasonable conductivity (Thanks to Dr. Paul La Violette for this reminder).

In a related work, (*Tech. Phys. Lett.*, V. 26, #12, 2000, p.1105-07), Roshchin and Godin have published experimental results of their one-ring device, called a "Magnetic Energy Converter," with rolling magnets on bearings. It was designed as an improvement to the Searl device. Though my above analysis does not depend upon the ring being made of magnetic material, Roshchin and Godin did so. Their findings are encouraging and detailed enough for researchers to find renewed interest in this type of magnetic motor.

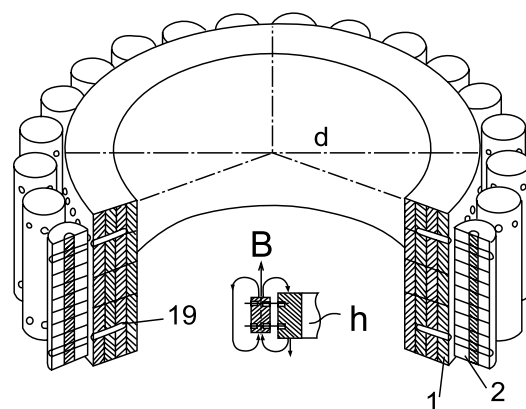


Fig.5

Magnetic Energy Converter in the experiment
by Roshchin and Godin (Russia)

Conclusion

So far, a couple of permanent magnet motors may have achieved perpetual motion, which exceeds 100% efficiency. Of course, conservation of energy concepts have to be considered and the source of the alleged extra energy examined. If permanent magnet field gradients do offer a unidirectional force, as the textbooks predict, then it is about time for its conversion toward useful work. The roller magnet geometry, now called a "magnetic energy converter" is also a unique style of magnetic motor. Exemplified in the Russian patent #2155435 by Roshchin and Godin, it is a magnetic motor-generator that shows potential for excess energy output. Since it relies upon the circulating cylindrical magnet rolling around a ring, the design is actually a generator rather than a motor. However, as they utilize the torque produced by the self-sustained motion of the magnets to run a separate electrical generator, it is working as a motor.

Reprint from Proceedings of Institute for New Energy Conference, 2001

Hydrogen Energetics

Review by Alla Pashova

A Russian writer Ludmila Ulitskaya, who is rather far from energy problems, says: "I'm quite sure that cheap electric energy sources have been already worked out and are hidden in oil king's safes. However such projects won't be taken out of the safes until the last oil drop is combusted. They don't want redistribution of money, world, power, and soon". Experts are sure to agree with the writer.

Now only ideas which can coexist together with the traditional oil power engineering and with a system of world oil distribution can escape the safes. Some expensive scientific toys promising future universal welfare are created to reassure ecologists, viz automobiles equipped with hydrogen engine. According to estimation of Japan representatives of motor car industry, installation of the hydrogen engine into such a car as a classical Sedan now comes to about \$700 000. Approximate cost of a hydrogen bus named Kitaro achieves the astronomic amount of \$1.25 million.

The hydrogen engine consists of several fuel elements, which are known as fuel cells. Hydrogen under pressure of 1.5-2.7 atmospheres comes to an anode. A cavernous catalyst splits the molecules into electrons and protons. The electrons set the electric engine in motion, and the protons come through a membrane acting to a cathode as an electrolyte. Here the catalyst combines them with the working electrons and with atmosphere oxygen into water molecules. It should be noted that the Europeans and the Americans are extremely charmed by this water streamlet which is exhausted instead of poisoning gases. Moreover, output of the fuel cell is 3-5 times more than output of the petrol engine.

The first hydrogen power station inaugurated in Las Vegas, Nevada, in 2002, (see Fig.1, 2) represents a system of the fuel cells with the proton penetrable membrane as an electrolyte (they are designed and produced by experts of Plug Power Inc.). The station produces hydrogen transforming and cleaning natural gas and generates electric power combining hydrogen stored in reservoirs with atmosphere oxygen. The USA Energy Department and Air Products Inc. together paid \$ 10.8 million for this project.

It is necessary to note that the priority branch of the hydrogen engineering is providing new means of transport with fuel, and electric power production is just the second aim. The mentioned station produces electric power in addition to its main function. Nevertheless, if fuel market begins to

decrease then the electric power payments will provide the "hydrogen magnates" with stable profit.



Fig. 1
Hydrogen power station

Nowadays the hydrogen automobiles allow oil kings keep the system of centralized fuel distribution and the infrastructure of service stations which will provide the means of transport with methanol, natural gas with hydrogen blend, and liquefied or gaseous hydrogen. Thus interested companies control the hydrogen engineering and scientific thought.

Moreover, oil can be applied as it is useful for board reforming (conversion), i.e. it can be used as a hydrogen source. The systems based on conversion have been known for a long time but there was need to work at them.

Russian experts improved the conversion system by replacement of the catalyst by plasma. Thus the conversion occurs in gas discharge of HVF appearing in the blend which needs to be converted. According to experts' opinion the Russian system is portable and has high output. In 2001 a group of experts of Russian Centre of Automobile Engine represented experimental prototype basing on Chevrolet Pickup S 10.

The ideal of modern hydrogen engineering is the following: "There should be minimal changes in the system of fuel distribution, non-polluted air, and thin streamlet of distil exhausted". However, evidently, the exhausted water is an ideal source for hydrogen fuel reproduction by means of high effective electrolyzing. If the closed system is worked out we would obtain an energy source powered by continuous chain of electrolyzing and recombination whose efficiency would be more than 100 %.

What are the known ways of hydrogen production? The greatest amount of the gas is produced on the base of catalytic conversion of hydrocarbon with water vapor. Temperature of the process depends on the catalyst composition. It is known that temperature of propane reaction can be decreased to 370° using bauxite as a catalyst. Approximately 95% of by-product carbon monoxide is further used in the reaction with water vapor.

A significant part of the total hydrogen production is given by a method of water gas. The essence of the method lies in reaction of water vapor with coke that is followed by the producing of carbon monoxide with hydrogen mix. The reaction is endothermal, it occurs at 1000°C. The heated coke is processed by the vapor; extracted purified mix of gases contains some hydrogen, some carbon dioxide, and great share of carbon monoxide. Further vapor processing of the carbon monoxide at 370°C increases the hydrogen extraction. The amount of carbon dioxide increases as well however it is easy to be removed by passing the gases mix through a scrubber sprayed by a water contraflow.



Fig. 2

There is a well-known iron-vapor method according to which vapor is passed above iron at 500-1000°C. Hydrogen obtained by this method is usually applied to hydrogenise fats and oils. Composition of the iron oxide depends on the process temperature. Iron-3 oxide (Fe_3O_4) prevails at the temperature below 560° C. If the vapor is passed above the iron at the temperature above 560° C then iron-2 oxide (FeO) share increases. A slight admixture of carbon monoxide is removed when the heated mix passes above a catalyst. At this time the carbon monoxide is transformed into methane.

In the processes of oxidation and thermal cracking of hydrocarbons at soot production hydrogen is produced as a by-product.

The next effective method is methanol-vapor one. It is an endothermal reaction which is proceeds in common iron reactors at 260° C temperature and at 20 atmospheres pressure.

There should be also mentioned a catalytic reaction of ammonia decomposition at which nitrogen and hydrogen is produced. The reaction can be profitable if it is necessary to produce great amount of hydrogen. The method is useful if the obtained hydrogen is directly applied.

Electrolysis is the oldest method to produce hydrogen. Direct current comes to electrodes, the cathode collects hydrogen, and the anode accumulates oxygen. The technology makes hydrogen to be too expensive energy carrier. There is often used a technology of hot processing of water vapor at 700-900° C accompanied with light petrol and heavy liquid fuel which bleeds oxygen. This method is quite expensive as well.

As it is known, **wasteful power consumption of classical electrolysis** is caused by the fact that it is used to overcome forces of hydrate bound of ions with water molecules and to compensate endothermal effect of water decomposition. Therefore, ions reduction at corresponding electrodes requires more current intensity than in the case of absence of this physical phenomena. Hence production of 1 cubic meter of hydrogen requires 18-21.6 MJ, and total power consumption exceeds 50 MJ (taking into account the electric power production). Therefore hydrogen becomes too expensive.

In 1888 D.A. Lachinov patented a method of non-contact electrolysis. Improvement of this method promises huge amount of cheap hydrogen and appearance of high effective energy source operating as a closed cycle. The main problem of Lachinov's method is a gas layer covering the electrode in some time and impeding the reaction. It was proposed by I. A. Goryachev to prevent the gas layer using pulsating electric field. A.V. Frolov has proposed to increase electrolysis efficiency by means of rotation. Centrifugal force causes more swift detach of gas blebs from electrodes surfaces. Power consumption to overcome frictional force in the construction and to generate potential electric field is insignificant as compared with output. Hence efficiency of the system may exceed 100%.

There is also described the experimental device for production of hydrogen and oxygen from water where modulated voltage (not dc voltage) is applied to the electrodes. Modulation frequency is in connection with proper oscillation frequency of water molecules as well as with spatial structure. Possible efficiency of water electrolysis in spark discharge which removes oxygen admixture should be investigated. Water electrolysis at the radiation

by electromagnetic waves of light range needs to be investigated as well.

Ikar Research Centre informs that plasma electrolysis can be the most probable source of cheap hydrogen. In 1987 a group of Russian scientists patented the first plasma-electrolytic reactor. Since the reactor had been worked out at a defense establishment then the patent was restricted and not covered by press. The patent contains a structural scheme of the reactor and some results of cleaning and disinfection of water by plasma. The patent does not represent any information of additional energy generated by plasma or hydrogen production.

In April of 1989 American scientists Pons and Fleishman published their experimental results on additional energy production at common water electrolysis. They claimed cold fusion to be source of this energy. However there is no reliable proof for this phenomenon.

In 1996 Yu. Beklyamishev, one of the co-authors of the first plasma-electrolytic reactor, published his experimental results. They demonstrated that there was additional energy in the plasma-electrolytic process. However he did not explain the energy source.

In 1998 there were published new experimental issues of appearance of additional energy in the plasma-electrolytic process. A group of Russian scientists tested one of the plasma-electrolytic reactors and officially fixed the additional energy. A report of the testing session was published in issue #22 of "Infinite Energy" magazine. In May of 1998 the third edition of a book named "Crisis of Theoretical Physics" was published by Prof. F. M. Kanarev. It contains data of additional energy production at plasma electrolysis of water defining the energy source. Soon Ohmori and Mizuno (Japan) published their results in works of Vancouver conference on cold fusion and in issue #20 of "Infinite Energy". Ohmori and Mizuno observed neutron radiation occurring at a plasma process as well as iron, chrome, nickel, and carbon appearance on a wolfram cathode. That seemed to be a strong evidence of cold nuclear fusion at plasma electrolysis of water. Ohmori and Mizuno have explained neutron radiation as a result of electrons captured by protons. Nevertheless their conclusions raise doubts as cold fusion would have produced much more additional energy than it was fixed.

In 1996 there appeared the first publications where hydrogen atoms fusion instead of nuclear fusion was supposed as the additional energy source at usual electrolysis as well as at plasma source. In Russia

first experimental results demonstrating energy consumption decrease for hydrogen production at plasma electrolysis of water were published in 1999 by Prof. F.M. Kanarev. (See F.M. Kanarev's article in this issue of NET).



Fig. 3

Honda FCX-V3 uses hydrogen as a fuel. Hydrogen is fed under high pressure in the engine.

Nevertheless we have to note that high efficiency electrolysis is possible! O. Hvolson in his "Physics" (Berlin, 1923) explains a method of designing of a machine which can produce heat due to positive difference between energy of hydrogen combustion and energy consumed to hydrogen production by means of water electrolysis. In this case we do not consume energy to split the atoms. It occurs due to intermolecular forces at water dissociation by sulphuric acid ions. Energy is consumed only to neutralize charges of existent hydrogen ions and acid residue ions. Hydrogen combustion produces the energy which would have been consumed to split the atoms in the air. **Hence 67.54 Kcal of energy can be produced at 5 Kcal consumed. (F. Lepehin)**

High effective electrolysis application is clear future of energetics. Nowadays Stuart Energy Inc applies water electrolysis as a hydrogen source in a frame of hydrogen-fuel project. Experts of Stuart Energy Inc have designed a refueling unit which produces hydrogen and stores it in a 104-pound reservoir. Thus several auto are provided with fuel and it takes a couple of minutes to refuel.

It is quite simple to predict social and economical consequences of innovation of high effective energy source operating as a closed cycle energy system. Economic activity and private life of people will be independent of cities, of their industry and power engineering. People will move out of the cities and they will use compact and powerful energy sources there. Hence, decentralization of world economics will happen.

Regions of any country become more free from the central authority, the power of which nowadays is based on centralized fuel energetics.

On the Longitudinal Electromagnetic Waves

Alexander V. Frolov

General Director, Faraday Lab Ltd

Phone/fax: 7-812-380-3844

Email: office@faraday.ru

Concerning acoustic waves, we deal with longitudinal oscillations of the medium, since degree of air (medium) compression and rarefaction changes along the direction of the wave spreading. Notion of the medium of electromagnetic waves propagation, i.e. notion of "aether", as well as the very possibility of the existence of longitudinal electromagnetic waves is disputable for some scientists. Let's clarify the situation and demonstrate that usual photon is longitudinal wave of energy density, which can be described as Umov-Poynting vector.

The transverse character of electromagnetic waves means that vector of electric field and vector of magnetic field are directed across the wave line. However, these vectors are just our subjective way to describe the process. Notions of electric and magnetic fields can be replaced by the notion of **unified helical field**, since to describe the motion of the point along the helical line there should be concerned the linear transfer (it is detected as electric field) and the process of rotation (it is described with the magnetic field). Thus notions of electrodynamics are just one of the ways to describe reality. Energy density of the given point of space is the real (objective) parameter of the wave. This energy density is described by the known Umov-Poynting vector $\vec{S} = \vec{E} \times \vec{H}$.

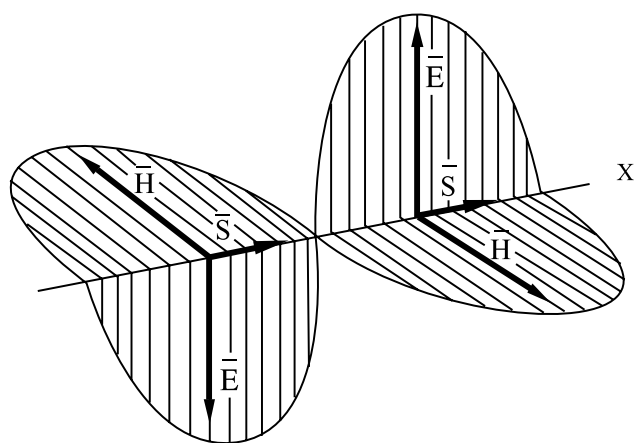


Fig.1

Let us consider electromagnetic wave in classical representation (Fig.1). Then we discover that direction of Umov-Poynting vector coincides with the wave line. The vector is unidirectional and "pulsating", because its quantity changes from zero to some maximal value and then it is reduced to zero, besides it takes place at half of the period of

transverse wave. So, it is the explanation of the fact that frequency of longitudinal oscillations is twice as much than frequency of transverse oscillations (Fig. 2). **Previously it was known from the mechanism of energy interchange between longitudinal and transverse plasma oscillations and from the phenomenon of parametrical resonance. However the physical meaning of this phenomenon was not disclosed.**

From the presented here conception it follows that from the physical point of view, electromagnetic waves are **longitudinal oscillations of energy density**. In usual case these oscillations are unidirectional pulsations that determines the ability of the photon to be moving unidirectionally. Practically it is possible to create other types of photons, i.e. types of oscillations of energy density with qualitative new physical properties. It can be achieved by setting of definite functions and superposition of $\vec{E}$ and $\vec{H}$ vectors.

For example, in 1996 a conference "New Ideas in Natural Science" was organized by us in Saint-Petersburg, with the participation of 30 foreign guests and more than 100 Russian scientists. The report made by Academician Ignatyev, Krasnoyarsk, aroused great interest. During the experiments with rotating of crossed vectors $\vec{E}$ and $\vec{H}$ (see Fig. 3) there was created Poiting's vector, which corresponds to propulsion force of 60 N (about 6 kg).

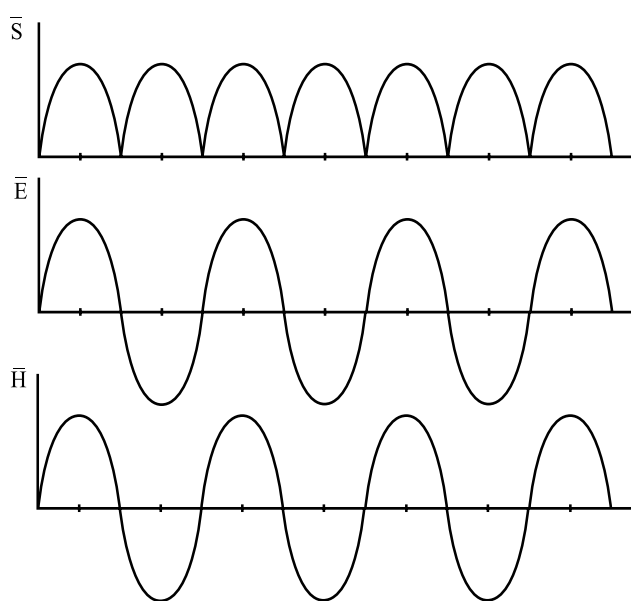


Fig. 2

The experiment is demonstrated on the photo (see Fig. 4), where the diameter of the device is equal to 4 meters and ends of the coils are to toroidal capacitors. This experiment was made in Krasnoyarsk.

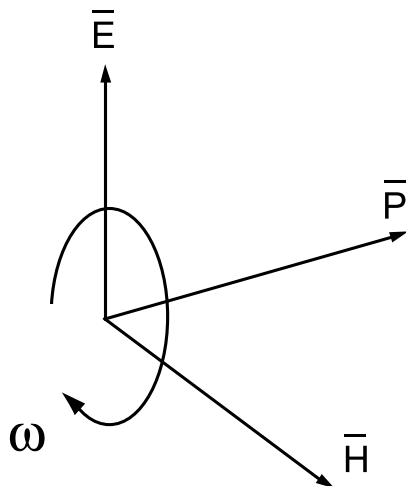


Fig. 3

Since it is impossible to consider vacuum, where some form of energy can exist, as "emptiness" then we can speak about vacuum as about some medium. Faraday and Maxwell, classics of electromagnetic theory, wrote exactly about deformations, stresses and expansion of

aether. From this point of view electromagnetic waves are analogues of the waves of longitudinal deformation of elastic medium. More than 60 years ago Nicola Tesla wrote: "I showed that the universal medium is a gaseous body in which only longitudinal pulses can be propagated, involving alternating compressions and expansions similar to those produced by sound waves in the air. Thus, a wireless transmitter does not emit Hertz waves which are a myth, but sound waves in the ether, behaving in every respect like those in the air, except that, owing to the great elastic force and extremely small density of the medium, their speed is that of light." [1]

Nowadays, the development of engineering and the new views upon the phenomena of electromagnetism, impel us to consider physical **vacuum as material medium of the special type**, which has the well-known properties, in particular electrical and magnetic properties. Moreover, this medium has energy, and energy density can be changed in case of propagation of any photon. Thus, as Tesla stated in his article "The True Wireless": "The Hertz wave theory of wireless transmission may be kept up for a while, but I do not hesitate to say that in a short time it will be recognized as one of the most remarkable and inexplicable aberrations of the scientific mind which has ever been recorded in history".


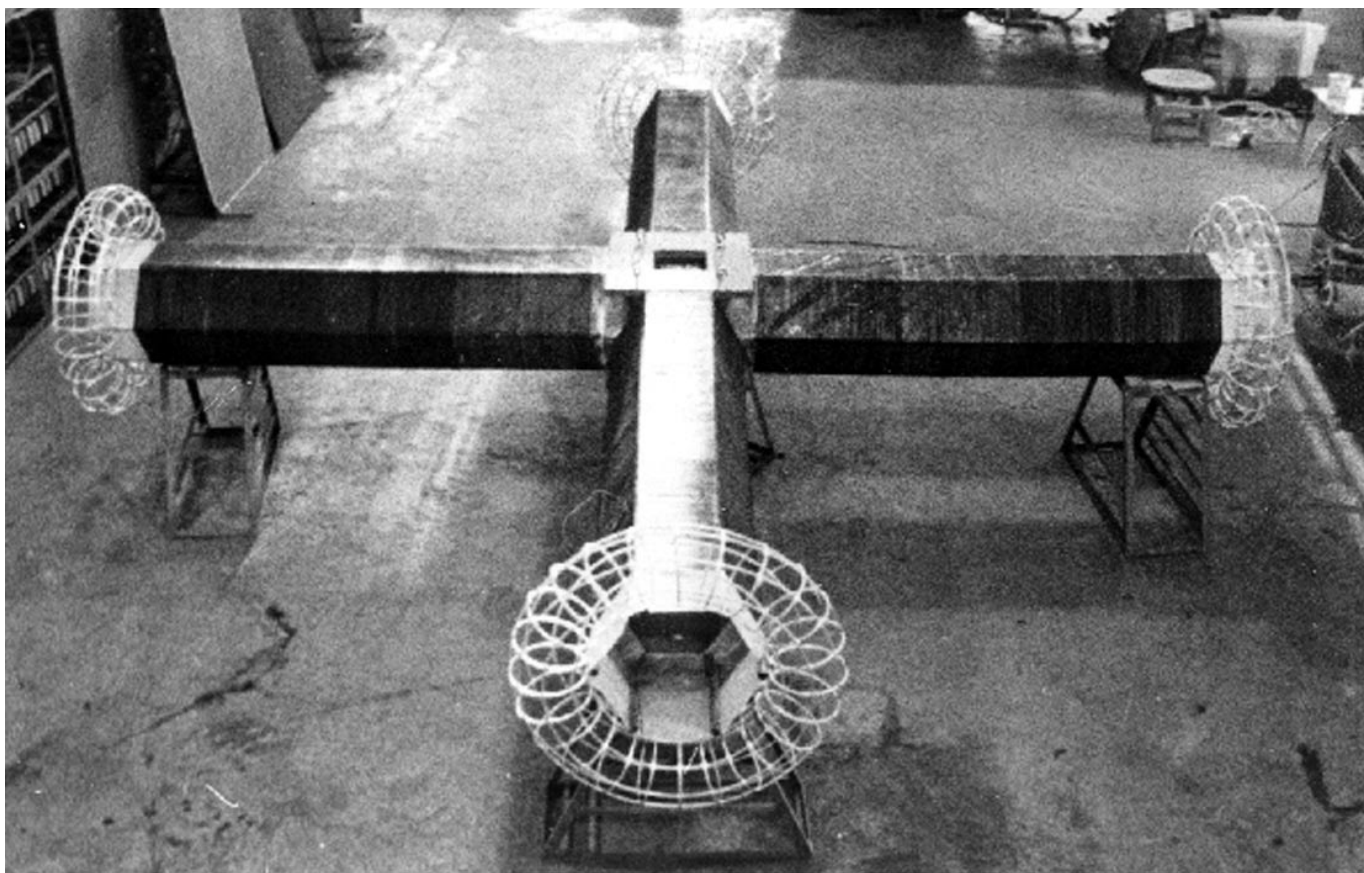


Fig. 4

References

1. "Pioneer Radio Engineer Gives Views on Power", New York Herald Tribune, Sept. 11, 1932.

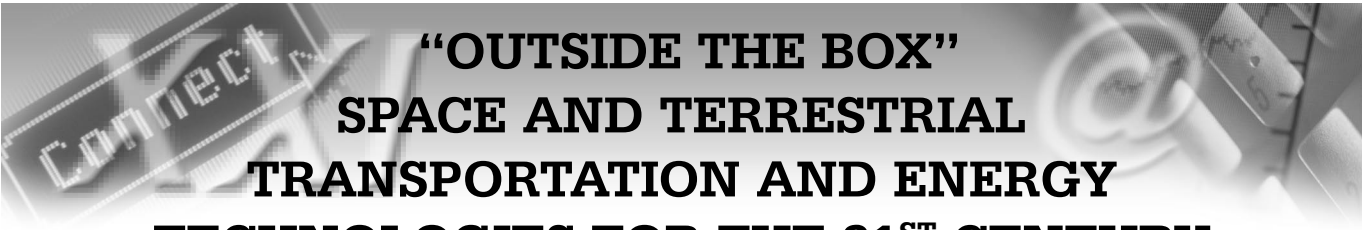

“OUTSIDE THE BOX” SPACE AND TERRESTRIAL TRANSPORTATION AND ENERGY TECHNOLOGIES FOR THE 21ST CENTURY

Theodore C. Loder

tedloder@aol.com

Institute for the Study of Earth, Oceans and Space
University of New Hampshire
Durham, NH 03824

Abstract

This paper reviews the development of antigravity research in the US and notes how research activity seemed to disappear by the mid 1950s. It then addresses recently reported scientific findings and witness testimonies - that show us that this research and technology is alive and well and very advanced. The revelations of findings in this area will alter dramatically our 20th century view of physics and technology and must be considered in planning for both energy and transportation needs in the 21st century.

Historical Background

Townsend Brown's Technology of Electrogravitics [1]

In the mid 1920's Townsend Brown [2] discovered that electric charge and gravitational mass are coupled. He found that when a capacitor is charged to a high voltage, it has a tendency to move toward the positive pole. His findings, which became known as the Biefeld-Brown effect, were opposed by conventional minded physicists of his time.

The Pearl Harbor Demonstration. Around 1953, Brown conducted a demonstration for military top brass. He flew a pair of 3-foot diameter discs around a 50-foot course tethered to a central pole. Energized with 150,000 volts and emitting ions from their leading edge, they attained speeds of several hundred miles per hour. The subject was thereafter classified.

Project Winterhaven. Brown submitted a proposal to the Pentagon for the development of a Mach 3 disc shaped electrogravitic fighter craft. Drawings of its basic design are shown in one of his patents. They are essentially large-scale versions of his tethered test discs.

Review of Issues from the 1950s

In 1956, a British research company, Aviation Studies (International) Ltd. published a classified report on Electrogravitics Systems examining various aspects of

gravity control. They summarized the pioneering work of Townsend Brown and then described the use of electrogravitic thrust as follows:

“The essence of electrogravitics thrust is the use of a very strong positive charge on one side of the vehicle and a negative on the other. The core of the motor is a condenser and the ability of the condenser to hold its charge (the K-number) is the yardstick of performance ” [3].

In one of their conclusions, based on Brown's work, they suggested that: “Electrostatic energy sufficient to produce a Mach 3 fighter is possible with megavolt energies ” [4].

In spite of Brown's solid research, they later stated that, “One of the difficulties in 1954 and 1955 was to get aviation to take electrogravitics seriously. The name alone was enough to put people off” [5]. It seems that is as true today as it was in the 1950s.

A report by another British company, Gravity Rand, Ltd. in 1956, agrees with this assessment and states: “To assert electrogravitics is nonsense is as unreal as to say it is practically extant. Management should be careful of men in their employ with a closed mind or even partially closed mind on the subject.” [6]

However, a trade press magazine, The Aviation Report, made numerous references to antigravity projects and listed many of the companies pursuing research in this area. Quotes from The Aviation Report listed in the Aviation Studies (International) Ltd. Report [7] are suggestive of what was going on behind the scenes.

In 1954 they predicted that: “... progress has been slow. But indications are now that the Pentagon is ready to sponsor a range of devices to help further knowledge.”... “Tentative targets now being set anticipate that the first disk should be complete before

1960 and it would take the whole of the 'sixties to develop it properly, even though some combat things might be available ten years from now." (Aviation Report, 12 October 1954) [8].

During this time period many of the major defense and technology companies were cited as either having research projects or activities in this new field. For example: "Companies studying the implications of gravitics are said, in a new statement, to include Glenn Martin, Convair, Sperry-Rand, and Sikorsky, Bell, Lear Inc. and Clark Electronics. Other companies who have previously evinced interest include Lockheed, Douglas and Hiller." (Aviation Report, 9 December 1955) [9].

Others of these reports mention: AT&T, General Electric, as well as Curtiss-Wright, Boeing and North American as having groups studying electrogravitics.

During the same time period, the Gravity Rand report notes that: "Already companies are specializing in evolution of particular components of an electrogravitics disk." [10]

However, in the area of predictions, the Aviation Report stated the following based on an extrapolation of technology development: "Thus this century will be divided into two parts – almost to the day. The first half belonged to the Wright Brothers who foresaw nearly all the basic issues in which gravity was the bitter foe. In part of the second half, gravity will be the great provider. Electrical energy, rather irrelevant for propulsion in the first half becomes a kind of catalyst to motion in the second half of the century." (Aviation Report, 7 September 1954) [11].

Looking back it is easy to say that they missed the mark. Did they really miss it by a half a century? Reading through these reports it is quite obvious that there was much interest in antigravity among a number of very high profile companies, as well as in the Department of Defense. What happened to this interest and why was it all downplayed during the following four plus decades? After all, T. Brown had shown that there is a demonstrable connection between high voltage fields and gravity. Why has it taken until the 1990s for more than just a few scientists to look at these results and publish on them in the open literature? A review of recent statements by former military personnel and civilians connected to covert projects begins to shed light on research activity in these areas over the last half century. **And it appears that there had been significant breakthroughs during this time period, well shielded from both the scientific and public eye.**

Recent Scientific Developments

In this section we consider developments in the antigravity field since the late 1980s and why the confluence of scientific findings and the testimony of

witnesses associated with the military and covert groups indicates that a gravity solution with technological implications has been found.

Although general relativity has not been able to explain Brown's electrogravitic observations, or any other antigravity phenomenon, the recent physics methodology of quantum electrodynamics (QED), appears to offer the theoretical framework to explain electrogravitic coupling. Recent papers by members of the Institute for Advanced Study Alpha Foundation are putting a solid theoretical foundation onto the antigravity effects within the theory of electrodynamics and include papers by Evans [12] and Anastasozki et al [13].

Earlier in a 1994 breakthrough paper, Alcubierre showed that superluminal space travel is, in principle, physically possible and will not violate the tenants of the theory of relativity [14]. Puthoff [15] later analyzed these findings in light of the present SETI (Search for Extraterrestrial Intelligence) paradigms that insist that we could not be visited by extraterrestrial civilizations because of the speed-of-light limitations dictated by the general relativity theory. He suggests that superluminal travel is indeed possible. This leads to reduced-time interstellar travel and the possibility of extraterrestrial visitation, which our limited understanding of physics and scientific arrogance has "forbidden" in some sectors for most of the 20th century.

The second aspect of these physics findings deals with the zero point or vacuum state energy shown by the Casimir effect [16], which predicts that two metal plates close together attract each other due to imbalance in the quantum fluctuations. The implications of this zero point or vacuum state energy are tremendous and are described in several papers by Puthoff [17] starting during the late 1980s. Bearden [18] and colleagues have also written extensively on the theoretical physics of zero point energy and additionally have described various technological means of extracting this energy (for example see the recent paper by Anastasozki et al [19]). A theoretical book on zero point energy (and antigravity) was published by Bearden in 2002 [20]. There is significant evidence that scientists since Tesla have known about this energy, but that its existence and potential use has been discouraged and indeed suppressed over the past half century or more [21].

The coupling of the electrogravitic phenomena observations and the zero point energy findings are leading to a new understanding of both the nature of matter and of gravity. This is just now being discussed in scientific journals (though some evidence suggests that it has been understood for decades within the black project covert community). The question that is being addressed is: what keeps

the universe running? Or more specifically, where do electrons get their energy to keep spinning around atoms? As electrons change state they absorb or release energy, and where does it come from? The simplistic answer is that it is coming from the vacuum state. Puthoff [22] describes the process as follows: "I discovered that you can consider the electron as continually radiating away its energy as predicted by classical theory, but **simultaneously absorbing a compensating amount** of energy from the ever-present sea of zero-point energy in which the atom is immersed. An equilibrium between these two processes leads to the correct values for the parameters that define the lowest energy, or ground-state orbit (see "Why atoms don't collapse," NEW SCIENTIST, July 1987). Thus there is a DYNAMIC EQUILIBRIUM in which the zero-point energy stabilizes the electron in a set ground-state orbit. It seems that the very stability of matter itself appears to depend on an underlying sea of electromagnetic zero-point energy."

Furthermore, it appears that it is the spinning of electrons that provides inertia and mass to atoms. These theories, linking electron spin, zero point energy, mass, and inertia have been presented in a number of recent papers, such as those by Haisch [23] and colleagues and provide us with a possible explanation of the Biefeld-Brown effect. It appears that an intense voltage field creates an electromagnetic barrier that blocks the atomic structure of an atom from interacting with the zero point field. This slows down the electrons, reducing their gyroscopic effect, and thus reducing atomic mass and inertia, making them easier to move around.

Evidence of Extensive Antigravity Technology

The B-2 Advanced Technology Bomber

In 1993, LaViolette wrote a paper [24] discussing the B-2 bomber and speculating on its probable antigravity propulsion system, based on a solid understanding of electrogravitics, [25] the aircraft's design and the materials used in its manufacture. It appears that the craft is using a sophisticated form of the antigravity principles first described by T. Brown. Support for this thesis came from the Aviation Week and Space Technology (March 9, 1992), which reported that the B-2 bomber electrostatically charges its leading edge and its exhaust stream. Their information had come from a small group of former black project research scientists and engineers suggesting the B-2 utilizes antigravity technology. This information was supported by Bob Oechsler, an ex-NASA mission specialist who had publicly made a similar claim in 1990. These findings support the contention that there have been major developments in the area of antigravity propulsion which are presently being applied in advanced aircraft.

LaViolette later states the obvious that "the commercial airline industry could dramatically benefit with this technology which would not only substantially increase the miles per gallon fuel efficiency of jet airliners, but would also permit high-speed flight that would dramatically cut flight time." [26]

The Hunt for Zero Point [27]

This recent book contains some of the strongest evidence yet for major efforts and success in the field of antigravity technology. The author, Nick Cook, who for the past 15 years has been the Aviation Editor and Aerospace Consultant for Jane's Defense Weekly, spent the last 10 years collecting information for the book. This included archival research on Nazi Germany's antigravity technology and interviews with top officials at NASA, the Pentagon and secret defense installations. He shows that America has cracked the gravity code and classified the information at the highest security levels. **Because antigravity and its allied zero point energy technologies potentially offer the world a future of unlimited, non-polluting energy it has been suppressed because of the "huge economic threat"**. His findings support those reported by many of the Disclosure Project witnesses cited above.

Antigravity Technology Demonstrations

Although T. Brown reported many of his findings nearly a half century ago, other experimenters have just recently begun to reproduce his work and report on it in the open literature and on the WWW. For example, Davenport [28] published the results of his work in 1995 supporting the findings of T. Brown, while Bahder and Fazi [29] in 2002 described their assessment of the forces associated with an asymmetric capacitor. Transdimensional Technologies [30] in the USA and J. Naudin [31] labs in France have posted on the WWW: diagrams, web videos, and data on their versions of antigravity "Lifters" based on an extension of Brown's work. It is a sad commentary on this whole area of research to see that public science is requiring us to demonstrate principles that were demonstrated nearly fifty years ago.

There have also been a number of other demonstrations of "antigravity" phenomena by researchers throughout the world. This includes the work of Brazilian physics professor, Fran De Aquino, and such devices as: the Searl Electrogravity Disc, the Podkletnov Gravity Shield and Project Greenglow, the Zinsser Kineto-baric Field Propulsion and the Woodward Field Thrust Experiments on Piezoelectrics. All of these are described in more detail by Greer and Loder. [32]

Implications of This Research

Antigravity and zero point energy research and their applications are finally being addressed by some of the open scientific community. This means there will have to be a rewriting of textbooks in this area so our new generation of students can apply this "new knowledge." Its application will lead to major breakthroughs in transportation technologies both earthside and in outer space. The implications are that we have the potential for human exploration of our solar system and beyond, if we have the will, within our lifetimes. It also means that the majority of 20th century space technology will be obsolete and in fact may already be so.

The zero point or vacuum state energy source is seen as a totally non-polluting energy source, which has the potential to replace all the fossil fuels on this planet. It also will provide the energy needed for long range space flights. This means that fuel cells and solar cells in common use today for space flight energy applications will only be needed until we transition to these new energy technologies.

Based on an analysis of trends in antigravity research over the last half-century and the information provided by numerous witnesses, it appears that there is both good and bad news. The good news is that it appears that we (at least covert projects) have already developed the theories of antigravity, and additionally have developed working spacecraft based on these principles. The bad news is that these technologies have been developed for at least several decades, at the public's expense and that human kind has been deprived of these technologies, while continuing to waste energy using less efficient and pollution enhancing technologies.

Supporting this contention is the following quote from Ben Rich, former head of the Lockheed Skunkworks. Just prior to his death, he stated to a small group after a lecture [33] that: "We already have the means to travel among the stars, but these technologies are locked up in black projects and it would take an act of God to ever get them out to benefit humanity..." He further went on to say that, 'anything you can imagine we already know how to do.' Strong words from a knowledgeable deep insider and words that support what a number of the witnesses stated as well.

As the reality of this knowledge begins to be understood, there will be an outcry among space scientists not on the inside for release of these technologies to allow all of us to explore space. There will be major changes in the way that NASA does its business, though predicting these changes is difficult.

Not only has space exploration in the public sector suffered, but our planet's environment has suffered as well. Thus as this knowledge begins to sink in there will be an outcry among all concerned citizens on this planet for release of these technologies to allow all of us to reduce and ultimately eliminate global warming and environmental pollution that so threatens our way of life. These technologies will not only affect space travel technologies, but will also have a profound effect on transportation and energy production on the earth's surface.

In conclusion, we might consider the observation made by Halton Arp [34]: "We are certainly not at the end of science. Most probably we are just at the beginning!"

Acknowledgements

I thank the following people for many discussions while preparing and writing this paper including: S. Greer, A. Craddock, T. Bearden, P. LaViolette, M. McCandlish, D. Hamilton, T. Valone, E. Mallove, T. Loder, C. Loder, S. Patel and many of the courageous Disclosure Project witnesses.

References Cited

1. Quoted from: LaViolette, P. A. 2000. Moving Beyond the First Law and Advanced Field Propulsion Technologies. In T. Loder (ed.), "Outside-the-Box" Technologies, Their Critical Role Concerning Environmental Trends, and the Unnecessary Energy Crisis. Report prepared for The U.S. Senate Environment and Public Works Comm. www.senate.gov/~epw/loder.htm.
2. Brown, T. T. 1929. How I control gravity. Science and Information Magazine, Aug. 1929. Reprinted in Psychic Observer 37 (1): 66-67.
3. Aviation Studies (International) Ltd. 1956. Electro-gravitics Systems: An examination of electrostatic motion, dynamic counterbary and barycentric control. p. 14. In Valone, T. (ed.), 1994. Electrogravitics Systems: Reports on a new propulsion methodology. Integrity Research Institute, Washington, DC 20005.
4. Ibid. p. 27.
5. Ibid. p. 19.
6. Gravity Rand Ltd. 1956. The Gravitics Situation. p. 54. In Valone, T. (ed.), 1994. Electrogravitics Systems: Reports on a new propulsion methodology. Integrity Research Institute, Washington, DC 20005.
7. Aviation Studies (International) Ltd. 1956. Electrogravitics Systems: An examination of electrostatic motion, dynamic counterbary and barycentric control. p. 11. In Valone, T. (ed.), 1994. Electrogravitics Systems: Reports on a new propulsion methodology. Integrity Research Institute, Washington, DC 20005.
8. Ibid. p. 34.
9. Ibid. p. 41.
10. Gravity Rand Ltd. 1956. The Gravitics Situation. p. 47. In Valone, T. (ed.), 1994. Electrogravitics Systems: Reports on a new propulsion methodology. Integrity Research Institute, Washington, DC 20005.
11. Aviation Studies (International) Ltd. 1956. Electrogravitics Systems: An examination of electrostatic motion, dynamic counterbary and barycentric control. p. 32. In Valone, T. (ed.), 1994. Electrogravitics Systems: Reports on a new propulsion methodology. Integrity Research Institute, Washington, DC 20005.
12. Evans, M. W. 2002. The link between the Sachs and O(3) theories of electrodynamics. In Evans, M.W. (ed.), Modern Nonlinear Physics, Pun 2. 2nd ed., Advances in Chemical

13. Anastasovski, P.K., T.E. Bearden, C. Ciubotariu, W.T. Coffey, L.B. Crowell, G.J. Evans, M.W. Evans, R. Flower, A. Labounsky, B. Lehnert, M. Mészáros, P.R. Molnár, S. Roy, and J.-P. Vigiér. 2001. Anti gravity effects in the Sachs theory of electrodynamics Foundations of Physics Letters. 14(6):601-605
14. Alcubierre, M. 1994. The Warp Drive: Hyper-fast travel within general relativity. Classical and Quantum Gravity, 11, L73.
15. Puthoff, H. E. 1996. SETI, The Velocity-of-Light Limitation, and the Alcubierre Warp Drive: An Integrating Overview, Physics Essays 9:156.
16. Lamoreaux, S.K. 1997. Demonstration of the Casimir force in the 0.6 to 6 μm range. Physics Review Letters. 78:5.
17. Puthoff, H. 1989. Gravity as a Zero-Point Fluctuation Force." Phys. Rev. A., 39(5):2333-2342. Puthoff, H. 1989. Source of Electromagnetic Zero-Point Energy." Phys. Rev. A, 40(9):4597-4862.
18. See the Tom Bearden web site for an extensive listing and copies of his papers at: www.cheniere.org.
19. Anastasovski, P.K., T.E. Bearden, C. Ciubotariu, W.T. Coffey, L.B. Crowell, G.J. Evans, M.W. Evans, R. Flower, A. Labounsky, B. Lehnert, M. Mészáros, P.R. Molnár, J.K. Moscicki, S. Roy, and J.P. Vigiér. 2001. Explanation of the motionless electromagnetic generator with 0(3) Electrodynamics. Foundations of Physics Letters, 14(1):87-93.
20. Bearden, T. 2002. Energy from the Vacuum: Concepts and Principles. Cheniere Press, Santa Barbara, CA.
21. Valone, T. 2000. The Right Time to Develop Future Energy Technologies. in T. Loder (ed.). "Outside-the-Box" Technologies, Their Critical Role Concerning Environmental Trends, and the Unnecessary Energy Crisis. Report prepared for The U.S. Senate Environment and Public Works Comm. www.senate.gov/~epw/loder.htm.
22. Puthoff, H. 1990. Everything for Nothing. New Scientist, 28 July 1990, pp. 52-55.
23. Haisch, B., Rueda, A. and Puthoff, H. 1994. Beyond $E = mc^2$: A First Glimpse of a Postmodern Physics, in which Mass, Inertia and Gravity Arise from Underlying Electromagnetic Processes. The Sciences, 34:26. Haisch, B., Rueda, A., and Puthoff, H. 1997. Physics of the Zero-Point Field: Implications for Inertia, Gravitation and Mass. Speculations in Science and Technology,

- 20:9. Haisch, B. and Rueda, A. 1998. An Electromagnetic Basis for Inertia and Gravitation: What Are the Implications for 21st Century Physics and Technology? in El-Genk, M.S. (ed.), Space Technology and Applications International Forum-1998, DOE CNF-980103, CP420, p. 1443. Haisch, B. and Rueda, A. 1999. The Zero-Point Field and the NASA Challenge to Create the Space Drive. Proc. NASA Breakthrough Propulsion Physics Workshop, NASA/CP-1999-208694, p. 55.
24. LaViolette, P. 1993. The U.S. Antigravity Squadron. p. 82-101. In Valone, T. (ed.), 1994. Electrogravitics Systems: Reports on a new propulsion methodology. Integrity Research Institute, Washington, DC 20005.p.82-101.
25. LaViolette, P. A. 1992. Electrogravitics: Back to the future. Electric Spacecraft, Issue 4, pp. 23-28. LaViolette, P. A. 1993. A theory of electrogravitics. Electric Spacecraft, Issue 8, pp. 33-36
26. LaViolette, P. A. 2000. Moving Beyond the First Law and Advanced Field Propulsion Technologies. in T. Loder (ed.). "Outside-the-Box" Technologies, Their Critical Role Concerning Environmental Trends, and the Unnecessary Energy Crisis. Report prepared for The U.S. Senate Environment and Public Works Comm. www.senate.gov/~epw/loder.htm.
27. Cook, N. 2001. The Hunt for Zero Point: Inside the World of Antigravity. Broadway Books, NY. 256pp.
28. Deavenport, L. 1995. "T.T. Brown Experiment replicated. Electric Spacecraft Journal. Issue 16. Oct. 1995. (Reprinted in: Valone, T. (ed.), 1994. Electro-gravitics Systems: Reports on a new propulsion methodology. Integrity Research Institute, Washington, DC 20005)
29. Bahder, T.B. and Fazi, C., "Force on an Asymmetric Capacitor," Army Research Laboratory, v51 ARL-TR.nb. Avail. at: <http://xxx.lanl.gov/abs/physics/02110>. 2002.
30. Transdimensional Technologies, 906-E Bob Wallace Ave., Huntsville, AL 35801.
31. <http://jnaudin.free.fr>
32. Greer, S.M. and T.C. Loder III. 2001. Disclosure Project Briefing Document, 492 pp. Available on CD from: The Disclosure Project, P.O. Box 2365, Charlottesville, VA 22902. Also available from: www.disclosureproject.org.
33. Lecture given at UCLA Engineering Department on March 23, 1993
34. Arp, H. 1998. Seeing Red: Redshifts, Cosmology and Academic Science. Montreal, Aperion. (p. 249).

Congress "The Time Machine"

Faraday Labs Ltd invites to participate in scientific congress devoted to experiments on changing of space-time properties. It is planned April 12, 2003, Moscow. Main topics of the congress are time and gravitation in the context of eatherodynamics, experiments and applied aspects of these technologies. The main report is "Method to Control Temporal Parameters of Physical Processes" by Alexander V. Frolov.

Organizing committee: Vadim A. Chernobrov (KOSMOPOISK research center) and Alexander V. Frolov (Faraday Labs Ltd). The registration fees are not required.

Please, contact us <http://www.faraday.ru> or **email** congress@faraday.ru **Phone/fax 7-812-380-3844**

Please send this pre-registration form by post: P.O. Box 37, St. Petersburg, Russia 193024 or **e-mail:** congress@faraday.ru

PRE-REGISTRATION FORM for participation in the congress "The Time Machine"

Last name:

First name:

Title/ Function:

Company/ Organization:

Address:

Postcode:

City:

Country:

Tel.:

Fax:

e-mail:

- ☐ I would like to submit an oral presentation (report). (Please, enclose one-page abstract).
- ☐ I intend to participate as a guest
- ☐ I'm interested in further information.

Date

Signature

COMMERCIALISING the "SEARL EFFECT" for ENERGY and PROPULSION SYSTEMS

Review from web site <http://www.sisrc.com/>
Email address: admin@sisrc.com

The "Searl Effect", discovered by J.J.R. Searl, is a method of extracting energy. Some current expressions for the source of this energy being The Space Fabric, Quantum Space Field, and Zero Point Energy.

SISRC Ltd has been formed to develop and license Searl Effect Technology (SET) on a global basis.

THE COMPANY

SISRC Ltd is the company formed to administer the implementation of the Searl Effect Technology, (SET) invented by J. R. R. Searl. SISRC Ltd designs, develops and implements Searl Effect Technology as it is initiated in various applications and territories. SISRC Ltd is the administrative hub of the group and will continue to be based in the UK. SISRC Ltd will grant production and marketing licenses for Searl Effect Technology applications to different companies in specific territories. Currently proposed related companies include:

- * SISRC -Germany, SISRC -Iberia, SISRC - Sweden, SISRC - Australia, SISRC New Zealand.
- * SISRC -AV (Audio Visual) provides computer graphics presentations of the SET.

BACKGROUND

The Searl Effect Generator (SEG) technology, as applied to the commercial market, had been previously developed to the point where a few prototype SEG generators were made, and used for electricity generation and motion. Commercial interest at that time focused on the SEG's transport potential and, under commercial pressure to deliver a fully functioning system, the original generators were used and lost in a series of vehicular propulsion experiments and demonstrations. Funding was insufficient to continue with the manufacture of the required larger-scale pressurized cabin machines - resulting in the termination of the project at that time.

Although all the operating principles, precise proportions and weights of the required materials are known for three of the four required operating materials, the precise data of the original magnetic layer is uncertain. The objective of the current R&D programme is to re-establish the original magnetic layer using modern and more efficient materials.

Originally, the layered materials were constructed and magnetized by the now-defunct Midlands Electricity Board under the direction of John Searl (see colored photo of the experimental craft construction on the cover page).

Modern magnetic materials have advanced considerably, and old ones discontinued, so a series of tests need to be conducted to establish the optimum materials and processes. These tests need to comply with the working criteria required and must lead to a cost-effective manufacturing process.



Fig.1

Experimental ring and rollers

In recent times SISRC has been re-establishing the original research. Due to the very limited funding that has been available, only a partially functioning demonstration prototype of the SEG principles has been possible. This prototype consists of the innermost of the three composite rings required and several rollers.

We would like to hear from anyone who worked on or was involved with Searl Technology prior to 1983. Also anyone who has any old technical data, photographs or films relating to the technology. Such information could greatly assist this technology to reach the marketplace for the benefit of all and would be dealt with in the strictest of confidence.

TECHNICAL DESCRIPTION

Physically the Searl Effect Generator (SEG) consists of three concentric rings each made of a composite of four different materials which are also concentrically attached to each other. The three rings are fixed to a base. Surrounding each of the rings, and free to rotate around them, are rollers - typically 10 on the first ring, 25 on the next and 35 on the outer ring. Surrounding the rollers on the outer ring are coils which are connected in various configurations to supply either AC or DC current at a variety of voltages.

Multiple magnetic poles are imprinted on the rings and rollers to form frictionless magnetic bearings. These also arrange the static charge into opposing charge clusters which cause the rollers to rotate around the circumference of the ring (as shown in Fig. 2).

Some expressions currently in use to describe the source of the energy for the SEG are The Space Fabric, Quantum Energy field of Space or Zero Point Energy. This is an unlimited and constant source of energy which can be made to flow when the correctly proportioned masses concerned are stimulated by the correct frequencies creating an 'open system'.

The idea of utilising this source of energy is currently the subject of various devices and experiments such as the 'Lamb shift', 'Casimir Effect' and the work of the Russian Nobel Prize winner Ilya Prigogine. However these devices and experiments tend to only prove the existence of the energy and not a method to create a coherent, ordered flow to produce useful power.



Fig. 2

15 KWt Searl Effect Generator (SEG)

In contrast, John Searl has discovered that, in order to create a steady and stable flow, all the masses of the device (and the stimulating frequencies) must conform to precise values determined mathematically by the 'Law of the Squares'. A machine constructed to these principles produces a stable and useful power output.

DEFINITION OF A SURFACE OPERATING S.E.G. (J. Searl) 15.09.00

A Linear motor operating on a magnetic bearing with the characteristics of an auto-transformer. The S.E.G. is defined as a device, which is constructed from 2,124 component parts, which make up 3 plates and 66 roller sets (see figures on the cover page). 12 of the 2,124 components create the 3 plates, which act

as reaction components. 2,112 components are employed to create 66 roller sets, which act as active components. Each roller set consists of 8 segments constructed from 32 components. Each segment cannot be less than 34 grams in weight, as the law of the squares defines that value as the lowest value suitable for the reasonable generation of electricity. Therefore the smallest roller set must weigh 272 grams, making a grand total of 2,244 grams per roller set for the smallest surface bound SEG.

Tolerance should be about 0.05 gram per roller set. The larger the error the greater is the loss of power within the unit. Therefore the total tolerance for the smallest SEG roller set must not be greater than 3.30 grams - above this factor the SEG will not function. **For the best results, the tolerance across the total 66 roller sets should not exceed 0.05 grams!**

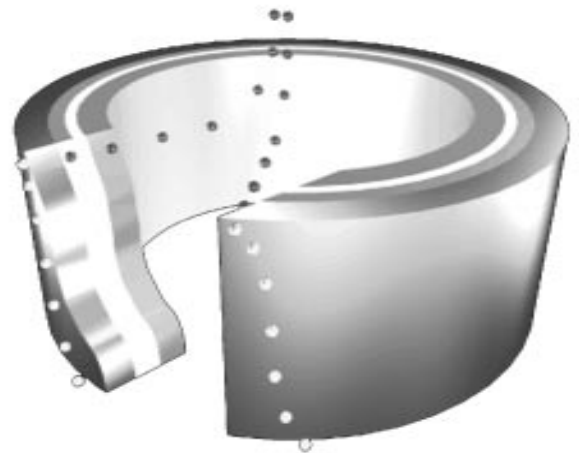


Fig.3

The S.E.G. is a step up rotary transformer. In fact it's a 'three rotary transformers' operational system, within a unit. The inner transformer output is fed into the input of the second plate which increases the output of the second unit, which output feeds as an input to the final unit, thereby increasing its final output to a very high voltage. Therefore the S.E.G. is just a prime mover for the production of clean electrical energy. The output windings must be designed to step down this output to 240 volts at 15KWt's.

During 1968 it being upon this issue, as development progress both here and in the USA, new findings are being created, and updates will be added to this page, as they are certified. When the SEG rollers are brought into close proximity to the SEG Ring, the Searl Effect resonant magnetic field causes negative ions and electrons to be drawn into and accelerated through the machine. This process is assisted by the highly electron-attracting rare earth metal Neodymium.

The unique mechanical and material arrangement of the SEG pulses the neodymium to continually release and replace the surplus electrons to provide electrical or mechanical power, or both.

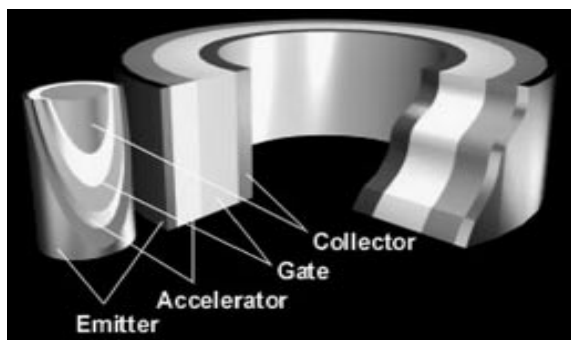


Fig.4

DEVELOPMENT

Prior to the production of complete 15KWt Searl Effect Generators (SEGs), a minimum of two demonstration Ring & Roller prototypes are to be produced.

The "Ring" is typical of the innermost of the three rings required to make a complete SEG. The 69-roller sets in a complete three ring SEG are identical. Six roller sets will be made for the prototype inner rings so that the Searl Effect can be demonstrated.

The production of a self-running Ring & Roller prototype will establish the precise sequence and parameters of electrical, magnetising and material processes required

for the SEG and will demonstrate electrical power generation. An operating single inner ring with 1-8 rollers will also determine if a particular material will function correctly and at what level of power output.

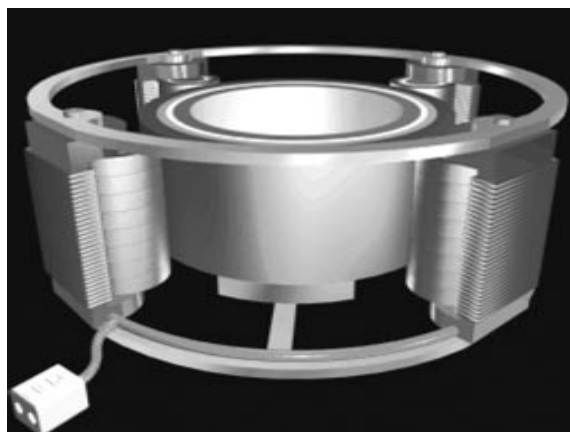


Fig. 5

Demonstration ring and rollers

The five phases of the development programme that commenced in October 1999 have been completed and the rollers successfully magnetised with 'Searl Effect' magnetic fields. A sixth phase is now required to apply the technology developed in Phase five to the "Ring". This sixth Phase resulting in a demonstration Ring & Roller prototype has duration of 6 months.



Scientific Breakthrough Liberates Energy Users from Fossil Fuel Dependence

Information from

http://www.genesisworldenergy.org/genesis_world_energy.htm

Story originally published by Diana Echeverria, USA

Director of Public Relations
Guy Rome & Associates, Inc.
208-345-4143 208-602-0325 (cell)

Technology breakthrough harnesses energy from the molecular structure of water

BOISE, ID - Dec. 5, 2002 - Genesis World Energy, a privately funded consortium created by a group of military and space program research and development specialists, today unveiled a scientific breakthrough that allows consumers to easily access the energy contained within the hydrogen and oxygen molecular structure of ordinary water. This scientific breakthrough provides a limitless, low cost and environmentally clean source of energy that can be implemented with minimal cost and effort. The viability of using water as an energy source, previously a theoretical concept, is now a reality. "Water has always been the source of life on

this planet, now it will also transform the way we create energy" said Charles Shaw, corporate counsel and spokesperson for Genesis World Energy. "The implications for worldwide energy generation and consumption are nothing less than staggering."

The Edison Device

The first application of this technology is represented in the "Edison Device", a self-contained, self-sustaining energy generation unit. Roughly the size of an outdoor air conditioning system, the power source can be quickly and easily installed in any home or business to provide virtually unlimited energy from any available water source. The Edison Device utilizes the existing electrical wiring and natural gas plumbing in a home or business to replace the energy provided by utility companies. The home version of the Edison Device produces approximately 30 kWt of combined gas and electrical energy per day. By comparison, the typical home uses between five to six kilowatts per day. The commercial model is capable of producing 100 kilowatts of energy per day. The energy generation portion of the devices has no moving parts. In fact, the only "mechanical" aspects of the equipment are small circulation pumps and micro-valves, making the Edison Device both silent and virtually maintenance-free. A minimum amount of water is used over an estimated 20+ years of service life.



Interesting Publications of the Last Year

Discovery by a Group of Scientists Headed by Valerian Sobolev

Some time ago mass media announced that a sensational discovery was made by a group of Russian scientists headed by Valerian Sobolev. This discovery aroused ambiguous attitude of physic community. We have written about this fundamental and, to a certain extent, revolution discovery. Let us revise the fact that Sobolev claimed 7 scientific discoveries which were made, i.e. the process of depletion (a special electrochemical process), magnetic discharge, a new energy source, a method of low temperature plasma generation and superconductor. A laboratory system of the experimentally disclosed process as well as its industrial prototype is easy to be realized in practice for creation of new energy sources and wide-ranging production of ultrastrong materials. In many cases these materials can replace existing constructional materials.

The materials produced as a result of the process are multielement chemical compounds which are new states of matter. This new state of matter has a **time-changing magnetic field that can be EMF source in a coil of a generator**. Ordered structures of matters which are in the new modified state are nothing but a magnet charge. Materials containing the magnet charge and representing a continuous matters are **new energy sources**. Due to the new state matters become able to produce electric power as well as to generate low temperature plasma. It is easy to be realized in the process of common technological procedures. That promises designing of propulsors for "unsupported" transportation systems in near future.

Basing on realization of the disclosed process and using new materials the group of Russian Scientists headed by Sobolev together with American businessmen has created superfine and flexible glass for packing. The glass was called as "strong glass". It seems to demonstrate higher pressure stability than steel. A method of production of these materials was patented in 1999. In the patent the scientists of Valerian Sobolev's group are represented as authors of this new method, and the owner of the patent is Dynelec Corp (Columbus, Ohio, USA). You can read about the patent at the Web-site of <http://patft.uspto.gov/netahtml/srchnum.htm> (patent #5,964,913, October 12, 1999).

Sobolev's group has appeal to the Russian government for sponsorship; however only foreign investors have provided funds for new energy sources developing. According to Russian Information Agency "News", Sobolev's group has signed a \$168 million contract with one of Canadian companies for developing industrial production of energy sources. Manufacturing of such energy sources **can change energy supply system all over the world**. According to the contract the Canadian company is going to finance building of at least two plants. One of the plants is going to be built in Russia, and the other one is planning to be established in Canada. Each plant is supposed to produce 70 thousand of the self-running energy sources a year. Power output of the sources will come to 3-10 kWt. In other words, in the nearest future every person will be able to buy such an energy source and to apply it in household.

Single-Wire Electric Power System

(see photo on the cover page)

Experimental Results of Russian Scientists

Scientists of the All-Russia scientific research institute of electrification of agriculture (VIESH) academician D.S. Strebkov, engineer S.V. Avramenko, dr., A.I. Nekrasov, post-graduate student O.A. Roshchin developed a new method and the equipment for transmission of electric energy on a single-wire line using resonant idle operation mode and reactive capacitive currents for transmission of active electric power. Tesla transformers and frequency converter were used at the experiments.

First there was created the experimental sample of single-wire electric power system (SWEPS) with **10 kW** electric capacity and 3000 V voltage. As a result, obtained SWEPS electric parameters a hundred times exceeded parameters of a usual two-wire or three-wire alternative and direct current line.

In the end of 2002 there was made an attempt to increase transmitted capacity by using of more powerful condensers, which were installed in resonant circuit. There was developed the electric technique of

20kW single-wire electric power system (SWEPS) with two Tesla transformers. As a result parameters of a low-voltage winding of the step-down transformer were changed. They **exceeded parameters of a usual two-phase or three-phase ac line or dc line in two hundred times**. At room temperature effective specific transmitted electric power was 4 MW/mm² and specific current density was 600 A/mm². These parameters could be achieved for existing methods of electric energy only at use of special materials in a mode of low temperature superconductivity. The measurements which were made at wire with diameter of 1mm, 100 microns and 80 microns, demonstrated that parameters did not depend on diameter of a wire. There was also experimentally confirmed the property of a single-wire line to transfer active power without essential losses on line resistance. Irradiation losses at low frequency 3,4 kHz were small. In single-wire power system the 80 microns wire plays a role of directing system for an electromagnetic energy flow, which runs from the generator to the load.



We present update information on the experiments with Lifters or asymmetrical capacitors, which use High Voltage to produce a thrust. **By Jean-Louis Naudin it was demonstrated with "Maximus" experiment, that a Lifter can be scaled up and also that such a device is able to lift up to 60 g of payload (total weight: 194 g). According to Naudin, it is now possible to build a craft which will use the Biefeld-Brown effect to fly silently and without moving parts only powered by electrical energy.** It was also declared that on January 8th, 2003, there was successfully done two historical flights with a mouse as a test pilot of the Lifter "Maximus" (**propellantless electrokinetic craft**). Below there is an analysis of electrogravitation experiments made by Jean-Louis Naudin and Tim Ventura. (See color photos on the cover page).

Review of Electrogravitation Experiments made by Jean-Louis Naudin and Tim Ventura

Tim Ventura

Tim Ventura Website: <http://www.americanantigravity.com>
Email: TVentura@seattle.telecomsys.com, tventura6@atbi.com

There is a spreadsheet containing a jpeg-snapshot of data that I have assembled based upon Jean-Louis Naudin's published results (JLN Labs Website: <http://jnaudin.free.fr> and <http://www.jlnlabs.org>). In the graphs that I've created, it seems to indicate that current plays more of a role in propulsion than voltage does — i.e.: for a given amount of power in watts, raising the current and decreasing the voltage seems to create a higher level of thrust.

In light of this, I have been increasing the thrust of my own Lifters by creating an electrical-bypass of the "load-resistor" on my power-supply's high-voltage output. This has an interesting result:

I use a current-driven power-supply, which means that if no load is connected to it the voltage will build up on the high-voltage output until arcing occurs. In my case the voltage will build up to around 65kV, at which point the power-supply will automatically shut down. Conversely, if a very light load (such as a short circuit) occurs, the opposite effect happens and the power-supply will deliver much higher current at a much lower voltage until the supply is overdrawn and once again shuts down.

Normally the output load-resistor constrains the current, and in doing so it maintains the voltage on the high-voltage output at the nominal 50kV output level. However, bypassing the output load-resistor allows the power-supply to deliver voltage and current that are based almost entirely on the type of load connected to it.

When I connect a normal Lifter to the bypassed power-supply, the voltage will build across the air-gap until ions begin to flow in a conduction-current across the air-gap. Although this begins to happen at approximately 15kV, it seems to have some type of "peak efficiency" at approximately 22.5 kV. The amount of current climbs to approximately 11mA at this voltage.

This method of experimental setup seems to allow the Lifter to "find its own sweet-spot" for operation, instead of using the output-resistor to "force" a specific voltage on it for operation. This appears to maximize the thrust output during operation.

Lifter Efficiency Spreadsheet

Description	Lift capacity (grams)	Length (cm)	Efficiency (g/m)	Lifter Weight (grams)	Voltage (kilovolts)	Corona Air-Gap (centimeters)	Current (mA)	Power (watts)
Lifter 1	3.3	60	5.5	2.3	41.9	3	0.57	23.9
Lifter 2	9.6	180	5.3	6.6	43.35	3	1.12	48.5
Lifter 3	20	360	5.6	16	27.5	3	2.53	69.5
Lifter 4	36	720	5	32	44	3	2.01	132.9
3-Stage Lifter 3	54	1080	5	24	30	4.5	8.06	240
Coliseum Lifter	90	2160	4.16	50	31.769	4.5	8.06	254.15

New Electric Fire Technology

Valery D. Dudyshev

Doctor of Technical Science, Professor,
Corresponding Member of Russian Ecological Academy
ecolog@samaramail.ru
<http://www.intrasoft.ru/nizot>

Abstract

The article proves importance and prospects of development of combustion technologies. In particular there is considered application of a new electric fire technology for environmentally appropriate combustion of any matters and gases. The technology uses electric fields as combustion catalyst. There is observed application of technology in heat-and-power engineering, transport heat engines, disposal units etc. [1, 2]. It is demonstrated that the new technology allows intensify combustion processes and increase their controllability (i.e. the control of temperature, gases pressure, gradient of heat conductivity, and so on). There is made a conclusion about availability of the technology to solve critical energetic and ecological problems of the civilization.

We hope that this article will excite interest of a wide circle of readers, i.e. of professionals in the area of combustion and heat technologies, physicists, ecologists, and those people who are interested in new scientific ideas.

Global Ecological Problems are the Problems of Ineffective Combustion of Hydrocarbon Fuel

The ecological problems become more and more serious and threaten to grow into world ecological catastrophe. The main cause of the atmosphere pollution in megapolises is imperfection of combustion technologies (of heat-and-power engineering, heat machines, transport engines, waste combustion...). It has been proved that their share of pollution of the planet atmosphere comes to 70-80%. The combustion technologies mean any technologies of combustion of fuel, matters and gases. The combustion technologies are the most popular technologies in the world. The modern civilization without the combustion technologies is impossible. There are many industries, which apply these technologies, such as heat-and-power engineering, transport, metallurgy, food industry, oil-and-gas refining industry, chemical industry, waste combustion neutralization.

Therefore the global ecological problems will not be solved until the mankind develops the combustion technologies. The article describes and discloses the essence of the new technology of ecologically appropriate and effective combustion of fuel and wastes of any type.

Why is it difficult for ecologists to conserve nature?

Modern methods and technology used for solving of the ecological problems consist in **analysis** of extent and sources of the environment pollution (ecological monitoring), and, moreover, in **refinement of atmosphere, water and soil, which are used in different technologies or have been polluted due to the imperfection of the technologies** (it is refinement from such toxic components as drinking and run-off water, exhaust and waste gases etc.).

Unfortunately, methods of measuring of the huge spectrum of toxic matters, which are thrown into the atmosphere at matters combustion, as well as the methods of their utilization are impartially difficult, expensive and imperfect. Even using of an ideal technics for measuring of the atmosphere pollution is not effective since it is a struggle with **consequences** of the combustion and other technologies imperfection but not with **causes** of the atmosphere pollution.

Ecological and energetic effectiveness of the known combustion technologies

It is known that real effectiveness of transformation of chemical energy of fuel in the combustion process is low. For example, in heat engines it comes to 25%, effectiveness of transformation of heat energy into electric energy in thermoelectric power stations does not exceed 40%. If energy consumptions of mining, processing and delivery of the fuel to consumers are taken into account then the summary efficiency of the existent combustion technologies (of heat machines and devices) comes to no more than 10 – 15%! It means that more than the half of chemical energy of the fuel is transformed into heat and different toxic matters and waste gases, which pollute the planet atmosphere. They cause acid precipitation, a global "greenhouse" effect, which threaten to cause the climate warming, the world flood, and final poisoning of the living nature. Thus the share of imperfect power engineering in the nature pollution comes to 70 – 80%! How is it possible to cleanse the planet atmosphere, especially the environment of world megapolises, in the situation when the amount of toxic matters produced by transport and industries is comparable with the amount of rest pure air?

Until the mankind learns burn matters and gases by effective and ecologically appropriate way the planet atmosphere will remain polluted and in near future it can become uninhabitable. Thus we will not solve the ecological problems until we gain the understanding of the combustion processes and processes of combustion transformation of matter chemical energy into heat energy, and then into other useful types of energy (i.e. electric energy, mechanical energy, light energy).

Physical Essence and Problem of Classical Combustion of Matters

Combustion is one of the most difficult phenomena, which are known by the humankind. From the scientific point this phenomenon is a chain reaction of sequential fragmentation of fuel particles into smaller charged radicals; it is physical chemical processes of transformation of chemical energy of intermolecular connections as well as combustion also includes physical processes of transformation of energy into heat and light on molecular and atomic levels. Many other processes, which proceed simultaneously, are involved.

From school years we know that combustion is a process of interaction of fuel with an oxidant that is accompanied by heat and light energy generation. In higher school the words of "as well as by cryptic energy of chemical connection of waste gases" are added to the school definition. The combustion processes are studied and improved by scientists and experts of different areas (chemists, physicists, heat-and-power engineering specialists, thermalphysicists etc.). There are known fundamental investigations of combustion chain reactions made by such Russian scientists as N.N. Semenov, Ya.B. Zeldovich and their followers.

Until now intensiveness of fuel combustion is increased by air blowing into the combustion zone that increases the amount of waste toxic gases thrown into the atmosphere. **Let us arouse several questions, which seem naive at first sight. Why is an oxidant (air or oxygen) needed for matter combustion? Is it possible to do it without any oxidant?** How does the combustion process begin and proceed? There are a lot of vague questions in physics of combustion. For example, how can the temperature and the intensiveness of the combustion be regulated? Can the heat conductivity of the flame be controlled? How can heat motion of particles be regulated in the flame and in the waste gases, and what can it cause? There is another problem of combustion. It is the very hydrocarbon fuels, which are applied at modern heat processes. The great Russian scientist, D.I. Mendeleev stated that to use oil is the same thing as to stoke a stove with banknotes.

Since the hydrocarbon fuels are complicated chemical matters and the combustion processes are imperfect then in the process of their combustion a great amount of different by-product matters and toxic gases are produced. They waste unused self-energy of fuel into the atmosphere and pollute our planet.

Physical essence of the new electric combustion technology

How is it possible to burn the hydrocarbon fuel by environmentally appropriate way? How can this environmentally appropriate technology be realized in

practice? A brief answer is following: **it is necessary to make such conditions of combustion of organic fuel, and to introduce such a combustion catalyst that the energy of intermolecular and intramolecular connections of the organic fuel becomes absolutely free. At that the chemical energy can be transformed into energy of electromagnetic radiation, for example, into light energy and heat energy without generation of by-product polluting matters and gases. Then a working body (for example, water) is effectively heated by this directed concentrated electromagnetic radiation. In this process effects of electromagnetic waves reflection and concentration are used, or the electromagnetic radiation is directly transformed into electric energy.** In this case there is a new opportunity to regulate flame temperature and to extremely decrease quantity of the oxidant, i.e. to create organics combustion with minimal quantity of waste gases.

Is it principally possible to burn organic matters and gases without the atmosphere pollution using electric field as a catalyst? It is possible if parameters of this field are correctly chosen. More precisely it is possible if huge Coulomb forces of the electric field are correctly regulated by interaction of electrically charged particles of the fuel and the oxidant with force lines of the electric field.

One variant of an experimental device is represented in Fig. 1.

Devices for approbation of the new electric combustion technology

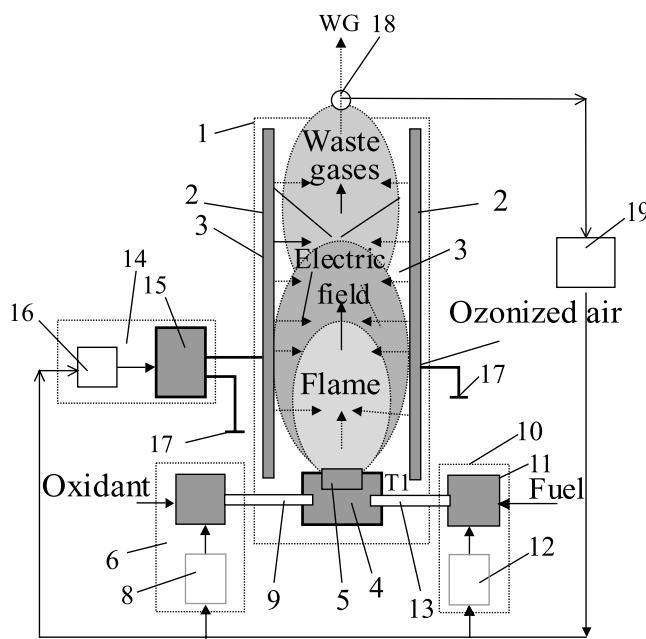


Fig.1 a

Plan of the experimental device

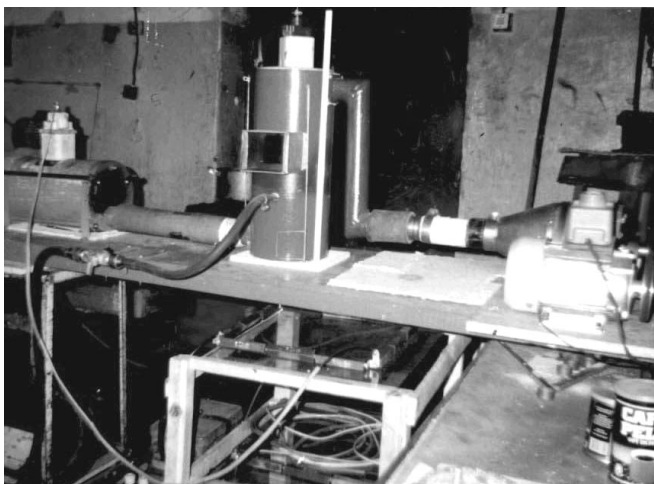


Fig. 1 b

Photo of the experimental system

A structure chart of the experimental device, which was designed to investigate the new electric combustion technology, is demonstrated in Fig.1a. The device contains a body (1) equipped with flat electrodes, which are insulated from the body (2), (they can be placed in either horizontal flat or vertical flat). The electrodes (2) are located on opposite inner walls of a combustion chamber (3). The device is equipped with a mixer (4) with a device for supplying of blended fuel to the zone of combustion. At the same time the device (5) is used for electrical combustion of the blend. The described device is equipped with an air track (6), which contains an oxidant activator (7) joined with a regulator (8) by a control circuit and with the mixer (4) by an air pipe (9). The regulator (8) serves for regulation of the oxidant activation extent. At the end of the air pipe it is possible to place a vortex device (it is not shown in the figure). Also the device is equipped with a fuel track (10) containing a fuel activator (11) and a regulator (12) of the activator and consumption of fuel. The block (11) is joined with the mixer (4) by a fuel pipe. The device is equipped with an electric combustion activator (14) containing a high-voltage transformer (15) of intensity and frequency joined to its regulator (16) by a control circuit. An electric outlet of the block (15) is joined to one of the electrodes (2), and the second outlet is safely electrically grounded by a grounding mat (17). The high-voltage wire of the outlet of the block (15) is connected with the electrode (2) through a bushing insulator (it is not demonstrated in Fig.1a). The device is equipped with a gas toxicity calculator (18) joined to the inlet of a mode optimizer (19), which is a control system for interacted regulating of all the parameters of combustion. For that the outlet of the mode optimizer (19) is joined to the inlets of control of the regulators (8), (12), (16).

The device operates in the following way. At first an activated oxidant of O1 is applied through the air track (6), activator (7) and air pipe (9) to the mixer (4). Then an activated fuel of F1 is applied through the fuel track (10)

and the activator (11) to the same mixer (4). A blended fuel is prepared in the mixer (4) and then is atomized and combusted by a sparkle of the block (5). In the combustion chamber (3) flame and waste gases are processed by strong alternating electric field, which is generated by the block (14) in a gap between the electrodes (2). In the process of combustion waste gases toxicity is measured by the special toxicity sensor (18). Depending on current toxicity the parameters of flame combustion are regulated by the mode optimizer (19). More precisely the oxidant consumption and the extent of its activation are changed by the regulator (6), the fuel consumption and the extent of its activation are changed by the regulator (12), the intensity and frequency of the alternating electric field generated by the block (14) in the combustion chamber (3) is changed by the regulator (16). Let us note that the electric field in the combustion chamber (3), viz in the gap between the electrodes (2), catalytically influences on both the flame and the waste gases. The essence of the process lies in the fact that the processes of fragmentation and oxidation of fuel radicals and of toxic oxide molecules are accelerated. Intensiveness of combustion and of toxic gases refinement increases as well as the intensity of this field and its frequency do. As a result of the interconnected regulation of all the listed parameters fuel of any kind can be fully, intensively, "cleanly" combusted.

In Fig.1b there is a photo of the operating experimental device designed to investigate the processes of influence of electric field on the process of matters combustion and of cleaning of waste gases. The photo represents following things.

1. In the left side there is a furnace with a high-voltage electrode in a higher part of its body.
2. In the centre there is a vertical column of the electric combustion cleaning (after-burning) of toxic gases in the electric field; on the top of the column a high-voltage electrode can be seen. Gas pipes designed for toxic gases supply-withdrawal are connected with the column and located to the right and to the left from it.
3. A regulable blower is represented in the upper right side of the picture. It is designed for toxic gases withdrawal and connected with the gas pipe by the column.
4. At the foot of the picture there is a regulable high-voltage tension source (the electric field source), which is connected with the furnace and the column of toxic gases cleaning by high-voltage wires.

It is experimentally proved that combination of two stages of the combustion activation (i.e. in the furnace and the column) ensures ideal cleaning of toxic gases at combustion of any toxic matters.

Some Results of Experiments

Our experiments and investigations of many-sided influence of electric and high-voltage electromagnetic fields on the combustion process have proved that such practically ideal condition of fuel and matters combustion is possible to be realized in practice [1].

Low-powered static and alternating electric fields (i.e. the fields of constant sign and of variable sign) of more than 1kV/cm intensity were used as combustion catalysts as well as high-frequency electromagnetic fields of low power with some frequency of oscillations of molecules in the flame (flame power is 0.1 – 1% of heat power of the flame of the combusted organic fuel).

Peculiarities of Oxidants Application in the New Technology

It is known from the thermodynamics and combustion theory that optimal ratio of the oxidant mass, for example air, and the fuel is approximately 1:16 in an average combustion process. In our experiments with the electro-field catalyst the ecologically appropriate combustion of the hydrocarbon fuel (mazut, straw oil) was achieved at oxidant deficiency (for example, at the ratio of oxidant mass and the fuel of 1:1). For experts it means that there is a real possibility for 10 – 15 times decrease of amount of waste gases of any heat machines and to while their former power is the same. As the experiments demonstrate carbon and hydrocarbon are absolutely removed from the waste gases. In the experiments oxides of hydrogen and nitrogen were 4 – 8 times decreased and flame existence was 5 – 10 times increased.

The issues of the experiments prove the hypothesis about possibility of effective environmentally appropriate combustion as a process of direct transformation of chemical energy of organic fuel into electromagnetic radiation energy of the flame (including heat and optic diapasons). The transformation is accompanied by removal of polluting toxic components from the waste gases that occurs due to many times intensification of the combustion process under action of electromagnetic catalysts.

Operations of regulable activation of fuel oxidants (simultaneous or separate), which are introduced into the combustion technology, ensure additional improving of the combustion process. Especially it occurs at heavy oil fuel combustion and water-fuel emulsion combustion that was experimentally tested by us. The process becomes especially effective if the flame of the combusted activated blended fuel is additionally processed by alternating electric field. Due to introduction of the operation of all the combustion parameters regulation (of consumption of fuel, oxidant, of their activation extent, and of their combustion

intensiveness extent), according to the information of the waste gases toxicity, it is possible to achieve effective combustion of fuel and waste products of practically all kinds.

Our experiments demonstrate that combination of the very flame procession with procession of the waste gases and air (i.e. an oxidant) by electric field is very effective for the waste gases cleaning. The essence of this additional cleaning of the waste gases lies in fragmentation of carbon particles and exhaust opacity by electric forces of an alternating field as well as in after-oxidation of some toxic oxides in the medium of an ozonized oxidant. Energy consumption for activation of the flame combustion by strong electric fields is small and does not exceed 1–3% of heat energy of the flame. Advantage of this invention is universality of the application for combustion of any inflammables. It is possible due to widening of the diapason of the electric field parameters regulation (of intensity and frequency), especially in the mode of their interconnected regulation.

The essence of catalytic action of the alternating electric field on the flame combustion process consists in effective breaking of dipole radicals of fuel by an activated (dipole) oxidant. Moreover, the essence lies in better mixing of layers of combusting flame with the oxidant that occurs due to removal of a doubled electric layer from the limit line of the flame. Thus this technical solution allows achieve new positive effects due to its significant peculiarities, i.e. extending of application area of the known electric combustion method over the combustion process of any inflammables as well as it allows significantly increase controllability of the flame combustion process.

Let us note that in the experiments on the combustion of organic fuel in strong electric fields the regulation of the flame temperature and of its existence was achieved at unchanged consumption of fuel and of oxidant. That was achieved by changing of the parameters of the combustion electric-field catalyst (intensity and frequency) of a longitudinal electric (electromagnetic) field. Rotation and stabilization of the flame was achieved by a rotating transversal electric field. Changing of the flame height was realized by the longitudinal electric field.

The investigation, which has been performed by us, proves that directly acting on the flame the very electric field which directly influences on the flame and emission of electrons flow (ideal type of oxidation) into the flame can most effectively intensify the combustion process and make it harmless for the humankind and for the environment!

It has already been experimentally proved that energy consumption required for generation and regulation of this electric field and of the electrons flow for intensification and environmental

appropriateness of the combustion is quite small relatively the combustion energy and comes to fractions of a percent of the flame energy. Thus our experiments prove that the best **“oxidants” and combustion catalysts** are not superfluous air but the **electron and the electric field!**

Regulation of Heat Conductance of the Flame and the Heat Flow

As our experiments have demonstrated, the electric field can act as an effective combustion catalyst as well as a regulator of its intensiveness; moreover, it can control even a vector of heat conductance. It is proved by the experiments that the parameters of this field can be regulated as well as temperature of the flame and gradient of the flame heat conductance. Interesting experimental results were obtained measuring full heat of combustion of the same quantity of fuel at the usual method of fuel combustion and at the method, which uses combustion electric catalysts, even in the case of oxidant deficiency. In the last case the energy of fuel combustion almost 1.5 times increases that can be explained by fuller transformation of fuel chemical energy into electromagnetic radiation. At the usual combustion methods the chemical energy of the organic fuel was not completely used and remained as a cryptic summary chemical energy of intermolecular connections of many toxic waste gases, which were exhausted into the atmosphere by heat devices. Basing on the performed experiments it may be supposed that, evidently, specific heats of matters are 20-50% higher at this method than at their usual combustion method. The essence of the new electric combustion technologies consists in this new physics of combustion.

The author has already got patents for invention of Russian Federation [3 – 12] for the methods of regulation and intensification of matters combustion processes.

Some peculiarities of atomization, inflammation and combustion of organic fuel in electric fields

We have not discussed all the potential capabilities and advantages of the new electric combustion technology for different areas of technics. Let us demonstrate them in more details.

One of characters of the new electric combustion technology is **effects of oxidant ozonization, of electrostatic atomization and electrostatic injection of electrically charged particles of fuel and the oxidant that is followed by generation of the finest aerofuel opacity on a molecular level in a combustion chamber.** Naturally, such fine atomization of the fuel causes its easier evaporation, inflammation

and combustion especially in the medium of the ozonized oxidant. **The mechanism of fuel electrostatic fragmentation is physically explained by Coulomb interaction of repulsion from each other of electrically likely charged fuel drops (particles) that is accompanied by their progressing fragmentation and corresponding decrease of their mass and electric charge.** As the experiments have shown the extent of the fuel drops (particles) fragmentation depends on initial electric potential of fuel charging and initial size of injected fuel drops (particles), which for their part depend on configuration and size of a fuel-injection nozzle as well as on pressure occurring in a fuel line of the heat machine.

Generated by dipolar high-voltage potentials catalyzing electric field can be introduced into the atomization zone or (and) the combustion zone of the combustion chamber of an engine. Its Coulomb forces accelerate motion of electrically charged particles of fuel and oxidant to an opposite electric potential, which is connected with, for example, a piston of an engine. Thus electric field acts as an electrostatic pump that allows decrease pressure in a fuel line as well as allows practically ideally atomize the fuel and mix it with the oxidant. Moreover, it lets simplify and improve the systems of injection and inflammation of the blended fuel in heat machines and devices, for example, in internal combustion engines or in boiler plants. Their application can cause additional improving of energetic and ecological characters of the combustion technologies. According to our information, such high-performance fuel-injection nozzles have yet been unknown in technics therefore they have not been applied in heat machines (injector internal combustion engine).

Is it possible to combust water? Water as a fuel!

More amazing experimental results were obtained at 40-80% dilution (emulsification) of liquid organic **fuel**, for example diesel oil, with **habitual water**. Summary energy as heat and light, which is generated in the process of such blend combustion, was not practically changed that can be explained by liberation of energy of chemical connections of water as well as of fuel. In the process of the experiments on combustion of the emulsion at first **it was transformed into the finest water vapor on the molecular level by means of capillary electroosmosis and of electrostatic atomization.** Then dipolar water molecules, which had been electrified by field, were fragmented into hydrogen and oxygen, and then the hydrogen was effectively combusted in the medium of the ozonized oxygen. Let us note that at this mechanism of water “evaporation” and of following splitting of water molecules into hydrogen and oxygen the electric field expends energy, and heat of organic fuel combustion just accelerates (catalyze) this process.

Editor: It is necessary to note that electric field can not expend energy. If there are no conduction currents then the field source does not decrease difference of potentials. Hence it can be concluded that effectiveness of such power systems is possible to be UNRESTRICTEDLY HIGH. The author writes about it below as about an "incomprehensible phenomenon".

The most amazing and incomprehensible fact is that the electric field transforms water into "vapor" and breaks the water molecule into hydrogen and oxygen practically **without any expenditure at minimum of energy consumption**. Electric power of the intensity high-voltage transformer, which is necessary for strong field generation, lies in the interval from several watts to tens of watts. As the experiments have demonstrated electric consumption of the high-voltage source practically is not changed at correct shunting of the flame by the electric field (i.e. through an air gap). Current consumption practically did not increase depending on mode of fuel atomization and its combustion (of flame height, of combustion intensiveness...).

There are only two conditions of effective work of static electric field as an electrostatic pump-atomizer of fuel and as a catalyst of blended fuel combustion. The first one is intensity of the field in the zone of fuel atomization and in the zone of flame combustion. The second one is enough emission of electrons into the blended fuel flow. In this mode Coulomb forces make work of electrostatic pressure generation and of electrostatic fragmentation of particles and molecules of fuel and water. The forces repulse likely charged drops of water. Heat motion of fuel radicals, which are combusted and fragmentized in the flame, impedes their chemical recompounding into water molecules in the zone of combustion. Moreover, it causes proceeding of a very physical chain reaction of hydrogen combustion in the flame.

Therefore additional light and heat energy, which is generated in the flame by combustion of hydrogen generated from water molecules that occurs in the ozonized oxygen, does not decrease summary energy of combustion of blend of fuel with water but increases it.

Thus using of electric and electromagnetic fields as the strongest catalysts of combustion of organic fuels and any matters clears great **prospects** of combustion technologies improving. Moreover it allows create ecologically appropriate heat machines and devices and 20-50% increase their effectiveness due to fuller transformation of chemical energy of inflammables into heat or light energy.

Ways of radical improvement of heat machines or about a new mechanism of transformation of heat energy into mechanical energy and into kinetic one

For clear realization of causes of extremely low output of modern heat machines that has generally lead the civilization to the ecological catastrophe it is necessary to understand their common principle of operation as well as a cause of heat energy non-effective using in them.

A mechanism of transformation of heat energy, which is generated by fuel combustion, is the same for all known heat machines. It consists in generation and transformation of superfluous pressure of a heated working body (i.e. gas, vapor etc.) into kinetic energy of a working element of the heat machine (i.e. a piston of an internal combustion engine, a turbine of an aviation engine, a reaction jet flowing out a rocket nozzle etc.) in special chambers of the machines.

It is also known that the higher the temperature of the heated working body, for example of a gas, the higher initial pressure in the working chamber of a heat machine. **Why output of heat machines is so low?** Any expert of thermal physics, thermodynamics, and heat machines can answer that efficiency (output) of heat energy transformation into mechanical one is defined by the second law of thermodynamics and is clearly illustrated by Carno heat cycle. According to these postulates, **output** of an ideal heat engine does not depend on a working matter and on the engine construction but is defined by temperatures of the working body in the starting point and in the final point of the cycle, i.e. by the temperatures of the heater and of the refrigerator of the **heat machine**. Real output of the heat machines is limited by heat stability of materials and by imperfection of engine constructions.

Nevertheless known thermodynamic processes and laws of heat motion of particles and molecules are significantly changed in strong electric fields and demonstrate new prospects for improving of heat machines.

A solution of the problem can be briefly formulated as: to increase output of heat machines it is necessary to use a new mechanism of redistribution of heat energy into energy of directed pressure of a compressed working body (i.e. gas, vapor, etc.) on the working element of the heat machine. At the minimal pressure it should be redistributed on sidewalls of the working chamber.

Can it be realized in practice? On the face of it the technical solution is unrealizable nevertheless it exists. It is possible to redistribute and to regulate heat motion

(pressure) of heated gas inside a closed reservoir and, hence, its temperature in a certain direction. To achieve this aim **it is necessary to introduce static electric field into the combustion chamber of a heat machine and to orient heat motion of electrically charged and dipolar molecules of expanding working bodies (i.e. gas, vapor) along force lines of the electric field by electric Coulomb forces.** Something similar occurs, for example, in liquid crystal cells of electronic timer, in Kerr cells (electric optic effect) at periodical application of electric field to them that causes dipolar molecules turn along a field vector as well as change of light penetrability of these matters.

There is a difference between this known in electrooptics phenomenon and our case. The difference lies in the fact that polarized gas molecules remain movable along force lines of the electric field in contrast to liquid crystals, which do not. This fact causes redistribution of parameters of heat energy (i.e. pressure, temperature, and heat penetrability) of dipolar molecules of heated gas just along force lines of the field. The more the intensity of the field at the initial temperature of the working body is the more the difference of pressures on the sidewalls of the chamber and on the working element, for example, on an engine piston.

Heat motion of polarized particles of heated gas can be decelerated by combination of three electric fields of constant sign in accordance with all three coordinate axes; hence it is possible to significantly and quickly decrease temperature and pressure of the gas. In this case the heat energy of the heated gas makes jump transformation into electromagnetic radiation.

Editor: Historically this method, i.e. plasma retention by electric field, was proposed by Oleg Lavrentiev in 1948. He had 7-grade education and served as a sergeant in Armed Forces in Sakhalin. After he sent Stalin a letter containing a phrase, as "I know a secret of hydrogen bomb creation" he was invited to Moscow to set his ideas out to academicians. His ideas were not lost nevertheless the scheme of plasma electrostatic retention was not applied ("Expert" magazine #23, 18 of July of 2001). In 1950 Sakharov and Tamm proposed a scheme of a toroidal magnetic thermonuclear reactor which has been developed until now. Why is it so? It is difficult, expansive and practically unreal...

Thus introduction of strong electric fields into heat machines allows significantly increase effectiveness of transformation of heat energy of a working body into mechanical and kinetic energy of working elements of the machines by means of directed regulation of temperature and pressure of heated gas,

for example, in the starting point and in the final point of a working stroke of a piston. In other words it allows increase output of the machines.

APPLICATION AREA OF NEW ELECTRIC COMBUSTION TECHNOLOGY

Practical application of the new combustion and thermal technologies

The new technology is universal and applicable in practically all spheres of technics. Therefore we believe that further development and application of this new technology of fuel and waste products combustion is very important for radical improving of all the heat machines and of all thermal technologies. As the civilization uses hydrocarbon fuel and matters in its life circle then just this new technology can solve critical ecological and energetic problems of the civilization.

It is impossible to view in details all proposed perspective technical solutions based on this technology [1-25] within one article. Therefore we give only one striking example.

Environmentally appropriate engine for motor transport

Since the transport, which uses thermal internal combustion engine (ICE), is most harmful for the environment then let us discuss ways of their ecological and energy improving. Several years ago the author patented "method of intensification of ICE operation" [7]. The essence of the invention consists in introduction of controllable electric field into combustion chambers during the whole operation period of an engine by special monoelectrode spark-plugs (Fig.2).

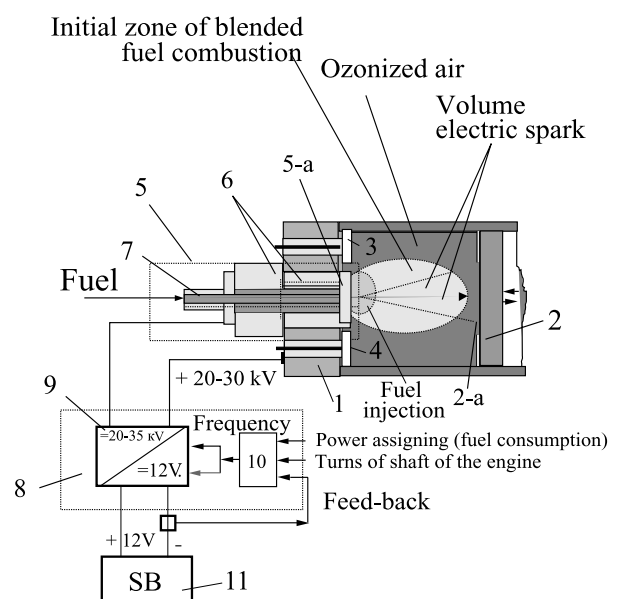


Fig.2a

Plan of an environmentally appropriate ICE (for transport)

1. – combustion chamber;
2. – piston, 2a – heat-resistant surface of the piston (zone of electric-spark discharge)
3. – admission valve (its canal is not indicated)
4. – exhaust valve (its canal is not indicated)
5. – combined mono-electrode spark-plug; 5a – fuel nozzle with hollow central electrode and end disk electrode
6. – electric insulator of the spark-plug – fuel nozzle
7. – fuel pump (for example, an electrostatic one)
8. – high-voltage regulable transformer (electric field source)
9. – force block of tension high-voltage transformer (= 12V/25kV)
10. – system of regulation of electric field source (9)
11. – board current network = 12V (SB is a storage battery of an automobile).

This structure chart briefly demonstrates basic components of a new ICE, where there is directed pressure of gases on a piston. In particular, many inventions of the author are realized in practice here, i.e. semi-digital spark-plug, electrostatic fuel nozzle (5), electrostatic fuel pump (7). A new mode of volume inflammation of blended fuel has been realized in practice, i.e. “a spark coming from a disk electrode (5-a) to a piston (2-a)”. Since it is possible to regulate the electric field intensity generated by a high-voltage source of tension then an advance angle of blended fuel inflammation can be regulated, gases pressure on the piston at explosion stroke of ICE operation can be regulated as well.

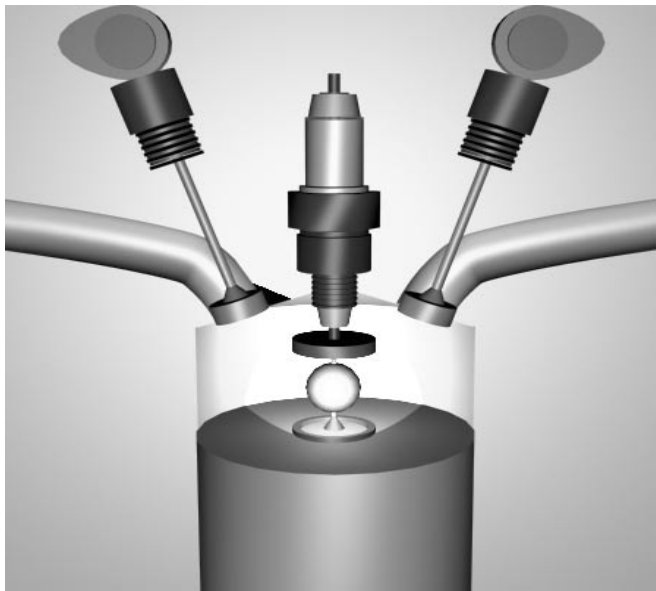


Fig.2b

Photo of a simplified construction of the new ICE

Fig.2b demonstrates simplified three-dimensional construction of the proposed energetically and ecologically perfect ICE. There are observable elements such as a combustion chamber, a piston, valves, a monoelectrode spark-plug, and an electrostatic fuel nozzle (in the centre on top), which is connected with the spark-plug. In the centre of the combustion chamber

it can be seen volume inflammation of the blended fuel at spark appearance from end electrode to the piston.

As a result a summary positive effect of ecological, construction and energetic improving of ICE is achieved, i.e. effective cleaning of exhausted gases directly in the combustion chambers of the engine, significant simplification and perfection of a fuel injection system, improvement of system of distribution and electric inflammation of the blended fuel. In this engine a distributor (as well as its analogues) is removed at all since sparking and intensive inflammation of the blended fuel automatically appears between central electrode of the spark-plug and the piston which comes to the upper “dead” point. The central electrode of the spark-plug is constantly under high tension. The advance angle of ignition is regulated by change of the electric field intensity. Powerful multipoint ignition causes simultaneous intensive inflammation of the blended fuel that occurs throughout the whole chamber. The electric field as a powerful combustion catalyst intensifies the process of the blend combustion at the explosion stroke of the engine and at after-burning of waste gases directly in the combustion chambers at the following output stroke of the engine operation. Directed along the axis of the piston in the combustion chambers this electric field serves as a transformer of gases heat energy into mechanical energy of the thermal engine pistons. That is caused by the fact that the field orients heat motion of the expanding gases along the axis of the pistons in combustion chambers of the engine at explosion stroke of ICE just. It causes redistribution of heat energy and increase of the gases pressure on the very pistons that significantly improves effectiveness of transformation of heat energy of the fuel combustion into mechanical energy of the piston motion (theoretically the improvement is by two-three times), i.e. it two-three times increases output of a classical thermal engine making it come to 70-80%.

The electric field, which is introduced into the combustion chambers of an internal combustion engine, ensures significant economy of fuel (up to 30-40%) at saving of its working characteristics. It occurs due to fog electrostatic spray of fuel and to the fuel electrization as well as due to oxide ozonization. Moreover it occurs as a result of deep after-burning of hydrocarbon components of fuel, combusting blend and waste exhaust gases. This method allows effectively regulate temperature of the blend combustion in the chambers while required compression in cylinders is the same, for example, to minimize nitric oxide generation in the exhaust gases. As a result there is no necessity in external devices for cleaning of exhaust gases of internal combustion engines; ecological appropriateness improvement can be simultaneously achieved. Additional aerosol hydro-alkaline processing of these gases can allow totally clean **exhaust gases** of the transport, which operates on thermal engines.

Workability of such an environmentally appropriate engine in two-stroke and four-stroke variants is experimentally demonstrated. There are also experimentally shown decrease of all toxic components in exhaust gases, 20-30% increase of useful power of the engine, and simultaneous decrease of fuel consumption.

Thus practical application of the new electric combustion technology can exert revolutionary influence upon propulsion engineering development and upon increasing of ecological compatibility and effectiveness of the transport, which operates on thermal engines.

Diagram of operations of technology of effective using of refinery wastes in heat-and-power engineering

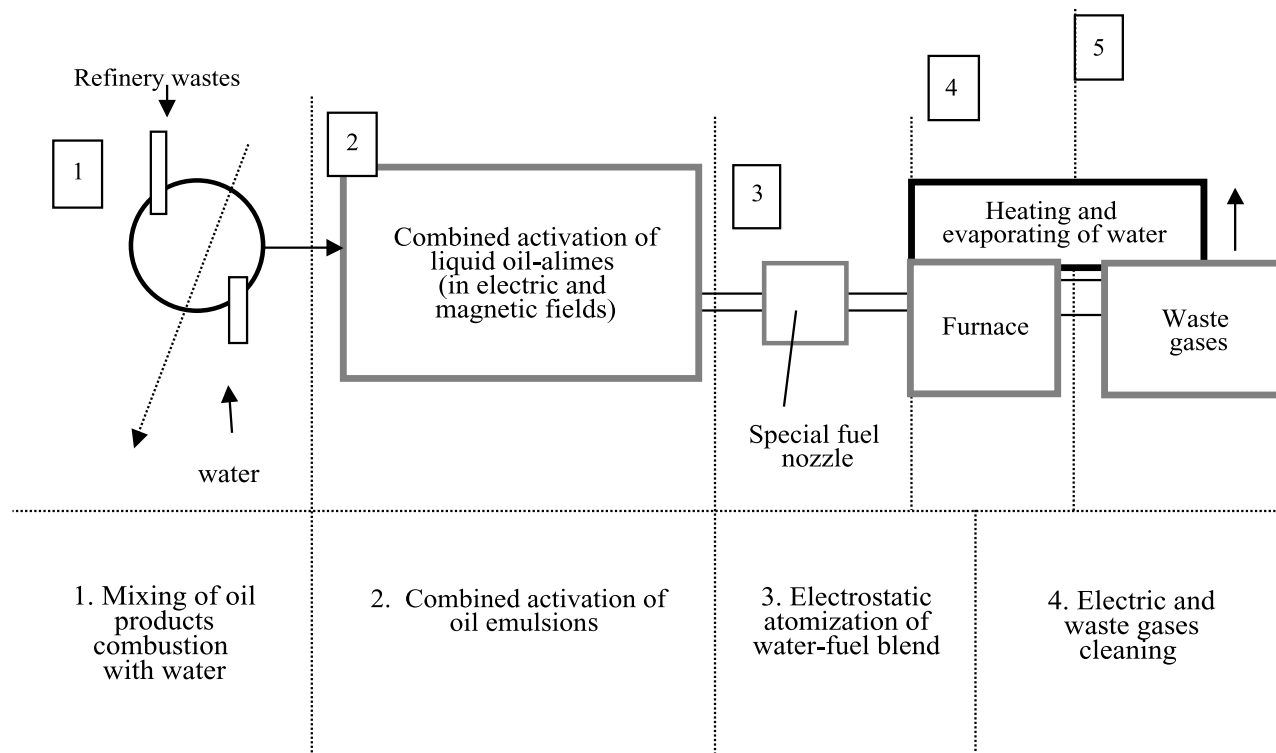


Fig.3

Technology of environmentally appropriate combustion of refinery wastes as fuel for boiler plants

The author has patented other technical solutions of improvement of different devices, which are based on these technologies. These solutions concerning boiler plants, gas turbine engines and jet engines and many other heat machines and devices allow increase their effectiveness and simultaneously significantly improve their ecological factors. As an example of application of this technology in heat-and-power engineering there is a diagram of operations of the technology of the environmentally appropriate combustion of refinery waste as a fuel for boiler plants (Fig.3). Unfortunately the limits of one article do not allow discuss these inventions in details nevertheless the author will realize it in practice in future works.

Conclusions:

1. The existent methods of solving of the ecological problems are ineffective as well as work of organizations, which deal with ecological and nature conservation activity. It is caused by the fact that they are oriented to search and remove consequences of ecological pollution of the nature instead of their causes.
2. The article demonstrates real causes of global ecological problems, which consist in imperfection of technologies of generation and transformation of energy.
3. Using of strong electric and electromagnetic fields of low power as combustion catalysts allow significantly improve ecological factors of combustion technologies and of devices, which realize the technologies in practice. In other words it allows realize in practice "clean combustion of fuels and wastes and possible existence of "clean" heat technics".
4. Application of electric and electromagnetic fields in the combustion technologies allows significantly increase effectiveness of transformation of chemical and heat energies of fuel into mechanical and electric energies.
5. The electric combustion technology allows realize in practice principally new ways to control combustion process as well as to control many thermal and kinetic processes (i.e. processes of pressure, heat conductance, temperature, etc.), i.e. allows increase output of heat machines.

6. The new electric combustion technology is a universal method of solving of ecological and energetic problems of the civilization and a universal way of radical improvement of technics (i.e. of the transport, boiler plants, oil-and-gas processing plants, combustion wastes recycling plants, etc.).

References

1. V.D. Dudyshev Electric combustion technology is an effective way to solve energetic and ecological problems //"Ecology and Industry of Russia" ("Ekologia I Promyshlennost Rossii") magazine, #3 1997;
2. V.D. Dudyshev How is it possible to save the civilization and the nature from global ecology pollution? //"Ecology and Industry of Russia" ("Ekologia I Promyshlennost Rossii") magazine, #11 1997;
3. V.D. Dudyshev Method of combustion control. Patent of Russian Federation #2071219 of 19.04.1994;
4. V.D. Dudyshev Method of intensification and regulation of combustion. Patent of Russian Federation #2125682 of 06.06.1995;
5. V.D. Dudyshev Method of electric combustion of refuse and wastes. Patent of Russian Federation #2117870 of 06.06.1995;
6. V.D. Dudyshev Method of electric combustion cleaning of waste gases. Patent of Russian Federation #2125168 of 15.11.1995;
7. V.D. Dudyshev Method of combustion intensification in a fire-chamber of a boiler plant. Patent of Russian Federation #2079766 of 14.06.1995;
8. V.D. Dudyshev Method of flame extinguishing, Copyright of USSR #1621234 of 12.03.1988;
9. V.D. Dudyshev Method of decrease of toxicity of exhaust gases of motor transport. Patent of Russian Federation #2117179 of 20.02.1996;
10. V.D. Dudyshev New method of environmentally appropriate matter combustion as a radical way of solving of global ecological problems. // Collected reports of II international congress of "Environment for us and future generations: ecology, business and human rights in new conditions", Russia, Samara, 1997;
11. V.D. Dudyshev New method of refuse electric combustion // Collected reports of III international congress of "Environment for us and future generations: ecology, business and human rights in new conditions", Russia, Samara, 1998;
12. V.D. Dudyshev Problems of ecological education and upbringing of the youth // Collected reports of II international practical conference of "Pedagogical activity as a cultural activity", Russia, Samara, 1999;
13. V.D. Dudyshev Environmental safety of motor transport //"Ecology and Industry of Russia" ("Ekologia I Promyshlennost Rossii") magazine, #5 1997;
14. V.D. Dudyshev Perspective technical works out and inventions of ecological improvement of motor transport. //"Ecology and Industry of Russia" ("Ekologia I Promyshlennost Rossii") magazine, #12 1998;
15. V.D. Dudyshev Method of ICE exhaust gases cleaning, i.e. electric combustion cleaning and electric filter at ICE output. Patent of Russian Federation #1404664;
16. V.D. Dudyshev Problems and ways of ecological improving of native motor transport. //"Ecology and Industry of Russia" ("Ekologia I Promyshlennost Rossii") magazine, #11 1998;
17. V.D. Dudyshev Method of internal cleaning of exhaust gases of ICE. Patent of Russian Federation #2165031;
18. V.D. Dudyshev Method of intensification of ICE operation. Patent of Russian Federation #2135814;
19. V.D. Dudyshev Method of decreasing of toxicity of ICE exhaust gases and a device of its application. Patent of Russian Federation #2135814;
20. V.D. Dudyshev Method of intensification and regulation of combustion. Patent of Russian Federation #2125682;
21. V.D. Dudyshev Method of heat machine control. Patent of Russian Federation #2134354;
22. V.D. Dudyshev Environmentally appropriate ICE. // "New technologies" ("Novye tekhnologii") magazine #2 2001 Samara;
23. V.D. Dudyshev New electric combustion technologies. // "New technologies" ("Novye tekhnologii") magazine #3 2001 Samara;
24. V.D. Dudyshev New electric combustion technologies. // "New technologies" ("Novye tekhnologii") magazine #4 2001 Samara;
25. V.D. Dudyshev New electric technology of fire non-contact extinguishing and ignition prevention. // "New technologies" ("Novye tekhnologii") magazine #9 2002 Samara;



Infinite Energy Magazine



* Cold Fusion * New Energy
* New Science * New Technology

Subscriptions, 6 Issues Per Year

\$29.95 North America

\$49.95 Foreign

Single Sample Copy

\$5.95 North America, \$10.00

Foreign

Infinite Energy Magazine

P.O. Box 2816-FV

Concord, NH 03302-2816

Phone: 603-228-4516 Fax: 603-224-5975

<http://www.infinite-energy.com>

EAGLE-RESEARCH

Energy Solutions
since 1984

**A Research Organization that
Develops & Distributes
Practical Energy-Saving
Methods & Devices**

4 Energy Way, P.O. Box 118
Porthill, Idaho 83853
FAX: 250/492-7480

Technical questions to:
wiseman@eagle-research.com

New Effect of "Cold" Evaporation and Dissociation of Liquids Based on Capillar Electroosmosis

Valery D. Dudyshev

Doctor of Technical Science, Professor,
Corresponding Member of Russian Ecological Academy

ecolog@samaramail.ru
http://www.intrasoft.ru/nizot

There is discovered new electric physical effect of intensive "cold" evaporation and dissociation of liquids and aqueous solutions into fuel gases **without any energy consumption** due to high-voltage capillar electroosmosis [1].

Prospects and problems of hydrogen engineering

Effective obtaining of hydrogen from water is a long-standing tempting dream of the civilization. That is connected with the fact that there is a huge amount of water on the planet, and hydrogen engineering promises the possibility to obtain unlimited quantity of "free" energy obtained from water. All the more, the very process of hydrogen combustion in oxygen medium, which is obtained from water as well, ensures ideal high-calorie and environmentally appropriate combustion.

Ecological and energetic problems are very actual nevertheless they have not been effectively solved. All known methods and devices of production of hydrogen and other fuel gases are ineffective since there is no a real high-performance technology of evaporation and splitting of liquid molecules. The main cause of ineffectiveness of the analogous consists in their difficulty and in energy consumption for breaking of intermolecular connections at dissociation of water liquid fractions.

Physical-chemical structure of even habitual tap water is quite complicated since there are numerous intermolecular connections, chains and other molecular structures in water. In particular, in habitual tap water there are different chains of oriented water molecules, which are peculiarly connected with admixture ions (cluster formations), its various colloidal compounds and isotopes, mineral matters as well as various dissolved gases and admixtures.

It is a paradox but in the living nature there is a long-standing effective way of electric capillar delivery and "cold" evaporation of liquid, which allows transform it into gaseous state without heat energy and electric energy supply line. This natural effect is realized in practice by plants, which deliver aqueous solution and make its "cold" evaporation by capillar electroosmosis. It is quite comprehensible that this natural energetically perfect technology is applicable in methods of liquids transformation into fuel gases. The author of this article has designed such experimental devices of cold electric capillar evaporation of liquids according to electric pumps of trees (Fig.1-3).

The simplest operating device, which experimentally realizes in practice the effect of high-voltage capillar electroosmosis of the "cold" evaporation and dissociation of water molecules, is demonstrated in Fig.1.

New Electroosmotic Capillar Method of Obtaining of Fuel Gas from Water

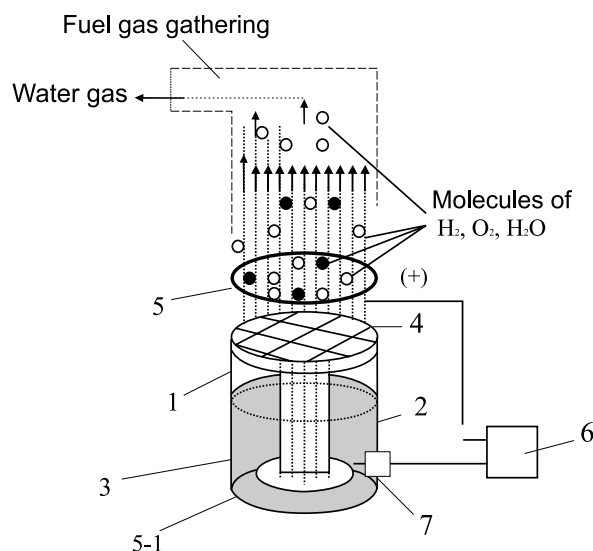


Fig.1

Simplest device of capillar electroosmosis of liquids

First experiments on the electric capillar dissociation of liquids were made with using of habitual water as well as its solutions and water-fuel emulsions of various concentrations as liquids. In all these cases fuel gases were successfully obtained in spite of the fact that these gases greatly varied due to their composition and heat capacity. The experiments on the electroosmotic evaporation and dissociation of liquids are realized in practice by the following way. First a wick (3) and a porous evaporator (4) are moisten with a water-fuel blend (emulsion) (2) then the blend (2) is poured into a reservoir (1). Then a high-voltage source of tension (6) is switched on and high-voltage difference of potentials (about 20 kV) is supplied to the liquid at some distance from the capillaries (i.e. from the wick (3) and the evaporator (4)). The source of electric field is joined to the device by electrodes (5-1) and (5). A plate perforated electrode (5) is placed above the evaporator (4) surface at a distance, which is enough to prevent an electric breakdown between the electrodes (5) and (5-1). Electrostatic forces of longitudinal electric field acts on the liquid. As a result dipolar polarized molecules of the liquid move along capillaries of the wick (3) and evaporator (4) from the reservoir to an opposite electric potential of the electrode (5) (i.e. electroosmosis occurred). Liquid molecules are detached from the evaporator (4) surface by these forces and transformed into a visual fog, i.e. the liquid is transformed into another aggregative state at minimal energy consumption of the electric field source (6). After that they provide electroosmotic elevation of this liquid. In the process of detaching and collision of evaporated liquid molecules with molecules of air and ozone as well as with electrons there is occurring partial dissociation between the evaporator (4) and the upper electrode (5) in an ionization zone. At the process a fuel gas is produced, which can come thorough a gas collector (7), for example, into combustion chambers of motor transport engine.

It has been experimentally shown that change of intensiveness of process of evaporation and dissociation of vapor molecules depends on change of distance from the electrode (5) to the evaporator (4). Moreover, this dependence is conditioned by the following factors, viz by changing of the evaporator area, kind of the liquid,

quality of capillar material of the wick (3) and the evaporator (4), parameters of the electric field as well as the source of intensity (of power) (6).

The author's first experiments on this simplest device, which were organized in 1986, demonstrated that "cold" water fog (i.e. gas) appears in capillaries from liquid (i.e. water) at high-voltage electroosmosis without any observable energy consumption but just using potential energy of the electric field. This conclusion is evident since in the process of experimenting consumed electric current of the field source was the same and equal to the consumed current of the source idling. This current was not changed depending on the appearance of the liquid evaporation.

The experiments demonstrated that capillar electroosmosis evaporated quite significant quantity of water (1 liter) without any energy consumption for 10 minutes at a 10-centimeter-diameter capillar cylinder. That is to say that the consumed electric power (10 Watts) of the electric current source, i.e. of the tension high-voltage transformer (20 kV), was unchangeable and did not depend on mode of its operation. It has been experimentally stated that the whole consumed energy supplied by the current network is insignificantly small comparably with the energy of liquid evaporation. It can be explained by the fact that power was consumed only to generate the electric field and did not increase at liquid capillar evaporation that occurred due to work of an ionic pump and of a polarized pump. Hence the effect of cold electric-capillar evaporation of liquid is very economical in respect to the process energy consumption.

In spite of the fact that energetic essence of this process has not been disclosed it is evident that both "cold evaporation" and water dissociation are realized in practice by potential energy of the electric field. More precisely, the visual process of evaporation and water splitting into H_2 and O_2 at the capillar electroosmosis is realized by powerful Coulomb forces of this strong electric field.

Editor: It is not the most surprising fact. The most astonishment is aroused by school-day stereotypes that work of a field at a closed cycle is equal to zero. These stereotypes have been kept in mind of people for a long period of time. Everybody understands that a field can do work but if a body falling from some height is accelerated in a potential field and its kinetic energy increases then it requires energy consumption to relevelate the body up to this height. Nevertheless, the analogy of a gravitation field with an electric one is not one-valued since the electric field may be generated only at a part of trajectory of the accelerated body motion. An electric field can be pulsating, it can be screened or it is possible to change its direction at the reverse part of the trajectory in such a way that the field constantly accelerates the body. Hence a principal conclusion can be made: summary work of a potential field may not be equal to zero. This conclusion has earlier been proposed by A.V. Frolov in his article published in the USA (Newsletter of the Institute for New Energy. May 1994. p. 1-4).

In principle this uncommon electroosmotic pump-evaporator-splitter is an example of the perpetual motion machine of the second type. Thus the high-voltage capillar electroosmosis of aqueous liquid provides really intensive and energetically free

evaporation and splitting of water molecules into the fuel gas (H_2 , O_2 , H_2O) by means of using of potential energy of the electric field.

To produce more complete dissociation of water molecules into the fuel gas it is necessary to make the whole water molecules collide each other and be split into molecules of H_2 and O_2 in an additional transversal alternating field (Fig.2).

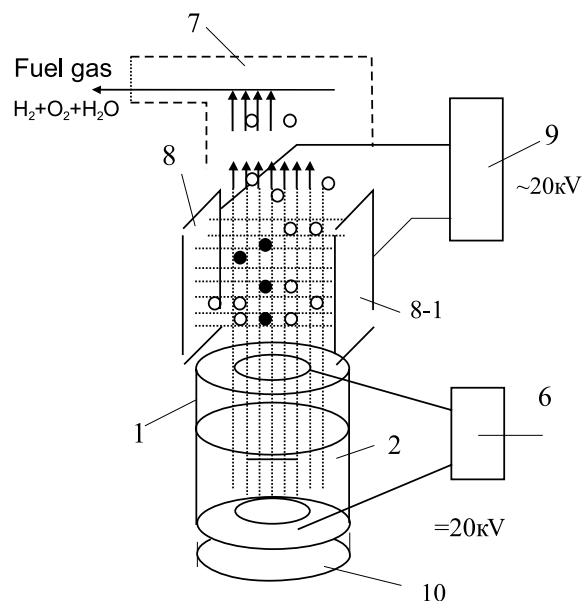


Fig.2

Device for production of fuel gas by electroosmosis. The device is equipped with an additional high - voltage splitting center of liquid molecules by electric alternating field.

At the second stage of water dissociation the energy of the second electric field is used, more precisely, powerful electrostatic forces are used to intensify oscillation resonant process of "collision-repulsion" of electrified water molecules represented as water gas. The result of this process is complete breaking of liquid molecules and generation of fuel gas molecules.

Conditions of optimal dissociation vary due to a kind of the liquid, to capillaries properties, and to the field parameters. These conditions are caused by required productivity of the process of dissociation of concrete liquid. Fig.2 demonstrates in details functional structure and composition of the device equipped with two sources of the electric field.

In the case of preliminary division of initially chemically neutral water into chemically active fractions (i.e. acid fraction and alkaline fraction) realization of the technology of production of fuel gas from water becomes possible at temperature below zero (up to -30°C). In winter it is quite important and useful for motor transport. This "fractional" electrically activated water does not freeze at degree of frost; hence the device designed for hydrogen production from such activated water can operate at environment temperature below zero and at degree of frost.

This principle of additional chemical activation of water (or liquid) is realized in practice in the device

(Fig.3). In contrast to the devices mentioned above (see Fig.1, 2) this device is supplied with an electrochemical activator of liquid (3) with evaporators (4).

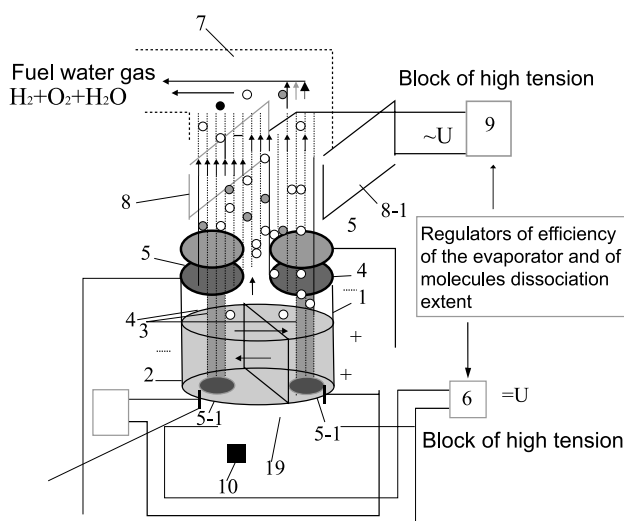


Fig.3

Hybrid device equipped with two sources of electric field and liquid electric activator

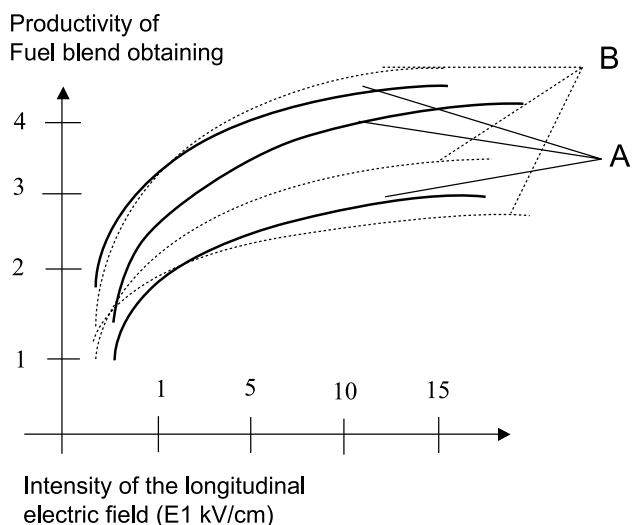


Fig.4

Productivity of the method increases as well as oscillation frequency of the second transversal electric field (A) and evaporating area (B) increase.

There is a known and low-expenditure progressive electric technology by Stanly Mayer, which has been worked out to obtain fuel gas from water (Mayer cells). Our technology is more progressive and ensures higher productivity than Stanly Mayer's technology does [3]. It can be explained by the fact that this electroosmotic effect of evaporation and liquid dissociation combined with a mechanism of the electrostatic pump and the ionic pump ensures intensive evaporation and dissociation of liquid as well as effective detachment of gas molecules from the dissociation zone. The process of gas molecules detachment is accompanied by acceleration from the

upper end of the capillaries. Therefore in our case the effect of screening of the working zone of molecules electric dissociation is not produced. All these processes proceed at minimal energy consumption, which is similar to analogous energy consumption. Moreover, the process of fuel gas production does not slow down as the process in Mayer's technology does therefore gas productivity of our method is significantly higher than that of this progressive analogue at similar minimal energy consumption.

Some technical and economical aspects of the new technology realization

In the near future production run of these high-effective electroosmotic generators of fuel gas from practically any liquids (including tap water), which are based on the proposed new technology, can be established. At the first familiarization level it is especially easy and economically appropriate to realize in practice a variant of the device of transformation of water-fuel emulsion into fuel gas. A prime cost of the production-run device for generation of fuel gas from water of 1000 m³/hour productivity comes to approximately 1 thousand of US dollars. Consumed power of such an electric generator should come to no more than 50-100 Watts. Therefore such compact and effective fuel electrolyzers can operate practically in any motor car. As a result heat engines can work on any hydrocarbon liquid or even on habitual water. Mass application of these devices for the motor transport can cause immediate energetic and ecological perfection of the motor transport as well as designing of an environmentally appropriate and economical heat engine. Approximate financial expenditures for working out and designing of the device for fuel gas obtaining from water, and for bringing the investigation of the first testing device of 100 m³/sec productivity to an experimental-industrial model come to about 450-500 thousands of US dollars. That contains the expenditures for projecting and investigation, for designing of the very experimental device and of a testing bed, which is necessary for approbation and engineering development of the device. The author is interested in business and creative cooperation with those companies, which can provide this project with investments to bring the device to the experimental-industrial model and introduce the perspective technology into practice.

Conclusion

Electroosmotic "cold" evaporation and dissociation of water and aqueous solutions through capillaries is a perspective way of highly productive fuel gas production at minimum of energy consumption.

References

1. V.D. Dudyshev New electric combustion technology is an effective way of solving of energetic and ecological problems // "Ecology and Industry of Russia" ("Ekologia i Promyshlennost Rossii") magazine #3 1997;
2. "New Energy News" magazine, May 1994. P. 1 – 5;
3. Stanly Mayer Method of production of fuel gas. Patent of the USA #4.936,961;

Conceptual Hurdles to New Millennium Physics

Donald Reed

E-mail: torsionpower@yahoo.com

Abstract

Time, space, energy and mass form the four-fold conceptual basis for gauging physical reality. The following paper, as a follow-up to a previous exposition [1] which focused on the necessity to change the current paradigm for time, continues in this same vein, but will also consider in greater depth the interrelations of this phenomenon with the other three yardsticks cited above. Again, information garnered from a wide variety of sources will be considered. We hope to provide, through just such a unique eclectic format, the beginnings of a possible fresh understanding of the workings of nature and perhaps ultimately furnish a conceptual basis for extending the structure of current physical theory to compatibly encompass the elements of a unified framework of physics and metaphysics.

Introduction

In the former article cited above, by investigating the following varied sources and research [2-17], we came to the inescapable conclusion that the phenomena of time and space are considerably more intimately related than is currently suspected by modern science, and will require a drastic re-working to fit the conclusions of the various evidence cited. Towards this end, the adoption of a more expansive paradigm for these yardsticks was suggested, which incorporates a fluid-field nature for time and space where both are derivatives of the fundamental ground-form of energy in flux or oscillation. These new approaches involve the inclusion of a Kozyrev-type of "substantial"(active) time-flow as opposed to the conventional "relational"(passive) concept of time, where it is used as a static parameter signifying duration. The substantial aspect of time presupposes that it is an essence which can and does affect physical processes, and that those same physical systems can cause a reverse action on time [8]. Such active fluctuating (deformable) types of time or space, implies the establishment of a revolutionary notion: positing completely *non-scalable* metrics for both time and space. This is in direct contrast to all contemporary orthodox models for physical reality, either in Einsteinian relativity (Special or General theory), quantum field theory, or even superstring/supersymmetric theory, all of which continue to consider both of these yardsticks from their relational (length or durational) standpoints. Consequently, all these formalisms require scalable metrics of some sort for their proper description (for refreshing viewpoints on this matter, see [7]). For instance, in the standard equations of quantum theory, time is regarded merely as an unchangeable static parameter. When we later consider applying these novel substantial aspects of time to the edifice of quantum theory, we will see that time must then become a "hidden variable". It will be seen that by considering time in this manner, a clearer and more tractable explanation of the inevitable probabilistic aspects of

quantum theory, evidenced in the signature Uncertainty Principle, complementarity and non-locality will arise, without having to invoke the counter-productive and ill-conceived Copenhagen Interpretation.

Oscillatory Models for Time and Space

Upon accepting non-scalable metrics for time and space, we observe that a similar field nature for **energy** and **mass** must in turn also be postulated. Moreover, from the Killick description of how (sub-atomic) tachion-pairs operate [6], shuttling their energy back-and-forth in a free-wheeling but purposeful manner and creating oscillatory features of time and space by their action, we should consider the possibility of another unprecedented concept: a "value-motivated" energy might be at the foundation of the structural integrity of physical matter. This is conceivable when considering Killick's description of the tachion-pair dynamic/evolutionary cycle as necessarily including the 3-step process of observation – reflection – action (**trinitivity** of motion). Along the same lines, from the Smith book **The New Science** [5], we learn that a so-called "tempic field" energy exists, which could be described as the parent structure out of which our standard conception of "clock-time" (entropy changes) results. The tempic field is essentially a scalar (but not static) function which has vectorial nature only in terms of its distribution or *gradient* in space. Because of the nature of the tempic field, its derivatives – the electric and magnetic fields can operate on each other in a specific geometric/topological manner, to produce a local change in the *time-frame* of matter, to use a term coined by the entity Kryon [4]. This theoretical description of the alteration of inertial/gravitational mass and time-frame has possibly seen recent actual demonstration in the dramatic experiments of John Hutchison [10] and Rudolf Zinsser's "kinetobaric" effect [11], as well as unpublished research of both Wilbert Smith and Ken Killick with electric caduceus-wound coils [5,6].

New Models for Relativistic-Fluidic Vacuum-Structure and Possibility of its Manipulation

All of this evidence allows us to conclude that measurable changes in relativistic parameters of time, space, mass and energy might not only be a feature accompanying rapid uniform movement of physical objects (Special Relativity), or representative of large gravitating astrophysical objects (General Relativity). Indeed, by relying on current limited paradigms, contemporary physics may have missed ascertaining the possibility of being able to alter these same relativistic parameters by the artificial technological manipulation of the tempic (vacuum) fields of sub-atomic particles in stationary matter, by use of specific electromagnetic fields. Tom Bearden, for one, has articulated on these various "futuristic"-type technologies in his many writings over the years [15]. We have recently seen that some of the novel theoretical conceptions of the more visionary physicists such as David Hestenes on the zitterbewegung (vacuum "jitter") phenomenon exhibited by the electron [12-14], has finally caught up with some of these advanced ideas by presenting new mathematical demonstrations (using geometric Clifford-algebraic) manipulations of the Dirac equation. In summary, the Hestenes' study concludes that the Dirac wave function and its properties, including

the Dirac equation and relations to physical observables such as energy-momentum, spin and position probability current, all possess heretofore obscured important geometric relations. These results imply that probabilistic features of the quantum theory of the electron/positron arise principally from the electromagnetic interaction of the accompanying zitterbewegung-spin field of these particles with the ambient dynamic vacuum. This is, of course, in direct contrast to the conventional received view that ascribes wave-particle duality as a property of matter that is completely independent of the nature of its interactions. This revolutionary geometric interpretation of electron dynamics incorporates in its model an electron spin which arises from a helical or spiral world-line in space-time. The essential unprecedented feature of the Hestenes' zitterbewegung idea is the association of the spin with the local circulatory-helical motion characterized by the *phase* of the electron wave function. Thus, we reach the conclusion that the complex phase factor of the electron wave function can be directly associated with an objective helical motion of the electron which is, in turn, a derivative of the zitterbewegung. One intriguing feature of this structure is a frequency of oscillation that is inversely proportional to the scalar radius of curvature of the particles' helical world-line. Moreover, the Clifford-algebraic analysis reveals that this oscillation frequency is identical to electron/positron *mass*, revealing a possible key variable particle mass-energy (*frequency measure*), which is in inverse relationship to particle size. It is clear that this new model has important classical implications not yet considered by established physics which nevertheless directly correspond to some of the key features of subatomic behavior enumerated above and previously. Here, we refer to the tachion-pair dynamics [1,6], and also to the microscopic dynamics of elementary particles revealed by the selected esoteric sources previously considered [1-5].

Another researcher who echoes many of these conclusions is C. Sano [21]. Sano built on the work of A.P. Smirnov [22] who postulated that Newton's Third Law of action/reaction actually modeled "screw" structures, implying that elementary particles (specifically electrons/positrons) possess chiral-spiral field configurations. Accordingly, Sano posited that all actions/reactions are transmitted between actors and reactors by parallel or perpendicular clutching of the rotating chains of electromagnetic spirals of the hidden electrons and positron-pairs of the vacuum. Also, similar to the Hestenes' development cited above, Sano postulated that the radius of the outer electromagnetic spiral surrounding the electron/positron pair can change, oscillating in size around either particle, and thus producing the particles' electric or magnetic character. Supporting his theory, Sano cites the key research of I.M. Shakhporanov [23] whose experiments claimed that magnetic monopoles were generated, by employing an electrical circuit based upon Moebius band topology. Some of the unusual phenomena demonstrated by this apparatus, tending to support the magnetic monopole hypothesis, was transformation of diamagnetic substances into paramagnetic, the ferromagnetization of normally non-magnetizable materials (graphite, etc.), acceleration of chemical reactions, acceleration or deceleration of the decay of radioactive materials, etc. Sano also claimed that

extraction of energy from the vacuum was possible using rotational action/reaction using magnetic monopoles.

Referencing this research to the current exposition, we recall that the key element of Killick's hypothetical tachion-pair operation was the similar non-linear/non-orientable Moebius-type dynamic cycle which results in the corresponding deformation (compression or rarefaction) of time/space/energy parameters [1,6]. In this regard, the remarkable similarity of this model to the research of Sano and Shakhporanov may be much more than mere coincidence. In fact, later we shall examine new research outlining an apparatus (yet untested), which claims to overcome the Coulomb barrier in low energy nuclear reactions (LENR), and achieves nuclear fusion by producing local time-dilation of soft photons in proximity of the deuteron reactants.

Additional Key Russian Research

To motivate the reader's sensibilities towards consideration of some of these unorthodox ideas, we defer to the previous article [1] in which many of these notions and mentioned research are explored in greater depth, as well as consider the following corroborative research.

One intriguing example of such experiments is the work of V. Chernobrov, from which he has claimed to demonstrate both acceleration and deceleration of local time-rate, within a small spherical enclosed volume conducted since 1988 [18]. The experimental system to produce these effects, was a set of electromagnets, connected in series and parallel and installed inside the globe-shaped surface in several layers. In various arrangements including up to 3 to 5 of such layers, these electromagnetic working surfaces (EWS) of various diameters were installed inside each other (similar to the Russian toy doll "matrioshka") with the maximum EWS diameter was about 1 meter, and the minimum (internal) diameter of 115 mm. With this configuration, Chernobrov claimed to measure small but detectable deceleration (-30 sec/hr.) and acceleration (+30 sec/hr.) of time within the sphere to time monitored outside its field of influence. One interesting difference was noted between the slowing down vs. the speeding up of time. The deceleration occurred considerably more smoothly and steadily whereas with acceleration, sharp discontinuous jumps were observed. These instabilities accompanying time-acceleration was observed in connection with cycles of the moon, diurnal fluctuations, and also operator presence. Chernobrov also noticed another phenomenon that also was reported in connection with the alleged legendary Philadelphia experiment, where matter in different time-frames apparently exhibited strange relative optical phenomena [see 1,4]. Specifically, the human eye in the time-frame exterior to the experiment perceives matter within the time-frame created by the apparatus as either transparent or surrounded by a vague white mist. We note with interest that transparent "shimmering" effects of substances in the target area were also occasionally a feature of Hutchison effect [10].

Academician A. Chernetsky produced what he termed a self-generating discharge (SGD) in a plasma that exhibited longitudinal energy density waves from a

structured vacuum. Some unusual effects noted were over-unity energy generation ($C.O.P. > 1$), as well as change of the electrical conductivity of matter (reduction of the resistance of resistor) placed between the capacitor plates of the SGD. A local structured vacuum was definitely produced since the resistance value remained unchanged even when the generator was turned off. Here reference must be made to the Kozyrev experiments [1,8], in which a type of similar *memory* process was activated ostensibly within the vacuum. Specifically, it turned out that in experiments with a vibrating torsion balance (or pendulum), at points of support the emerging additional forces did not disappear when the irreversible process (vibration) was stopped, but remained in the system for an appreciable time. The SGD plasma device may have also produced a detectable change in local time-flow rate as evidenced by decrease in frequency of a quartz oscillator placed in the discharge of the generator. The Chernetsky generator thus possibly caused anomalies in time-rate at a local space position. There were also basically anecdotal phenomena where psychic ability of personnel in proximity to the SGD was apparently enhanced [19]. The latter effects are not inconceivable once the intimate connection of consciousness to space and time is ascertained, from consideration of not only hypothetical "value-motivated" tachion-pair dynamics, but from the more prosaic studies as we shall see next.

Pathological Studies in Time-Perception

We can motivate further understanding for the claimed intimate connection of time to space by considering the results of a recent study of patients possessing a disjointed sense of time by Metod Saniga of the Slovak Academy of Sciences [20]. Saniga discovered the brain is hard-wired to perceive space and time as interconnected. Specifically, time pathology is apparently always accompanied by space pathology, in a sense that space either loses dimensions or acquires other dimensions. To quote Saniga "When time seems to stop, people often feel as if space becomes 2-dimensional. On the other hand, when the subject feels they perceive the past, present and future all at once, they simultaneously have the impression that space has infinite dimensions". This phenomenon is apparently not culturally endemic since Saniga illustrates that both pathologies cross cultural lines, evidencing similar studies cited from Italian, German and English psychological journals. In his report, Saniga combined mathematical models ("pencil-conics") and pathology reports of schizophrenic, drug-induced and other abnormal perceptions of time. His current work also encompasses studies of near-death experiences. He found that most of those who claim to have allegedly crossed over to the "other side" and back, tell similar tales. For that brief moment of near-death, the universal subjective experience of all individuals in this state of consciousness is that time loses its meaning. Although such evidence can at best be considered as anecdotal, since subjective conscious experience transcends the possibility of scientific proof, nevertheless perhaps these results from pathological and near-death studies also give us a hint towards new conceptions of time and space that necessitate both phenomena to be inextricably linked.

Investigation of the Possible Internal Properties of Time

One inescapable conclusion that results from all the above varied studies, either scientifically or psychologically based, and which cries out for future experimental verification, is the possible existence of an internal structure for time. Such a structure also implies the necessity for constructing a new edifice for physical reality that incorporates non-scalable metrics for the four fundamental yardsticks. We shall first investigate supporting evidence for internal time structure and subsequently the various implications of space, time, energy or mass that is non-scalable.

First, accepting an internal time structure, we are led to conclude that in quantum theory, time must then attain "hidden variable" status. One recent study that brilliantly articulates this notion, is the thought-provoking paper by X. Chen [24]. By positing 3 time variables as quantum hidden variables, Chen derives the Dirac equation classically. Moreover, he demonstrates that the non-intuitive property of "spin" of an electron or positron, arises naturally as a topological property of 3-dimensional time + 3-dimensional space. By extrapolating from this model, Chen then concludes that the inherent probabilistic aspects of quantum theory itself, as evidenced in wave-particle duality, Uncertainty Principle, quantum non-locality ("entangled" particles), etc., can be interpreted as the behavior of a single particle in 3 + 3 time-space. Chen postulates that the three dimensions of time geometrically form a "time sphere", with a generic point on the sphere possessing the following 3 coordinates: time radius, and two "time angles". The mathematical formalism arising from the process of stereographic projection from the north pole of this sphere, having radius of one-half, to any point on the spherical surface, incorporates both the positive-energy (north hemisphere) and negative-energy (south hemisphere) solutions to the Dirac equation (see Fig. 1 for clarification; note Z is a four-component spinor wave function). Also, by considering the evolution of a single particle, from the standpoint of this model of internal time-space, we can derive a picture of different paths on the time sphere of different weights, and on each path causality is satisfied. Through this process, Chen derives a purely classical explanation of the originally quantum-mechanically canonized Feynman Path Integral concept. This result emerges since each path from the time-sphere center to the surface corresponds to each Feynman path, and the surface of the sphere corresponds to the "surface" of the wave function. Chen also classically explains the processes inherent to Bose-Einstein-condensation (BEC) and superconductivity with this model. In such phenomena, two particles with the same spatial coordinates, cannot possess the same time angle, and thus will not have any interaction with each other and occupy the same quantum state as evidenced in BEC and superconductivity. Finally, Chen's solutions of the Dirac equation for a free particle correspond to Hopf bundles in monopole theory, and each Hopf fiber corresponds to each plane wave with different momentum states. This picture corresponds to wave packet diffusion in quantum theory. When a particle is in a fixed momentum state, each space point can contain only one Hopf bundle (one time angle), and various different time angles will be distributed in the whole

space but with the same Hopf bundle. Consequently, that particle can be found everywhere. This picture appears to describe the Uncertainty Principle classically using 3 + 3 dimensional time-space. Along similar lines R. Kiehn [25] has also recently underscored the important but overlooked classical connection between spinors, minimal surfaces and the Hopf map.

Recently, Chen's work has been further developed by H. Kitada [26] who, by introducing both 3-dimensional time and energy operators, sheds new classical light on the uncertainty relation that holds between these two parameters as well. Moreover, Chen is not the only researcher to derive the Dirac equation classically. R.A. Close has published a paper which presents a classical mathematical description of circularly-polarized waves in 3-dimensions [27]. It turns out that these chiral space waves are satisfied by a four-component wave function which satisfies a Dirac equation. Furthermore, much like the Hestenes' zitterbewegung interpretation of quantum theory, the term normally associated with electron mass in the Close equation, introduces a rotation or oscillation frequency of the propagation direction.

Classical models for nuclear processes have also recently been proposed which incidentally also imply internal time structure. Notable among these, C. Cagle claims to have developed a fusion energy device employing LENR based upon such a classical theory [28]. Normally, Deuterium nuclei are diffuse in momentum space (having high relative velocities). The process Cagle outlines produces a compactification of their momentum space (low relative velocities), so that the deuterons develop a common de Broglie wavelength that is greater than or equal to the inter-particle distance. This is claimed to be accomplished by passing soft x-ray photons near the region of two deuterons in a lattice structure of Lithium Deuteride. **The soft x-ray, when absorbed, produces a region of total time-dilation, causing two effects: first, ionization of atoms by strongly repelling any associated electrons in the area, and secondly and most importantly, the physical extent of the time-dilation causes two adjacent normally repelling Deuterium nuclei to overlap in a common momentum space; that is, their relative velocities achieve very low values.** Consequently, due to the time dilation, for a very short time their common de Broglie wavelength exceeds their inter-particle distance. Thus, they become strongly attractive and undergo nuclear fusion.

Cagle also claims to clarify misconceptions about the fusion process in a thermonuclear bomb. He maintains that it is not due to extreme kinetic energies (high temperatures) of particles as supposed in current paradigms, but due to nuclear processes caused by absorption of a time-dilated soft photon flux, produced by Compton scattering of hard x-rays from a fission igniter, passing through a foil of depleted Uranium. Again, just like the controlled nuclear fusion process, this causes overlapping of deuterons in momentum space (low kinetic energies) for a few pico seconds, and subsequent fusion with normal exothermal processes ensuing.

Furthermore, as a fundamental component of his LENR fusion device, which ostensibly produces time dilation and controls energy production from the fusion process, Cagle incorporates a topological field structure termed

an electromagnetotoroid. The toroidal field current oscillates between toroidal and poloidal modes in a dynamic cycle which is amazingly virtually identical to Killick's description of the oscillation dynamics of a single unit toroidal tachion [1,6](also see Cagle's website for animated simulation).

Regarding dynamics of astrophysical structures, Cagle further claims that the stellar jet core star of HH30 is also a gigantic electromagnetotoroid. During the poloidal current mode, vast quantities of matter are produced and ejected along the poloidal axis when the mode changes from poloidal to toroidal. This leads one to consider the possibility that the source of superluminal gamma ray bursters, which have heretofore mystified astrophysicists and defied explanation in terms of current paradigms, might be the result of large-scale abrupt changes in the time-frame of celestial vacuum regions, subsequently causing a boost in light velocity.

Implications of Non-scalable Metrics

When postulating fluid-field natures for the four yardsticks of physical reality: time, space, energy and mass, we must assume the existence of a *non-scalable* metric for our vacuum structure. Such a non-scalable vacuum, absent of a defined reference frame, must of necessity possess a *dual* nature. That is, the primary feature of a dual vacuum structure implies that infinitely small quantities must be treated on an equal footing with those that are infinitely large. In other words, information encoded into infinitesimal elements, is also instantly present in the unbounded infinite extents as well. This is tantamount to the existence of a holographic information encoding and transmitting vacuum field, which would structure events in space and time as a non-Markovian chain. In a non-Markovian chain of events, the prediction about the next link in the chain, requires a knowledge of **all** links, not just the one preceding it.

Metod Saniga's research into mystical perceptions of superconscious reality appears to support such a primordial non-Markovian holographic mapping of time and space. To quote from a transcript of such a vision: "I wake up in a whole different world...a different space...This space was distinct from the one we all know. It had different dimensions, everything contained everything else. One was situated in a state of being in which the 'will be' (future) and the 'vanishing' (past) were already included, and this being was my consciousness. It contained it all. The 'being contained' was present very vividly in a geometric way in the form of circles of different sizes which again were all part of a unity since all of the circles formed exactly one circle. The biggest circle was a part of the smallest and vice versa." [20].

Such a structure of time and space can best be topologically encoded in a non-orientable structure such as the Moebius band or Klein bottle. Similar to the data presented in the above mystical revelations and in the previously treated Killick tachion-pair dynamics [1,5], in such configurations "inside" and "outside" lose their meanings and meld into one another; ordinary dichotomic relations distinguishing thesis from antithesis are sublated and supplanted by a higher unity defining the evolutionary process of the system. In the

mathematical edifice abstracted from such a vacuum structure, duality rather than exclusivity of field structures holds sway. This in turn, presupposes a static-dynamic triality of fundamental field structures, characterized by the three magnitudes: zero, infinity and the mediating factor of unity, the latter being an indication that each of the other two field extremes are in perfect balance. Accordingly, we will assume that the stability (coherency) of non-scalable fields results whenever more than half their reality is in common.

Further development pertaining to a specific algebraic-geometric structure that would inherently incorporate this field model, will be carried out in a future paper. Nevertheless, the interested reader can skirmish on this frontier by consulting the relevant recent references to a Clifford-algebraic structure which encodes the projective duality of "space" and "counterspace" into a model for mechanics on the quantum level [29]. This promising model accounts classically for the phenomenon of quantum non-locality. It also heralds a new version of quantum field theory which, by treating electron-positron pairs as topologically non-orientable, is free of the detrimental divergences in self energy and charge, thus obviating the necessity for the ad hoc prescription of renormalization so endemic to current theory [30].

However, due to the limited scope of the current treatment, here we shall only make general comments on the significance of the above-mentioned concept of field triality. Although this model may appear foreign to current physical theory, we underscore that exactly such a system was delineated by W. Smith in the book, *The New Science* [5]. Observing, as we have [1], that this book in some parts of its exposition can cause confusion, we carefully choose the following selected passages that are most instructive in clarifying the notion of non-scalable metrics and in pointing the way to new paradigms (my comments in parentheses). General comment on non-scalable metrics: "Unity is half way between zero and infinity and always remains the fulcrum about which all other values regardless of scale pivot". On the electric field: "Between the two limits of zero and infinity and through unity there is divergence which we recognize as the electric field, but with the exception that there is no point charge at zero. Our awareness establishes the charge at radius unity with exactly half of it being 'inside' and the other half being 'outside'". On tempic field dynamics: "The tempic field being purely scalar in nature merely contributes to the manner in which changes can occur in the system. If, however, through some characteristic of configuration, the tempic field within a composite particle displays some irregularity, this will manifest as a 'vibration', and if the magnitude of the vibration is sufficient as to cause the interpenetrating fields to exceed the half-and-half point, the whole system will come apart: radioactivity. When a system does come apart, those field which were coherent and interpenetrating in the correct proportion will remain so and take off down the tempic field gradient and become radiated energy". On velocity of light/Planck's constant: "Within the universe we perceive, we are reasonably satisfied that the maximum value of all the coherent fields involved in our particles and radiated energy have the same value. Planck's constant is the numerical expression of this value, and the velocity of light is the expression of the numerical value of the (local) tempic field intensity". On nuclear fusion: "If a region is selected in which there

are two fields of the same kind, same magnitude, same direction, such that very nearly half the reality of each is within the region, then the two fields are just on the verge of becoming coherent. If the fields are not coherent, the total energy in the region is the sum of the energies of the two fields; i.e., twice the square of the field intensity of each integrated over the region, or twice the energy of the two fields incoherent. This represents the 'packing energy' of bits and pieces of atomic nuclei, and also points the way to the precipitation of energy out of the cosmic background (vacuum engineering)". Notice how this description, written 45 years ago, of how a tempic field gradient (time-stress) operates between atomic nuclei to produce coherency (half-in half-out condition), perfectly parallels the recent Cagle view, which claims the fusion process takes place only as a function of time-dilation [28]. Finally, on gravitation: "With the exception of skew electric fields (electric field possessing tempic field gradient) all the other fields of an aggregate mass may be considered as static because they have no component of the tempic field at right angles to them. The skew fields (spiral-helical?) on the other hand, are dynamic because they do have a quadrature tempic field component. Furthermore, skew fields are largely incoherent (gravitation cannot normally be shielded) simply because the usual almost random orientation precludes their meeting the half-in requirement of form to become coherent. Since the gravitational field is due to the skew electric field, or stated differently, to the induction from the 'motional magnetic field' (longitudinally moved magnetic field), this is the logical region to explore for the mechanism by which fields may be produced to combine with the gravitational field (of Earth) to produce a resultant more to our liking (alteration of local gravitational potential)".

This last quote describes the gravitational field of a mass as a residual field phenomenon, similarly to the Sakharov and Puthoff conclusions which attribute gravitational and inertial mass to the interaction of accelerated or gravitating matter with the zero-point-vacuum-fluctuations (ZPF) causing a vacuum reaction force [31]. Moreover, similar to the Hestenes' claims, in their recent papers [32], Haisch/Rueda/Dobyns propose that, via this new interpretation of inertial mass as an acceleration-dependent electromagnetic (Lorentz) force, that a former postulate of quantum mechanics appears to be derivable classically via the interpretation of rest mass as the energy of the ZPF driven zitterbewegung; that is, the de Broglie wavelength of a moving particle, may be derived from Doppler shifts of the Compton frequency oscillations associated with zitterbewegung that occurs when a particle is placed in motion.

For further studies of physical theories with non-scalable metrics, the reader is directed to the excellent work of A.A. Nassikas [16]. Like few theories hitherto postulated, Nassikas posits a fundamental probability density function for vacuum energy, out of which oscillatory-deformable sub-atomic level physical aspects of time and space then emerge. This is the reverse to most contemporary paradigms, which view energy as a derivative of matter, time and space, even at the quantum level. Finally, A. Frolov has used Nassikas' theory to explain over-unity energy generation that has been demonstrated in some LENR electrolytic cells of the Pons-Fleischmann variety [17].

Editor: Actually Prof. Nassikas wrote in this patent that the idea which is described in the patent was proposed by Alexander Frolov. In 1996 these questions were discussed by us in Saint-Petersburg. Specifically, a Palladium cathode over-saturated with protons produces an imbalance of the vacuum engine in this area, with an accompanying change in the local time-rate and subsequent breakdown in the Coulomb barrier of the nuclei as per schemes articulated by C. Cagle [28] and T. Bearden [15].

Conclusions

In this journey through the latest research and speculations involving new interpretations of the four physical yardsticks: time, space, energy and mass, we hope the reader and technical specialists/theorists have been inspired to continue research along the lines suggested in the above dissertation. In this regard, certain open-ended questions present themselves that focus squarely on the viability of technological future developments in the new energy field. First, could the missing element in our eventual understanding of all devices featuring documented over-unity energy generation, change in mass (gravitational potential), LENR-based transmutation of elements and the amelioration of radioactivity, etc., be due the alteration of local time-flow in sub-atomic vacuum fields within the apparatus? Secondly, could the frustrating feature of the capriciousness of over-unity power and the like to yield to testable replication in many cases, be due to currently unperceived uncontrollable aspects of time and the vacuum which must be addressed in order to solve these problems? Thirdly, could incorporation of non-orientable topological structures such as the Moebius band, Klein bottle, etc. in new models of electrodynamic field structure, be instrumental in finding the answers to both of the previous questions? With sufficient probing for possible answers to such questions, the present author has the firm belief that new paradigms are certain to soon result that will crystallize these thoughts into viable scientific hypotheses subject to experimental testable verification. As an offshoot and definite bonus of this process, possibly a new more expansive understanding of the role of the vacuum in both nature and consciousness will be in the offing.

References

1. D. Reed, "A New Paradigm for Time: Evidence from Empirical and Esoteric Sources", Explore!-for the Professional, vol. 4/5 July/Sept., 2002.
2. J. Roberts, unpublished remarks as transcribed by W.H. Kautz.
3. J. Roberts, *The Seth Material*, Prentice-Hall, Inc., 1970, pp. 292-298.
4. J. Roberts, *The "Unknown" Reality*, Prentice-Hall, Inc., 1986.
5. L. Carroll, *Alchemy of the Human Spirit* (Kryon Book III), The Kryon Writings, 1995.
6. L. Carroll, *Letters From Home* (Kryon Book VI), The Kryon Writings, 1998.
7. L. Carroll, *Passing the Marker* (Kryon Book VIII), The Kryon Writings, 2000.
8. W. Smith, *The New Science*, Fern-Graphic Pub., 1964.
9. D. Reed & K. Killick, "Tachion Energy Theory", *Energy Unlimited*, 1978-1983.
10. A. Correa & P. Correa, "Consequences of the Null Result of the Michelson-Morley Experiment: The Demise of the Stationary Aether, the Rise of Special Relativity and the Heuristic Concept of the Photon", *Infinite Energy*, no. 38, July-Aug. 2001, pp. 47-64.
11. A. Correa & P. Correa, "The Sagnac and Michelson-Gale Experiments", *Infinite Energy*, no. 39, Sept.-Oct. 2001, pp. 32-49.
12. N. Kozyrev, "On the Possibility for the Experimental

- Investigation of the Properties of Time", *Time in Science and Philosophy*, Prague, 1971, pp. 111-132.
- N. Kozyrev, "An Unexplored World", *Soviet Life*, 1965.
- A.P. Levich, *On the Way to Understanding the Time Phenomenon* (Part II: The Active Properties of Time According to N. A. Kozyrev), World Scientific, Singapore, 1996.
9. D. Reed, "Torsion Field Research and Implications for New Physics and Energy Technologies", *Jour. New Energy*, vol. 4, no. 2, Fall, 1999, pp. 151-164.
10. J. Hutchison, "The Hutchison Effect Apparatus", *Proc. of the 1st Symp. On New Energy*, Denver, May, 1994, p. 199.
11. J. Hutchison, "Inside the Hutchison Effect", *Extraordinary Science*, vol. III, issue 4, Oct-Dec. 1991, pp. 23-26.
12. T. Valone (ed), *Mechanical Energy from Gravitational Anisotropy*, Integrity Research Institute, Washington, DC, 1996.
13. W. Peschka, "Kinetobaric Effect as Basis For a New Propulsion Principle", *Raumfahrt-Forschung*, Feb, 1974 (in German); trans. By D. Reed, *Infinite Energy*, vol. 4, issue no. 22, 1998, pp. 52-56.
14. D. Reed, "Translator's Analysis and Comments on the Zinsser Effect Device", *Infinite Energy*, vol. 4, issue no. 22, 1998, pp. 57-59.
15. D. Hestenes, "Quantum Mechanics from Self-Interaction", *Found. Phys.*, vol. 15, no. 1, 1985, pp. 63-87.
16. D. Hestenes, "The Zitterbewegung Interpretation of Quantum Mechanics", *Found. Phys.*, vol. 20, no. 10, 1990, pp. 1213-1232.
17. D. Hestenes, "Zitterbewegung Modeling", *Found. Phys.*, vol. 23, no. 3, 1992, pp. 365-387.
18. T. Bearden, *Extracting and Using Electromagnetic Energy from the Active Vacuum*, Association of Distinguished American Scientists, Huntsville, Alabama, 2000.
19. T. Bearden, "Giant Negentropy in the Common Dipole", *Proc IC-2000*, St. Petersburg, Russia, 2000(in Press)
20. A.A. Nassikas, "The Hypothesis of the Unified Field and the Principle of Its Dual Interpretation", *Proc. Of III Int. Conf. On Problems of Space Time and Gravitation*, Russian Academy of Sciences, St. Petersburg, Russia, 1996.
21. A. Frolov, "The Work Created by Means of a Potential Field", *Proc of III Int. Conf. On Problems of Space Time and Gravitation*, Russian Academy of Sciences, St. Petersburg, Russia, 1996.
22. V. Chernobrov, "Experiments on the Change of the Direction and Rate of Time Motion", *Proc. Of III Int. Conf. On Problems of Space Time and Gravitation*, Russian Academy of Sciences, St. Petersburg, Russia, 1996.
23. A.V. Chernetsky, "Processes in Plasma Systems with Electric Charge Division", *Deutsche Vereinigung fur Schwerkraft-Feld Energie e. V.* no. 25, Mar. 1991, no. 27, Feb. 1992.
24. M. Saniga, "Unveiling the Nature of Time-Altered States of Consciousness and Pencil-Generated Space-Times", *Int. Jour. Of Transdisciplinary Studies*, vol. 2, no. 2, pp. 8-17.
25. C. Sano, "Twisting and Untwisting of Spirals of Aether and Fractal Vortices Connecting Dynamic Aethers", *Jour. New Energy*, vol. 6, no. 2, Fall 2001, pp. 178-184.
26. A.P. Smirnov, "Hyper-Physics - Physics of Reality", *Kneeling Before the Truth*, pp. 62-100, *Materials of the 2nd Int. Scientific Clarification Conf.-2000*, St. Petersburg, Russia,(2000).
27. I.M. Shakhparonov, "Interaction of Kozyrev-Dirac Emanation Methods of Detection and Interaction with Matter", *Proc. Of III Int. Conf. On Problems of Space Time and Gravitation*, Russian Academy of Sciences, St. Petersburg, Russia, 1996, pp. 175-187.
28. X. Chen, *A New Interpretation of Quantum Theory - Time as a Hidden Variable*, Apr. 2001, xxx.lanl.gov/abs/quant-ph/9902037.
29. R.Kiehn, *Spinors, Minimal Surfaces, Torsion, Helicity, Chirality, Spin, Twistors, Orientation, Continuity, fractals, Point Particles, Polarization, the Light Cone and the Hopf Map*, www.uh.edu/~rkiehn.
30. H. Kitada, *Three Dimensional Time and Energy Operators and an Uncertainty Relation*, July 2000, xxx.lanl.gov/abs/quant-ph/0007028.
31. R.A. Close, "Torsion Waves in Three Dimensions: Quantum Mechanics with a Twist", *Found. Phys. Lett.*, vol. 15, no. 1, Feb. 2002, pp. 71-83.
32. C. Cagle, (2001), www.singtech.com/.
33. O. Conradt, "Mechanics in Space and Counterspace", *Jour. Math Phys.*, vol. 41, no. 10, 2000, pp. 6995-7028.
34. B. Fauser, "Projective Relativity- Present Status and Outlook", *Gen. Rel. Grav.*, vol. 33, 2001, pp. 875-887.
35. H.E. Puthoff, *Phys. Rev. A*, vol. 39,(1989), p. 2333. B. Haisch , A. Rueda & H.E. Puthoff, *Phys. Rev. A*, vol 49,(1994), p.678.
36. B. Haisch, A. Rueda & Y. Dobyns, "Inertial Mass and Quantum Vacuum Fields", *Annalen der Physik*, (Sept. 2000).
37. B. Haisch & A. Rueda, "On the Relation Between a Zero-Point-Field-Induced Inertial Effect and the Einstein-de Broglie Formula", *Phys. Lett. A*, vol. 268, (Apr. 2000), pp. 224-227.

History Pages

Resonant Phenomena Occurring in Alternating Current Circuit

Alexander V. Frolov

Tel/fax: 7-(812)-380-38-44
E-mail: office@faraday.ru

There is a classical (according to manuals) notion that resonant phenomena can not influence on efficiency of a transformer or a motor as in a capacitive circuit or in an inductive circuit power produced at minimal power at the input of an oscillation circuit is reactive (let us remind that active power is measured at active resistance).

At the beginning of the last century this aspect was viewed differently. Advantages of a resonant case in alternating current circuits were used in practice. Let us appeal to a rare book by J. Claude-V. Ostwald named "Electricity and its applications by popular language" (I.N. Kushnerev Press, Moscow, 1914, p. 463).

"The phenomenon proceeds in a corresponding electric circuit as well as it occurs in hydraulic model: if self-induction and capacity parallel connected with each other are under influence of an alternating electric propulsion force then the total current coming through the system is equal to the difference of currents which pass two certain paths.

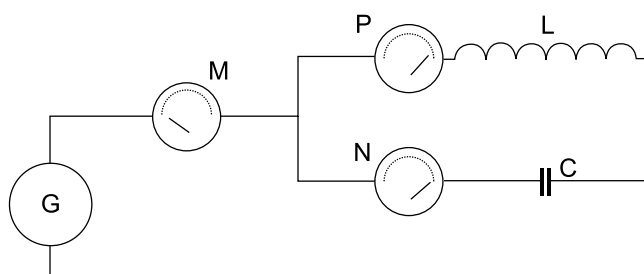


Fig.1

... join ammeters to the general circuit (M) and to either path (P and N). If P demonstrates 100 Amperes and N demonstrates 80 Amperes then the total current will be equal to 20 Amperes instead of 180 Amperes. Thus alternating current has its own "summary" so we should consider its condition. ...capacity introduction compensates self-induction action in some way... let us begin to change the self-induction by moving a core into. What will happen if the current coming through the coil achieves 80 Amperes, i.e. is equal to the current observed in the path with a capacitor?


As you guess, since the total current is equal to difference between currents passing the paths then now it will be equal zero. It is an incredible case: the device produces zero current dividing into two paths and in each of these paths current is equal to 80 Amperes. It is a good example for the first acquaintance with alternating current, isn't it?"

Andrey A. Melnichenko (Moscow) is one of modern investigators who research this phenomenon. Any motor

of alternating current can be considered as inductance. A circuit consists of motor coils and some capacitor connected in series with the motor winding. Thus if we take the circuit, consisting of motor coils and a capacitor which is connected in series to motor winding and adjust it in resonance, then mechanical power occurring on the motor shaft is produced at zero (minimal) power consumption of an alternating current source.

Melnichenko applied a simple method of voltage increase by means of resonance: he succeeded in obtaining of normal voltage for operation of standard motors of 50 Hz 220 V from a source of 50 Hz 110 V and 70 V. The circuit consumption for overcoming of its active resistance (of coils) can be considered as insignificant. Low frequency currents require a large capacitor. Nevertheless even at higher frequency, for example at 400 Hz, the system can be compact and effective. This method is worth to be applied in a scheme consisting of an alternating current motor in resonance mode and an electric generator which has a stable load. Change of load causes change of rotation speed therefore the system requires to be readjusted for resonance.

Experiments with powerful alternating current motors (about 100 Amperes as J.C. Ostwald wrote) working in resonance mode should demonstrate all advantages of the resonance mode application.

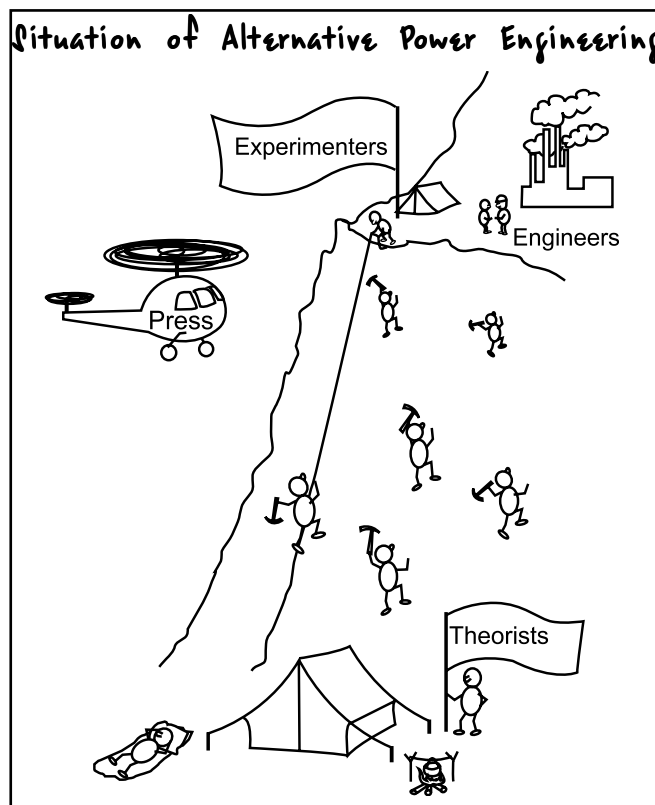

Space Power Generator and Paramahamsa Tewari Update

Submitted by Toby Grotz, USA

<http://www.tewari.org>

A new generation of Space Power Generators is being built by Paramahamsa Tewari. The new design is expected to achieve substantial gains over previous models which has been measured over unity by experts in the utility industry as well as by independent consultants. Details are presented on the web site <http://www.tewari.org>.

From the Electron to a Perpetual System of Motion

Paramahamsa Tewari, B.Sc. Engg

As is well known, an electron, despite high-speed interactions with electric and magnetic fields and other particles of matter, remains unaffected structurally—maintaining its mass, charge, inertia, and locality after the interactions. This single fact itself is sufficient to postulate on the existence of some unique universal entity constituting the electron, such that the structure explains the known properties and behavior of the electron – as to how it sustains the collisions with the other particles and, yet, remains permanently indestructible without any reduction in the quantities of its basic properties. A theory that explains this enigmatic fact is framed and described in detail elsewhere. It reveals that the electron is a perpetually rotating system, a space-vortex (vortex of absolute vacuum) that through the process of motion in electric current, and interaction with external magnetic field can also lead to the development of a system partially violating Lenz's law and, thereby, capable of achieving perpetual motion in a machine. Such a conclusion has a new theoretical basis, as well as experimental confirmation – briefly outlined in this paper.

The basic understanding of the interaction of electric current with magnetic fields requires deeper knowledge of the fundamental nature of the electric current as well the magnetic field; this, in turn, leads to an inquiry on the nature of "electric charge" and its distribution in the electron structure. The origin of electron mass and charge, electrostatic and electrodynamic forces are described below with the vortex structure of electron, which further facilitates explanation of atomic structure and, thereafter, an over-unity efficiency generator. Due to brevity, predominantly qualitative-descriptions of the physical processes involved have been presented.

The full theory and diagrams are presented in *From the Electron to a Perpetual System of Motion* at <http://www.tewari.org>.


Universal Principles of Space and Matter (A Call for Conceptual Reorientation)

A new book, *Universal Principles of Space and Matter* has just been published by Paramahamsa Tewari. Arrangements are being made with the publisher to provide these books outside of India. The price is expected to be about \$30 depending on shipping costs from India.

A new theory of matter, that confronts with the existing concepts of space in the contemporary physics.

The basic phenomena dealt with are:

- * Structural interrelationship between space and matter
- * Origin of mass, inertia, and electric charge
- * Creation of the electron from space

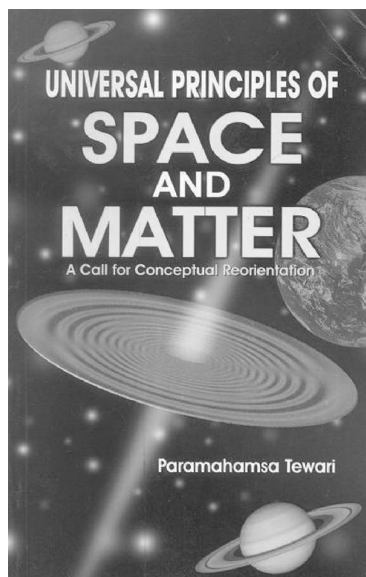

- * Discovery of new fundamental equations on mass and charge
- * Derivation of the presently known universal constants (gravitational, Coulomb's constant, dielectric, magnetic permeability, electron charge, electron mass, Planck's constant etc.) with the postulate of a single universal constant – the speed of light in the absolute vacuum
- * Discovery of an inward force in nuclear structure against the Coulomb repulsive forces, hitherto unknown
- * Relationship between light and gravity
- * Theoretical derivation of the surface gravity of the Earth, Sun and the planets
- * Discovery of electrical repulsive forces between the Sun and the planets, unknown in celestial mechanics
- * Derivation of the planetary orbits
- * Prediction of the continuous creation of universal matter at galactic centers and existence of electrical forces of interaction between the stars and galaxies, so far least suspected
- * Identifying the fundamental particle of matter
- * Revelation of conceptual errors in the modern understanding of the basic nature of light
- * Vindication of Einstein's conclusion of the speed of light as the limiting speed
- * Vindication of Descartes' principle of property-less ether.

New Reviews of P. Tewari's work

New reviews of P. Tewari's work have been received from Dr. John A. Wheeler and Prof. Umberto Bartocci. A copy of Universal Principles of Space and Matter was forwarded this summer to Dr. John A. Wheeler at his summer residence in Maine.

Dr. Wheeler saw the development of modern physics while working with Neils Bohr at age 27 and was a colleague of Albert Einstein's at Princeton. Credited with being the "father of the Black Hole Theory", Dr. Wheeler is well schooled in quantum mechanics and relativity.

After receiving his copy of Universal Principle of Space and Matter Dr. Wheeler called the book "a unique gift". Further reviews of P. Tewari's work by Dr. Wheeler can be found at: http://www.tewari.org/Critical_Reviews/critical_reviews.html.

Prof. Umberto Bartocci

Universita' di Perugia
Dipartimento di Matematica e Informatica Via Vanvitelli
06100 PERUGIA - ITALY
Tel.: (39)-075-5002494
E-mail: bartocci@dipmat.unipg.it

This is a very singular book, in front of the current paradigm of contemporary Physics, a "cartesian-inspired" work which calls for reorientation in the foundations, by wisely warning that:

The conclusion of the modern physics that absolute space, time, simultaneity, and space filling media are discredited ideas is certainly premature (p. 178).

The books deals with arguments such as: Discovery of Charge and Mass Equations; Fundamental States of Cosmic Energy, Fields and Forces; Gravitation; Universal Constants; Motion of Electron; Atomic Structure; Light; Creation of Cosmic Matter (about Tewari's physical conceptions see also the second section of this Episteme's special issue <http://www.dipmat.unipg.it/~bartocci>).

JNET

New Energy Technologies collection of articles Japanese Version

Collection of articles from New Energy Technologies magazine, 2001-2002 is published in Japan.

On purchasing of the book, please, contact

Eiichi Yamamoto,
President Yama Trans Co. Ltd.

Email: admin@yamatrans.co.jp or
eyama@yamatrans.co.jp

Raum&Zeit

EhlersVerlag GmbH,
Geltlinger Str.14e,
82515 Wolfratshausen
Telephon: 08171/41 84-76,
Telefax: 08171/41 84-66
Internet:
<http://www.raum-und-zeit.com>



Institut für Raum-Energie-Forschung (IREF) i.m.
Leonard Euler



- Global Scaling Theory - Hydrogen-Helium Energetic
- Gravitation theory - Information technologies
- Mathematic Biology - Telecommunication technologies
- Gravitation energetics- Transport technologies

**Rotating device
powered by
permanent
magnets**

Minato Wheel

<http://fdp.hemsida.net>

*Experiments made in Sweden
by Eric Vogels*

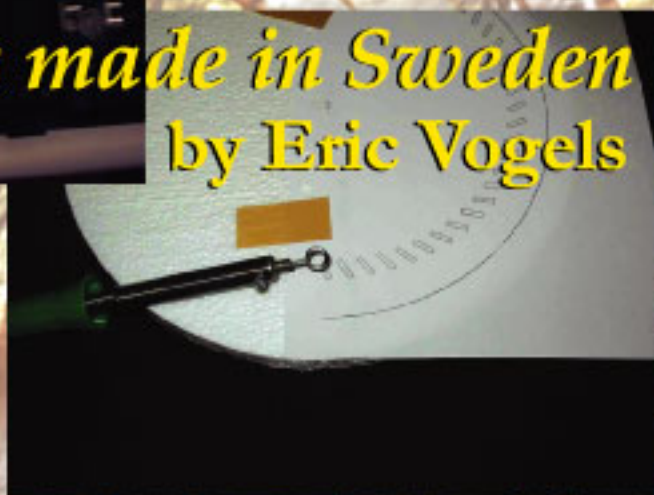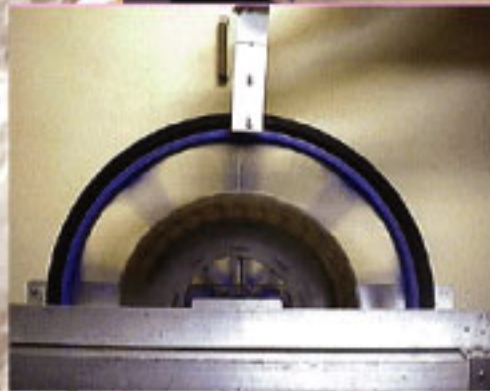

**Read about launch vehicle "Lightcraft" in the review
"Commercial exploration of space"**

<http://www.lightcrafttechnologies.com>




*"Lightcraft" is made
for space flights
by means of megawatt
laser beam*



Lightcraft Technologies, Inc.

Ball Lightning control

**Experiments
by Russian scientists**

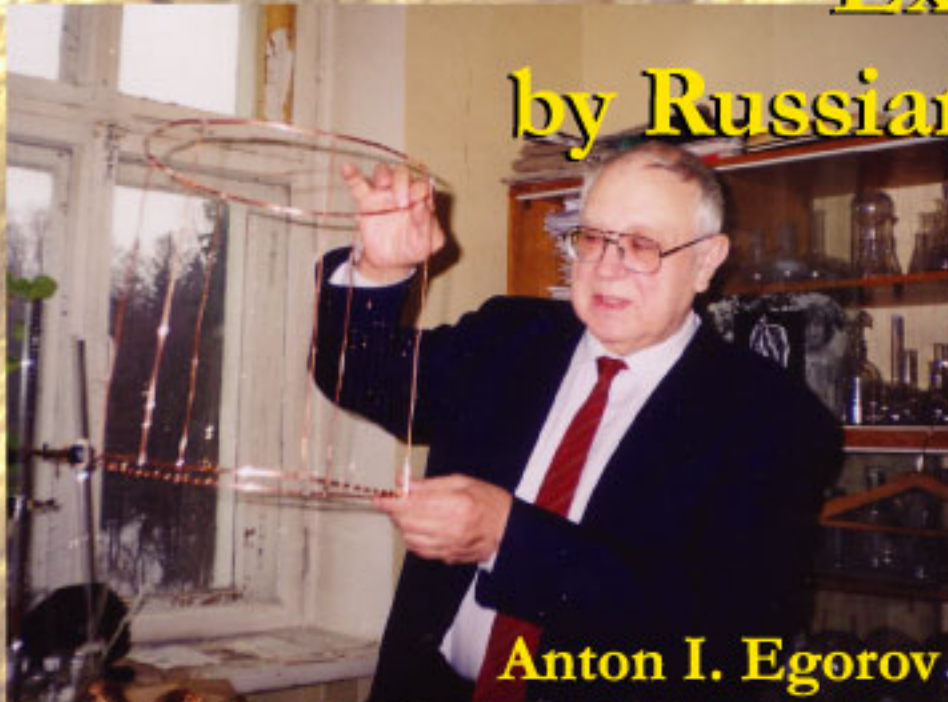

Anton I. Egorov

**The standard
ball formation**



Read in this issue!

Tilley Foundation, Inc.

<http://www.tilleyfoundation.com>



*K. Tilley
Electric Vehicle
(TEV) - automobile
of the future generation*



ISSN 1684-7288



New Energy Technologies

Printed version ISSN 1684-7288



Online version ISSN 1684-9698

Published by Faraday Laboratories Ltd.

Issue #2 (11), 2003

Research on advanced aerospace systems and new energy sources

Commercial exploration of space

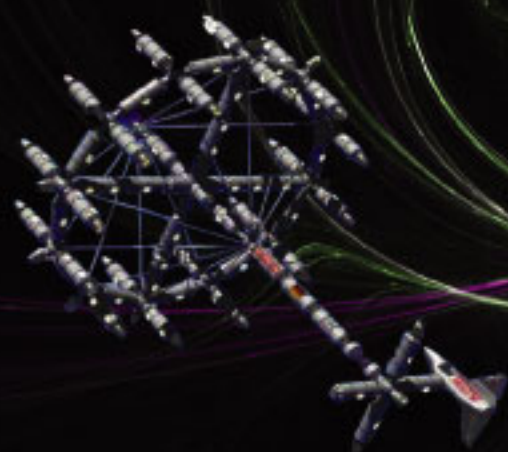

Also in this issue:

- New experiments on magnetic motors
- Ball lightning in laboratory environment
- Alternative aircrafts and space propulsion systems



NEW ENERGY TECHNOLOGIES #11

1. Minato Wheel. E. Vogels (Sweden)
2. Mechanism of Drive-Free motion. S.A. Gerasimov (Russia)
3. Production of Ball Lightning in Laboratory Environment. Report by A. Pashova (Russia)
4. Electric Discharge Produced into Air Half-Space. G.D. Shabanov, O.M. Zhrebtsov (Russia)
5. Free Energy. A.V. Frolov (Russia)
6. Some General Properties of Matter and Energy Sources. E.D. Sorokodum (Russia)
7. Commercial Exploration of Space. Review by O. Leontyeva (Russia).
8. Prospects of Hydrogen Energetics. Ph.M. Kanarev (Russia)
9. Heater Producing Healthy Effect. A.L. Belyaeva and others (Kirghizia)
10. Inertial Propulsion Device. V.E. Senkevich (Russia)
11. Unlimited Accelerated Nonreactive Motion. Review.
12. Revolutionary Current. S.K. Baliyan (India)
13. Tilley Electric Vehicle. Review.
14. Trends in the Application of Motor-Generators. A. Akau (USA)
15. Electric Vehicle in Russia. Review by A. Pashova (Russia)
16. The Richard Clem Motor and the Conical Pump. R. Koontz (USA)
17. Spontaneous Flow Heat Pump. J.-L. Brochet (France)
18. Registration of Gravitational Waves. V.N. Petrov (Russia)
19. High-Energy Hyper-Low-Frequency Electric Field. Yu.V. Ivanko (Ukraine)
20. To the Question of Work Made by Electrostatic Field. A.V. Frolov (Russia)
21. Comments to Electro-Reactive LIFTER News.
22. Letters from Readers.
23. Advertisements (books)

Perfect Energy Source

Minato wheel. Experiments in Sweden



Eric Vogels, Sweden

E-mail: fdp@hemsida.net
<http://fdp.hemsida.net>

The self-running bicycle wheel was shown to the public at the First International New Science Symposium in 1997, held in Korea. The inventor of the wheel, Mr. Kohei Minato, was a speaker during the symposium. On www.keelynet.com you can find the quote of an eyewitness:

"The motor is actuated by moving the N pole of a large permanent magnet (the drive magnet) toward the wheel. As this magnet is moved toward the wheel, the wheel starts to spin. As the magnet is moved closer to the wheel it spins faster.

The acceleration of the wheel is rapid. So rapid in fact, as to be startling. To put it another way I was very impressed. The motor works. And it works very well. In the film clip (see <http://fdp.hemsida.net>) a slight pumping action of Minato's hand holding the magnet is apparent. When I braced my hand so that there was no pumping action, the motor still ran. In fact it seemed to run better.

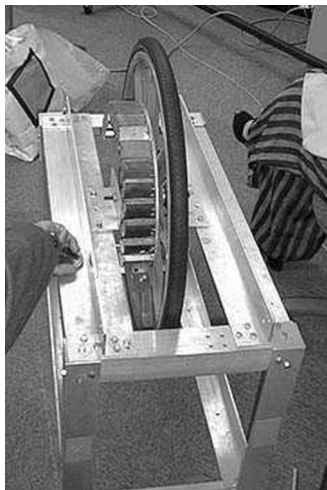


Fig. 1

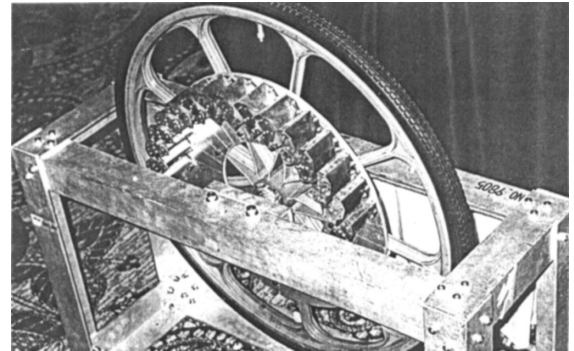


Fig. 2

Pumping action by the hand held magnet **is not** the power that drives the motor. When the drive magnet is moved away from the wheel it coasts rather quickly to a stop and comes to rest in a manner typical of any spinning bicycle wheel. Again when the wheel is at rest and a large magnet is moved up to the wheel it starts to spin. At no time it is necessary to touch the wheel to get it rotating."

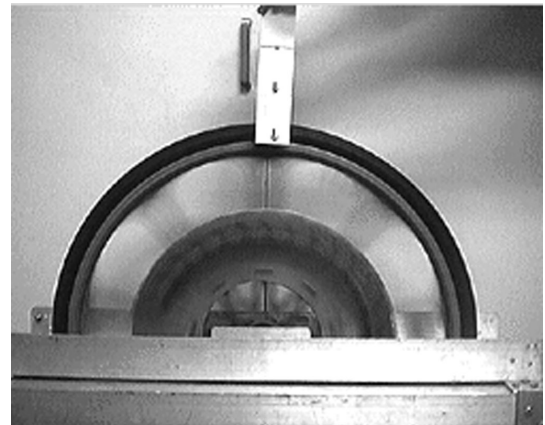


Fig. 3

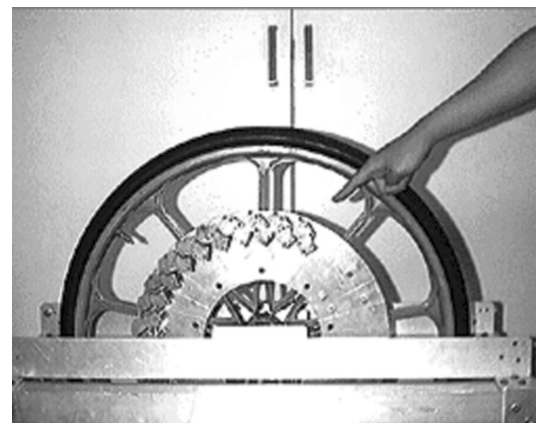


Fig. 4

Since the symposium in 1997 and the first publications in the Internet several people have tried to replicate the wheel, as it seemed to be a **perfect energy source for the future**. Some claims are made that replication was successful but no proof in the form of pictures or video clips are given.

Because I have a great interest in magnets and free energy and the fact that I did a lot of experiments to find a device that could be rotated only by means of permanent magnets, I decided to try to replicate the wheel by myself.

This journey started by searching on the Internet and collecting all the material that was available. A good way to sort all the found material was building my own website at <http://fdp.hemsida.net> where all my findings are presented.

One of the devices I build was made from a 'how to build a Minato wheel'-manual that I found on the Internet.

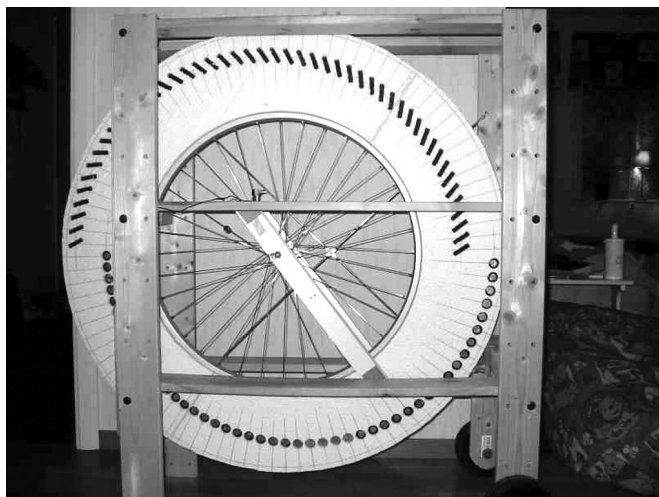


Fig. 5

Unfortunately this wheel did not show any movement at all. I mounted the magnets at several angles and distances from the rim without achieving any positive results. Since the size of the wheel (1 meter diameter) was not very practical to handle and since the results were negative I searched for an easier way for testing. I found that the use of Styrofoam, an old turntable and Neodymium disc magnets kept the whole project within the edges of my kitchen table. I developed a computer program to help me design wheels, since I want to be able to replicate my own wheel, in case I find a model that works. I do not believe in an engine that works after several weeks of tuning and that fails to function as soon as one magnet is replaced. Individual tuning is okay to optimise a working design but if a design does not show the potential to rotate by itself it's a flawed design.

After optimising the way to build the small wheels, I could design and make a wheel in 30 minutes.

I made a test scenario and the results for every test were posted on the web site.

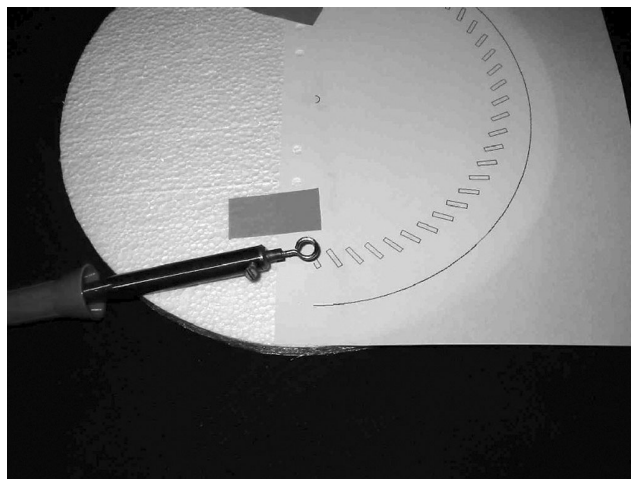


Fig. 6

I searched for the 'perfect' angle, number of magnets and position. The set-up with the strongest thrust was used as the base for the other experiment. By this time I realized that I was not really trying to rebuild the Minato wheel but that I wanted **a rotating device, powered by permanent magnets**.

When for the first time I decided to split a track of magnets that covered 180 degrees of the wheel in a number of smaller tracks, **the results became much better**.

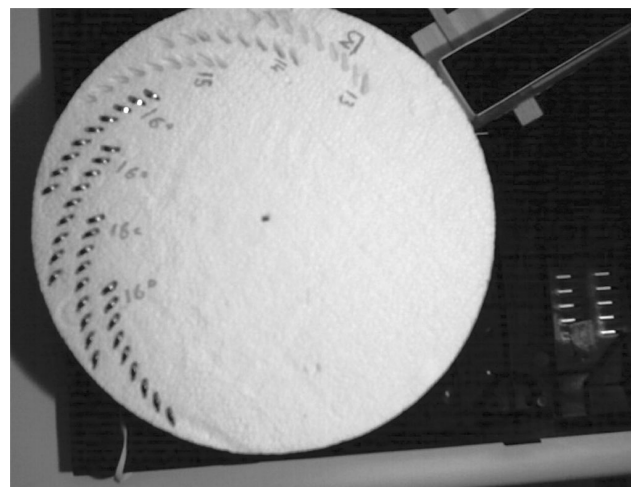


Fig. 7

By using this way of placing the magnets, every track differs a little bit from the next track, depending on its place on the wheel. The angle of the magnets influences on the thrust that is given by the stator magnet, depending on the speed that the track is entering the magnetic field of the stator. In other words: the track at the beginning of the wheel, with magnets covered side of the wheel, gives less thrust than the track at the end. This is important since a track with a lot of thrust has a big 'sticky spot' that should pass the stator. This 'sticky spot' stops the wheel during its rotation just before the first track enters the magnetic field of the stator.

During the last experiments the stator magnet changed place and pushed against the magnetic fields of the tracks from above. Simply because more thrust was developed by this way. The next wheel will have the tracks mounted on a different level. It means that the first track will have a bigger distance to the stator magnet than the last track. This should make the sticky spot weaker and the final 'kick off' stronger. The final wheel will be mounted vertically, like the Minato Wheel.

Thanks to the invention of the Neodymium magnet in 1983, magnets became much more powerful while the size and length decreased. Before 1983 a lot of the

experiments could not be done since the size of the magnets made the positioning of several magnets in tracks like this was impossible. It is my personal believes that the strength of these magnets will lead to results that are impossible according to the physical law books, because these magnets did not exist when those books were written.

Until the moment I write this I have not found the perfect energy source yet but by exploitation all the material and findings on my web site I hope that more people get interested and will help searching for a great energy device that will not pollute the air which our children and grand children have to breath.



Sergey A. Gerasimov, Russia

Physics Department, Rostov State University, Rostov-on-Don, 344090

Email: GSIM1953@mail.ru

*The article presents results of the experimental study of the motion created by vibrations of an internal mass of the system of bodies accompanied by impacts of the unbalanced load with the external body. This type of propulsion drive is known by a number of names. Among these are the **vibrational propulsion device** and **reactionless machine**. Sometimes it is called the **inertioid** [1, 2]. The vibrational transposition is proved to go on by means of internal forces of a system of bodies [3-5]. The Tolchin's inertioid [6] is considered to be the first device that used the forces of inertia to create the reactionless infinite motion in space. We are not in a position to be a judge of this. There exist a number of projects of such machines but experimental results concerning such kind of motion are very limited. Below there are the experimental results on average velocities of such a motion and the description of a propulsion device a main particularity of which is absence of wheel-drive.*

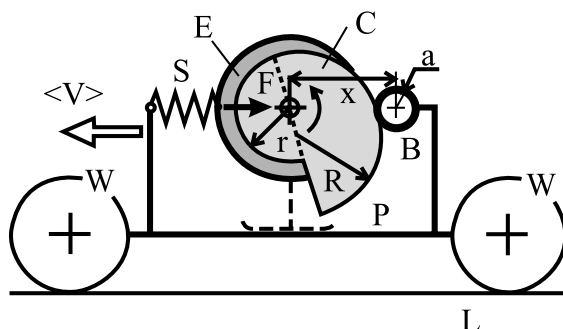


Fig. 1

Schematic representation of a vibratory-impact self-transposition

The unbalanced load in this device is an electric motor E of mass m that executes undamped vibrations

relative to a platform P of mass M with four wheels W which can roll on a horizontal surface L with rolling friction the coefficient of which is k . The frictional force is determined to be a force which adjusts to keep the cart from motion across a surface. A disk cam C at one end of the axle of the motor ensures a prescribed character of the vibrations and elastic impacts between the load m and the follower B of radius a . In present experimental device, the cam C consists of two semicircles of different radii r and R as it is shown in Fig.1. In this experiment $r=0.03\text{m}$, $R=0.05\text{m}$ and $a=0.01\text{m}$. The electric motor and the platform are coupled by a connecting spring S . The force F by means of which the electric motor is pressed to the follower varies linearly from $F=4\text{N}$ at $x=0.04\text{m}$ to $F=4.8\text{N}$ at $x=0.08\text{m}$. The compressed spring S is necessary not only for creating close contact between the cam and the follower. The restoring force of the spring produces the transposition of the cart in a direction opposite to F when the follower moves without contact from $x=2R-r+a$ up to an impact at $x=r+a$. The impact suppresses the transposition. Another mode of transposition is also possible when the impact of the cam on the follower is a reason of the transposition of the cart in the direction of the force F . In this case the frictional force extinguishes the transposition of the cart.

Friction between the load of mass m and the cart is negligible since the corresponding effective coefficient is less than 0.001. The same is for the friction between the cam and the follower. The mass of the spring is $m_s=0.007\text{ kg}$, and the mass of the cam is $m_c=0.019\text{ kg}$. The total mass of the wheels is $m_w=0.082\text{ kg}$. This value can be useful for a theoretical

During the last experiments the stator magnet changed place and pushed against the magnetic fields of the tracks from above. Simply because more thrust was developed by this way. The next wheel will have the tracks mounted on a different level. It means that the first track will have a bigger distance to the stator magnet than the last track. This should make the sticky spot weaker and the final 'kick off' stronger. The final wheel will be mounted vertically, like the Minato Wheel.

Thanks to the invention of the Neodymium magnet in 1983, magnets became much more powerful while the size and length decreased. Before 1983 a lot of the

experiments could not be done since the size of the magnets made the positioning of several magnets in tracks like this was impossible. It is my personal believes that the strength of these magnets will lead to results that are impossible according to the physical law books, because these magnets did not exist when those books were written.

Until the moment I write this I have not found the perfect energy source yet but by exploitation all the material and findings on my web site I hope that more people get interested and will help searching for a great energy device that will not pollute the air which our children and grand children have to breath.



Sergey A. Gerasimov, Russia

Physics Department, Rostov State University, Rostov-on-Don, 344090

Email: GSIM1953@mail.ru

*The article presents results of the experimental study of the motion created by vibrations of an internal mass of the system of bodies accompanied by impacts of the unbalanced load with the external body. This type of propulsion drive is known by a number of names. Among these are the **vibrational propulsion device** and **reactionless machine**. Sometimes it is called the **inertioid** [1, 2]. The vibrational transposition is proved to go on by means of internal forces of a system of bodies [3-5]. The Tolchin's inertioid [6] is considered to be the first device that used the forces of inertia to create the reactionless infinite motion in space. We are not in a position to be a judge of this. There exist a number of projects of such machines but experimental results concerning such kind of motion are very limited. Below there are the experimental results on average velocities of such a motion and the description of a propulsion device a main particularity of which is absence of wheel-drive.*

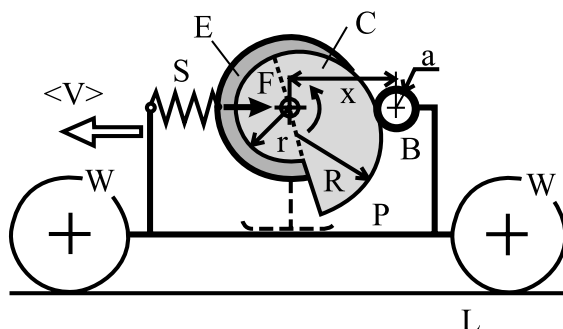


Fig. 1

Schematic representation of a vibratory-impact self-transposition

The unbalanced load in this device is an electric motor E of mass m that executes undamped vibrations

relative to a platform P of mass M with four wheels W which can roll on a horizontal surface L with rolling friction the coefficient of which is k . The frictional force is determined to be a force which adjusts to keep the cart from motion across a surface. A disk cam C at one end of the axle of the motor ensures a prescribed character of the vibrations and elastic impacts between the load m and the follower B of radius a . In present experimental device, the cam C consists of two semicircles of different radii r and R as it is shown in Fig.1. In this experiment $r=0.03\text{m}$, $R=0.05\text{m}$ and $a=0.01\text{m}$. The electric motor and the platform are coupled by a connecting spring S . The force F by means of which the electric motor is pressed to the follower varies linearly from $F=4\text{N}$ at $x=0.04\text{m}$ to $F=4.8\text{N}$ at $x=0.08\text{m}$. The compressed spring S is necessary not only for creating close contact between the cam and the follower. The restoring force of the spring produces the transposition of the cart in a direction opposite to F when the follower moves without contact from $x=2R-r+a$ up to an impact at $x=r+a$. The impact suppresses the transposition. Another mode of transposition is also possible when the impact of the cam on the follower is a reason of the transposition of the cart in the direction of the force F . In this case the frictional force extinguishes the transposition of the cart.

Friction between the load of mass m and the cart is negligible since the corresponding effective coefficient is less than 0.001. The same is for the friction between the cam and the follower. The mass of the spring is $m_s=0.007\text{ kg}$, and the mass of the cam is $m_c=0.019\text{ kg}$. The total mass of the wheels is $m_w=0.082\text{ kg}$. This value can be useful for a theoretical

analysis. Thus, the total mass of the unbalanced body is chosen to be much larger than the mass of the cam or the spring: $m = m_E + m_C + m_S \approx m_E$.

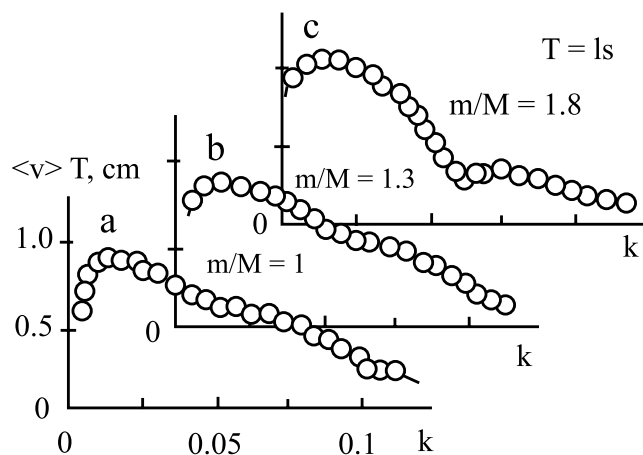


Fig. 2

Frictional coefficient dependence of average velocity of the platform at the period of vibrations $T=1s$ for various mass ratios m/M :

(a) $M=0.9$ kg, (b) $m=1.2$ kg, (c) $m=1.6$ kg

At least in the case of irreversible mode, one could expect that the value of average velocity of transposition $\langle v \rangle$ must be proportional to the number of impacts per unit of time. In the other words the path traveled by the cart per one impact must not depend on frequency of vibrations. This is a reason why the dependence of the product $\langle v \rangle T$ versus the value of the friction coefficient k and ratio of masses $d = m/M$ is investigated in this work. Measurements were carried out for two magnitudes of rotation period $T=1s$ and $T=6s$ of the cam. The obtained results are presented in Fig. 2 and Fig. 3. First of all, the assumption mentioned above is not confirmed.

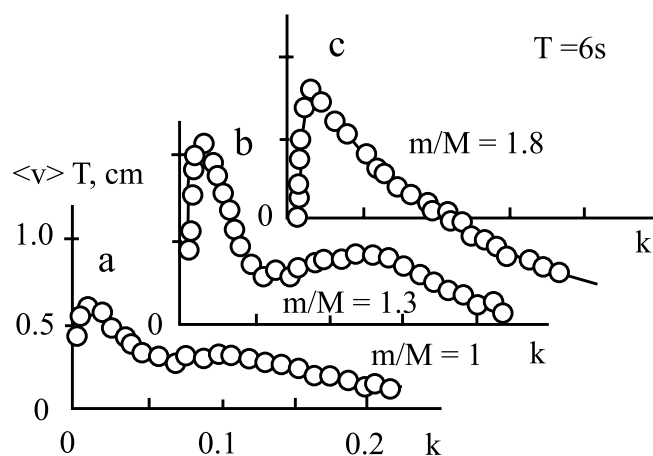


Fig. 3

Average velocity of the platform $\langle v \rangle$ as a function of frictional coefficient k at $T=6s$ for various mass ratios m/M : (a) $M=0.9$ kg, (b) $m=1.2$ kg, (c) $m=1.6$ kg

The value $\langle v \rangle T$ for the period of the rotation $T=1s$ sufficiently differs from that for $T=6s$ measured at the same conditions. Besides, when the mass ratio is large the cart can change its direction of transposition. The reason of these results is not clear but this device provides a challenge to explain and investigate this kind of motion that enables us to discover the reactionless motion if it is probable. One should pay attention to a fact that the infinite transposition of the platform takes place even if the friction coefficient k is small.

References

1. Gulia N.V. *Inertia*. // Moscow: Nauka. 1982.
2. Aspden H. Anti-gravity Electronics. // *Electron and Wireless World*. 1989. V. 95. No 1635. P. 29-31.
3. Nappo F. Sulla Influenza Indiretta Delle Forze Inertne sul Moto del Baricentro. // *La Ricerca Scientifica (Rendiconti)*. 1965. V. 8. No 1. P. 3-14.
4. Gerasimov S.A. Anisotropy of Frictional Force and Vibrational Transposition. // *Problems of Applied Physics*. 2001. V 7. P. 85-88.
5. Gerasimov S.A. Self-Similarity of Vibrational Motion in a Resistant Medium. // *Journal of Applied Mechanics and Technical Physics*. 2002. V. 43. No 1. P. 90-92.
6. Tolchin V.N. *Inertoid*. // Perm: Perm Book Publisher. 1977.

About the Author



Sergey A. Gerasimov graduated from Faculty of Experimental and Theoretical Physics of Moscow Physical Engineering Institute in 1976. Received Degree of PhD in Physics and Mathematics in 1987. Author of about 70 articles on Astrophysics, Atomic and Radiation Physics, Classical Electrodynamics and Mechanics. In present -

Associate Professor of Department of General Physics of Rostov-on-Don State University. The fields of scientific interests are questionable problems in physics: self-interaction, self-transposition, unipolar induction.



an online and published magazine about Electric, Hybrid, Fuel Cell Vehicles, advanced batteries, ultra capacitors, fuel cells, microturbines, free energy systems, events and exhibitions worldwide

63600 Deschutes Mkt Rd,
Bend Oregon, 97701
541-388-1908 fax 541-388-2750
etimes@teleport.com
www.electrifyingtimes.com
Subscription \$13/3 issues

Production of Ball Lightning in Laboratory Environment

Report by our correspondent Alla Pashova

Three years ago a working device producing a ball lightning in laboratory environment was designed in Saint-Petersburg Institute for Nuclear Physics (SPINP). The produced ball lightning is accessible for detail investigation and quite stable. The lifetime of the ball lightning comes to about one second that is rather significant for alike artificial formations. The experiments on the device made by scientists of SPINP, i.e. A. E. Egorov, G. D. Shabanov, S. Stepanov, are not supported or financed. Let us note that every scientist of the group searches proofs for his own hypothesis of nature and structure of the ball lightning at all.

A leading expert of SPINP, Anton I. Egorov, pays attention to dethronement of scientific myths:

— There is a myth of ball lightning that is created by mass media. The mythical ball lightning is a concentrate of mysterious energy which is extremely dangerous for a human. It destroys houses, kills animals, pursues people. After meeting it a human can lose his hair or teeth and different misfortunes begin to happen. Supposing a simple story of a farmer-eyewitness: "It thundered, and a fist-sized fire ball rolled down along a drainpipe. It fell into a barrel of water, the water gurgled. I came up to it and put my hand into the water. The water seemed to become warmer...". After republishing of the story by several newspapers a dramatic story about a ball lightning which has evaporated a barrel of water appears. No wonder that such familiar attitude to facts causes hundreds of hypotheses of ball lightning nature.

— **What is your hypothesis about ball lightning structure?**

— At the beginning of 90th I. D. Stakhanov, a member of Institute of Magnetism (IZMIRAN), developed a special method to interview eye-witnesses that resulted a right notion on ball lightning phenomenon. According to Stakhanov, ball lightning is a clot of hydrated plasma which is generated in wet air at electrical discharge.

Water as a chemical compound is remarkable for its anomalous properties: combining of two lightest elements does not generate gas but produces a high-boiling liquid. This is caused by extremely irregular distribution of electrons in a water molecule. Due to this property it acquires properties of an electric dipole. Water molecules interact with charged ions, aerosol particles, and with each other in a special way.

If a positive ion and a negative ion are introduced simultaneously into a puff of warm wet air then water dipoles immediately produce hydrate shells around the ions. When the hydrated positive ion approaches the hydrated negative ion additional water molecules are drawn into gaps between them. As a result, there is a stable cluster in which the charged ions are conserved. The cluster consists of two ions of opposite charges and the hydrate shell. Water molecules prevent the ions' approaching and recombination, hence, lifetime of the ions in the cluster increases up to tens of minutes, i.e. in 12-13 orders. Interaction of clusters causes open-chain structures followed by space structures. That is to say, there is appeared a clot of cold hydrated plasma that accumulates great energy (up to 1 kJoule per liter). The clot of plasma loses this energy at recombination of ions.

— **Could you, please, tell about the design of the device? What processes proceed when the device is operating?**

— Our task is to introduce an abundant population of ions into a puff of warm air saturated with water vapors. A base of the device for laboratory reproduction of ball lightning is a capacitor bank which is able to be charged up to 5.5 kV. The positive pole of the capacitor bank is connected to a ring electrode by means of a copper bar. The ring electrode is placed on a bottom of a polyethylene reservoir filled with water. The negative pole of the capacitor bank is connected to a carbonic electrode which is placed in the centre of the reservoir near water surface. A quartz pipe encloses the electrode in such a way that it is possible to drop water or to put some natural matter on it.

To generate a ball lightning 2-3 drops of water are put on the electrode. When impulse discharge occurs a bright plasma spout escapes the centre of the electrode that is accompanied by a quiet plop. A glowing plasmoid which is an artificial ball lightning parts from the plasma spout. It comes up slowly in the air and then disappears falling to pieces in 0.2-0.3 seconds.

We have made thousands of experiments for investigation of ball lightning properties, i.e. defining size, lifetime, colour, average temperature, excessive charge, content of a dust component.

It was ascertained that the artificial ball lightning is generated in a narrow interval of breakdown tensions. The average size of such a ball lightning is 12-20 cm,

and its lifetime comes to 1 second. Temperature of the ball lightning is not very high, i.e. 50° C. This can be defined if to take into account speed of rising of the ball lightning. If the plasmoid is accepted as a puff of warm wet air of 14-centimeter diameter which in atmosphere comes up at 293 K at speed of 1-1.2 m/sec then, consequently, its temperature should not exceed 330 K.

Colour of the lightning varies greatly and depends on presence of aerosol of matter trapped in the moment of discharge. Usually the lilac central part of the plasmoid is surrounded by a diffusive yellowish layer. Some admixture of sodium salt and calcium makes the core of the plasmoid yellow or orange.

If the central carbonic electrode is replaced by an iron or copper or aluminum one then the fundamental character of the phenomenon does not change. However, colour of the plasmoid depends on a radiation spectrum of excited atoms of the electrode, i.e. iron plasmoids are whitish, copper plasmoids are greenish, aluminum ones are white with reddish shimmer.

— **A generated ball lightning exists for about 1 second. How can it be made more stable?**

— Lifetime of an artificial ball lightning depends on many conditions, i.e. size and geometrical form of the central electrode, voltage between the electrodes, value and duration of a current impulse, temperature and electroconductivity of water which is put on the central electrode. Besides, lifetime of the plasmoid can be changed by introducing an additional dispersive phase into it. We have tested tens of matters and begun to investigate suspensions of colloidal graphite and fine-dispersated ferric oxide.

A suspension of 3 g of colloidal graphite, 8-10 ml of acetone (which played role of penetrating agent), and 90 ml of water is put on the central carbonic electrode. When an electrical discharge occurs a layer of the suspension forms a flying spherical plasmoid. It comes up slowly and disappears in 0.3-0.8 seconds. The core of the plasmoid has a colour of flame, i.e. colour of burning carbon.

To prolong the existence of the generated ball lightning without application of aerosols it will be possible to use the so-called "Faraday's cylinder" whose production has been already begun. For the same purpose G.D. Shabanov proposes to put a stopping potential on a probe of detention.

— **There is an opinion that physical nature of ball lightning is similar to the process of controlled thermonuclear fusion. In this case, if your work on generation of a stable ball lightning is successful then you will be a competitor of the expensive project of controlled thermonuclear fusion.**

— I think that it is totally incorrect. Hydrated

plasma is the first enemy of the thermo-nuclear fusion as water molecules do not allow neutrons approach each other. Effective cold fusion should be realized in organic liquids, for example, in heavy acetone or in a water-free medium. Somehow, it should be an absolutely "dry" process. No experiments on real "dry" cold fusion have been realized in practice. It has not been also examined the surfaces on which the combination of heavy hydrogen atoms produces maximal heating.

Scientists should pay attention to two most effective cold fusion processes. The first one expects association of two atoms of deuterium occurring on a totally dry deuterated surface which consists of, for example, zirconium deuteride. In the moment of fusion of a deuterium molecule local heating appears, and neutrons depart. The other perspective method of realization of the cold fusion process requires an absolutely "dry" organic liquid, i.e. liquid acetone in which hydrogen atoms are replaced by deuterium atoms (C_3D_6O) or by atoms of cyclic compound of $C_6(D_2)_6$. A tellurium or zirconium tip of an ultra-sonic dispersant is placed into a reservoir of this liquid. Cavitation blebs are formed on the surface of the dispersant. Neutron output comes to 10^4 particles. Maximal neutron output, which was achieved by Lipson, an American experimenter, consists of 10^8 neutrons at a desired result of 10^{13} . Certain quantity of neutrons can be obtained during ultrasonic cavitation which is accompanied by a phenomenon of sonoluminescence. Due to sound resonance the only cavitation bleb is generated in acetone. When the bleb collapses weak glowing is observed. The cause of this phenomenon consists in gas heating occurring in the bleb that is the result of high pressure produced by its collapse. The burst can last from 1/20 up to 1/1000 sec. Light intensiveness depends on quantity of gas in the bleb. If gas is absent in the bleb then the glowing does not occur. Light emission of the bleb is very weak, it becomes visible if it is strengthened or in absolute darkness.

— **Is it rightful that cold fusion is the future of world power engineering?**

To my mind another direction seems to be more perspective, i.e. extraction of uranium from sea water and then its burning in heavy hydrogen reactors like one which exists in Canada. Photo voltaic accumulators can also become a successful approach of the alternative traditional fuel engineering. By the way, a working model of such a device to utilize free solar energy has recently been created in our Institute (official web site: <http://www.pnpi.spb.ru>).

Editor: Read the publications on this theme in following issues of our magazine. Below there is a description of other attempts to generate a ball lightning in laboratory environment or at home. Besides, we publish an article dedicated to the problem of laser control of ball lightning. In the article there are photos (also see the cover page) and a scheme of the working device designed by this scientific group.

Ball Lightning Experiments

Information from
http://www-personal.umich.edu/~reginald/ball_1.html


Ball Lightning in the Microwave

This is a great experiment to try at home. It requires a microwave oven, a candle, a toothpick and a lighter. First you put the candle (~1-2 inches in height) in the microwave (remove glass plate from bottom so candle sits on metal). Put the toothpick in the candle sticking straight up. Light the toothpick on fire so that flames are leaping off the tip. Shut the door quickly and turn on oven full blast. There will be loud popping noises and then balls of fire will leap from the toothpick and

fly around inside the microwave while making a buzzing sound like a bee. If it doesn't work at first try to move the position of the candle in order to find the "hot spot" in the oven for it to work.

Real Ball Lightning Generated by Pulsed Power Inductor

This experiment is very DANGEROUS. The author did this one a few years ago. The Idea was got from an article about a guy generating ball lightning using a high current transformer (TBA). The author had an idea of using an inductor to store large amounts of electrical energy. The conductor on the end of the stick touches the metal ring. This completes the circuit, and start the inductor. Then there was used the air compressor nozzle to blow out the arc as the wire was pulled away. The copper wire explodes and creates rapidly rotating and burning molten balls of copper. These 'Balls of Fire' exhibit many of the properties of real ball lightning.

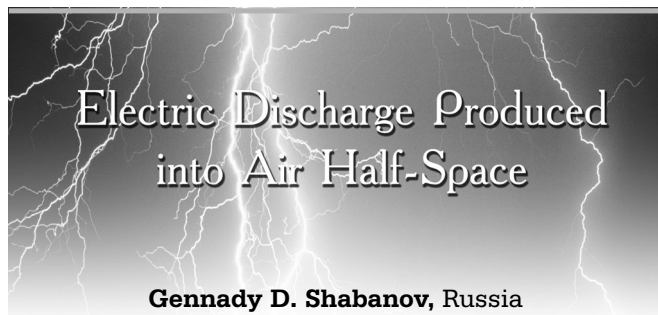

Tel. +7(271)46477
E-mail: discharge@gtu.ru

Oleg M. Zherebtsov, Russia

Tel. +7(271)46272
E-mail: omzher@mail.ru

In the article a possibility of streak lightning control by means of low intensive laser emission is observed.

During investigation of an electric discharge into air half-space [1] it was noticed that this discharge can be controlled by a low intensive laser beam. Now there is a problem of laser control of lightning discharge [2]. However, numerous works on this approach demonstrate that "the hope to get a quick solution of the problem of lightning control by laser emission has not been confirmed" [3].

Careful observation of this problem in [2] has shown ways out the situation. The authors of [2] consider plasma channel produced (by means of laser) in free atmosphere at a possible greatest height to be of doubtless interest of the science of lightning. Finally, creation of the plasma channel should be of benefit for lightning protection. The authors of [2] give notice that

"there are many difficulties of fundamental and practical importance on this path".

Weak theoretical understanding of lightning generation causes pessimistic estimations of solution of the problem. The article [2] notes particularly that "there are neither adequate theory, nor numerical calculations and qualitative understanding of the phenomena defining the speed of a leader... The situation of a theory of the leader channel is little better (from quantitative point of view)...".

Realistically the following statement can refer to the lightning discharge: "The electric discharge appeared to be very "unhandy" for theoretical description but the most interesting phenomenon in the experimental aspect" [4].

Experimental Part

In this work a capacitor bank with 0.6 mF capacity, which can be fed up to ~5 kV, was used to produce impulse discharge into air half-space. A scheme of the device is presented in Fig.1. At connection/disconnection of a discharger 5 a "spout" is let out of an electrode 3. The spout carries the potential of the cathode (virtual cathode) at a significant height into air half-space. A probe placed at the height of ~15 cm fixes a potential which is similar to the potential occurring at the cathode. The researches have demonstrated that the produced formation continues to glow for several hundreds of milliseconds (the glow is fixed from a zone located at 15-45 cm above the cathode). Typical time of the discharge comes to 100 ± 20 msec and depends on the cathode material. Electric field generated in the spout comes to less than 8 V cm^{-1} .

Ball Lightning Experiments

Information from
http://www-personal.umich.edu/~reginald/ball_1.html


Ball Lightning in the Microwave

This is a great experiment to try at home. It requires a microwave oven, a candle, a toothpick and a lighter. First you put the candle (~1-2 inches in height) in the microwave (remove glass plate from bottom so candle sits on metal). Put the toothpick in the candle sticking straight up. Light the toothpick on fire so that flames are leaping off the tip. Shut the door quickly and turn on oven full blast. There will be loud popping noises and then balls of fire will leap from the toothpick and

fly around inside the microwave while making a buzzing sound like a bee. If it doesn't work at first try to move the position of the candle in order to find the "hot spot" in the oven for it to work.

Real Ball Lightning Generated by Pulsed Power Inductor

This experiment is very DANGEROUS. The author did this one a few years ago. The Idea was got from an article about a guy generating ball lightning using a high current transformer (TBA). The author had an idea of using an inductor to store large amounts of electrical energy. The conductor on the end of the stick touches the metal ring. This completes the circuit, and start the inductor. Then there was used the air compressor nozzle to blow out the arc as the wire was pulled away. The copper wire explodes and creates rapidly rotating and burning molten balls of copper. These 'Balls of Fire' exhibit many of the properties of real ball lightning.

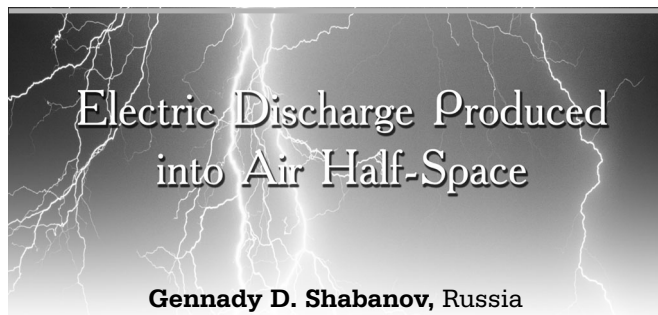

Tel. +7(271)46477
E-mail: discharge@gtu.ru

Oleg M. Zherebtsov, Russia

Tel. +7(271)46272
E-mail: omzher@mail.ru

In the article a possibility of streak lightning control by means of low intensive laser emission is observed.

During investigation of an electric discharge into air half-space [1] it was noticed that this discharge can be controlled by a low intensive laser beam. Now there is a problem of laser control of lightning discharge [2]. However, numerous works on this approach demonstrate that "the hope to get a quick solution of the problem of lightning control by laser emission has not been confirmed" [3].

Careful observation of this problem in [2] has shown ways out the situation. The authors of [2] consider plasma channel produced (by means of laser) in free atmosphere at a possible greatest height to be of doubtless interest of the science of lightning. Finally, creation of the plasma channel should be of benefit for lightning protection. The authors of [2] give notice that

"there are many difficulties of fundamental and practical importance on this path".

Weak theoretical understanding of lightning generation causes pessimistic estimations of solution of the problem. The article [2] notes particularly that "there are neither adequate theory, nor numerical calculations and qualitative understanding of the phenomena defining the speed of a leader... The situation of a theory of the leader channel is little better (from quantitative point of view)...".

Realistically the following statement can refer to the lightning discharge: "The electric discharge appeared to be very "unhandy" for theoretical description but the most interesting phenomenon in the experimental aspect" [4].

Experimental Part

In this work a capacitor bank with 0.6 mF capacity, which can be fed up to ~5 kV, was used to produce impulse discharge into air half-space. A scheme of the device is presented in Fig.1. At connection/disconnection of a discharger 5 a "spout" is let out of an electrode 3. The spout carries the potential of the cathode (virtual cathode) at a significant height into air half-space. A probe placed at the height of ~15 cm fixes a potential which is similar to the potential occurring at the cathode. The researches have demonstrated that the produced formation continues to glow for several hundreds of milliseconds (the glow is fixed from a zone located at 15-45 cm above the cathode). Typical time of the discharge comes to 100 ± 20 msec and depends on the cathode material. Electric field generated in the spout comes to less than 8 V cm^{-1} .

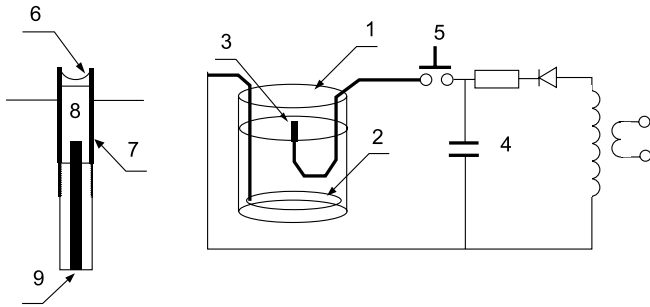


Fig 1

A scheme of a device made for producing of long-living plasmoids

1 – a polyethylene reservoir, 2 – a ring electrode, 3 – a central electrode, 4 – a capacitor bank of 0.6 mF capacity, 5 – a discharger, 6 – water or aqueous suspension drop, 7 – a quartz pipe, 8 – a carbonic or metal electrode, 9 – a copper bar.

The spout was acted by weak laser emission of less than 1 mW at 22-centimeter height. The laser beam was directed perpendicular to the discharge axis, the spout achieving the laser beam moved along the beam towards the laser.

In Fig.2 the spout has moved ~8.5 cm along the laser beam, and a usual sphere formation was generated. Due to the horizontal motion it was distorted if to be compared with usual sphere formation. The usual sphere formation is represented in Fig.3 (also see the cover).



Fig. 2

Motion of the leader channel (spout) along the laser accompanied with the sphere formation

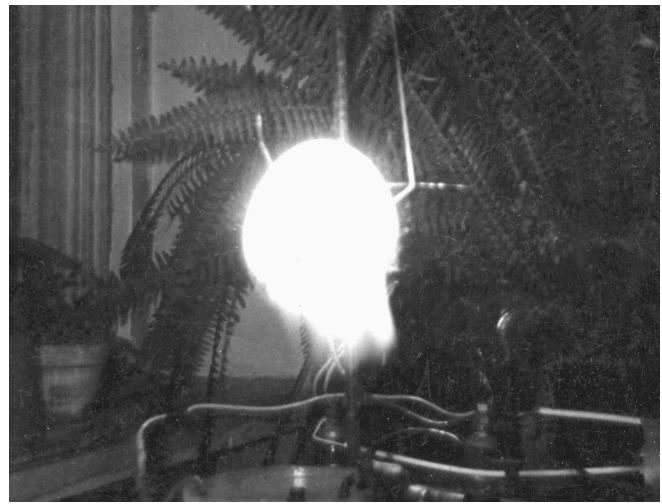


Fig.3

The standard ball formation

Discussion

As it is evenly mentioned in [5], results of model experiments are difficult to be applied directly to laser control of lightning because in short intervals characteristics of the discharge differ from characteristics of lightning discharges. Actually, at comparing considered current and the field existing in a lightning ($i \sim 100$ A, ~ 3 V cm⁻¹) with these phenomena occurring in a laboratory spark (~ 1 A, ~ 300 V cm⁻¹) incorrectness of modeling of this process becomes obvious. From the other hand the authors of [2] note that “the leader channel is like a channel of electric arc... At current strength of ~ 100 A plasma of the channel of the arc is supported by fields the densities of which come to several volts by a centimeter. The lightning has such leader currents”.

Even an air arc of atmosphere pressure has a field of about 100 V cm⁻¹ at currents of about 1 A. The generated discharges (spout) accompanied by the field of less than 8 V cm⁻¹ (maximal current appearing in the discharge gap is 50-60 A) are more appropriate for modeling the leader channel of the streak lightning than typical discharges used for investigation of these processes, for example, like [6].

At first approximation the leader channel is considered as an ideal conductor in the article [2]. We make research to define the field in the discharge (spout) more exactly. The article [2] makes the following consideration about a cause of occasional generation of new leader heads: “the surface of *equipotential* plasma conductor (channel) has a property of *instability*. There is an occasionally generated sharp jut. An intensified field appears at the jut along the edge. Under the influence of the field the jut becomes to grow in any direction including at the significant angle to the weak outer field”. The aforesaid seems to explain why our leader channel changes its direction and runs at right angle to its initial motion. (Fig.2). Weak harmonic action of the laser beam to the leader channel causes generation of a new head which continues motion “on the significant angle”.

The effect of plasma motion towards a light beam is a demonstration of a general tendency of propagation of the discharges to an incident electromagnetic field [7]. "Area occupied by plasma usually increases towards the laser emission" [8]. Leading character of motion of this formation is confirmed in [9] as well as the interaction with the laser beam is confirmed in [10]. It should be taken into account that in the works [9-10] experiments were performed at devices which generated such a discharge. However, that discharge was by 2 orders weaker than the discharge generated by the device represented in this work. Naturally, the results were less defined. Comparison of the discharges is presented in [11].

According to our data, the leader channel (spout) has a very abrupt bound (less than 1 mm). In this layer the field can come to $\sim 30 \text{ kV cm}^{-1}$ (at height of 15 cm).

Conclusions

Due to the assumption [2] about *instability* of the surface of the *equipotential* leader channel there has been successfully performed the "control" action on an electric discharge which models a streak lightning. It has been achieved by means of weak harmonic oscillations made by the laser. This mechanism is supposed to be applied for streak lightning control.

References

1. G. D. Shabanov. Optical properties of glowing formations // Letters in the Magazine of Technical Physics. 2002, V.28, I.4, P. 81-86;

2. E. M. Bazelyan, Yu. P. Rizer. Mechanism of attraction of lightning and problem of lightning laser control (Nowadays Physics) // the UPS. 2000. V. 170, #7, P.753-769;
3. A.D. Starikov, Yu. A. Rezunkov. Lightning discharge control by laser emission. // the Optic Magazine. 1999, V. 66, #3, P. 15-16;
4. B. E. Meyerovich on the path to realization of electromagnetic collapse // the UPS. 1986. V. 149, #2, P.221-257;
5. Miki Megumu, Uada Acushi, Shindo Takatoshi. Characteristics of laser controlled discharges occurring in long air gaps // the Optic Magazine, 1999, V. 66, #3, P. 25-29;
6. P. Rembo, J. Biggert, V. Kubechek, J. Schwartz, A. Berstein, J. Dilet, R. Bernstein, K. Shtalkopff. Laboratory investigations of lightning discharge initiated by laser // the Optic Magazine, 1999, V. 66, #3, P. 30-35;
7. Yu. P. Rizer Laser spark and distribution of discharges. Moscow: Science (Nauka), 1974. P.308
8. A. A. Mak, N. A. Solovyev. Introduction into physics of high temperature laser plasma. Leningrad: Publishing House of Leningrad University. 1991. P. 152;
9. S. E. Yemelin, A. L. Priezorsky, V.S. Semenov, G. E. Skvortsov Characteristics of dynamic state propagation in stream of capillary discharge. // Letters in the Magazine of Technical Physics. 1997, V.23, I.19, P. 54-59;
10. R. F. Avramenko, A. Yu. Gridin, A. I. Klimov, V. I. Nikolaeva. Experimental investigation of power-consuming compact plasma formations. // Collected articles Ball lightning in laboratory. Moscow: Chemistry. 1994;
11. G. D. Shabanov, O. M. Zherebtsov, Experimental modeling of ball lightning analogue. // Theses of 10th Russian conference on ball lightning. Moscow (Dagomys). 2002. P. 17-20.

New Energy Technologies *PRINT EDITION ADVERTIZING RATES*

Full Page Ad

B/W - \$400

Color - \$800

Half Page Ad

B/W -
\$200

Color -
\$400

Quarter Page Ad

B/W - \$100

Color - \$200

New Energy Technologies is distributed in the leading Scientific Laboratories in Russia and has subscribers in more than 20 countries all over the world

To advertise contact us:
Faraday Labs Ltd, Phone/fax: 7-812-380-3844
<http://www.faraday.ru>, office@faraday.ru

Free Energy

Alexander V. Frolov, Russia

Faraday Laboratories Ltd

<http://www.faraday.ru>, tel/fax 7-812-3803844

In general the conception was formulated in 1995 and today we can say that the concept of physical vacuum, which is a new source of energy, finds more and more supporters. The fundamental works about nature of "zero point energy" are published, for example, Andrew D. Sakharov [1], Hal T. Puthoff [2] and many other interesting works. It is clear now that space or "physical vacuum" has its internal structure, therefore it can be used as a new source of energy if we organize the process of changing of this structure. Moreover, according to some theories, the existence of reality (i.e. the World of some certain parameters of space and time) is defined by the function of probability of energy density. For example, Dr. Nassikas, Greece [3], proves that it is not possible to consider the space without its energy, and there is no space without energy. The internal structure of reality is coexistence of two forms: gravitational energy and electromagnetic energy. Any local increase of the first one should produce decrease of the second one, so the sum amount of the change is zero.

In some other articles about energy transformation processes (gravitational form of energy into electromagnetic heat radiation of mass, for example) we can find that both increase of entropy and the inverse processes (decrease of entropy) are possible and in this case the electromagnetic energy can be converted into the gravitational form, that is shown in details in the works of Nobel laureate I. Prigozhin, Order and Chaos. Man's new dialog with Nature, London, 1984. Since **the direction of time** (the time course) and **direction of the entropy change** (increase or decrease) are related notions then free energy technologies are considered by Kozyrev as methods of practical application of natural time course [4] that is presented in aether-dynamics by Frolov as aether flow of some density and this aether density determines the time rate as hardness of cause-effect connections for any process, and also for the process of existence of matter in space-time of this aether density.

According to this theory, in any point of space it is possible to get power by means of energy transformations without any consumption of mass-fuel. We can say also that in this case some change of the energy density of space should be detected.

Let's clarify some determinations:

1. The Potential (lat. Potentia that means "force"). In physics this is scalar parameter, it's gradient expresses the intensity of field of a certain force. In common sense, the potential is possibilities, which

exist for execution of some task, for completion of some work.

2. The Work is a quantitative parameter of energy transformations. The transformation means here change of form.

3. The Energy (Greek "Energie" means "action, activity") is a quantitative characteristic for different forms of motion.

4. The Power is amount of work per unit of time.

According to the given determinations by The Soviet Encyclopedic Dictionary, edition of 1988, Moscow, **the fact of presence of potential (scalar) field, for example, electrical or gravitational field, is real possibility to produce some work if we can organize change of energy forms. Let's note that power source is not required to keep the potential field in force. It is free.**

...the potential (scalar) field can produce real work!

The example of this work, which is produced by the field: body falls in gravitational field and when it strikes on the ground then some part of its potential energy is transformed to heat, that is the work as transformation of energy forms. So, there is a conclusion: the potential (scalar) field can produce real work! But we have considered only a half of cycle and in classical case in the second half of the cycle it will be necessary to produce the same work against the field to raise the body to the initial point.

Let's formulate the task to produce the work periodically and to get the power in load from this process. Usual mistake is to accept the particular case (the same body returns back in the same field) as a single possible case. But in special case changes of the system are possible, for example, the field intensity is not a constant but some variable value (alternating or pulsing), or the body changes its own parameters. In this case in each of half-cycle of the process the field can produce real positive work to accelerate the body.

The main technological solutions are obvious: **it is necessary to create gradient of field in space** (full or partial screening of trajectory of the body, which is moving in the field) **or gradient of field in time** (pulsing mode of field). This is quite easy for electric and magnetic fields, but for system, which uses gravitational field to produce the work, we can assume changes of parameters of the body only.

It is possible to understand why professional physicists dislike the question about possibility to use scalar (potential) fields to produce useful work in a load since they think about The Law of Energy Conservation. To find mutual understanding it is necessary "to upgrade" this Law for 4-dimentional case of real physical system. It is necessary to introduce **the notion of the structure of space-time** where the considered process is created. In other words, for real practical engineering tasks it is necessary to consider **space-time of the real process** but not an abstract space-time. Usually the energy density of technical processes is small in comparison with natural energy density of space (aether density), which is a result of real astrophysical processes, i.e. motion of planet, star, galaxy. If we discover structure of this real rhythm of the space-time of our planet then we'll be able to design it in our technical devices to use aether-dynamics as theoretical basis.

So, in orthodox physics there is the unchallengeable formulation: the work of potential field on closed trajectory of motion is equal to zero. Yes, it is right for only case: if one part of work is positive (the acceleration) and another part is negative (the deceleration). But one part of the trajectory or a part of periodic process with the negative work can be excluded by different methods: by means of spatial superposition, pulsing mode and change of interaction polarity or by the screening of electromagnetic interaction.

For example, minor changes in vacuum tube design (the grid is located under cathode) allows increasing the kinetic energy of electrons and to increase emission current by means of the potential on the grid only. Also vector potential of magnetic field or gravitational potential can be used by similar way.

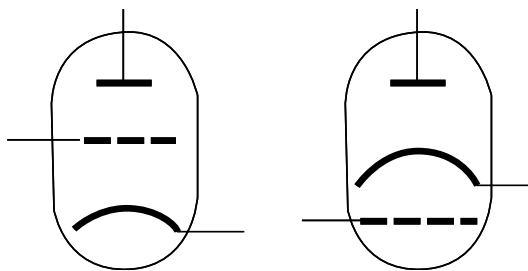


Fig. 1

Besides this way it is possible to use pulsed mode and switch-off the primary energy source before the emission electrons will reach the anode, Fig.2. In this case there is not the conductivity current between anode and cathode and the primary source is not discharging during its work.

Therefore, it is not a news that potential field can produce real work. In any textbook there are examples of positive and negative half-cycles that result to zero net work. But for the case of consequent execution of two processes the parameters of one of the processes

can be changed, that **the work, which is produced on the closed trajectory can be formed as two or more parts of positive work**. Important aspect is following: it is necessary to determine the point (moment) of change the sign of the interaction and at that point (moment) to change the parameters of the process accordingly.

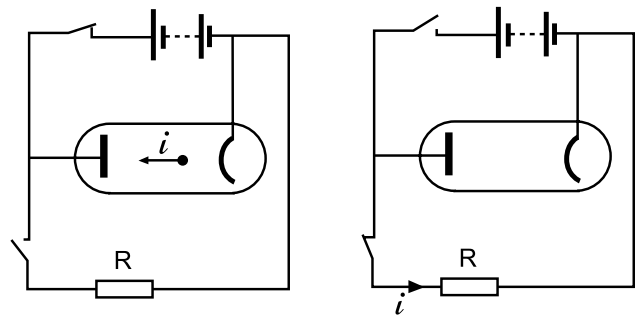


Fig. 2

The good sense requires the answer: what is the source of the power to produce this work if this proposed concept is right? Let's notice that before the considered examples, the existence of **power interactions of potential fields** must make the same question. For example, how the ordinary permanent magnet (i.e. its vector potential) holds a piece of metal making work against force of gravity without any fuel? How the potential field can move and accelerate ions, i.e. kinetic energy of ions can be increased without any fuel? What provides the forces of elasticity? Let's try to find answers from consideration of inner structure of electric and magnetic field, especially let's develop **our understanding of the notion of gradient, which describe properties of space-time design in area of this field**.

The concept of potential as bi-directional flow of photons and anti-photon was proposed by English mathematician E. Whittaker, and then it was developed by Dr. Thomas E. Bearden [5]. In this concept, the generalization of the Third Newton's law looks as the requirement of complementary pair to the process of the electromagnetic radiation. Since "process" means a change of information in time, this paired anti-process is reversed in time. Of course, it is development of process to its own future, but from our point of view, it goes from future to past. According to generalized Third Newton's law the radiation of photon is paired with anti-photon. In this case, the internal space-time structure of electric potential field is formed by two contrary flows of energy: photons spread from charge source and the anti-photon "inflow" into the charged mass. Let's notice that this concept defines the relationship of charge and mass. The charge without mass does not have any sense.

The flow of energy outgoing from charged mass is responsible for all phenomena of radiation. Incoming flow of energy is responsible for the gravitational interaction. Therefore, the notions "radiation" and

"gravitation" can be considered as complementary pair; that is considered in details in concept of Josef Hasslberger [6].

...it is impossible to get "something" from "nothing"

There is a quite correct question: since "something" can not be created from "nothing" then what and where will be changing if we create the process of free power dissipations in local area of our space-time by means of asymmetrical potential interaction?

Let's try to present a "process" as some change of "information" in time and from this point we'll get the conclusion about results of this energy disbalance of the natural internal structure of potential field: in this case the entropy process in direct time (heat dissipation in load) should be balanced with equal anti-entropy process in reversed time. In other words, the disbalance is change of the space-time curvature and changes in the time rate.

So, it is impossible to get "something" from "nothing" but if we have understanding of the balance (process in time and anti-process in reversed time) then in the Universe the 4-dimentional balance is not violated. It is assumed here that it is impossible to create one process but it is possible to create two opposite balanced processes, and each of them produce real work in the load. In astrophysical consideration it was stated in 1964 by Academician Gustav Naan, Estonia, Tartu. He wrote [7]:

"In our real world we could extract any amount of energy from vacuum if some technology provides at the same time the extracting of the same amount of energy for anti-world. Total sum value of energy is equal to zero."

Let's note also that similar conception of "dynamical zero" was applied in ancient India mathematics, i.e. "zero" is not "nothing" but it is hidden possibilities (balance of forces).

One more interesting question appears: what is about reality of the particle of matter after we have claimed that its mass-parameters are parameters of certain process? With this idea the material world as a whole is certain process and "stability" is not a property of some object but a parameter of its existence, which is a process in space-time of some certain energy density and some certain structure. By analogy the vortex in liquid is a process but it is not a liquid.

Thereafter, as electron was presented by Shredinger as wave packet and by Whittaker as function of two scalar potentials, the old idea of instability or **dynamic structure of matter** has the possibility of experimental testing and development as a

teleportation technology. This idea is technology of space-time engineering, i.e. creation of the space-time with some certain parameters where curvature (or rate of time) determined rate of existence of the matter in space. It is related with some energy density, which can be increased or decreased. Since by this way it is possible to consider any material particle of substance as certain process, which is balanced by corresponding time-reversed process, so there is no theoretical difficulties to develop technologies of chemical transmutation, materialization, dematerialization, teleportation etc.

So, the using of potential energy to create a process of dissipation of power in load does not violates the Law of Conservation, and this Law can be generalized: the total energy of four dimensional system is amount of energy of processes in time and energy of processes in reversed time, it is constant and it is equal to zero.

Now let's try to review some free energy projects (the systems to produce work without consumption of fuel). Russian Peter the Great had intention to visit Germany in 1725 to test the Orferius' device. There is a very old description of "perpetually rotating wheel", which was made in India by inventor Bhaskar in 1150! From that times the mind of inventors is developed to other modern systems but due to the efforts of scientific groups, which are interested to keep in force the ideas of primitive materialism, the great idea of free energy transformation is distorted to such extent that any person, who began to speak about free energy, had a chance to get the name of "mad". Why? The reason is common understanding of the "power", which is "some work per unit of time" and generally it can be presented only as result of some transformation of matter structure, i.e. disintegration, chemical reaction, nuclear decay, nuclear synthesis or any change of structure of a matter. In any case, a material (the firewood, oil products or nuclear fuel) is considered as the fuel, regardless of its transformation method.

Some concepts did not consider the fields (electromagnetic, gravitational and others) as a kind of matter. So hypotheses, and even successful experiments on transformation of "non-material" type of energy in energy of material object (into the work) were not taken into consideration. The physics is a study about measurable and tangible quantities. New measurement methods let us work with a new physical phenomenon. So, we can see that **real situation in alternative energy is changing due to experimenters efforts** but not from the great theoretical team.

Some time ago the electric energy was not considered as a material object, but gradually people have been able to refuse the gas pipes, which were real material source of power for the gas light lamp, in favor of electric wires for electrical illumination. In a short time, I think, it will be possible to refuse the wires and we'll

consider the aether (physical vacuum) as unlimited energy source if we organize **the process of transformation of space-time parameters**. It will be necessary to drop the old conception of "primary source of power", which should be connected with the consumer by some method and to develop conception of free energy source in any place "on-demand".

Let's consider, what the term "free energy" means today. The energy in general sense means the "ability of body to produce some work". The energy of closed system is constant. Certain device can look like "perpetual mobile", but nobody will be shocked because the way of energy "inflow" is known. For example, solar panel battery is obtaining its power from external source of light. But in general case, 3-dimensional observer can see nothing similar to the inflow of energy into the system if multi-dimensional energy balance is not analyzed. In other words, "perpetual mobile" is a right name since for its description it is necessary to use notions of "Time", "Eternity", "Causality" and other categories, which are more related with philosophy and religion but not with modern physics.

The "perpetual mobile idea" is really value to be the purpose of serious scientific work. In the book "Great experiments in physics" published by "World", 1973, Professor G. Lipson wrote: "Joule was the person of a very practical kind of mind and he was enthusiast of the perpetual mobile idea". I hope that it is not necessary to explain here who was Joule. However, "practicality" of free energy generators is obvious only for energy customers, but not for energy producers, who created the centralized system of energy distribution. This is the main reason of absence of alternative fuel-less energy systems in the modern market.

Let's consider the existing classification of "perpetual mobiles":

1. "Perpetual mobile" of the first kind is a design, which can "create energy". It is disputable aspect and all patent offices refuse to consider the patent claim of such type. They answer that "energy can not be created or destroyed" but energy can be transformed from one type into another type.
2. "Perpetual mobile" of the second kind is the collector of environmental heat. It is not a "thermo-pair" which uses temperature difference to produce electricity, but it is the "heat pump". This type of devices works with negative entropy, or more exactly, with sintropy. The terminology still is not defined but we can say that in entropy systems the produced work is equivalent to the dissipated heat and the work, which is produced by sintropy systems is equivalent to some absorbed environment heat.
3. The "perpetual mobile" of the third kind is a demonstration of perpetual motion without friction. The

analogue is electric current in superconductors. Development of this idea is creation of systems with negative friction. In electromagnetic systems it corresponds to the known cases of the "negative conductivity", i.e. some electrical circuits in this mode can generate output power.

Additionally, let's show that "creation of energy" is possible in theory, for example: two processes of equal power compensate each other $A + B = 0$. Let's assume that some technology creates another (inverse) process as: $0 = A + B$ i.e. two processes of some power in sum create zero result. In general principle, also there is possibility to use many processes balanced situation as $A + B + C + \dots = 0$ and this interesting conception is known as theory of multipolarity.

Let's consider some quite real (to my mind) examples from the history of development of free energy technologies. Nikola Tesla's investigations are not well known to modern scientists and engineers. In his works on development of wire-less telecommunication Tesla used flat spiral coils as a secondary winding of transformer. The magnetic field of such coil is radial and it is placed in the plane of the coil. In 1995 the author of this article experimented with similar flat spiral coils. I have to claim that when such coil is operating as secondary winding and the solenoid is the primary winding of the transformer then we can measure asymmetrical mutual induction, i.e. connection of active load (lamp) to output circuit of the transformer is free from input power in the primary winding. It is the simplest example of technical realization of the asymmetrical cause-effect connection, described by Kozyrev in his theory of active properties of time.

... "creation of energy" is possible in theory...

Another Tesla's invention is his resonance transformer. Modern electrical engineering describes transformer with forced electrical oscillations and radio engineering considers operation of resonance systems mainly. Tesla put the question on transformation of power in resonance transformer and by this way the efficiency can be more than 100%. With high frequency currents and high power level Tesla used single-wire terminals as loads, i.e. the lamps and other single-wire receivers of power (motors) were powered from high frequency changing electric field. Such single-wire terminal does not consume any power from primary source because it uses the change of potential in point of connection to conductor (let's note also that for maximum efficiency this point of connection should be one of the maximums of standing wave).

The notion about "free vibrations" belongs to Tesla and this term describes sinusoidal oscillations in electric circuit that is created after short non-sinusoidal impulse due to real vibrations of the free electrons. Resonance mode of the free vibrations can be the real way to excess power output.

Original Tesla's approach to electrodynamics allowed him to build in 1934 fuel-less car with electromotor, which was powered from some 12 vacuum tubes generator of unknown design.

The standing waves of electric field that were observed by Tesla during thunderstorm brought him to conclusion about possibility of the system to power remote energy consumers from energy generator without any transmission lines and without radiation methods. He assumed that it is necessary to create special standing wave of electric potential (or variable in time electric potential field) around the generator, then the unlimited number of loads (lamps, motors) in area of this potential field can be powered if they are tuned in resonance with oscillations of the generator. Let's notice that in each receiver the power can't be more than power of this generator but it is possible to install many independent "receivers" without mutual interference.

The modern investigations on these problems sound as sensation, because Tesla's works are unknown for the modern generation of scientists. Of course, modern electronics components and the tools facilities allow to create real "miracles" in comparison with the past age experiments. For example, engineer Avramenko described his work on single-wire power transmission in Journal of Russian Physical Ideas, 1991, No.2, and in journal "Inventor and rationalizator" 1992, No. 5, 6. The light bulb (or ventilator) was used as load of the single-wire power transmission line. This line can be made of high resistance material, for example, tungsten, but the power can be transmitted without heating of wire! It is possible to say that in this experiment a wire does not transmit power from the generator to the load, but the wire is the conductor of information signal, which is created by polarizational current opened and described by M. Faraday.

It is not difficult to repeat the experiments with single-wire line: it is necessary to place two diodes on the end of a line, which is connected to secondary windings of high voltage transformer (I used television set high voltage unit) by such a way that different poles of the diodes are connected to the line, Fig.3.

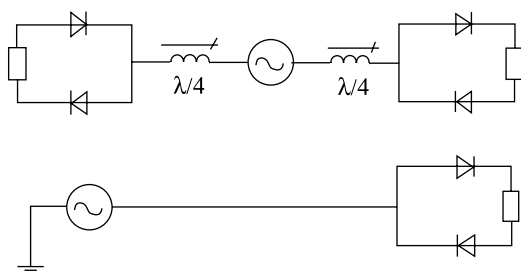


Fig.3

Two other poles of diodes create the source of potential difference (voltage), from what it is possible to charge the capacitor or to power the load (luminescent bulb). This diodes scheme is named as

"Avramenko's diodes plug". In my experiments it was determined that high efficiency mode is resonance mode in real line and in this case the maximum change of potential is created in the point of connection of the "Avramenko's diodes plug". There is well known formulas to calculate this resonance as quarter-wave antenna vibrator system. Of course, high frequency and high potential allow creating high power in the load. In 2001-2003 New Energy Technologies magazine have published new experimental results on single-wire power transmission reported by research team from Moscow (Prof. Strebkov, Avramenko, Nekrasov and others). For example, they built and tested lines from 20 to 100 Kwtt power level!

... the electric potential field can create non-compensated force in the system and to produce a work without any power input.

One more well known researcher on the subject of free energy was Thomas Townsend Brown. He considered creation of reactionless propulsion force by means of electric forces only. Ionization is not considered here! According to his works, the electric potential field can create non-compensated force in the system and to produce a work without any power input. English patent by T. T. Brown #300,311 of August 15, 1927 describes the method to create propulsion force and power from electric energy source only. In this first patent it was claimed that in ordinary flat electric capacitor (two flat plates and dielectric between them), which is charged up to 50 kilovolts and more, Brown discovered propulsion force. This force moves the capacitor to positively charged plate direction. It is only one of his ideas and in his other patents of 1930 - 1965 Brown has described many new methods to create propulsion force and free power in load by means of electric field only (scalar potential field as a source!).

... the efficiency of "electric system can be million to one"

We have to exclude ideas on electrokinetic apparatus since it is just a reactive method and propulsion force is result of ionization flow. Especial case is Brown's **idea to create the asymmetry of electrostatic forces** by means of some special form of surface, USA patent #3187206 of June 1, 1965, application of May 9, 1956 (Fig 4).

The schemes and descriptions by the Brown's patents are undoubtedly the work of great practical value. As was mentioned by Brown, the efficiency of "electric system can be million to one" because the potential field can produce real work, for example, rotate some electro generator, but it does not change the primary source of field.

In 1927 T. Brown demonstrated the devices in Ohio, later he worked in France. His works in France were

June 1, 1965

T. T. BROWN

3,187,206

ELECTROKINETIK APPARATUS

Filed May 9, 1958

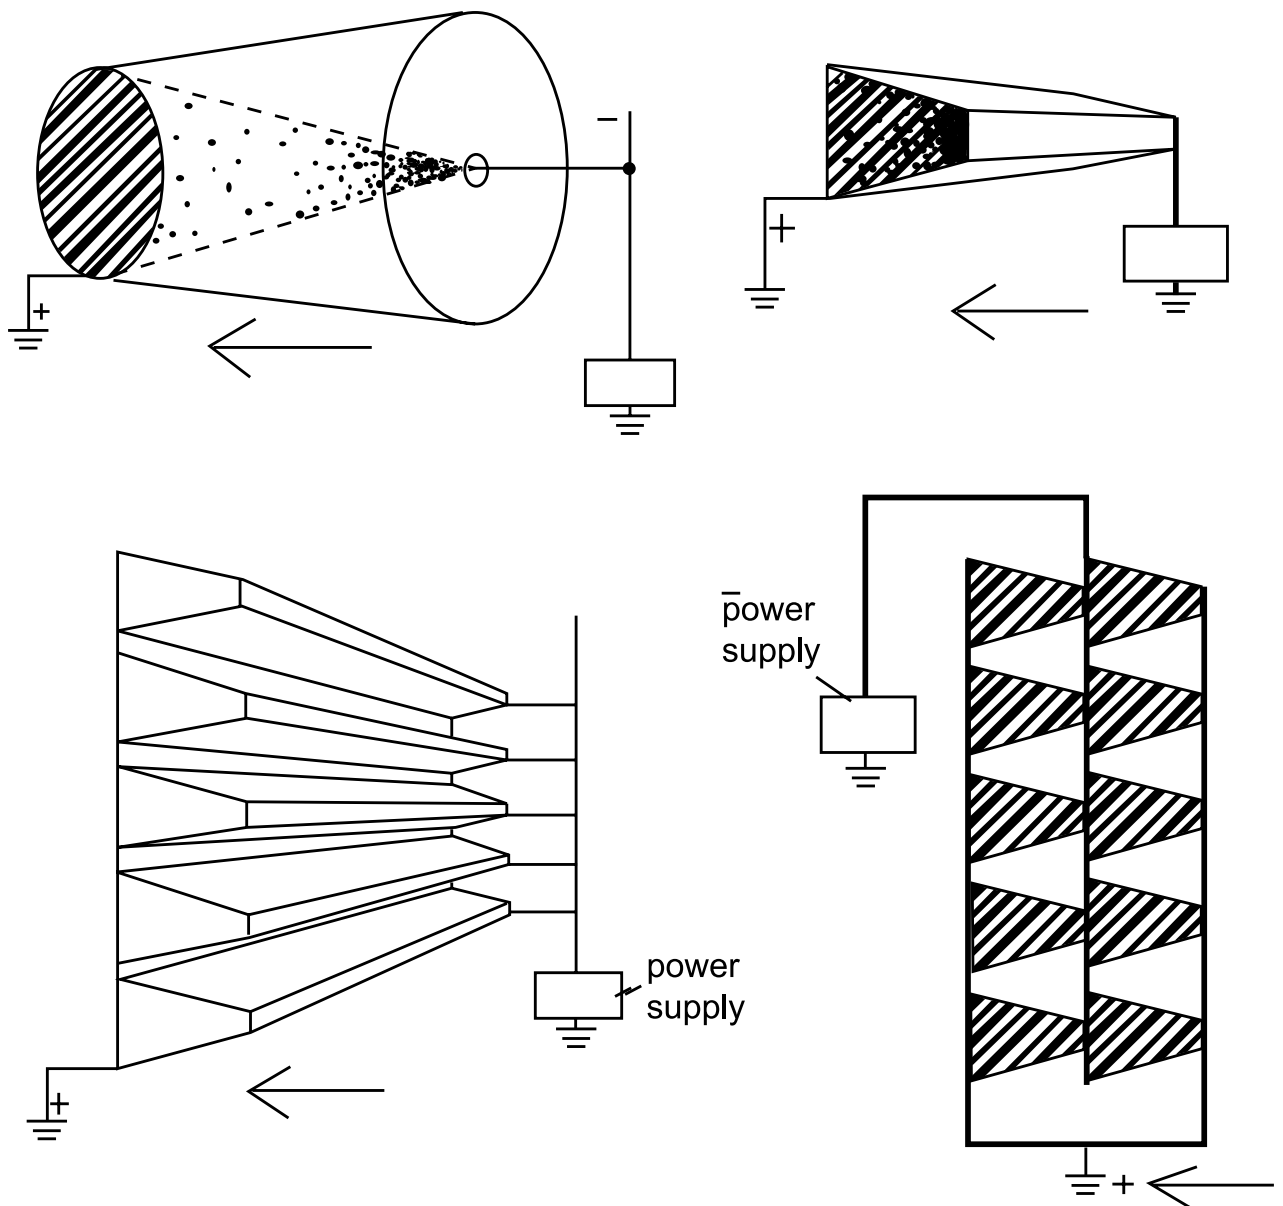


Fig. 4

Electrokinetic apparatus by T.T. Brown

Besides, there is the simplest example of creation of real work by means of potential field that is also resulting from the Brown's works. Usually two plates of electric capacitor are equal to each other. However, if one of the plates is small and another one is large then the electric field between them is not isotropy field and in this case there is some **gradient of intensity of the field**. In such field any dielectrical object, for example a ball, will be polarized unevenly and due to this fact some force should make it to be moving aside, where the field has the greater intensity. I have to note for mathematicians that since the intensity is "gradient of potential" then gradient of intensity is the **gradient of the gradient**, i.e. it is the second derivative of potential. This idea is an example of the well-known rule: the change gives the new quality.

The example of creation of the propulsion force by means of potential field is also connected with "perpetuum mobile" task, since conductivity currents in the capacitor are very small and it almost does not require power consumption (after being charged once time) and the system can produce mechanical work permanently, in this case it is the work against the gravity force. In general case, if the design allows asymmetrical energy transformations, then the surplus output power and reactionless propulsion force can be created in this system.

Most likely future aerospace systems, which are based on the electrogravity, are the most perspective direction of free energy technologies. Why not for the power engineering? It is clear that now there are some existing fuel heating systems, heat stations and power industry to provide by some traditional way all current needs of the society and due to this fact the innovation of any free energy technology is related with hard competition. However, for commercial programs for cosmos the reactive rockets principles are not acceptable more. Each satellite during its operation should produce profit to compensate large expenses for the rocket-carrier. Only fuel-less propulsion systems can allow developing space commercial programs that are new infinite market. Let's note that the gravitational (reactionless propulsion) technologies are not related with cosmodrome and their cost can be quite acceptable to realize the project with private funds.

... future aerospace systems, which are based on the electrogravity, are the most perspective direction of free energy technologies.

There are some known examples of free energy systems.

In 1921 The Seattle Times, as well as Denver Post of August 8, 1921 published the articles about inventions of Alfred Earl Hubbard. His device included the central core with coil and eight remote coils placed around the central core. After primary impulse, the impulses

in all coils were powered and rotating magnetic field was created in central coil. The power produced in the central coil was quite sufficient for self-excitation of the system and for producing of useful work in the load (motor). The boat and the car with electromotor, which was powered from the Hubbard's generator, were demonstrated.

In 1928, Lester Hendershot invented the electric generator of 300-Watts power. This device was designed of details used in radio-receiver to get oscillator (500 kilohertz) and non-inductive coil. Later, in 1970, William Cooper experimented with non-inductive bifilar coils. He used induction phenomenon in the case of zero magnetic component (two-wire winding or flat spire coil).

The Cooper's USA patent 3610971 of 1971 describes **the principle and the device to create power in secondary circuit without reaction on primary circuit**, as well as method to get reactionless propulsion force for aerospace application. Cooper also has found that specially designed coils can produce the field, which can not be screened and this field has some common parameters with the gravitational field.

The gravitation is considered by Cooper as a polarization of atoms in gravity field of planet. So he declares in description of his patent: "the electronic generator... of super high frequency creating the pulsing electric field of single polarity... acting in opposite direction to the Earth gravitational field... that to depolarized the atoms and to release them from the gravitation".

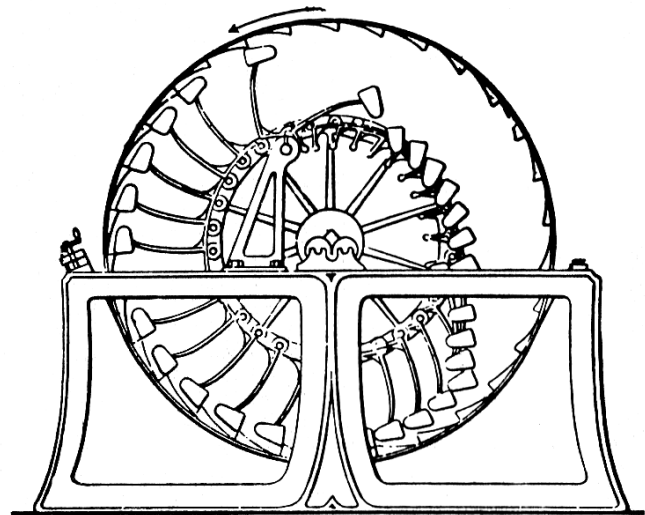


Fig.5

By the way, the gravitational field itself can be used to get a power. "Unbalanced wheel" is a well known design. The weights on the one side of the wheel, which is rotating in vertical plane, can be organized to be moving to axis, but on the another side the same weights can be organized to be shifted from the axis to the periphery of the wheel. By this way there is some

constant shifted center of gravity in the system and it can be permanently rotating system. One of the inventors who built such wheel is Hugo R. Fraga, Havana, Cuba (The Perpetual Motion Mystery. R.A. Ford, Lindsay Publications Inc., Bradley, IL 60915, USA, 1987, see Fig. 5).

The earliest information about such systems is dated of 1150 and the name of inventor is Bhaskar, India. He used the tangential disposed pipes, which were half-filled with water. In France (1235-1240) William de Onnecure demonstrated self-rotation wheel with seven weights. In Italy (1438) Mariano de Jacopo has built the system made of eight bars disposed in the plane of rotation, and the bar can be fold up in the middle like elbow joint to provide rotation. One of the well-known and documented events of real demonstration of perpetual rotation wheel was mentioned in 1620. Edward Somerset (Second Marquis of Worcester), author of the book "Century of Inventions", 1663, has built and tested the wheel of about 4 meters in diameter, 14 weights of 25 kilograms each. The test of this machine was organized in London, in witness of King Karl, Grand Duke Hamilton and Grand Duke Richmond, and there are files in royal archives about this test. The descriptions of these and other systems are published in the book "Perpetual mobiles: past and present time" by Brodiansky, Moscow, Energoatomisdat, 1989.



Fig.6

In different idea, which is known from Leonardo Da Vinci drawings, lifting of water is produced by the helical "Archimedes' screw" of small diameter with large centrifugal acceleration, which reduces weight, but lowering of water was organized with the screw of other (large) diameter, so the force of weight is working to rotate this screw by the weight of the falling water. The paradox of these systems will be removed if to consider them as systems of variable topology, as it was done at

the beginning of the present article. Practically, the **cycle is separated here into two processes** (the lifting and falling of mass) in the system with different parameters (the topology) for the first stage and the second stage of the cycle, but herewith **it is necessary to consider two different physical systems, not one and the same**. In that case, the classical theory can explain the work created by potential gravitational field of our planet as energy exchange between two different systems.

Other well known topic is research projects by John Searle, i.e. the "Searle's disks" (Fig. 6). It is necessary to note that the inventor mentioned in his articles anti-gravitational effect and free energy output also. The address is: John Searle, 13 Blackburn Lower Strand, Graham Park Estate, London MW9 5 NG, United Kingdom.

In several words we can say that rotor makes free electrons to be displaced to the peripheries of the system. With sufficient velocity it was mentioned that there is phosphorescence and ionization around the disk. It is possible to assume that main effect is based on well known Lorenz forces and understanding of the Poynting vector, which is circulating in this system. The ionization currents are closed through the space from periphery to the center, and self-rotation of the disk is provided by the classical Lorenz force, since the current interacts with magnetic field of the rollers.

In Russian experiments of 1992 Roshin and Godin built similar system of 7KWtt power output and they claimed that 100 kg axial force and areas of decreased temperature in environmental also were detected. Fig.7 demonstrates main parts of the system by Godin and Roshin.

It is necessary to note that similar anti-gravitational effects appearing for the case of over-unity operation were observed by different inventors independently. For example, in 1990 Floyd Sweet demonstrated his invention named as "vacuum triode amplifier" VTA. The barium magnets were pre-conditioned by special method to be used in special "trigger mode". This "bi-stable condition of magnet" provides possibility of transition from one direction of field to another direction due to the weak control signal, which was provided from external generator. It is known that if the material was pre-conditioned by the magnetic switching of 60 Hz frequency then its control signal must have the same 60 Hz frequency. A part of output power was closed to provide feedback and additionally some power can be used in output coil for the load. Tom Bearden studied the scheme of vacuum triode amplifier and confirmed that it demonstrates the work with negative energy. It means that the work in the load is connected with use of negative time. In this negative time, according to Bearden, the gravity is repulsing force. The experiments on VTA demonstrated that VTA decreased its weight according to level of the power, which is extracted from vacuum. Additionally we can

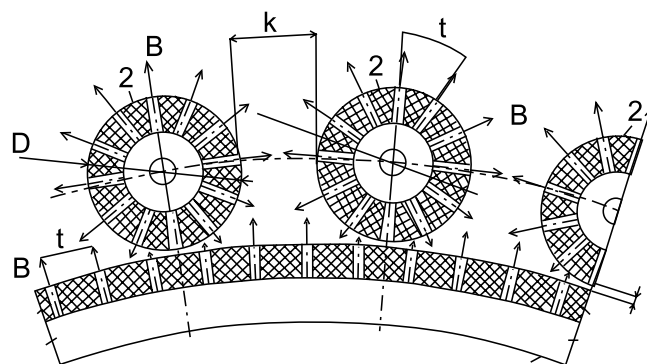
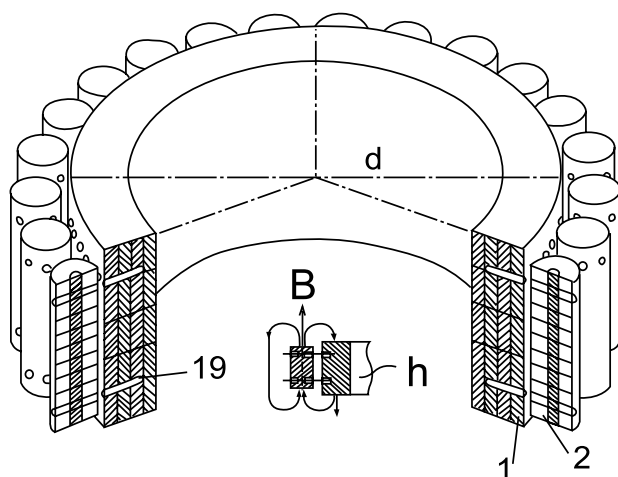


Fig.7

say that permanent magnets and coils of VTA were self-cooling during operation and the temperature difference was about 20 degrees in contrast with the environmental temperature.

One of VTA schemes includes two sets of magnets $4 \times 6 \times 1$ inch, placed on two walls of frame. The attraction is created between them. Output and controlling coils are located between them. The axes of output coils are parallel to the magnetic field lines, but the axis of control coils are placed under 90 degrees angle. The secret of system is the "conditioning process", which "brings the magnets to the special condition". It is necessary to create great number of micro-cracks in the magnet due to re-orientations of magnetic domains. In such "half-magnet" the domains get the ability to be orientated in the same direction in a weak "control" magnetic field. In fact, they are not domains but large parts of magnet's material, separated by micro-cracks, that is to say acoustic domains. Many researchers repeat Floyd's works. Let's note that arc discharge of alternating current through magnet barium ceramics directly can provide the best results of the "conditioning" process. The coil of "conditioning" is not necessary in this case. The frequency of alternating current must be corresponded to the frequency of the control signal. Thereby, Sweet was creating **the bi-stable solid-state condition of magnetic substance**. The acoustic resonance is the reason of oscillations with the frequency according to the control weak magnetic field. Floyd Sweet died on July 5, 1995 at age of 83 years old. It is known, that his widow sent the archives to some great Automobile Corporation.

... the extraction of space energy is result of transformation of vacuum energy but from the other hand the energy density in this case determines so called "time rate"

It is interesting to note again that the magnets of VTA demonstrated self-cooling during operation, up to 20

degrees difference in comparison with the environmental temperature. It is one more example of relation between notion "density of time" and "energy". We can say that the extraction of space energy is result of transformation of vacuum energy but from the other hand the energy density in this case determines so called "time rate".

Kozyrev's articles [4] on causal mechanics theory and experiments describe possibility to use "time course for producing of useful work". Kozyrev introduced notion "density of time" and he demonstrated experimentally several methods how to change the density of time, which depends on irreversible processes intensity. Powerful "generator" of such processes is biosphere of our plane and it creates **season and daily changes of the density of time**. It is known that VTA power output also was variable in different time of day and night. It can be explained by Kozyrev. Next step in logical development of this idea is **to change notions from the "density of time" to "density of aether"** [10].

Relation between magnet phenomena and aether circulations was known from the beginning of the electrodynamics and now we can assume that VTA was real example of asymmetrical cause-effect connection, where the hardness of this connection depends on the density of aether. In this case the season and daily variation of the aether density are reason of VTA output power variations. So, we can make a conclusion: conception of **asymmetrical cause-effect connections** should be used as theoretical basis of all over-unity systems.

Generation of extra power in nonlinear materials (ferrites and dielectrics) was considered by Nikolay E. Zayev, Journal of Russian Physical Ideas, #1, 1991. Discovery was claimed as "Cooling of some dielectrics by changing electric field with generation of energy", Russia discovery #32-OT-10159, November 14, 1979; the inventions were also claimed as "Method of transformation of heat energy of dielectrics into electric

energy”, Russian patent claim #3601725/07 (084905), of June 4, 1983 and “Method of transformation of heat energy of ferrites into electric energy”, Russian patent claim #3601726/25 (084904), of April 3, 1983. This theory is not about some transformation of space-time structure but in any case the practical application of conversion of environmental heat is very important because this work is real basis of free energy systems.

In one of Zaev's articles, which were published in Journal of Russian Physical Ideas, he quoted from K. Zialkovsky: “If the heat can be transmitted from cold body to hot body, then it must have enormous importance, and not only philosophical or scientific, but also practical importance. The Clausius postulate is not confirmed in this case. The gravitational force, as well as other reasons (number of the reasons is unknown) break this postulate... heat can be transmitted from cold body to hot body but only as the result of some exclusive conditions”, published in Russian, “The Second beginning of thermodynamics”, Kaluga, Russia, 1914. So, the inventor of free energy system should provide this “exclusive conditions” to organize collection and transformation of environmental heat in his free energy system.

Another well-known free energy system is Swiss electrostatic machine. In spiritual commune Methernitha, Linden in Switzerland, since 1980 several free energy devices have been generating total power of 750 kilowatts. From the technical point of view, these devices are modernized electrophore generator. Permanent magnets also included into design of these devices. The machine of 20 cm diameter produces about 200 watts, and a big machine has the disk of 3 meters and it produces about 30 kilowatts, Fig. 8.

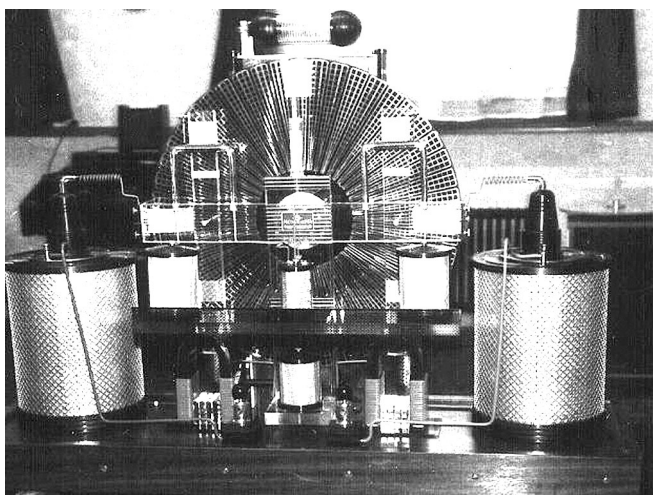


Fig.8

One of the modern technical decisions, which are very close to this Swiss machine is patent USA No. 4897592 by William Hide, January 30, 1990. This device is

“system to generate power from electric field”. It is one more example of work, which can be produced by potential field, in particularly by means of electric field that can be used as free source of power. The energy (the potential energy) is the possibility to produce work and the power is a work per unit of time, i.e. it is a process. The properly organized process, for example acceleration of rotor in Hide's machine, uses the potential field on the part of positive work (acceleration) and the author of the patent provides meta screen on the part of the trajectory, where the field decelerates the rotor.

... it is “perpetuum mobile” and it can not be patented even if it really works!

One more example is Reed's motor, which uses energy of permanent magnets. By the description of 1991 it is made of four disks (two immovable discs and two rotating discs), and eight magnets are placed on them. Howard Johnson used similar method, USA patent #4151431, Fig.9

U. S. Patent Apr. 24, 1979 Sheet 1 of 2 4, 151,431

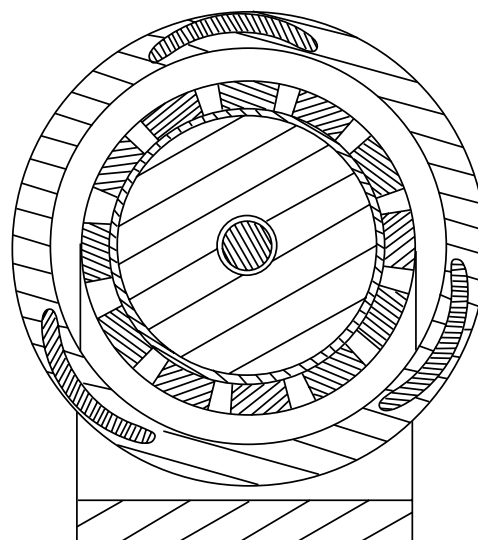
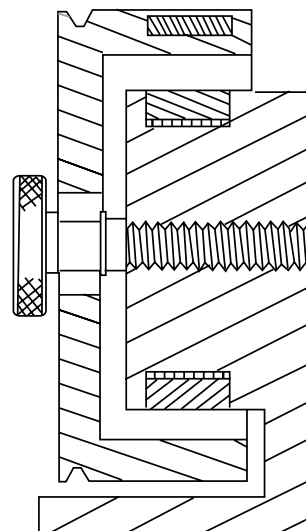


Fig.9

Journal "Science & Mechanics" of 1980 describes this invention. Howard filled the application in 1973 but he has got the confirmation only in 1979! The reason of delay is very clear: it is "perpetuum mobile" and it can not be patented even if it really works! Johnson found clear and simple description of generation of power in his device and explained it as "extraction of power from inner energy of electron spin in ferromagnetic material".

From text of his description it follows that USA patent #4,151,431 of April 24, 1979, "Permanent magnet motor", author Howard R. Johnson, application #422,306 December 6, 1973 was developed from the prototype that is USA patent #4,074,153 of 1978, class of international classification H02K 41/00E:

"The invention is directed to the method of utilizing the unpaired electron spins in ferromagnetic and other materials as a source of magnetic fields for producing power without any electron flow as occurs in normal conductors, and to permanent magnet motors for utilizing this method to produce a power source. In the practice of the invention the unpaired electron spins occurring within permanent magnets are utilized to produce a motive power source solely through the superconducting characteristics of a permanent magnet and the magnetic flux created by the magnets are controlled and concentrated to orient the magnetic forces generated in such a manner to useful continuous work, such as the displacement of a rotor with respect to a stator. The timing and orientation of magnetic forces at the rotor and stator components produced by the permanent magnets to produce a motor is accomplished with the proper geometrical relationship of these components."

...conception of asymmetrical cause-effect connections should be used as theoretical basis of all over-unity systems.

It is reported that functioning Johnson's model produced about 5 kilowatts power free of any primary source of energy. Let's note that Johnson writes in his patent about permanent magnet as about system with "super conductive parameters". The currents of electrons in permanent magnet are manifestation of real superconductivity and for this case it is not necessary to provide the cooling for zero ohmic resistance. Moreover, the "resistance" must be negative since the magnet could save and renew its magnetized condition. Thereby, any permanent magnet is the example of perpetuum mobile of the third kind on the micro level. Also we can say the same about each atom.

Also, let's note that in general case motion (rotation) can be created due to the discussed above gradient of field, which in Johnson's device is result of asymmetry in "rotor-stator" system. By the similar way the gradient of velocity of airflow above and below wing creates the gradient of pressure and this fact produces great lifting power in airplanes.

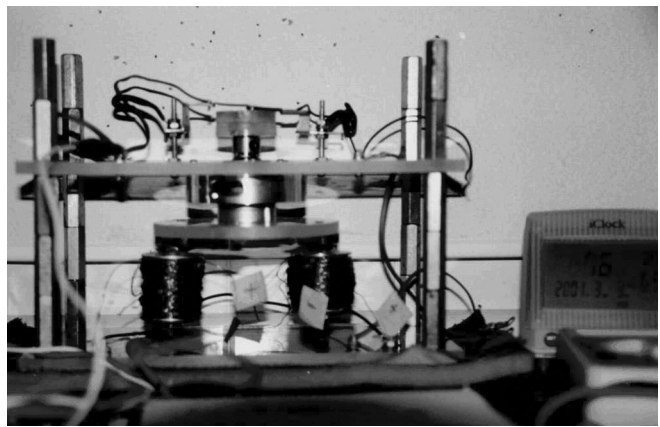


Fig.10

Well-known variant of permanent motor-generator is Adams motor, Fig.10. The rotor with radial orientated (the same pole outward) permanent magnets is rotating and creating induced currents in stator coils, which are placed around rotor in the plane of rotation. From the point of traditional electrical engineering, any motor-generator without closed magnet flux is not high efficient device. However, exactly open magnetic flux of the Adams motor allows to take off power without deceleration of the rotor. We can assume that in this case phenomenon of electromagnetic induction is not important but in this design there is magnetic induction only, i.e. magnetization and demagnetization of cores in the field of the moving magnet. It is a perfect analogy with phenomena of electric induction that is "electrization by influence". Similar "magnetization by influence" differs from electromagnetic induction and secondary magnetic field in winding of generator is not related with deceleration of the rotor. Robert Adams works with Harold Aspden under patenting of their system. Adams is more than 70 years old but from our correspondence with him we can say that he is going to build demonstration version of 10 Kwtt generator.

...any permanent magnet is the example of perpetuum mobile of the third kind on the micro level.

There is also special name "alternators" for this class of devices, which use interruption of magnetic flux, for example it is the device by USA patent of John Echlin #4567407.

The experiments to investigate the alternator principles were organized also by the author of this article and it was demonstrated that ferrite core of the generator coil is self-cooling. The simplest experiment is based on electro motor, which rotates iron plate and it periodically appears in the gap between magnet and coil. But it is necessary to note that change of the flux in the coil area should be organized by such a way to decrease the flux of the field in the rapprochement half-cycle and to increase the flux for the moving off half-cycle. In this case the

rotor is accelerated by the secondary field (back-EMF). From 1994 to 2003 several experiments were produced and main principles were claimed in the patent description, Fig.11.

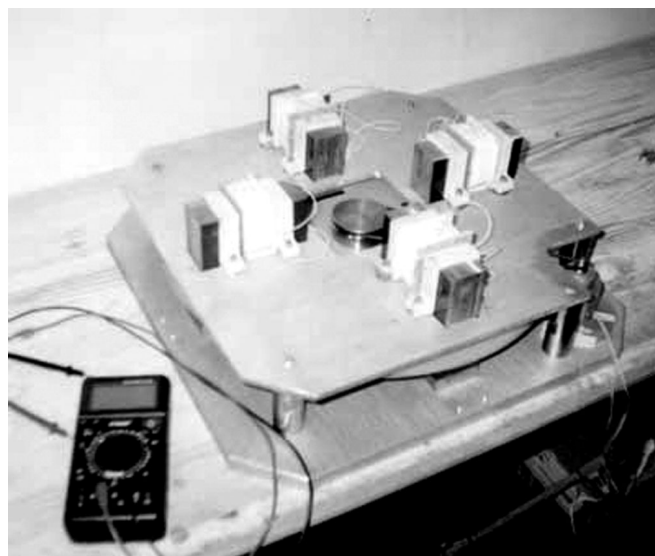
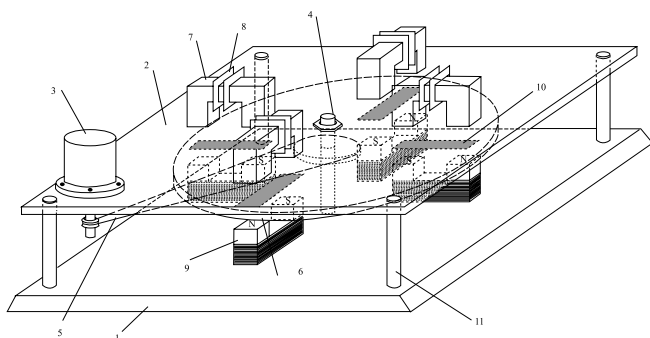


Fig.11

One more topic is "extraction of power from air" and Josef Swenson has conducted the series of simple experiments to develop it. The frequency of natural pulsations of electric field of planet is about 7.5 Hz and it is well known from Tesla's age. Swenson works with frequency 375 kilohertz and antenna of 10 meters. Please, contact for more details: Josef Swenson 423 North 15th Street, Moorhead, Minnesota

56560, USA. However, everybody remembers from the school story about simplest electrical experiments by Lomonosov and Rihman, who investigated arc discharge in gap between iron wire from a roof ("antenna") and ground wire. Let's include the resonance circuit "inductance-capacity" and diode rectifier to get some useful work in the load "from atmospheric electricity", Fig.12.

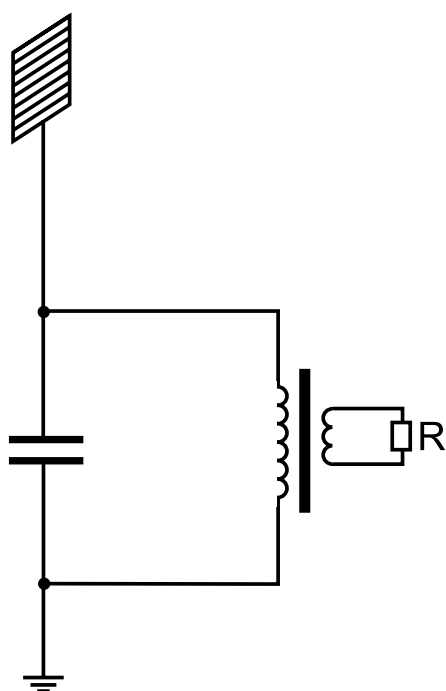


Fig.12

In 1900-1930 a lot of articles were published in technical press about Henry Moray. His demonstration systems produced more than 50 kilowatts free power output. It is known that Mr. Yakovlev (from USSR Foreign Department headed by Mr. Molotov) visited Morey in November of 1929 in New York to test his devices. The devices consist of capacitors, coils and special electronic-vacuum lamps.

In 1990 journal "Magnets", 2 (3) published article, which describe analogy between Moray's devices and Hubbard's coils, which can extract power by means of inner energy of nucleuses of materials if special resonance is created. In 1978 Cospray Research Institute has published the well-known book "The Sea of Energy" by T. N. Moray, in which theory of Moray is presented most completely.

RQM Raum-Quanten-Motoren Corporation (Schmiedgasse 48, CH-8640 Rapperswil, Switzerland, fax 41-55-2125209) offers for free energy devices of different power level: RQM 25 kilowatt and RQM 200 kilowatt. The principle of work is based on an invention by Oliver Crane and his theory. Web site <http://www.rqm.ch>. But I have to note that in present time they are developing capitalization of the company

mainly (actives are above 650 million dollars) than innovation of the new technology.

One more historical example: in 1925-1945, Hans Koler demonstrated his free energy devices. The system was built in Germany and it produced 60 kilowatts of free power. The description includes six permanent magnets and coils, which were superposed in plane of hexagon form. Each magnet is core of the coil.

Another interesting topic is unipolar induction effect, which is well-known from Faraday. This effect creates electro motive force (EMF) in rotating disk if axial magnetic field is applied to the disk. One of the well-known practical developments in this area is device by Bruce de Palma. In 1991 he has published the results of his tests, from which it follows that deceleration of the rotor due to back EMF in the case of unipolar induction is less than in traditional electro generators. So output power of system can exceed the power, which is necessary to rotate the rotor.

Really, motion of electrons in magnetic field, which is perpendicular to plane of rotation, is the reason of the Lorenz force and this force acts in radial direction that can not be the reason of deceleration. Indian research on this topic is developing by P. Tewari. In New Zealand there is research group headed by Dr. Ashley Gray. In 1994 the leader of Japanese market MITI published report about progress in 40 KWtt unipolar generator, which uses superconductors for its electromagnets. The interest of Japan to alternative energy projects can be explained by the position of Japan on fuel market.

There is a well known rule: Demand is related with Proposals. It is easy to imagine the prospects of local introducing of free energy systems in one or several countries, if some producers of product will be able to exclude expenses on electricity and fuel from cost sales. Other countries of their own rich natural resources (for example, oil) will be in problematic position on the new international market, mainly due to the fact that their industry and transport are oriented to conversion and consumption of oil fuel that increase the cost of all products.

... increase of the spark gap produces more surplus power in the load of the circuit.

One more modern free device was invented by Wingate Lambertson, USA. In his device free electrons get the additional energy passing through the number of thin metal-ceramic composed layers. The units were designed by the authors and each unit can generate 1600 watts, and it is possible to connect them in parallel. The address of author: Dr. Wingate Lambertson, 216 83rd Street, Holmes Beach, Florida 34217, USA.

Especially the researches on free energy with plasma processes should be noted here. In 1980-1990 Alexander Chernetsky, Yuri Galkin and others have published the

results of experiments on creation of "self generated discharge" SGD. The electric arc was placed consecutively into secondary circuit of electromagnetic transformer and it produces real increase of power in load and reduction of consumption power in primary circuit of transformer. The author of the present article produced simplest experiments to investigate the arc (electric discharge) in electric circuits and possibility to create the mode of "negative resistance" in this circuit was confirmed. One of the effects was demonstrated in 1996 during the conferences "New Ideas in Natural Science", St.-Petersburg.

Adjusting parameters of arc (distance between two electrodes) it is possible to see that consumption current is decreasing until zero and then it can change its direction i.e. this system begins to generate the power. During similar experiment of 1971 by Dr. Chernetsky substation transformer in Moscow Aviation Institute was destroyed in result of strong "reversed current" impulse, which exceeded consumed power in 10 times more. According to Chernetsky's concept, the reason of this mode is well known phenomenon of plasma instability and **pinch-effect for great currents**. However, the author of this article tested device, which demonstrated similar effect (switching on the load in secondary circuit of transformer and in the presence of arc in this circuit, consumption power does not increase, but reduces) for small currents about 300 mA.

Since for pinch-effect it is necessary hundreds Amperes then it was offered another explanation: the surplus power in this circuit appears due to the acceleration of electrons in the gap between electrodes, i.e. particles of plasma are **accelerated by means of electric potential field between two electrodes**. It is noted during the experiments that increase of the spark gap produces more **surplus power in the load of the circuit**. To avoid mistakes the measurements of the consumed power were organized in DC (direct current) battery circuit and therefore there is no any reason to speak of phase shifts mistakes to try to explain skeptically this effect.

... waves of density of time are used by organisms for their vital activity.

Today theory and experiments on self-generating discharge are quite well developed to build free energy systems of any power scale. The reason of delay in its practical development is a complex problem: this work leaves the frames of classical physics. In his book "About physical nature of bio-energy and its simulation", Moscow, Publ. VZPI, 1989, Dr. Chernetsky considered the structure of biological fields and bio-energy processes in living organisms from the point of **longitudinal waves conception**. Self-generating discharge in the mode of negative resistance produces such longitudinal waves and they are self-sustaining (self-powered energetically) and it is considered as field of living object.

Really experimentators of the Chernetsky's group, who worked with SGD device detected influence of biologically active radiations and fields, which can be not screened by usual methods. It was reported by Chernetsky that parameters of this radiation can be selected to accelerate the development of plants and biomass or to suppress it. So, we should speak about artificial living biological system or biological form of energy for this class of free energy devices. Perhaps by the same plasma oscillation way all living organisms provide its vital activity, since long time ago it was known that metabolism and food can not provide enough energy for vital processes.

Nikolay A. Kozyrev also wrote about "reason of life" and he confirmed that waves of density of time are used by organisms for their vital activity. Between "waves of density of time" and "waves with longitudinal component" there is a clear analogy. Kozyrev and Chernetsky experimentally demonstrated methods of creation of such waves.

...any free energy system should change the causality in surrounding space-time.

New Energy News magazine, March 1996, wrote about attempts to innovate for American aerospace stations special power source, which uses similar plasma technology: anomalous electric discharge. The USA patents #5416391 and #5449989 belong to Dr. Paulo Correa and Dr. Alexandra Correa, Canada. In their report on free energy Denver conference it was claimed that efficiency is about 483%.

Let's note one more free energy topic: high efficient electrolysis. Classical electrolysis as decomposition of electrolyte in electric field is a wonderful example of work, which is produced by field and it can be organized by such a way to be free from the primary energy source (battery). The traditional scheme uses closed circuit of current through electrolyte and the battery, so the battery is discharged during the operation with electrolytic cell. However any physics textbook confirms that **ions in electrolyte are moving due to electric field only, i.e. work to organize the displacement of ions and heat power, which is connected with this work, are produced by the potential field and expenses of the primary power are not required.**

The current through the battery, which is created in usual closed electric circuit destroys the primary difference of potentials in the battery but it is not some necessary condition. For correct organization of the experiment the products of electrolysis (gases) can be created almost free and their utilization (burning) can provide more heat power than input electric power.

Prof. Latchinov, the real member of Russian Physico-Chemical Society, who patented his method of electrolysis in 1888, mentioned that in some cases the

electrolytic cell is freezing during its operation. This is an effect of the law of Conservation, which forces to return the surplus power by means of heat environmental energy. In the experiment by Latchinov the electrolytic cell can create gases of high pressure and consumed power is the same as for the case of low pressure gases. However, it is clear that high pressure gases can produce more work than low pressure gases do. This question was sensational problem in scientific societies of 1888 and it is not solved yet completely.

One of other variants of high efficient electrolysis was investigated by Igor Goriatchev, Russia. Instead of usual 3 Volts level of electrolysis, Goriatchev uses 0.2 Volt pulsing mode. He claimed ratio output/input as 1500% efficiency and he hopes to increase this value twice in more perfect design.

Professor Kanarev from Krasnodar wrote about his experiments on plasma electrolysis and has proved that in electrolysis of water output power can be more than input power.

Real example of "perpetuum mobile of the second kind" is invention by Russian engineer Albert Serogodsky (Moscow) and German engineer Bernard Sheffer (Berlin). They have patented new system for direct transformation of environmental heat into electricity, Germany patent #4244016. Retro-condensation of mixture of benzine and water is organized in closed system under temperature of 154 °C degrees. You can try to get more info from: Werkstatt für Dezentrale Energieforschung, Pasewaldtstrasse 7, 14169 Berlin, Germany.

The fundamental theoretical researches on direct transformation of environmental heat to useful work were provided by Real Member of The Russian Physical Society Mr. Gennady N. Buynov, St.-Petersburg. The description of his project on "The Mono-thermal device" was published in journal "Russian Ideas" #2, 1992.

In 1995 the scientific journal of Russian Physical Society #1-6 published article "Perpetuum mobile of the second kind (paired gas-chemical cycle)". The author Gennady N. Buynov proposed to consider that **entropy function can be abortive**, i.e. it can be undetermined in some place if reversible chemical reactions are presented in the system.

Herewith, the circular integral of entropy is not a zero and in this case the heat function but not entropy function (according to the Gess law) becomes the function of condition.

Buynov offers to use four-oxide of nitrogen as working matter for this cycle. His works are excellent example of scientific enthusiasm, which (in combination with financial interest of the customers) could produce real results for Russia many years ago. Let's note that

priority of this discovery belongs to Russia in spite of attempts of other scientists to claim and develop this idea now as their own work.

We can make a very interesting conclusion if we analyze history of so called "cold fusion" discovery. According to de-classified materials of 1960, priorities of Russia in this topic are obvious. In 1989 Pons and Fleischman have reported about results of their experiment. In 1995 Russian Journal "Inventor and Rationalizator", #1 has published article about invention made by Ivan S. Filimonenko that was named in 1957 as "warm nuclear syntheses". In 1957 he detected **extra power output in process of heavy water electrolysis** and he mentioned several applied aspects, for example, propulsion force and possibility to reduce radioactivity by means of this process. In 1960 Kurchatov, Korolev and Zhukov have supported the ideas of the author. Russian Government adopted secret resolution on this work:

1. Investigation of energy generation.
2. Development of propulsion without reactive mass flow.
3. Research on protection from radioactivity.

But in next several years this work was suppressed by people of nuclear power plant team. The only system of such type named as TOPAZ was innovated for Russian aerospace systems. World-wide innovation of this technology is a real way to introduce "warm reactors of syntheses" and it is not necessary to wait for results of high-cost "Tokomak" project and other thermonuclear researches. Let's note that secondary effects (propulsion force and influence on radioactivity) are possible due to using of "free energy" aspect if output power is result of change of space-time parameters.

In 1994 Journal "Russian Ideas", #1-6, it was published an interesting document "Conclusion of The Moscow City Council Commission on the question about Ivan Filimonenko's discovery and its development". In this document it was recognized that it is vitally necessary to renew this works. But in 2003 we still have nothing new on this topic. Why? It can be assumed that the Problem of innovation for this technology is possible military application of the methods since influence on radioactivity (for example, remote reduction of radioactivity of some object) is area of interests of the Defense Department. The fact that energy generators by Filimonenko can be used for quick restoration of the present ecological balance is not so important in this case. The same conclusion is about propulsion method, which was proposed by Filimonenko. Mr. Korolev knew about this method; however present space programs are still based on rockets and reactive principles, and anti-gravity flying machines we can see only in fantastic movies.

At the same time, development of commercial cold fusion projects was started in some countries, for

example: Patterson Power Cell is introduced in Texas, USA (Clean Energy Technologies Inc., Dallas, Texas, fax 214-458-7690). More than thirty patents were owned by ENECO Corporation, which is collecting the main technological solutions in this area. The production of electrolytic thermal cells was started by Nova Resources Group., Inc., Colorado.

In August of 1995 Atomic Energy of Canada, Ltd. Company, which is member of The Planetary Association for Clean Energy, has published the review on modern methods of conversion of nucleus wastes and deactivation. Two new technologies were offered for introduction: contact processing by "Brown's gas" and remote processing by scalar (torsion) fields. Let's note that the technology proposed by Canadians and Filimonenko's technology demonstrate the effect of influence on the rates of radioactive decay.

These examples are only small part of real situation. Main references on publications are foreign and it can lead to wrong conclusion that Russia is delayed in this direction of new technologies development. In fact, Russia has more talented inventors and researchers than any other country. However, condition for work, patenting and publications of ideas are not the same, and usually Russian technologies cannot reach the level of international market. This problem depends only on real and official state policy with respect to inventors and scientists. In real life financial support of scientific institutes is mainly subsidy for management of the institutes, but not for science. The inventions and discoveries always were made by a certain real person, but not by Institute or some scientific team.

In Russia of last age and in the other world on the whole the institutes and laboratories have been creating for a new scientific problems, discoveries or new directions in science. It was necessary to claim about discovery and provide priority for own country to get official support. Main schools of thought appear by this natural way. By the same natural way the necessary in existing of some scientific institute can be removed when the idea grows up to serial production stage. If there are no any fresh ideas in this school then the institute should be transformed in design office of the production plant on this topic. It is almost impossible to create a new research institute in modern Russia, so really new ideas (if they are not ranged in frames of some existing scientific directions) can not be developed and they can not create a new school of thought in Russia.

... it is possible to make a conclusion about grandiose misinformation of society...

People (carriers of the new ideas) have to leave Russia to realize their sensational ideas on free energy and antigravitation topics. Why they do not work with Russian Academy of Sciences? It is the

rhetoical question. Usually after many years of correspondence with patent office or with official science bodies the authors can find that their ideas are published in "serious scientific magazines" but without any respect to their names...

Attachment 1 presents some information about patented technologies. When we study old and modern patent documents, it is possible to make a conclusion about **grandiose misinformation of society**, which leads to appearance of two different Worlds, separated by the level of knowledge: evident and hidden knowledge. The achievements of the second hidden world could change our planet, give a chance to remove all energy and ecological problems. Besides, we have discussed that some free energy systems (for example, self generated plasma discharge) have also the medical-biological aspects. This "influence" from free energy system is related with negative entropy processes in area of the operation of the system so some components of biological systems can be changed to less entropy. The design of free energy system defines the type of this influence. It was noted before that operation of any free energy system should be considered in high topology space-time as multidimensional system to see what the reason of the effect is.

So, since the rate of time course is determined by Nikolay A. Kozyrev as rate of cause-effect transformations, then any free energy system should change the causality in surrounding space-time. In this case we can assume that it creates quantum physics effects on the macro level. It is interesting to assume Heisenberg's uncertainty, tunnel effect and manifestation of wave characteristics (up to diffraction of objects) for macro level.

Some experimental data by Kozyrev is related with quantum effects, which were detected in his experiments with rotating and vibrating gyroscopes. This technology is the basis to design real teleportation systems, which will change parameters of space-time to allow changes of position of some material object from one point of space to another point of space (without transference on the distance between these points) by means of combining these points in the same place of space for some time.

The process of study of new technologies in alternative power industry and gravitation is developing actively in the world. Besides secret programs and institutes, it is possible to make a conclusion that activity of this work in countries of limited fuel resources is more efficient. Now Russia has rich **natural materials and oil resources but in the short time this advantage will not play any role in development of economy.**

Industrial and defense power of any country will depend on free energy technologies, knowledge on the biologically active energy and reactionless propulsion methods.

The new technology creates not only a new technical systems but also **new economical systems**. It is not physics but policy... Development of great Russian territories with industry of free energy technologies for home and commercial application is the way to change world economical balance in favor of Russia. It is difficult to say now what financial-economical group of modern Russia is most interested in development of this direction of science. The purpose of any financial-economical group is power on the market of energy resources, but when the free energy technologies are developing, then people and industrial or agricultural producers will be more independent from centralized system of energy and oil distribution, therefore, they will be more independent from influences of central authorities.

From the point of view of serious business, there is only one real argument in favor of developments of any really new technology: it should lead to increase of profit and expansion of the market. In this sense, it is possible to compare the new energy technologies with beginning of the steam machine age or with appearance of electric machines and illumination. This means the super profits and serious fight with competitors. To develop this way any efforts of scientists are not sufficient work. It is necessary to join them with the efforts of large business structures, which are interested to create new market of energy and power engineering in parallel to present monopoly fuel-energy market or to develop commercial exploration of space by means of new propulsion principles. In particular, telecommunication space satellites and projects on colonization of space could be the nearest commercial directions of the new market.

References

1. Sakharov A.D. "Quantum Fluctuations of Vacuum in Curved Space and Theory of Gravitation", Reports of Academy of Sciences USSR, vol. 12, 1968, page 1040.
2. Puthoff H.T., Ph. Review E, vol.48, num.2, p.1562-1565, "Extracting energy and heart from the vacuum"; Physical Review A, vol. 39, num. 5, "Gravity as a zero-point-fluctuation force".
3. Nassikas A.A., The Hypothesis of the Unified Field and the Principle of its Dual Interpretation, III International Conference "Problems of Space, Time, Gravitation", St.-Petersburg, 1994.
4. N.A. Kozyrev, Selected works, published by Leningrad State University, 1991, p.202, in Russian.
5. Gravitobiology, by T.E. Bearden, 1991, Tesla Book Company, P.O. Box 121873 Chula Vista, CA 91912, USA. Library of Congress Catalog Card Number 86-50553.
6. Hasselberg Josef, New Beginning of Thermodynamics, <http://hasslberger.com>, Hasslberger, Josef "The inventor and society" in Raum&Zeit #4, October 1989, Hasslberger, Josef "Vortex, the natural movement" in EXPLORE, No.5, Vol.3, 1992.

7. Gustav Naan, Symmetrical Universe, Tarty Astronomical Observatory, Vol. XXXIV, 1964.
8. New Results of Development and Testing of Single-Wire Electric Power System, Prof. Dmitry S. Strebkov, Eng. Stanislav V. Avramenko, Dr. Aleksey I. Nekrasov, Eng. Oleg A. Roschin, New Energy Technologies, #5(8), 2002.
9. An Experimental investigation of the Physical Effects In a Dynamic Magnetic System. V.V. Roschin and S.M. Godin, New Energy Technologies, #1, 2001.
10. Practical application of time rate control theory. Alexander V. Frolov, New Energy Technologies, #3, 2001.

Attachment 1

Methods and devices to create power without external sources and reactionless motion systems

- 3913004 October 14, 1975, Method and equipment to increase electric power, Robert Aleksander.
- 4975608 December 4, 1990, Motor with switchable magnetic resistance, Harold Aspden.
- 5288336 Converters of heat into electricity, Harold Aspden, see also patents 5,065,085 and 5,101,632
- 4622510 November 11, 1986, Parametric electric machine, Ferdinand Kap.
- 2912244 1959, Gravitational System, Ottis Karr.
- 4006401 February 1, 1977, Electromagnetic generator, V. Rivas
- 3811058, 3879622 Motors with permanent magnets.
- 1835721 December 8, 1931, Motor with permanent magnets, A. Povel.
- 1963213 June 19, 1934, Magnetic motor, G. Pose.
- 1859643 May 24, 1932, Motor with permanent magnets, G.L. Worsington.
- 1859764 May 24, 1932, Magnetic device, G. Baugon.
- 2982261 Mac Klinton's Air motor.
- 4595843 June 17, 1986, Transformer of rotation magnetic flux, Robert Del Vechio.
- 4567407 January 28, 1986, Motor - alternator, John Eklin.
- 3368141 January 6, 1968, Transformer in combination with permanent magnets, K. Garon.
- 3890548 June 17, 1975, Motor with pulsing capacitor discharge, Edwin Gray.
- 4595852 June 17, 1986, Electrostatic generator, Robert Gandlach.
- 4831299 May 16, 1989, Homopolar generator of alternating current, Enakishy Khasaka.
- 4249096 February 3, 1981, Electric dynamo, Barbara Nikoks.
- 3610971 October 5, 1971, Electromotive generator of electric field, Williams Couper.
- 4897592 January 30, 1990, System producing power from energy of electrostatic field, Williams Hyde.
- 4151431 April 24, 1979, Motor with permanent magnets, Hovard Johnson.

- 4806834 February 21, 1989, Electric circuit of inductive conductors, transformers and motors, Erl Kening.
- 3374376 March 19, 1968, Electric generator, Raymond Kromry.
- 3977191 August 31, 1976, Power source, Robert Brett.
- 3670494, Method of converting of atomic energy in kinetic energy.
- 4709323 November 24, 1987, Converter of parallel resonance, Charles Lien.
- 5146395 September 8, 1992, Power source using two accumulating circuits, Richard Mac Kee.
- 4210859 June 1, 1980, Inductive device with two orthogonal windings, Paul Meretsky.
- 4500827 February 19, 1985, Linear electric generator, Thomas Merit.
- 4904926 February 27, 1990, Electric generator of magnetic motion, Mario Patsishinsky.
- 4945273 July 1990, High effective electric machine, Josef Pinkertone.
- 4883977 November 28, 1989, Converter of magnetic power, Dennis Regan.
- 4077001 Electromagnetic converter, Frank Richardson.
- 5018180 May 21, 1991, Conversion of energy, Kennet Shoulders.
- 4652771 March 24, 1987, Transformer, Theodore Speach.
- 477 2816 September 20, 1988, Conversion of energy, Jefry Spens.
- 4748311 May 31, 1988, Inverter, Fridrikh-Verner Thomas.
- International patent H02K 31/00, 39/00 dated June 24 1982, Closed part of unipolar machine, Adam Trombly.
- 4687947 August 18, 1987, Electric circuit for conserving of power, Melvin Kobb.
- 4772775 September 20, 1988, Generation of plasma flux in electric arc, Sam Lich.
- The USA patents 5416391 and 5449989, Paulo Correa.
- 4432098 and 4429280, Transmission of information by means of magnetic vector potential, Raynolds Gelinas.
- Great Britain, #547668, January 30 (September 7) 1942, Motor with permanent magnets, Stenly Hichkok.
- Great Britain, application # 2282708A, Motor with permanent magnets, Robert Adams, Harold Aspden.
- 4394230 USA patent, July 19, 1983, Henry K. Pukharich.
- 2251775 Great Britain patent, April 20, 1994, Thermoelectric conversion, Harold Aspden.
- 5288336 USA patent, Thermoelectric conversion, Harold Aspden.

The USA patents on electrogravitation

- 1363037 Goddard, December 21, 1920;
- 2004352 Simon, June 11, 1935;

2210918 Karlovitz, August 13, 1940;
 2588427 Stringfield, March 11, 1952;
 2231877 Bennet, 18 February, 1941;
 2279586 Bennet, 14 April, 1942;
 2305500 Slayter, December 15, 1942.
 English patent 300,311 August 15, 1927, Townsend Braun.
 French patent 1003484 November 1951, Electrogravitation;
 3187206 June 1, 1965, Electrokinetic equipment, Townsend Brown.
 3022430 February 20, 1962, Electrokinetic generator, Townsend Brown.
 3018394 January 23, 1962, Electrokinetic converter, Townsend Brown.
 2949550 August 16, 1960, Electrokinetic equipment, Townsend Brown.
 1974483 September 25, 1934, Electrostatic motor, Townsend Brown.

Attachment 2

Organizations

- Faraday Lab Ltd, Lev Tolstoy Str. 7, St. Petersburg, 197376, Russia.
- The Russian Physics Society, 141002, Moscow reg., Mytishy, B. Sharapovskaya str. 3. Fax 095-2926511
- Academy for Future Sciences, P.O. Box FE, Los Gatos, CA 95031, USA.
- AERI, Advanced Energy Research Institute, 14 Devonshire Mews West, London W1N 1Fp, Great Britain.
- ADAS, Association of Distinguished American Scientists, P.O. Box 1472, Huntsville, AL 35807, USA.
- Borderland Sciences Research Foundation, P.O. Box 429, Garberville, CA 95440-0429, USA.
- Center for Action, P.O. Box 472, HCR 31, Sandy Valley, NT 89019, USA.
- Electrodynamics Gravity, Inc., 35 W. Tallmadge Ave., Akron, Ohio 44310, USA.
- Fusion Information Center, P.O. Box 58639, Salt Lake City, Utah 84158-0369, USA
- Gravity Power Research Association, 36 Mountain Road, Burlington, MA 01803, USA.
- GRI, Group Research Institute, P.O. Box 438, Nelson, New Zealand. Dr. Ashley Gray.
- High Energy Enterprises, P.O. Box 5636, Security, CO 80931, USA. Fax 719-4750582.
- Institute for Advanced Studies at Austin, 4030 Braker Lane W., Suite 300, Austin, TX 78759, USA.
- INE, Institute for New Energy, 1304 South College Avenue, Fort Collins, CO 80524, USA.
- Integrity Institute, 1377 K Street, NW, Suite 16, Washington DC, USA. Fax 202-543-3069.
- Orgone Biophysical Research Laboratory, Inc., P.O. Box 1395, E1 Cerrito, CA 94530, USA.
- Quantum Biology Research Laboratory, P.O. Box 60653, Palo Alto, CA 94306, USA.
- SEA, Space Energy Association, P.O. Box 11422, Clearwater, FL 34616, USA.

- Tesla Book Company, P.O. Box 121873, Chula Vista, CA 91912, USA.
- Tesla Incorporated, 760 Prairie Av., Craig, CO 81625, USA. Fax 303-824-7864.
- Journal Explore, P.O. Box 1508, Mount Vernon, Washington 98273, USA.
- Electric Spacecraft Journal, P.O. Box 18387, Asheville, NC 28814, USA. Fax 704-683-3511.
- Nexus New Times Magazine, P.O. Box 30, Mapleton Old, 4560, Australia. Fax 074-429381.
- Journal Cold Fusion Times, P.O. Box 81135, Wellesley Hills MA 02181, USA.
- Journal Infinite Energy, P.O. Box 2816, Concord, NH 03302-2816, USA.
- Journal 21st Century Science & Technology, P.O. Box 16285, Washington, DC, 20041, USA.
- Journal Cold Fusion, 70b Route 202N, Petersborough, NH 03458, USA.
- Brown's Gas International, 5063 Densmore Av., ENCINO, California 91436 USA.
- ENECO Inc., 391-B Chipeta Way, Salt Lake City, Utah 84108, USA. Fax 801-5836245.
- "Robert Adams and Company" 46 Landing Road, Whakatane, Bay of Plenty, New Zealand. Robert Adams,
- Methernitha, 3517 Linden, Switzerland. Manager Francis Bosshard.
- Swiss Association for Free Energy, P.O. Box 10, 5704, Egliswili, Switzerland.
- Space Research Institute, Box 33, Uwajima, Ehime 79, Japan. Dr. Shinichi Seike. Fax 895-24-7325.
- Nuclear Power Corporation, 581 400 Karnataka, India. Project Director Dr. Paramahansa Tewari.
- Cosmic Energy Foundation, Neptunuslaan 11, 3318 E1 Dordrecht, Netherlands. Dr. Martin Holwerda
- Sabberton Research, P.O. Box 35, Southampton S097BU, England, Dr. Harold Aspden.
- Labofex, Experimental and Applied Plasma Physics, Ontario, Canada, Dr. Paulo N. Correa.

Raum&Zeit

EhlersVerlag GmbH,
 Geltinger Str.14e,
 82515 Wolfratshausen
 Telephone: 08171/41 84-76,
 Telefax: 08171/41 84-66
 Internet:
<http://www.raum-und-zeit.com>



Institut für Raum-Energie-Forschung (IREF) i.m. Leonard Euler

- | | |
|--------------------------|----------------------------------|
| - Global Scaling Theory | - Hydrogen-Helium Energetic |
| - Gravitation theory | - Information technologies |
| - Mathematic Biology | - Telecommunication technologies |
| - Gravitation energetics | - Transport technologies |

Some General Properties of Matter and Energy Sources



Dr. Eugene D. Sorokodum

Volochaevskaya Street, 40-b, Flat 38,

111033, Moscow, Russia

Telephone: (7) - (095) -362 80 84

Email: e40dum@dol.ru <http://vortex.viptop.ru>

Introduction

Nowadays there are appear more and more attempts to disclose new methods of obtaining energy from the ambient space, i.e. from heat, electromagnetic, gravitational fields, physical vacuum, aether, etc. (See, for example, publications in New Energy Technologies [1-3]). The publications demonstrate that researchers meet various incompletely investigated physical processes. These scientific areas are difficult to be investigated. All this makes obstacles for development of works on creation of new energy sources. **In this work there is made an attempt to demonstrate general properties of energy sources of any physical nature. This attempt is based on a general analysis of properties of matter.** A theory of transformers is used to investigate general properties of matter.

Action of all physical, technical and biological systems is expressed in energy transformation. Numerous theories based on particular (specific for some system) methods are applied for description of these systems. However, if the number of degrees of freedom and of elements inside a system increases then many theories are not able to describe operation of the systems. First these problems appeared in electrical engineering, radio engineering, automation and acoustics. The theory of transformers is applied to these fields of science. The theory represents a complicated system as a "black box" having several inputs and outputs. Operation of the numerous elements occurring inside the box is represented as some equivalent functions reduced to the inputs and outputs.

In the last decades methods of solution of mechanical dynamic tasks by the method of complex resistances are developed as well as representation of elements as linear transformers [11] and finite elements in liquid [14]. This tendency can be applied to the mechanics of

Devoted to memory of Academician A.A. Harkevich

liquids and gases. Now there are successfully developed those concepts which assume observation of models having very few degrees of freedom to be enough for analyzing processes in hydrodynamic systems [10]. However, a mathematical apparatus for description of transformers operation which is well-developed in these areas of science and engineering has a special view and is applicable only for these scientific areas.

Academician A.A. Harkevich developed a theory of a linear transformer up to the level of the general theory of transformers which is applicable for transformation of any types of energy [24]. The general theory of transformers proposed by A. A. Harkevich is applicable for description of various energy sources, flying and swimming objects, functioning of different animals' organs, and technological processes. In this work some general properties of matter and energy sources are investigated, according to the general theory of transformers.

General theory of energy transformer

The whole ambient space, from the microworld to the macroworld, is filled with energy. According to different theories, space is represented as a compact medium (i.e. having distributed parameters) or a medium consisting of a limited number of discrete elements (i.e. having concentrated parameters). On the analogy of hydrodynamics [10, 14] the compact medium can be represented as an equivalent system with a limited number of degrees of freedom. Hence, the whole space can be represented as some system consisting of elements and communications between the elements with a limited number of degrees of freedom. Energy exchange occurs due to the degrees of freedom. Energy transmission occurs if energy gradient is presented in the ambient space. Due to the energy gradient a force tends to realize transmission in the space [4]. The elements can be systems as well.

Hence, the more we observe dividing the elements on the systems and the systems on the elements the more we will penetrate into the microworld (i.e. atoms, elementary particles, physical vacuum, aether, etc.). The more we combine the elements in the systems, and the systems in the new larger systems the more we observe the macroworld (the Solar System, galaxies etc.). All the systems and the elements are interconnected. The systems and their elements are

transformers of energy. Energy motion occurs in the smallest part of space. Consequently, the whole space can be represented as a system consisting of the energy transformers. In the general case due to every type of energy limits of a transformer consist of outer limits (i.e. communications with the macroworld) and inner limits (i.e. communications with the microworld). Dividing into the macroworld and the microworld occurs in relation to the size of a transformer for every type of energy. Types of energy coming through communications of a transformer and inside it may differ, i.e. mechanical, heating, electromagnetic, chemical and other known and unknown types of energy.

The processes in which a great number of interacting elements and different types of energy participate are very complicated and do not allow describe the processes accurately by modern mathematical methods. Hence, there is a problem to find such methods of solution of the tasks which without disclosing all the communications inside the element can give the understanding of the way an element moves in the system. The following premises can be made for the method of solution of the task of a system and its elements' motion:

1. Motion of all the elements in the space is characterized by energy exchange occurring among them;
2. We are interested in a certain limited area for every individual type of energy. The chosen limited area will be called as **a transformer**;
3. The transformer has degrees of freedom both on its limits (sides) and inside it (inner degrees of freedom);
4. Further this limited area (the transformer) which has or is able to have a limited number of degrees of freedom (sides) at its limit will be observed;
5. Interaction between this transformer and the ambient space occurs only through these degrees of freedom (sides) by means of energy exchange;
6. Motion of energy between the elements of the transformer occurs according to its degrees of freedom inside the transformer. There can be a limited or unlimited number of degrees of freedom.
7. All the space is full of the transformers. All the transformers adjoin each other without gaps. Energy exchange between the transformers occurs through their sides which do not have a size but reflect general kinematical and dynamic characteristics of the energy transferred through these sides.

Editor: The full variant of the article includes mathematical description of operation of energy transformers which is followed by these conclusions:

- There can be any number of different types of elements having a corresponding number of degrees of freedom and any type of energy inside the transformer. However, on every side of the transformer a generalized force has the same value and depends only on change of energy according to this degree of

freedom. Therefore, two transformers are considered to be equal if the generalized forces (energy changes) on all the sides are equal. In this case it is not necessary for the inner structure of the transformer, number of inner degrees of freedom, and energy types of these two transformers to be equal. This is **a principle of equivalency of transformers at the equivalency of the forces acting at the sides of transformers**.

- In the general case the generalized force at any side depends not only on energy exchange occurring at this side but on energy exchange occurring among the sides or at other sides of the transformer. The generalized forces are produced by energy distribution in the space.

- A transformer is characterized by the fact that there are different types of energy at its different input sides (or the energy can be of the same type but having other characteristics of motion).

Resistances of the interaction provide information about physical properties of the transformer, in particular, about physical interaction between the sides. At that a number of inner degrees of freedom in this transformer as well as the reactions at the other sides do not play any role. Proper resistances of the sides and resistances of the interaction provide information about inner physical characteristics of the transformer reduced to equivalent values at the sides. Hence, it is possible to have two transformers having equal equivalent resistances of interaction for all the sides. However, according to their geometrical and constructional characteristics and types of energy, the transformers will be different. The resistances may be a function of kinematical characteristics (**a nonlinear transformer**) or of time (**a parametrical transformer**). Moreover, it can have constant values (**a linear transformer**).

It is appropriate to consider physical properties of matter included in the volume of a transformer only due to resistances at the sides of the transformer.

Structure of the transformer

Every inner degree of freedom can be represented as a series circuit. By analogy with electric circuits [6, 7, 11, 16-18] the transformer can consist of various circuits. An unlimited number of degrees of freedom allows represent a transformer consisting of an unlimited number of chains. The circuits have series, parallel, or mixed junctions. A part of a circuit whose elements have the same generalized displacement is called as a branch. The branch can consist of one or several elements. A place where three or more branches are joined is called as a multiple junction. A circuit is considered to be a closed path including several branches and multiple junctions. All the elements of a chain connected in series have equal generalized displacement (as well as equal speed and acceleration). The generalized force acting on the

whole circuit is equal to the sum of forces acting on the elements of the series circuit.

The elements connected in series can be replaced by one element in such a way that the generalized displacement and the summary generalized force would not change. In the case of a parallel connection all the branches of the circuit are joined to the same pair of multiple junctions and are under influence of the same generalized force. Parallel circuits can be replaced by series equivalent circuit and vice versa [6, 7, 11, 17, 18]. Hence, a number of inner degrees of freedom and a quantity of chains may be decreased as well as increased. In this case resistances occurring on all the sides will be constant.

Structure of the linear transformer

The simplest transformer is a one-side transformer having one inner degree of freedom...

If to the input of the transformer we deliver generalized displacement (or force) which depends on time as a pure sinusoidal signal then the linear transformer will have sinusoidal reaction of the same frequency. For the sinusoidal signal with fixed frequency the linear transformer (including a transformer having an unlimited number of inner degrees of freedom) can be represented as an equivalent transformer reduced to this input as one chain. An equivalent transformer placing at this input at other fixed frequency of sinusoidal disturbance will be represented as a chain having one degree of freedom but different values of chain elements.

If the signal at the input of the transformer is of complicated time-periodical form then it can be decomposed to Fourier series. Every harmonics of the Fourier series will produce its own chain. The general complicated signal will produce the complex chain consisting of compound sum of elementary series chains. This complicated chain consists of elementary chains interconnected in series or in parallel and combined in multiple junctions and circuits. The construction principles of this complicated chain can be based on methods of identification and synthesis which are well developed in electrical engineering, automation for linear and non-linear transformers [9, 12, 13]. These principles are formally useful for transformers which transform energy of any physical nature. Identification produces so much elementary chains as the number of inner degrees of freedom. Every elementary chain reflects motion by one inner degree of freedom. Physical analogy occurring among motions of different nature is actual here [11, 16, 18]. Values of the generalized masses, elasticities, dissipative and active elements can depend on kinematical variables (non-linear chains), on time (parametrical chains), or they can be constant (linear chains).

If a series circuit includes mass and elasticity then it will have resonant frequency. At this frequency

reaction of mass and elasticity will be absent in the summary reaction. It is equal to the fact that we will know nothing about the value of mass (and elasticity) and, moreover, about its presence at all. The mass can have huge value, but it will be absent for us. Hence, if we assume a transformer as an atom then the atom may include elementary chains having huge masses (much more than the mass of the Earth), but we will not know about it until we apply such frequency to the input which explicates this mass.

Any energy transformer including a transformer with distributed parameters can be represented as a system of elementary series and parallel chains connected in a certain way. A concrete transformer can have various types of these connections. All of them can be included into another combination of connections that is accompanied by change of values of masses, elasticities, dissipative and active elements. However, in this case equivalency of reaction should be fulfilled at a certain diapason of frequencies on all the sides of the transformer.

There is a special spectrum of resonant frequencies for every combination of connections of the transformer. There will be an unlimited number of degrees of freedom and, hence, an unlimited number of resonances for the transformer with distributed parameters (for example, an elastic nail, a compressible fluid having a limited size). Our influence on the transformer usually has a certain diapason of frequencies. As the result of a limited diapason of excitation frequency the transformer will represent a system having a limited number of inner freedom, even if the transformer has distributed parameters.

Values of equivalent elements depend on oscillation frequency. Moreover, according to known laws, several parallel circuits can be transformed into a series one and vice versa. Taking it into account the following conclusions can be made:

1. The generalized mass, elasticity and dissipative elements do not have constant values in nature. Their value depends on frequency of the process, i.e. they depend on the character of time-change of the disturbance acting on the transformer.
2. The generalized mass, elasticity and dissipative elements are products of time-space change of energy.

Types of energy transformers

Transformers can be nonlinear, parametrical and linear. The transformer can be **active** (having an internal source) and **passive** (having an external source). The passive transformer can never be an energy source (by definition). A transformer can accept or transform one type of energy (monoenergetic transformers) or several types of energy (polyenergetic transformers). The polyenergetic transformer includes a mechanism and

corresponding elements and chains which allow transform one type of energy into another one. Fundamentally, all the transformers are polyenergetic transformers of energy, however many of them can be represented as monoenergetic ones since other types of energy participate weakly in them. Designing a transformer it is more convenient to put the energy source out the transformer. Let us further classify the passive transformers.

The passive transformers can belong to the following types:

1. Simple transformers

In this case energy is produced at the output due to transformation of energy coming to the inputs into energy of another type or having other characteristics. The following transformation can serve as the example.

An electric transformer: resistance of one value comes to the input, and the resistance of another value comes from the output (a type of energy is the same).

A furnace for combustion of fuel: energy of chemical connections comes to the input and heating energy comes from the output (energy of radiation may be neglected).

A Wind Generator, Hydroelectric Power Station: kinetic energy of moving air or water comes to the input, and electric energy comes from the output.

2. Energy intensifiers

In this case a transformer intensifies energy coming to one of the inputs due to energy coming to the other inputs (or to the other input). Below there is an example for a *monoenergetic transformer*. Energy (an electric signal having certain parameters) comes to the input of a transformer, and the output energy has the same characteristics but it is more intensive. It can occur due to electric energy coming to the other input of the transformer.

A heat pump represents an example for a *polyenergetic transformer*. Low potential heat energy of the ambient space (air, water, ground) comes to the input of the heat pump, and electric energy from a power network comes to the other input. The output heat energy has value which is equal to the sum of the coming heat energy of the ambient space and electric energy coming from the power network through the electric engine of the compressor. The output heat energy exceeds energy coming from the power network by several times. The output energy is always lower than the sum of the low potential heat energy and the electric energy coming to the input. Hence, the output of a heat pump is always less than unit.

Efficiency of the heat pump consists in the fact that a consumer pays for electric power produced by power network only (use of the low potential heat of the

ambient space is free). However, the output heat energy is several times more than the energy which can be produced by the electric power coming to the input.

3. Active oscillator

An active oscillator is a device of a certain type. Energy of time-constant characteristics comes to its input, and at output there is energy of time-periodical characteristics. Energy with time-periodical characteristics can come to the input as well since these characteristics are not connected with the time-periodical characteristics of the output energy. The transformer can operate in a mode of an active oscillator if it has the following features:

1. Indirect connection as a series circuit: one of the outputs is connected to an additional transformer whose output is connected to one of the inputs of the transformer. The additional transformer provides certain changes of the input signal (time delay).
2. Energy comes to the input (it can be time-constant or time-periodical).
3. The transformer must have a certain type of non-linearity.

Examples of the active oscillator

Internal combustion engine: the indirect connection is the system of combustion, the non-linear element is the system of admission and exhaust valves, and the energy source is energy of chemical connections of fuel.

Various electric generators: all of them have the indirect connection, the non-linear element, and the energy source.

The active oscillators differ from the electrical intensifiers qualitatively. The difference consists in the fact that the active oscillator can operate and receive energy from the ambient space without additional energy coming to it (from a power network, for example).

Theorists and experimenters try to create a self-supporting self-organizing system in their works on creation of alternative sources. This fundamentally correct tendency requires using theory of active oscillators. There is the developed theory in electrical engineering, automation, and other scientific fields [25]. To simplify application of these theories it is necessary to use analogy between equal processes which take place in different physical fields.

4. Rectifiers

Time-periodical energy comes to the input of the transformer. The output energy has time-constant or practically time-constant characteristics. If the transformer has a non-linear element or elements of a certain type (a diode or a one-sided valve) then it can

operate in the mode of a rectifier. The examples are electrical rectifiers and pumps of a valve type.

Properties of energy transformers

General properties:

1. A transformer can transform energy of one type as well as transform one type of energy into another type.
2. The generalized kinetic, potential and dissipative energies are specific peculiarities of energy change in the space and time.
3. The generalized masses, elasticities and dissipative elements are products of energy change in space and time.
4. Values of the generalized masses, elasticities and dissipative elements (existing inside the transformer as well as reduced to the equivalent values on the sides of it) depend on a temporal character of changes of kinematical or dynamic disturbances. Values of the generalized masses and elasticities at the sides of the transformer are lower than the corresponding values inside the transformer.
5. Energy interchange between macrostructures and microstructures can occur through a transformer.
6. One area of space can "know" about another area of space through energy exchange only, i.e. through generalized dynamic and kinematical interactions. In the light of the fact that chains of different transformers can have similar physical properties (for example, an equal resonant structure) interference of these transformers seems to be possible including interference occurring at a great distance.

Properties of the passive monoenergetic transformer:

1. Transformation of characteristics of the same energy type.
2. The output energy can be both equal or lower than the sum of energies coming to all the inputs. The sum of the output energies decreases due to dissipative losses occurring inside the transformer.

Properties of the passive polyenergetic transformer:

1. One energy type coming to an input can be transformed into another energy type coming from the output.
2. The sum of energies of all the outputs can be equal to the sum of energies of all the inputs or less than it. The sum of the output energies decreases due to dissipative losses occurring inside the transformer. The output will always be lower than unit. If the energy coming from certain of the outputs (within the limits of one output) is considered as a positive effect then the output will be less than the mentioned value.
3. Energy of one and the same type comes to the input and from the output while other energy types can come from other outputs. This property can allow increase one type of energy coming from an output at the expense of the other types of energy coming to the inputs.

Analysis

This article is aimed to provide general properties of the energy transformers and to analyze some problems of creation of renewed energy sources, according to these properties. There are made various attempts to design a renewed energy source which would produce energy without fuel consumption. In the light of the above mentioned results, the researches on creation of the renewed energy source may be represented by the following way. Energy can be produced from the macrostructures and the microstructures.

In the case of the macrostructure, energy can be produced by a simple transformer, an electric intensifier or an active oscillator. Methods of production of energy from the ambient space by means of simple transformers (thermoelectric and hydroelectric power stations, wind generators, etc.) are developed sufficiently by the humankind. Works on producing energy from the ambient space by means of energy intensifiers are on its initial stage. Heat pumps, which utilize low potential heat energy by means of Freon-compressor heat pumps, are successfully introduced. One of the perspective approaches is replacing such a heat pump by a vortex oscillating heat pump which does not contain Freon and a compressor [3, 5, 19, 22]. In future it will be possible to replace the energetic pump by a new energy transformer of the type of an active oscillator. In this case the energy source will always obtain energy from the ambient space without using additional energy from a power network. Energy sources of the type of the active oscillator are internal and external combustion engines, stream engines, etc.

In the general case a transformer can contain different energy types and has communications with **outer microstructures**. It should be noted that the outer microstructures can be included in the geometrical size of the transformer. Energy of this microstructure can be huge; hence, this energy can be obtained from them for a very long period of time. Atomic reactors can serve as an example for this fact. The types of energy in these microstructures can be represented by known types (electromagnetic energy, nuclear energy) and unknown types (whose numerous quantity can be considered). These energy types exist in the ambient space. However, almost all the transformers of energy produced by a human (except the nuclear reactors) do not interact with the energies, and we do not obtain energy from these microstructures.

The task of creation of a new energy source consists in designing such an energy transformer which could obtain energy from the microstructures and transform it into the type of energy which is needed to a consumer. In this case all the designed transformers will not have over unit output. Efficiency of these transformers will be defined by the cost of the energy produced by them. This energy depends on a ratio of

energy coming to one of the inputs (electric power) (for example, in heat pumps) to the output energy. If the output energy is much more than the artificial energy which comes to one of the inputs then this transformer can be very useful for a consumer.

New high effective energy sources are often claimed to be created. According to the observed facts, existence of such sources is practically possible. Nevertheless, realization of this source will depend on our knowledge of physics of the microstructures and methods of transformation of energy of the microstructures into such type of energy which can be used by a consumer. Physics of microstructures is investigated badly, and many types of energy are totally unknown. Therefore, modern scientists try to create the new energy sources at random. In this case the following results can be achieved:

1. The high effectiveness of an energy source (over unit output) does not correspond to reality.
2. The output energy of the energy source is actually higher than the input energy (the source of the energy intensifier type).
3. The energy source actually produces energy without artificial input energy (the source of the active oscillator type). It can occur if an inventor failed to recognize the source of energy coming from the microstructures. It can be connected with particular or total lack of exploration of physics of the microstructures. Moreover, the fact is caused by transcendent difficulty of disclosing energy sources from the macrostructures.

Conclusions

It is principally possible to create an energy source whose output energy would be higher than its input energy (an energy intensifier) or an energy source which would produce energy without additional input energy (an active oscillator).

1. Various energy sources or transformers of energy of the macrostructures and microstructures can be designed.
2. Practical value of the energy source is defined according to cost of its output energy instead of the output value.
3. Designing new energy sources it is useful to consider them from the point of view of transformers. It is worth to define all the communications of the transformer and to state experimentally energy at all the accessible communications of the transformer.
4. Developing theories of sources it is expedient to use physical analogy and to take into account ready results of works on theories of transformers, chains, etc. of electrical engineering, radio engineering, automation and other scientific fields.
5. In the light of the fact that it is planned to obtain energy from the microstructures it is necessary to pay attention to new probable types of radiation and to their influence on a human.

References

1. Frolov A.V. The work Advanced Energy and Propulsion Systems based on Chronal Reaction Method // *New Energy Technologies*. - 2001, 2. p.51-55.
2. Frolov A.V. Reactionless Propulsion and Active Force // *New Energy Technologies*. - 2001, 2. p.56-58.
3. Sorokodum E. Recycling of energy of the atmosphere by means of vortex // *Russian technologies for industry "Renewable Energy" IWRFR'2001*, may 28-30, 2001, Saint-Petersburg. Abstracts. - 2001, p. 92-93.
4. Sorokodum E. On general nature of forces. *New Energy Technologies*. 1(4), 2002, p.30-36.
5. Sorokodum E. D. Vortex heat-generators. *New Energy Technologies Issue*. Vol.2(5), 2002, p.17-76.
6. Andreev V.S. Theory of nonlinear electric circuits. M.: Radio and Communication. 1982, p.280
7. Atabekov G.I. Theory of linear electric circuits. M.: Soviet Radio. 1960, p. 712
8. Berezkin E.N. Lectures on theoretic mechanics. Part 11. Dynamics of the system, dynamics of solid body, analytical dynamics. M.: MSU - 1968, p.314
9. Blakyer O. Analysis of nonlinear systems. Transl. from English. Edited by Hohlov R.V. M.: Mir. - 1969, p. 400
10. Gledzer E.B., Dolzansky F.V., Obuhov A.M. Systems of hydrodynamic type and their application. M.: Nauka - 1981, p. 366
11. Druzinsky I.A. Mechanical circuits // *L.: Mashinostroenie*. - 1977, p. 240
12. Kononenko V.O., Plahtienko N.P. Methods of identification of nonlinear mechanical oscillating systems
13. Zakrzhevsky M.V. Oscillations of essentially-nonlinear mechanical systems. Riga, "Zinatne". - 1980, p.190
14. Ladikov Yu.P. Stabilization of the processes in continuums. M.: Nauka. - 1978, p. 432
15. Merkin D.R. To the question on forces' structure // *Applied mathematics and mechanics*. - 1975, 39, 35. p. 929-932
16. Oltsen G. Dynamic analogies. M.: State Edition. Foreign Literature. - 1947, p.223
17. Popov E.P. Theory of linear systems of automatic regulation and control. M.: Nauka. - 1989, p.302
18. Puhov G.E., Vasilyev V.V., Stepanov A.E., Tokareva O.N. Electrical modeling of the tasks of structural mechanics. Edition of Academy of Science of Ukrainian SSR. - 1963
19. Rodionov B.N., Sorokodum E.D. Vortex energetic. Constructional materials, equipment, technologies of the XX century. 3 (26). 2001, p. 28, 29
20. Sorokodum E.D. Theory of transformers for nonlinear biomechanical oscillating systems. Taganrog institute of radio engineering. - Dep. in VINITI, 7.05.1980, #1948-80 Dep. - 1980, p. 38
21. Sorokodum E.D. On the application of theory of nonlinear transformers for the calculation of complex mechanical oscillating systems. Reports at the scientific conference "Problems of nonlinear oscillations of mechanical systems". Kiev. - 1978
22. Sorokodum E.D. Vortex source of energy. International scientific and social conference. Prospects of preservation and developing of the united civilization of the planet. Culture. Ecology. Space. 26-31 of May, 2002
23. Strelkov S.P. Introduction to the theory of oscillations. M.: Nauka. - 1964, p. 440
24. Harkevich A.A. Theory of transformers. State Energetic edition, M.-L.: 1948, p. 191
25. Harkevich A.A. Auto-oscillations. / Harkevich A.A. Selected works in 3 volumes, V. 2, M.: Nauka - 1948, pp. 253-379.



Review

by **Olga Leontyeva**, Editor

<http://www.faraday.ru>

Of late years the mankind has greatly advanced in space exploration. New spaceships are created, automatic apparatus are launched to the planets of solar system, space stations are orbited. A man has passed to outer space and begun exploring the planets of solar system. More and more specialists and people of different professions are involved in the development of space industry. However to present day only a few of them has succeeded flying into space.

At the present state of affairs space flight is very expensive and a serious reason should exist to forward a man into space if he or she does not relate to the aims of professional cosmonautics. However in last years there has appeared a certain breakthrough in the solving of the problem. Nowadays space technologies gradually turn from the sphere of experimental and scientific researches to the area of practical application. The time has come for a man to realize the real space flight without being the professional cosmonaut.

What are the ways to solve the problem? No doubt that special attention should be paid to the development of new space technologies, search of new types of fuel and attraction of investments to the sphere of space tourism.

April 28, 2001 can be considered as official date of birth of space tourism, when there was launched the space ship "Soyuz TM-32" with the first space tourist aboard. Almost in a year, on April 25, 2002 the space tourist #2 South African Republic person Mark Shattlword started on his space journey.

Today many companies give the opportunity to make a real space flight for all comers who have enough money and health. It is promised the providing of the most modern space technologies and the most perfect space equipment. It can be created a furor by the "Minimum program" of the Russian company "Atlas Aerospace" which is made by the members of Yu.A. Gagarin Center of training of cosmonauts.

In recent years at the international market there appear more and more companies which deal with search and encouragement of inventors who work on creation of

alternative propulsion systems. Activity of "X Prize Foundation" company can be considered as an example.

The X PRIZE Foundation

722-A Spirit of St. Louis Blvd

St. Louis, Mo. 63005

Tel: 636-519-9449, Fax: 314-533-6502

<http://www.xprize.org>

E-mail: press@xprize.org

The X PRIZE is a \$10,000,000 prize to jumpstart the space tourism industry through competition between the most talented entrepreneurs and rocket experts in the world. The \$10 Million cash prize will be awarded to the first team that:

- Privately finances, builds & launches a spaceship, able to carry three people to 100 kilometers (62.5 miles)
- Returns safely to Earth
- Repeats the launch with the same ship within 2 weeks

The X PRIZE competition follows in the footsteps of more than 100 aviation incentive prizes offered between 1905 and 1935 which created today's multibillion dollar air transport industry.

For more than 30 years, the general public has waited for an opportunity to enjoy the space frontier on a first-hand basis. The X PRIZE Foundation is working to make space travel possible for all. The spaceships that compete for the X PRIZE are designed to carry passengers.

Since its inception in May 1996, the X PRIZE Foundation has registered more than 20 teams from seven countries to compete for the prize. The X PRIZE is fully funded through January 1, 2005, through private donations and backed by an insurance policy to guarantee that the \$10 million is in place on the day that the prize is won. Additional funds are still being raised by the X PRIZE Foundation to implement the competition (judging, media, event management, etc.) and continue the Foundation's education mission.

The X PRIZE was inspired by the early aviation prizes of the 20th Century, primarily the spectacular trans-Atlantic flight of Charles Lindbergh in The Spirit of St. Louis which captured the US \$25,000 (US\$) Orteig

prize in 1927. Through a smaller, faster, better approach to aviation, Lindbergh and his financial supporters, The Spirit of St. Louis Organization, demonstrated that a small professional team could outperform a large, government-style effort.

The Societal Benefits of the X PRIZE include:

- * Creation of a new generation of heroes
- * Inspiring and educating students
- * Focusing public attention and investment capital on this new business frontier
- * Challenging explorers and rocket scientists around the world; and,
- * Vehicles built for the X PRIZE will eventually serve four different industries:
 - Space Tourism
 - Low-cost satellite launching
 - Same-day package delivery
 - Rapid point-to-point passenger travel.

In Fig. 1 it is demonstrated the typical X Prize trajectory.

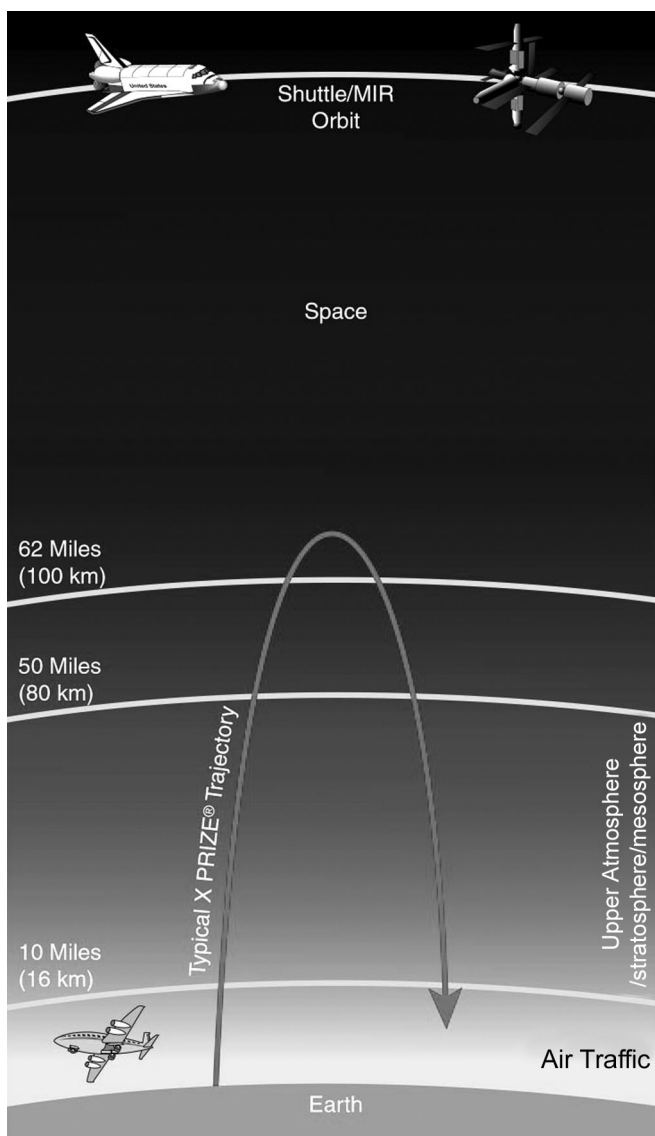


Fig. 1

Editor: Below we publish photos and brief comments about some official X PRIZE registrant teams. More detailed information you can find at <http://www.xprize.org/imagefacts/photo1.html>.

The Da Vinci Project

<http://www.davinciproject.com>



Fig. 2
"Wild fire"

The **da Vinci Project** will launch its spacecraft ("Wild Fire") from the world's largest helium balloon. The 3,270 kg (7,200 pound) rocket will be tethered 720 meters (2,400 feet) below the balloon and lifted over the course of an hour to an altitude of 80,000 feet. The 10,000 pound thrust, liquid oxygen, kerosene engines will fire the first stage and the rocket will fly an initial angular trajectory to clear the balloon. The spacecraft then will transition to vertical flight to its apogee of 120 km in space. The rocket will reach a maximum speed on both its ascent and re-entry of Mach 4, or 4,250 kph (2,650 mph).

An innovative ballute will protect and stabilize the rocket on re-entry. A flyable parachute will be deployed at 25,000 feet and the rocket will descend under control, guided by GPS, to a predetermined landing zone. The da Vinci Project has already successfully conducted full-scale rocket motor test and has built a full-scale mockup of their vehicle.

"Discraft" corporation

<http://www.xprize.org/teams/teams.html>

John Bloomer, the team leader, is an aerospace engineer and he has worked on many aerospace projects, including Apollo and holds more than 60 patents on a disc platform aircraft. Bloomer's ship utilizes "Blastwave" Pulsejets.

Flight Sequence

Fixed, 7850-ft²-area, laminar-flow wing take-off at about 60 mph within about 150 ft, featuring climb with gradual air-breathing acceleration (according to a fixed program) at fixed angles, to exit the atmosphere at Mach 10 on an unpowered ballistic arc to reach 75-mi. altitude: return on down-leg of same unpowered arc to gradual power-on flare-out re-entry of the atmosphere in simple reverse sequence of the take-off velocity profile. Range above 100,000 ft is about 480 mi. which is covered in about 5 minutes.

“Kelly Space & Technology”

<http://www.kellyspace.com>

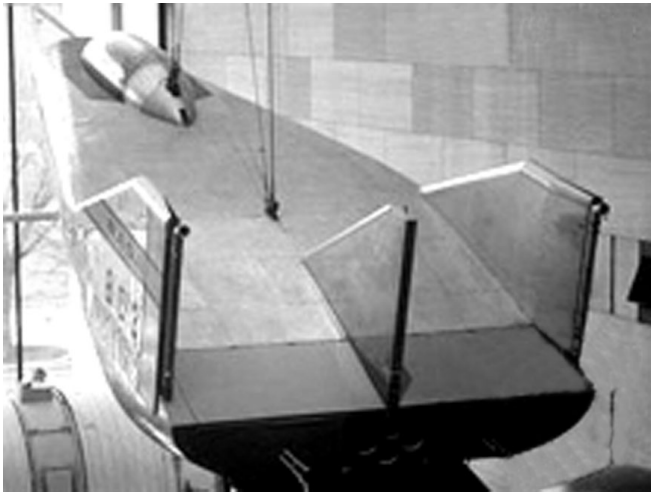


Fig. 3
“LB-X”

The vehicle is a rocket-powered delta wing glider with a liquid oxygen and kerosene liquid rocket engine. The spacecraft is prepared and fueled at the takeoff airport. The spacecraft is towed to release altitude behind a conventional jet powered aircraft such as Boeing 747 aircraft. Upon release from the tow aircraft, the main engine is throttled up for boost phase. The vehicle nominally coasts to an apogee altitude of 100 kilometers. The vehicle then glides to a landing at the takeoff airport for checkout and refueling prior to the next flight.

Flight Sequence

The lifting body will be towed to launch altitude behind another aircraft, and the rockets will be ignited. The craft will return to the landing site and make an unpowered, horizontal landing.

“Lone Star Space Access”

<http://www.dynamicar.com>

The Cosmos Mariner employs air-breathing jet propulsion for take-off and landing from conventional

airports and rocket propulsion for ascent from cruise flight in the stratosphere to 30 or 40 nautical miles altitude. From there, the vehicle coasts to a target altitude of around 65 nautical miles. The air frame is designed to interface with two jet engines (turbofan or turbojet) each with 20,000-lbs static thrust or less. For rocket propulsion, the Cosmos Mariner will use the Aerojet AJ26-NK31A, a staged-combustion kerosene engine. The vehicle is designed to take off and land from conventional runways.

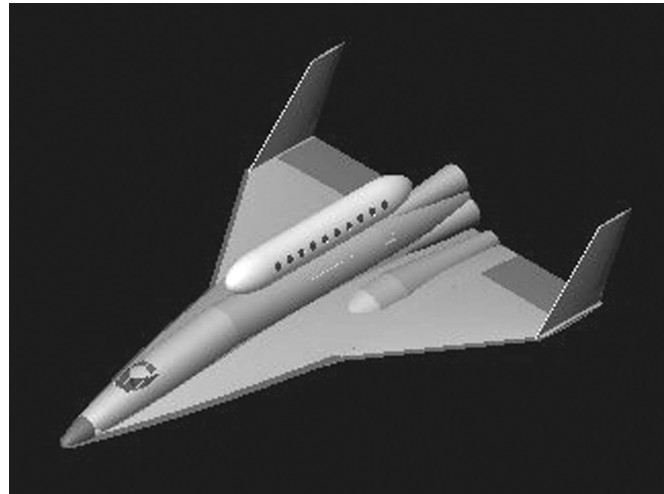


Fig. 4
“Cosmos Mariner”

Along with X Prize Foundation it should be mentioned **ALLTRA** Company (Germany). ALLTRA consists of a small group of space experts. The main objective of ALLTRA is to ‘sell’ the space idea to a broad public and to identify future commercial opportunities in the space sector.

On the official ALLTRA website <http://www.alltra.de> you can find collection of artist’s views of the projects which are aimed at decrease in space ships value by means of using of new types of engines. Besides the Company deals with the development of space hotel projects.

JNET

New Energy Technologies collection of articles Japanese Version

Collection of articles from New Energy Technologies magazine, 2001-2002 is published in Japan.

On purchasing of the book, please, contact

Eiichi Yamamoto,
President Yama Trans Co. Ltd.

Email: admin@yamatrans.co.jp or
eyama@yamatrans.co.jp

Alternative Aircrafts and Space Propulsion Systems

Editor: Nowadays all over the world there are made numerous attempts to create new types of aircrafts and alternative space propulsion systems. Below we publish the review of some interesting devices which are presented in the modern market.

“Arbortech Pty.Ltd”

<http://www.airboard.com.au>



Fig. 1
Airboard 2000

General Technical Specifications

Total payload, including rider — 100 kg (220 lb)
Operating time — 1 hour on full tank of fuel
Construction — Fiber glass/High-impact plastic shell, Aluminum frame, Rubber skirt
Starting — Electric key-start, Battery included
Engine — Briggs & Stratton 4-stroke
Fuel tank capacity — 5 litre (1.3 US gal)
Fuel type — 85 Octane unleaded

How does it work?

Airboard uses Hovercraft air cushion principles to glide just above the ground. The air cushion is generated from a purpose designed engine and fan which are suspended below the Airboard shell. In addition to providing an air cushion for the Airboard

to ride on the fan also provides a fast stream of air exiting from the rear of the craft to provide forward thrust – just like a hovercraft. To help provide better acceleration the Airboard also includes a unique friction drive wheel at the rear. When the rider wishes to accelerate forward, weight transfer is used to bring the friction drive into contact with the ground. By engaging the friction drive clutch the Airboard can be accelerated forward without losing the feel of hovering above the ground. The control of the Airboard is provided by weight transfer of the rider, similar to surfboards, skate boards and snow boards. In operation the Airboard can be started, stopped and steered in a controlled manner and this means that riders can perform stunts, trick maneuvers and race around tight tracks against each other. In this unique way the Airboard is the first ever vehicle to deliver the advantages of hovercraft vehicle without the disadvantages of poor acceleration and handling.

“Trek Aerospace, Inc.”

<http://www.solotrek.com>



Fig. 2

Trek Aerospace

Preliminary Specifications and Predicted Performance

Normal Gross Take Off Weight	800 Lbs.
Fuel (15 U.S. Gallons)	98 Lbs.
Mission Payload, net of fuel	352 Lbs.
Takeoff/Landing Distance	0 (VTOL)
Maximum Speed	70 Mph
Range	120+ Miles
Hover/Loiter Endurance	2+ Hours
Engine Type	Advanced Int. Combustion
Fuel Requirements	Heavy-Fuel or Gasoline

Special Features: 100% fly-by-wire control system with electronic stability augmentation; Intuitive, easy to fly safely; Minimal field service requirements; Rugged, efficient power train.

DM AeroSafe

<http://dmaerosafe.freesevers.com>

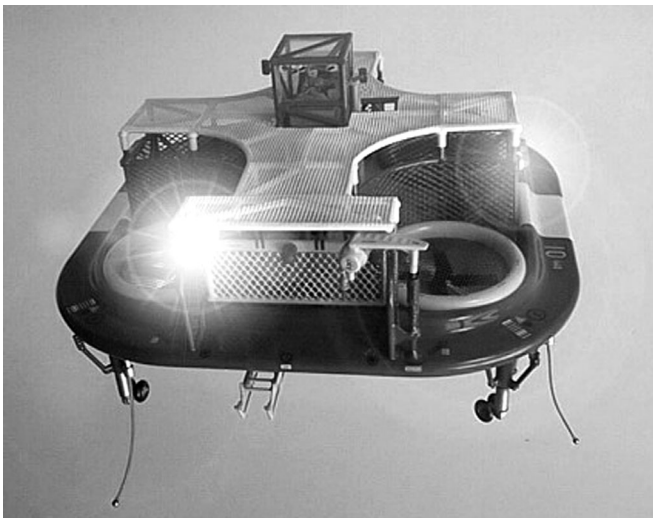


Fig. 3

EAGLE vertical take-off and landing
aerial rescue platform

DM AeroSafe is a small research and development team, which has developed a totally new high-rise rescue technology to retrieve trapped people from areas which cannot be reached by conventional aerial ladder, conventional helicopter or a helicopter equipped with a Heli-Basket.

This technology could give rise to a new class of air transportation means, used for safe close-in maneuvering around tall structures, even inside the highly populated areas.

Eagle Aerial Rescue Platform's Performance Summary

Dimensions:

Length - 42 feet (12.8 m)
Width - 42 feet (12.8 m)
Height - 16 feet (4.8 m)

Weights:

Max. Gross weight - 5000 pounds (2268 kg)
Payload (Crew of two plus 10 rescued people) - about 2000 pounds (about 900 kg).

Propulsion System:

Four (4) variable collective pitch Ducted Propellers
Propeller Diameter - 7.8 feet (2.4 m)
Engines - four (4) four-cylinder radial piston aero engines with forced air cooling system 250 hp each (1000 hp total)

Performance:

Max. Duration - about 5 hours without refueling
Max. Airspeed - 40 knots (75 km/h)
Max. operating altitude - about 7000 feet (about 2200 m).

“LTAS/CAMBOT, Inc.”

<http://www.lvcm.com>

Passenger Craft “Ltas 30-Xb”

The ships have rigid monocoque hulls, hybrid powered vectored thrust control and full active buoyancy control. (LTAS US Patent Pending).

This small 2-3 person craft at 70 to 80 feet in diameter will demonstrate ALL production systems and is designed for the LTAS FAA Type Certification program.

NASA's Langley Research Center

<http://science.nasa.gov>

NASA researchers are studying insects and birds, and using “smart” materials with uncanny properties to develop new and mind-boggling aircraft designs.

The “personal aircraft” that replaces the beloved automobile in people's garages may still lie in the realm of science fiction or Saturday-morning cartoons, but researchers at NASA's Langley Research Center (LaRC) are developing exotic technologies that could bring a personal “air-car” closer to reality.

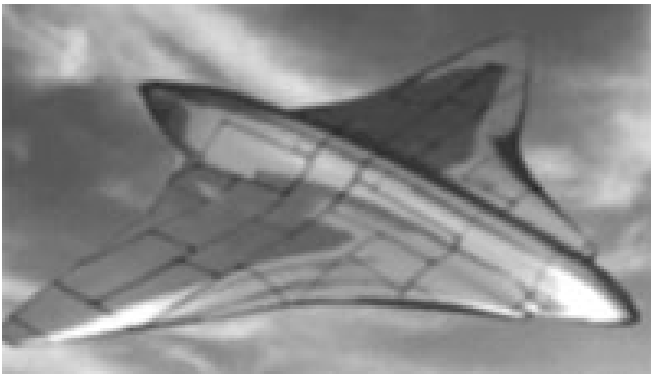


Fig. 4

And air-cars are just the beginning! Self-healing wings that flex and react like living organisms, versatile bombers that double as agile jet fighters, and swarms of tiny unmanned aircraft are just a few of the science-fiction-like possibilities that these next-generation technologies could make feasible in the decades ahead.

Laser Beam Flight

Lightcraft Technologies, Inc. (LTI)

<http://www.lightcrafttechnologies.com>

Lightcraft Technologies, Inc. is a new company committed to providing low-cost access to space through the use of beamed energy propulsion. (See color photos on the cover page).



Fig. 1

In 2000 at the High Energy Laser Systems Test Facility (HELSTF), Lightcraft Technologies, Inc. (LTI) set a new world's altitude record of 233 feet (71 meters) for its 4.8 inch (12.2 cm) diameter laser boosted rocket - in a flight lasting 12.7 seconds.

Although much of the flight was spent hovering at 230+ feet, the Lightcraft sustained no damage and will fly again. Besides setting the new altitude record, the craft demonstrated the longest ever laser-powered free flight and the greatest "air time" (i.e., launch-to-landing/recovery). LTI launched a total of seven vertical flights between 8:30 am and 11:30 am with three Lightcraft weighing less than 1.8 ounces (51 grams). Two of the flights by Lightcraft #3 reached 159 and 184 feet with the same propellant load!

...set a new world's altitude record of 233 feet!

The record flights were powered by the 10 kW pulsed carbon dioxide laser named "PLVTS" by the organization that owns it: the Directorate for Applied Technology, Test and Simulation (DATTS). Even though PLVTS was suffering from an arcing or grounding problem that caused it to run erratically, the laser power was still adequate to propel the craft to record altitudes.

What is a Lightcraft?

A Lightcraft is a 1kg launch vehicle, made from high temperature ceramic materials, that flies into space on a megawatt laser beam.



Fig. 2

The Lightcraft is both a single-stage-to-orbit launch vehicle and a satellite. If you have any further questions or comments, write or call LTI headquarters in Bennington, VT. The company representatives would be delighted to send you more information, or answer any inquiries over the phone.

How does it work?

A ground based laser is the power source that propels the Lightcraft into orbit. Lightcraft can deliver payloads into space for a fraction of the cost of traditional rockets because most of the engine stays on the ground, thereby unburdening the craft from having to lift the energy source for its propulsion system.



Fig. 3

The back side of the craft is a large, highly polished parabolic mirror that is designed to capture the laser beam projected at it from the ground. The mirror focuses the beam, rapidly heating the air to 5 TIMES the temperature of the sun, creating a blast wave out the back that pushes the vehicle upward. As the beam is rapidly pulsed, the vehicle is continuously propelled forward, on its way to orbit.

History of Lightcraft

1987 — Prof. Leik Myrabo invents Lightcraft for SDIO.

1997 — First successful wire-guided tests at WSMR. Solved flight stability difficulties, much like the Wright brothers did with the airplane.

1997 — Lightcraft broke Goddard's 41 ft., 1926 first successful rocket flight - but this time with no on-board fuel.

1998 — Record flight of 99 ft. with air breathing Lightcraft engine.

1999 — Record flight of 128 ft. with first rocket Lightcraft engine.

2000 — LTI sets new world record for highest flight (233 ft), longest flight time, and heaviest vehicle.

How can LTI reduce launch costs?

Conventional Launch — \$175,000,000

The Lightcraft — \$46,000

Chemical Rockets:

- carry massive propulsion source on board
- are expendable
- extremely costly
- prone to explosion due to fuel on board

Laser Propulsion:

- propulsion energy source remains on the ground!
- Lightcraft are inexpensive to manufacture and extremely light weight
- highly reusable power source is never subjected to the risks of flight

Lightcraft Technologies, Inc.

1914 Walloomsac Rd.
Bennington, VT 05201
Office: 802-447-6275
FAX: 802-447-8216

E-mail: tmyrabo@lightcrafttechnologies.com

Alternative space propulsion systems Star Drive

Mark R. Tomion, USA

<http://www.stardrivedevice.com>

Re: U.S. Patent **6,404,089** for the **Electrodynamic Field Generator, (EDF)**,

issued June 11, 2002 to Mark R. Tomion.

The 'official' name of the "StarDrive device", per the U.S. Patent and international PCT Applications, is **Electrodynamic Field Generator**. The EDF Generator uses banks of permanent magnets and rotating Field Coils to produce a very-high DC rotor voltage, and plane-parallel ring electrode arrays to electrostatically expand and control that voltage *as applied to the hull*, so that huge quantities of external Field electrons may be accelerated to energy levels that are usually reached only with a particle accelerator! It's somewhat like a glorified arc welder whose output is deliberately shorted to its own housing, and the DC voltage and current across the emitter and collector housing sections can be thermionically increased to values that are generally observed only in lightning: but the Field's *current density* is limited to a value which falls short of damaging the hull!

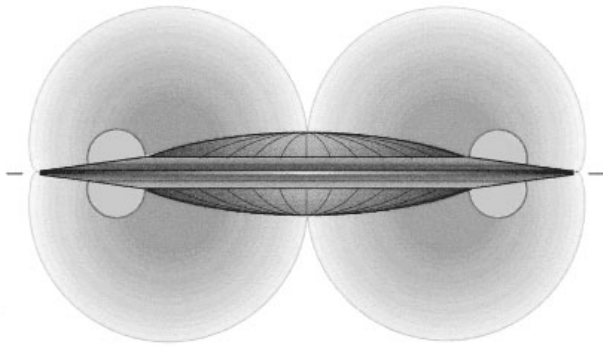


Fig. 1
StarDrive device hull & electrodynamic
Field configuration

As depicted above (Fig. 1), electrons circulating in the external Field envelope can achieve an impact velocity at the central collector sections which is very nearly that of light, and applied magnetic fields allow broad modulation of the Drive Field current's properties. The

Primary Arrays shown in the generalized schematic diagram below (Fig. 2) have control grids which allow an arc resistance imbalance to be imparted to the otherwise symmetrical Field current, so that they *render the two relativistic current impulses variably non-isometric*: thereby yielding thrust that is essentially **reactionless**! And the simple DC *Primary Power System*, like the early Faraday disk dynamo, is *wholly rotor-based* . . .

Note: It can be seen that the propulsive thrust developed by a StarDrive vessel is essentially brute-force in nature – it's produced simply by means of a controlled variable imbalance in the continuous *physical impact* of the two external hemitoroidal electron current streams with the collectors! If these two Field currents were of equal magnitude, no net force would be developed. However, if the "lower" current stream is stronger than the "upper", the vessel will be propelled away from the stronger current – in the "upward" direction. Since there's no 'backward' exhaust produced in the process, this type of thrust is truly and demonstrably reactionless in nature.

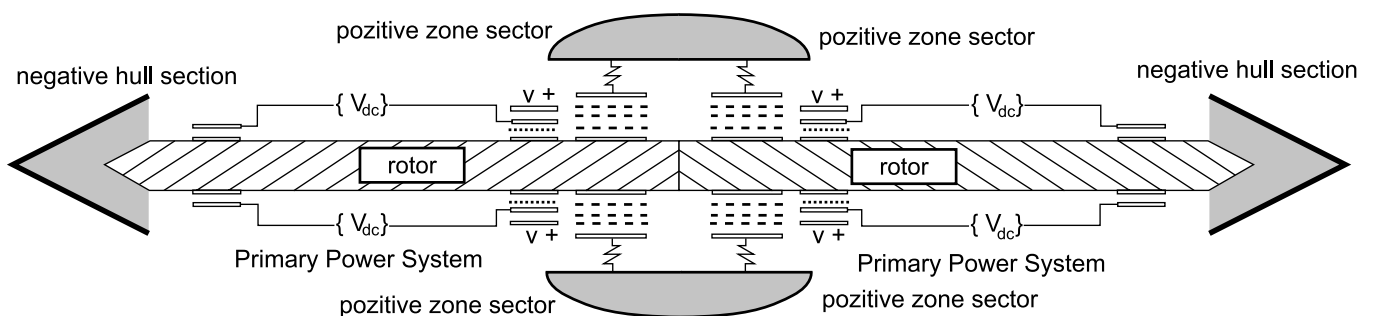


Fig. 2
Generalized schematic of rotor & dual induction ring assemblies

Needless to say, tremendous quantities of heat are produced in the StarDrive device's electron "targets" or collector housing sections, and liquid sodium must be pumped through each Primary Array's ceramic resistor network as a coolant. However, this excess heat in ground-based units may be used in the commercial generation of electric power and desalinization of seawater.

In fact, because an intense arc discharge field has the unique capacity to absorb vast quantities of quantum background energy, the EDF Generator is so efficient that the latter task may become truly cost-effective for the first time! And not only will large **over-unity** StarDrive Dynamo units be able to produce electric power at 60 to 720 MW output levels, they'll be able to do so for many years before the permanent magnet banks must be remagnetized!! *The only truly external input energy*

required in the interim is that necessary to initially bring the rotor up to speed . . .

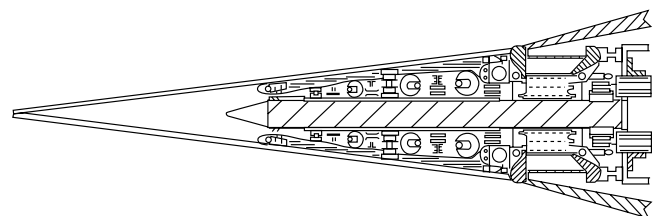


Fig. 3
A denumbered version of Fig. 1
from the EDF Generator Patent

Those of you who find this advanced technological prospect for the 21st century as exciting and fascinating as we do should consider making the

inventor's book *StarDrive Engineering* a valuable addition to your personal or reference library.

A Layman's Description of the StarDrive Device

Nearly anyone who endeavors to gain an initial understanding of the *Electrodynamic Field Generator*, even a scientist or engineer, is likely to ask for a concise layman's explanation of "how it works". This isn't easily accomplished, for this device represents an unorthodox and multidisciplinary technology. However, the overview provided below will discuss the operative characteristics of the machine's simplified *electric power generation variant* in what is hoped to be the most direct manner possible. In this case, when people ask the question above, what they generally mean is: "By what means is *over-unity* operation achieved in a 'StarDrive' Dynamo?". It is assumed here that the reader has not only already become acquainted with certain basic aspects of the design, but also understands that *over-unity* operation is an absolute prerequisite for any viable system of light-speed interstellar propulsion.

By way of further background, the formative mechanical design basis of the EDF Generator is of course the original Faraday disk dynamo. For whatever reason, no one seems to have bothered trying to develop this simple machine into a more sophisticated and *patentable* form before now. The principal limitation of Faraday's disk dynamo in its original form was that, when one or more permanent magnets were used to pass flux directly through the plane of a solid conductive rotor, a rather high-loss heavy current at very low voltage was produced. The first design improvement was therefore to use rotor-mounted toroid field coils in order to generate a much higher-voltage primary current, and to segment the rotor to reduce "eddy current" losses. Also, the toroid coil configuration absolutely minimizes Lenz losses, or the magnetic "drag" that is experienced by any conventional generator's rotor.

To eliminate the use of brushes, it was necessary to apply traditional vacuum tube design and operating principles. Fortunately, most of the original patent work in this field has passed into the public domain, so incorporating certain aspects of that work into the EDF Generator presented no impediment to its patentability. By using plane-parallel electrode arrays instead of brushes to charge the rotor, it is possible to limit that portion of the induced rotor current which passes through the field coils to a very low level – effectively isolating them from the actual output circuit. More importantly, however, it then becomes possible to thermoelectrically charge the Generator's housing itself in such a way that *it* carries the device's full output circuit current instead!

The reason for this unorthodox design parameter is that it was desired to actually incorporate a standing

electric arc field into the output circuit, to take advantage of the electron's inherent ability to absorb quantum background energy [including *zero point energy*, if and as necessary]. As a result of a thorough study of lightning, the inventor of the StarDrive device reasoned that the electrons comprising any naturally-occurring bolt of lightning had to *recover* (or absorb) an amount of ambient photonic energy equal to that which they expended in transit – in order to satisfy the conservation of energy principle. In such a case, it is not necessary that "we" do the *work* of moving charge *against* a potential gradient; the work may be done by the charge itself in being attracted *along* the potential gradient (or voltage level).

And since it is known from the field of welding that it takes less energy to sustain an arc than it does to initiate it, it therefore becomes possible to create an electrical circuit that outputs more energy than it requires as input. This is exactly what the EDF Generator does – by incorporating a standing arc field in its output circuit. Using the StarDrive device as our mechanism, "we" only provide the work-energy required to establish and maintain the external field's potential gradient, by initiating rotor rotation and bringing the thermoelectric elements up to temperature. The electrons in the electrodynamic field do all the rest . . .

Further Notes from the Inventor

In conjunction with one of our *StarDrive Generator* prototype project funding proposals, we are presently working on an interim proof-of-concept experiment for our proposed 24 kW air-cooled EDF Generator prototype. This full-scale mock-up of the 30"-dia. Generator's rotor and dual induction ring assemblies is intended to demonstrate the fundamental design principal discussed at the close of the Technical Overview (linked to our website's Method of Operation Summary page), whereby the voltage electrostatically induced on the rotor anode rings which power each Primary Array should be roughly one-third (1/3) of the Field Coil voltage (because of the capacitive dual induction ring geometry of the Primary Power System). For safety reasons, the Field voltage in all *air-cooled StarDrive Generators* will be limited by design to 850 VDC, and to 1,400 VDC in the larger *liquid-cooled StarDrive Dynamos*.

The experiment will also assist greatly in the derivation of remaining production model specifications, and will in fact incorporate production-quality rotor segments and electrode rings. Should this proof-of-concept experiment be successful, not only will the ability of our *over-unity 24 kW Generator* prototype to deliver large-scale DC output that's compatible with standard AC inverters (for utility grid distribution or off-grid conventional use) be virtually assured, but a major milestone incentive in our existing funding proposals will have been fulfilled as well. Further

updates like those below will be forthcoming on the News page of <http://www.stardrivedevice.com>.

01/28/03 - International Patent Filings Secured!: We are very pleased to report that we were successful in our efforts to secure numerous international (PCT) Patent Application filings for the *Electrodynamic Field Generator* by the final deadline of January 21, 2003! These important filings were effected in Australia, Canada, the People's Republic of China, the European Union (including France, Germany, Italy, Spain, and the United Kingdom), India, Japan, Mexico, the Russian Federation, and South Africa.

The securing of these key Patent Application filings adds immeasurable value to our StarDrive Engineering Project overall, as it will greatly protect and enhance our investors' upside global market potential (assuming, of course, that our 24 kW StarDrive Generator prototype is successful)! Be sure to check back from time to time for further updates as we proceed into the development phase of the Project.

11/07/02 - Academic Reference: Those of you kind visitors to our website who would like to have the benefit of an informed and unbiased academic opinion regarding the Electrodynamic Field Generator are welcome to contact John J. Tulip, Ph.D., Exec. Vice-Pres. of *American International University*. This consideration also applies of course to those parties who may be interested in securing a direct participation in our forthcoming EDF Generator Prototype Project. Dr. Tulip has not only expressed much-appreciated support of our efforts to introduce this important new technology, but has also had the opportunity to review our technical manual *StarDrive Engineering*. You may contact Dr. Tulip via e-mail at TulipJJ@aiuniversity.edu although we ask that you expect him to field serious and respectful inquiries only. Should you desire to speak with him by telephone, please be assured that he will endeavor to return your call whenever circumstances permit if you provide him with the proper phone number.

10/07/02 - Joint Venture Agreement Announced!: Mark Tomion, founder and president of Archer Enterprises and inventor of the recently-patented *Electrodynamic Field Generator*, is very pleased to announce that he has signed a Joint Venture Agreement with Affirm Technology Partners of Carlsbad, California to build a working prototype of his over-unity 'StarDrive' device's electric power output variant. The co-developers are planning to commence construction of a small air-cooled **StarDrive Generator** unit with a projected output rating of 24 kW and a housing diameter of only 30 inches, at a total weight of under 50 lbs., before the end of November 2002.

Should this exciting project be successful, it would represent an historic milestone in the development of over-unity electric power generation technology.

Not only is this small prototype EDF Generator expected to demonstrate a *minimum Coefficient of Performance in excess of 20:1*, but the design employed is completely linearly-scalable in a very broad range of sizes that would include liquid-cooled **StarDrive Dynamo** units with output ratings of up to 1 gigawatt! The most remarkable feature of these large Dynamo units is that an amount of recoverable thermal energy comparable to their respective electrical outputs will be made available for desalinating seawater, or for use in centralized municipal and industrial hydronic heating systems. And this capability would make the large-scale desalinization or distillation of water truly cost-effective for perhaps the first time ever.

Interested parties are welcome to contact Mr. Tomion at office@stardrivedevice.com (585-526-6817) for further information.

INFINITE ENERGY

Cold Fusion and New Energy Technology
Including Conventional and Renewable Energy



Infinite Energy Magazine

* Cold Fusion * New Energy
* New Science
* New Technology
Subscriptions, 6 Issues Per Year
\$29.95 North America
\$49.95 Foreign
Single Sample Copy
\$5.95 North America, \$10.00 Foreign

Infinite Energy Magazine
P.O. Box 2816-FV
Concord, NH 03302-2816
Phone: 603-228-4516 Fax: 603-224-5975
<http://www.infinite-energy.com>

Institute for Planetary Synthesis

P.O. Box 128, CH-1211 Geneva 20,
Switzerland

Tel. 41-022-733.88.76,
Fax 41-022-733.66.49

E-mail: ipsbox@ipsgeneva.com

website: <http://www.ipsgeneva.com>

Prospects of Hydrogen Energetics

Ph.M. Kanarev, Russia

E-mail: kanphil@mail.kuban.ru

Hydrogen is the only pollution free and inexhaustible energy carrier. But the implementation of such attractive properties of hydrogen is restrained by large expenses of energy for its production from water. Modern level of knowledge gives the opportunity to reduce these expenses [1], [2], [3].

It is known that a gram-atom is equal numerically to atomic mass of the substance, and a gram-molecule is equal numerically to molecular mass of the substance. For example, the hydrogen gram-molecule in the water molecule is equal to 2 grams, and the oxygen gram-atom is equal to 16 grams. The gram-molecule of water is equal to 18 grams. As the mass of hydrogen in the water molecule is $2 \times 100 / 18 = 11.11\%$ and the mass of oxygen atom is $16 \times 100 / 18 = 88.89\%$, the ratio between quantity of hydrogen and oxygen is preserved in one litre of water as well. It means that 1000 grams of one litre of water contain 111.11 grams of hydrogen and 888.89 grams of oxygen.

One litre of hydrogen has mass of 0.09 grams, one litre of molecular oxygen has mass of 1.47 grams. It means that from one litre of water it possible to produce $111.11 / 0.09 = 1234.44$ litres of hydrogen and $888.89 / 1.47 = 604.69$ litres of oxygen. Thus, one gram of water contains 1.23 litres of hydrogen [1].

Now energy consumption for production of 1000 litres of hydrogen from water is 4 kWh and of one litre – 4 Wh. As it is possible to produce 1.234 litres of hydrogen, then $1.234 \times 4 = 4.94$ Wh are spent for production of one gram of water now.

Instruments and Equipment Used for the Experiment

A special experimental low current electrolyzer, a voltmeter of the highest accuracy (accuracy class 0.2, GOST 8711-78), an ammeter of the highest class of accuracy (accuracy class 0.2, GOST 871160), a balance with value of a division of 0.10 grams and 0.010 grams, and a stopwatch with value of a division of 0.1s.

Experimental Results

Indices	Sum
1 – duration of electrolyzer operation connected to the supply line, in 6 cycles t, min	$6 \times 5 = 30.0$
2 – readings of voltmeter V, volts	13.6
3 – ammeter readings I, amperes	0.02
4 – power consumption ($P = V \times I \times t / 60$), Wh	0.136
5 – duration of electrolyzer operation disconnected from the supply line, in 6 cycles t, min	$6 \times 55 = 330.0$
6 – solution mass change m, grams	0.44
7 – mass of evaporated water m', grams	$0.02 \times 6 = 0.12$
8 – mass of water converted into gases m'' = m - m', gram	0.320
9 – power consumption per gram of water converted into gases $P' = P / m''$, Wh/grams of water	0.425
10 – existing power consumption per gram of water converted into gases P'', Wh/grams of water	4.94
11 – reduction of power consumption for hydrogen production from water, $K = P'' / P'$, times	11.62
12 – quantity of released hydrogen, $\Delta M = 0.320 \times 1.23 \times 0.09 = 0.035$, grams	0.035
13 – power content of hydrogen being produced ($E = 0.035 \times 142 / 3.6$) = 1.397, Wh	1.397
14 – energy efficacy of water electrolysis process ($E \times 100 / P$), %	1027

Note: Gas output is clearly observed during many hours after the electrolyzer is disconnected from the electricity supply.

Conclusion

Low ampere water electrolysis is a way for production of inexpensive hydrogen from water and hydrogen energetics.

References

1. Ph.M. Kanarev. The Foundation of Physchemistry of the Micro World. Krasnodar, 2002. 320 pages
2. <http://book.Kanarev.innoplaza.net>
3. [hppt://www.n-t.org/tp/ns/if.htm](http://www.n-t.org/tp/ns/if.htm).

Heater Producing Healthy Effect

The First Device of Healthy Life Support in Fuel-Energy Industry

A. Belyaeva, L. Savelyeva, O. Bondarenko, Kirghizia

<http://www.leteco.h1.ru>

Email: leteco@mail.ru

Nowadays problems of rational use of resources including energy resources are very important. Lack of energy-efficient technologies causes consumption of great amount of electric power, coal, and mineral oil. From another hand, in the XXI century one of the main approaches of human society development is turned to healthy life-style and development of ecologically appropriate technologies. Hence, basic direction of heating systems development should correspond to, at the least, two requirements, i.e. effectiveness (energy-saving) and ecological appropriation (ecological functioning). Moreover, it is necessary to take into account additional requirements for modern works:

- Relatively low prime cost of the systems;
- Minimal operating costs;
- Availability of a system of temperature mode control;
- Use of domestically produced materials for the systems.

The aim of the work is creation of a universal electric device of natural ecologically appropriate materials. The device should maintain relative air humidity of natural atmosphere in a quarter, make its ecology healthier, meet all the listed requirements, and represent new generation energy-saving system designed for heating of industrial and domestic areas according to features of technical solution.

A.L. Belyaeva is the author of this work. The invention of this heating device was acknowledged as the best invention of Kirghiz Republic of the last two years. A.L. Belyaeva was called as a laureate of a competition of "The Best Inventing in Kirghiz Republic in 2001-2002".

Solving this problem the author based on work experience existing in the area of semi-conductors production. Actually, the model was worked out in the common area of electric engineering and industrial crystals growing. Using of knowledge and skills of the both areas made creation of this device possible.

It should be noted that initially the invention of the heating device, which is discussed here, was

connected with necessity to improve microclimate and air atmosphere in a semi-conductor shop since the industrial process required optimal conditions. Hence, the device was observed as an element of the industrial process. However, soon other positive characteristics of the device were disclosed, i.e. when it was installed in a quarter all visible mould disappeared. Laboratory investigations stated that the operating device annihilated all pathogenic microflora. This rediscovered feature allowed using the device both in domestic and industrial area. After series of following laboratory investigations and bench tests construction of the device was changed and improved that allowed prepare it for line production.

Ceramic electroconvector: general characteristics

The working name of the final version of the model is *Ceramic Electroconvector TY 2971-006-22997241-2002*. Ceramic Electroconvector is an industrial and domestic electric heater of direct stationary action. It has high effective heat emission and satisfies ecological, sanitary, medical, and fire-prevention requirements.

At the same time it should be mentioned that by several characteristics this electroconvector differs from other known models of electroconvectors as well as from other existent heaters. It may be observed as a representative of an independent, specially created group of heating devices.

One of the main characteristics of the electroconvector is presence of constructive heating carbonic elements made of ecologically appropriate natural *non-metal* materials. Essentially, the electroconvector construction does not contain metal (the only metal part of the device is its supporting construction).

Production of heat of physiologically comfort zone requires 0.3 kW/h energy consumption which is 3-10 times less than energy consumption of known models of heating engineering. The Ceramic Electroconvector influences positively on ecology of a room. Room heating occurs better and more softly

as conducting carbonic elements can be heated maximally up to 100° C. As a result oxygen is not burnt, and air is not overdried in a room. Achieved minimization of metal content in the constructive elements of the device increases the level of ecological compatibility both of electroconvector constructions and operation.

The device accumulates no static electricity, neutralizes harmful magnetic field generated by alternating current in the conducting element (it is typical for all the other electrical household appliances). Therefore, **the additional positive effect** is produced and higher ecological characteristics of functioning of this electroconvector are confirmed.

Insulating strength of ceramics prevents electrical shock accidents. Ecological compatibility of the electroconvector is provided by materials of the construction. The base of the device is a studied natural silicate fiber which has quantitative and qualitative content of useful chemical elements which are the closest ones to the group of medical adsorbents listed in a medical encyclopedia. The ceramics is adjusted to emit electromagnetic waves only in infra-red spectrum.

The electroconvector produces heat waves in the average IR spectrum (8.4-8.6 mkm) which is maximally approximated to the diapason of heat waves generated by a human (9.37 mkm). It annihilates humidity of buildings independently of outer space humidity. At the same time it neither burns oxygen nor overdries air.

Healthy effect is produced by all the constructive elements made of ecologically appropriate natural materials. Electric power is transformed into heat emission by conducting elements. This process causes a mode of generation of a continuous heat spectrum of radiation. The heat radiation is similar to heat spectrum of radiation generated by a human. At the same time, this feature together with resonant oscillations of the crystal lattice of the ceramic cylinders produces a destroying effect on pathogenic and conditionally pathogenic microorganisms.

From the point of view of room ecology the proved healthy effect of the operating electroconvector becomes very significant. The effect considers continuous presence of a human in the room, i.e. risk of pathogen infection through respiration objectively decreases.

Application of the ceramic electroconvector is especially actual in patient care institutions and children's institutions, in special precision industries and space technologies. It can also be used in saunas with dry vapor.

The ceramic electroconvector is designed for unsupervised continuous work.

Structure of the electroconvector producing the healthy effect

Shortcomings of known electric heaters are: great electric power consumption (0.75-3.0 kW/h), big number of metal details, complex technical performance, and use of a necessary additional blower as a ventilator. Big number of metal details decreases ecological compatibility and productivity of the heaters. The listed devices have to use high temperatures on heat-release surfaces for warming up rooms up to the level of physiological comfort. This causes increase of energy consumption. Moreover, using of metal heating elements influences on air and relative humidity in the room. According to available data, no existent electroconvectors have healthy influence on ecology of a room.

The represented ceramic electroconvector contains a carrying frame with horizontal boards which have convective gaps. The carrying frame has heat-release monolithic hollow ceramic cylinders whose walls contain longitudinal through holes. Heating carbonic conducting elements and de-energized carbonic rods are built in the through holes. The heating conducting elements are connected in parallel-series circuit at the output of the cylinders with it's ends placed into insulating supports of the carrying frame.

Constructive heating elements are the main differences of the device. All the heat generating constructive elements, i.e. conducting and de-energized heating elements, as well as heat-release surfaces of ceramic cylinders have contiguous spectra of infra-red radiation.

Energy-efficient effect

The electric scheme of connection of the conducting elements provides different modes of work of the device. According to these modes, energy consumption is in the interval of 0.05-0.3 kW/h. The mode of 0.05 kW/h is calculated on a supporting level of warming-up of a room. Maximal energy consumption (0.3 kW/h) corresponds to the superior limit of the temperature mode of heating of working heat-release surfaces of the ceramic cylinders. In this case temperature of the heat generating elements, i.e. de-energized carbonic rods and conducting carbonic elements) lies in the limit of max 100°C. This produces a significant potential resource of electric strength and of durability of the used elements. The de-energized carbonic rods function as heat accumulators at switching on and switching off the device. Heating the conductors the de-energized rods accumulate heat through the ceramic walls of the cylinder till their temperature becomes equal to the temperature of the conducting elements. Appearing electromagnetic resonance between the conductors and the de-energized carbonic rods

intensifies infra-red radiation of the ceramic wall. Accumulative heat potential of the de-energized carbonic rods allows maintain uniform radial heating of the heat-release ceramic surface of the cylinder without decreasing energy consumption. In this case additional conducting elements of infra-red radiation become unnecessary.



The heating efficiency of the ceramic electroconvector was estimated by independent experts. Surface density of the radiation flow was calculated by formula of Stefan-Boizmann distribution law. Taking into account heating of the cylinders' surfaces up to 70°C this value came to 727 W/m^2 . **Total heat generated by the electroconvector per hour comes to 600 kcal or 698 W** at the total area of the radiation surfaces of 0.96 m^2 (on the basis of $1\text{ kcal}=1.163\text{ W/h}$ according to [1]). The electroconvector consumes 300 W/h and produces 698 W/h . That is to say that it effectively transforms electric energy into heat energy. Operational modes of the electroconvector are based on analysis of the heating effect produced by different devices, i.e. a tube metal heater (TMH) having a conducting metal element of Nichrom, a ceramic cylinder having a Nichrom conducting element, and a ceramic cylinder having a conducting element of carbonic ribbon. The carbonic ribbon produces high heating efficiency. Temperature on the surface of the ceramic frame is up to 80°C and temperature on the conducting element is 100°C . Hence, the device

equipped with the conducting element of the carbonic ribbon does not produce excessive heat radiation.

The electroconvector consumes 300 W/h and produces 698 W/h.

After one-year operation of the preproduction models in a private school it was noticed that number of respiratory illnesses and influenza among the pupils slumped, condition of skin became better, attacks of bronchial asthma among the teachers stopped, and allergic itch left the patients who suffered from allergy. A side effect was that flowers began to grow better, and those which had not blossomed began to blossom at least. Obviously, a combination takes place there: air cleaning of microorganisms, humidity normalization, warming comfort, and influence of pyramidal ceramic structures on water vapors which are transported by warm blasts.

Applied Know How

Ambient air in rooms is a complex substance including various chemical compounds, ions, dust parts, water vapors, infectious and potentially infectious microflora, etc. The electroconvector is represented by a ceramic hardphase crystal structure. Cold air blast moves close to the ceramic surface. It meets combined oscillation of crystal microlevel structures of ceramics. *Filtering electromagnetic screen* appears that breaks shell of pathogens and potential pathogens. It is a performance of **sanitation properties**. Atmospheric water contacts with structures of ceramics, then it is cleaned and structured. After that water cleans air which is breathed in by a human. Hence, the organism becomes healthier. It is a performance of the **healthy effect**. A clean room warmed uniformly improves human's health.

Main Performance Attributes of the Ceramic Electroconvector Producing Healthy Effect

Nominal required power	0.05-0.3 kWt/h
Voltage of the feeding network	$220 \pm 22\text{ V}$
Frequency of alternating current	50 Hz
Temperature of the conducting element in operation mode	$50...110^{\circ}\text{C}$
Temperature of the heat-release surface of the cylinder	$39...90^{\circ}\text{C}$
Surface density of radiation flow	727 Wt/m^2
Quantity of radiated heat	600 kcal/h
Class of protection	1
General area of heat-release surfaces of the cylinders	9600 cm^2
Sizes	$410 \times 400 \times 75\text{ mm}$
Weight	18-21 kg
Durability	30 years

The ceramic electroconvector is designed as a floor construction for repetition work.

References

1. Heat Engineering Reference-book, Moscow, Energy (Energia), 1975, V. 1, p. 12.

About the author



After graduating from Polytechnic University of Frunze city Alexandra L. Belyaeva (1953) participated in launching of semiconductor production. She was given a rank of Perfect Inventor and Rationalizer for invention and rationalization action. In 1987 her invention named Method of Production of Monosilicon Seed

Crystals was introduced into manufacture, according to close copyright of USSR. Since that year this introduction has allowed grow monosilicon having better semiconductor properties. She was given a rank of Inventor of USSR for the invention.

Alexandra L. Belyaeva has acknowledged and given a rank of Inventor of Kirghiz Republic. Since 1994 in collaboration with Russian specialists of ceramics she has been dealing with organization of ceramic productions in Kirghizstan. Here are the inventions by Belyaeva: Method of Production of Seed Crystals and Its Variants (Patent #42 KG), Ceramic Mass for Insulators' Production (Patent #43 KG), Ceramic Mass Having Heat-Radiating Properties (Patent #464 KG).

In 1992 Belyaeva was rewarded with a Silver medal of VDNH (Exhibition of Achievements of National Economy, Moscow) for development of technologies for production of constructive nitride-cadmium items of semiconductor wastes.

Her Method of Production of Nonexpendable Seed Crystals is at introduction stage. The seed monocrystals produced by the new method will allow grow ribbon monocrystals having certain properties. It will be possible to produce items made of the monocrystals which will meet requirements of energy-saving and ecological appropriation. These devices represent non-aging powerful energy sources, various semiconductive devices with no inner microdefects and with unlimited durability, structural water filters.

Since 2002 she has been dealing with organization of production of ecologically appropriate industrial-domestic appliances causing healthy effect. The invention of Ceramic Electroconvector Producing Healthy Effect is now introduced. Energy-saving of the new ecologically appropriate electroconvector exceeds energy-saving of all the existent heating systems.

Belyaeva is a laureate of competition of The Best Inventing in Kirghiz Republic in 2001-2002.

Inertial Propulsion Device

Vitaly E. Senkevich, Russia

E-mail: hhhhha@mail.ru

*A body is at rest or moves linearly and uniformly until it is not influenced by an external force.
(School course of physics)*

*Forget everything that you were taught at school.
(Arkady Raykin)*

This propulsion device consists of an engine and a body. The engine (see Fig.1) is remarkable for its movable stator (S) which can make free rotation as well as a rotor (R). When the engine starts the stator and the rotor begin to rotate in opposite directions. Thus the engine has two ends and one of them is connected to a flywheel (F). This flywheel begins accelerated rotation.

A cross-beam (CB) is connected to the second end of the engine where a rotating momentum appears. Under the influence of this momentum the cross-beam presses down one of the supports placed on the body (for example, Sup.1). As a result a force which is compensated by acceleration of the flywheel (F) appears on the support. When the flywheel is accelerated up to certain speed a control system (CS) switches the windings of the engine to change the direction into the opposite one (reverse). At that the cross-beam also tends to turn to the other side and presses down the second support (Sup.2). Thus the cycle repeats. It should be noted that forces acting at the supports are **codirected** and they move the whole device.

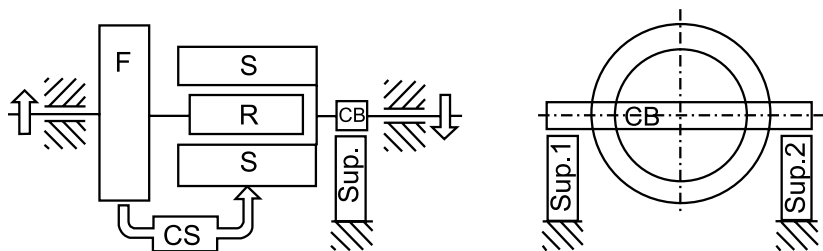


Fig.1

About the author



After graduating from Polytechnic University of Frunze city Alexandra L. Belyaeva (1953) participated in launching of semiconductor production. She was given a rank of Perfect Inventor and Rationalizer for invention and rationalization action. In 1987 her invention named Method of Production of Monosilicon Seed

Crystals was introduced into manufacture, according to close copyright of USSR. Since that year this introduction has allowed grow monosilicon having better semiconductor properties. She was given a rank of Inventor of USSR for the invention.

Alexandra L. Belyaeva has acknowledged and given a rank of Inventor of Kirghiz Republic. Since 1994 in collaboration with Russian specialists of ceramics she has been dealing with organization of ceramic productions in Kirghizstan. Here are the inventions by Belyaeva: Method of Production of Seed Crystals and Its Variants (Patent #42 KG), Ceramic Mass for Insulators' Production (Patent #43 KG), Ceramic Mass Having Heat-Radiating Properties (Patent #464 KG).

In 1992 Belyaeva was rewarded with a Silver medal of VDNH (Exhibition of Achievements of National Economy, Moscow) for development of technologies for production of constructive nitride-cadmium items of semiconductor wastes.

Her Method of Production of Nonexpendable Seed Crystals is at introduction stage. The seed monocrystals produced by the new method will allow grow ribbon monocrystals having certain properties. It will be possible to produce items made of the monocrystals which will meet requirements of energy-saving and ecological appropriation. These devices represent non-aging powerful energy sources, various semiconductive devices with no inner microdefects and with unlimited durability, structural water filters.

Since 2002 she has been dealing with organization of production of ecologically appropriate industrial-domestic appliances causing healthy effect. The invention of Ceramic Electroconvector Producing Healthy Effect is now introduced. Energy-saving of the new ecologically appropriate electroconvector exceeds energy-saving of all the existent heating systems.

Belyaeva is a laureate of competition of The Best Inventing in Kirghiz Republic in 2001-2002.

Inertial Propulsion Device

Vitaly E. Senkevich, Russia

E-mail: hhhhha@mail.ru

*A body is at rest or moves linearly and uniformly until it is not influenced by an external force.
(School course of physics)*

*Forget everything that you were taught at school.
(Arkady Raykin)*

This propulsion device consists of an engine and a body. The engine (see Fig.1) is remarkable for its movable stator (S) which can make free rotation as well as a rotor (R). When the engine starts the stator and the rotor begin to rotate in opposite directions. Thus the engine has two ends and one of them is connected to a flywheel (F). This flywheel begins accelerated rotation.

A cross-beam (CB) is connected to the second end of the engine where a rotating momentum appears. Under the influence of this momentum the cross-beam presses down one of the supports placed on the body (for example, Sup.1). As a result a force which is compensated by acceleration of the flywheel (F) appears on the support. When the flywheel is accelerated up to certain speed a control system (CS) switches the windings of the engine to change the direction into the opposite one (reverse). At that the cross-beam also tends to turn to the other side and presses down the second support (Sup.2). Thus the cycle repeats. It should be noted that forces acting at the supports are **codirected** and they move the whole device.

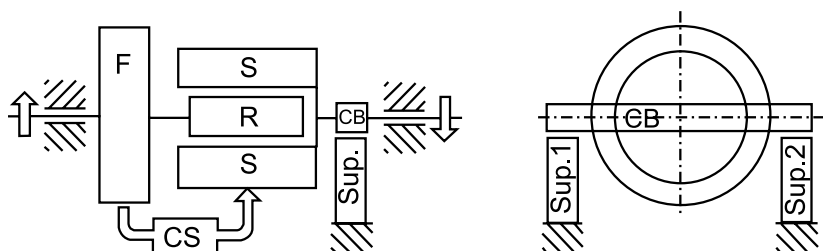


Fig.1

Unlimited Accelerated Nonreactive Motion

by G.P. Ivanov

Information from <http://tts.lt/~nara/ruspopul.htm>

Bias of centre of inertia of the closed system is a phenomenon exceeding the bounds of modern scientific conceptions. At the same time it is a way to the new marvelous world of earlier unknown laws and phenomena of nature. Researches made by G.P. Ivanov, Russia, have allowed him come to the following conclusion: it is a quite realizable task to create technical devices which can move under the action of nonreactive forces. However a purposeful scientific-research spade-work is required for the reliable registration of them by modern experimental facilities. According to the author during the whole XX century the known idea of latent impulse were misleading the scientists from the serious research of impulse-energy processes existing in systems at the presence of quasi-stationary electric and magnetic fields. According to G.P. Ivanov, it is related with the fact that the notion of "latent impulse" has nothing in common with the real momentum, since the very existence of "latent impulse" and "latent energy" which attends it, would make it impossible, for example, to adjust radio equipment since all effective capacitances change their value a hundred and thousand times as much (it depends on their orientation with respect to the magnetic field of the Earth).

Fig. 1, 2 demonstrate the patented by G.P. Ivanov method of realization of nonreactive motion (G.P. Ivanov, Yu.G. Ivanov. Method for production of propulsion. Patent #2172865, M., 2001). Fig. 1 demonstrates a device which consists of magnetized core with the attached metal electrodes.

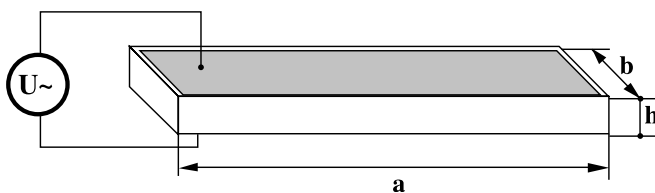


Fig. 1

The simplest "nonreactive" element

When alternating voltage is applied the device together with the center of inertia of the whole system (including power source and lead) will oscillate under the action of nonreactive force. It will move along the direction which is perpendicular to the vectors of electric and magnetic fields inside the core.

On Fig. 2 there is an analogous device supplied with a cylinder core. Magnetization of the core is defined by current of the coil which is wound around it (see Fig.2).

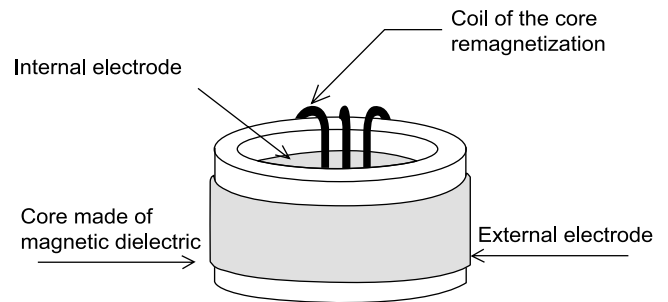


Fig. 2

Diagram of the device which can be in unlimited accelerated nonreactive motion

Let us supply the electrodes of the device with such voltage which is enough to change field density in the core (for example, according to the law $E = E_0 \sin \omega t$), and the coil with voltage enough to change the magnetization (according to the law $M = M_0 \cos \omega t$). Then nonreactive force which is constant in its direction will act on the device along the axis of the cylinder. The average of the force is $F_{cp} = \pi f E_0 M_0 V / c^2$, where E_0 , M_0 are the amplitudes of density values of the electric field and amplitudes of the core magnetization, f is frequency, V is core capacity. As a result the device can either move with acceleration or act against external forces. The researches allow the author to prove the validity of the following theorem: **At motion of the open-loop system (device) the work made by nonreactive force could not be realized by means of decrease of energy of the proper (appurtenant to the system) power source.** Where this energy comes from if there are no artificial power sources outside the device? However everywhere there is such form of matter as electrovacuum. It allows us come to a conclusion that nonreactive forces make work by means of decrease of electrovacuum energy.

Existence of electrovacuum does not contradict to the modern physical picture of the world. On the contrary providing the realization of laws of momentum and energy conservation, this idea originates from and organically supplements it. The theory of electrovacuum opens quite realizable prospects in different fields of human activity which seem to be fantastic and impossible. It also proposes unusual ways to solve many problems which are considered as insoluble. For example, it becomes possible to create nonreactive cosmonautics and private aircrafts. Energetics will be changed beyond recognition since power sources which require no material fuel will occupy the place of big and small modern electric power stations. The analogous list could be continued. There are presented quite realizable prospects related to inexhaustible reserves which are hidden in the ambient space.

Revolutionary Current

Suresh Kumar Baliyan, India

E-mail: suresh_baliyan@rediffmail.com
suresh_baliyan@yahoo.com

*Electricity is one of the most wonderful inventions of the 18th century. It can be produced by various methods in which different types of energy are used such as mechanical or chemical energy. In this article we discuss a new type of methods in which **electrostatic energy** is used.*

In this method we use **electrets** as an energy source. Electrets are permanent polarized dielectric material which is made by cooling dielectric material in a high intensity electric field. When we place an electron in the electric field of a point charge, it is influenced by a force. If the direction of the force is such that the electron moves in a closed path then it represents a current in the opposite direction along the closed path. Here closed path means a metal wire loop in which the electron movement is responsible for the current.

The charge of the electrets remains constant for many years (100) and there is no loss of energy because we use only the property of electrets that they apply force when a charge is placed in its electric field. Since here we create energy in the form of electric current then it violates the Law of conservation of energy.

Let us discuss the method in three steps:

- 1) Fundamental
- 2) Equivalent circuit
- 3) How we can use it as a potential source of electricity.

1. When we put a metal rod in the electric field of a point negative charge then the electron is influenced by repulsion force which moves in arrow direction and the electric field is cut by putting an earthed metal plate from any direction. When we place four charges on the corner of the metal frame and shield the electric field in particular direction as shown in Fig.1 then the force on the electron which is placed in metal frame will be in the direction of arrow and this makes a loop. The force influencing on the electron will be continuous, so the current which moves in direction opposite to the electron movement will induced in the metal frame.

2. The equivalent circuit of Fig.1 is shown in Fig2. It demonstrates that a 'V' volt battery and a resistance 'R' can be replaced by an arm of the metal frame. The polarity of the battery is shown in Fig. 1. A current of

magnitude (V/R) will be induced in the circuit by this method.

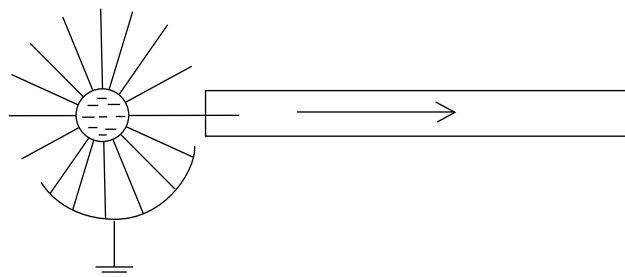


Fig. 1a

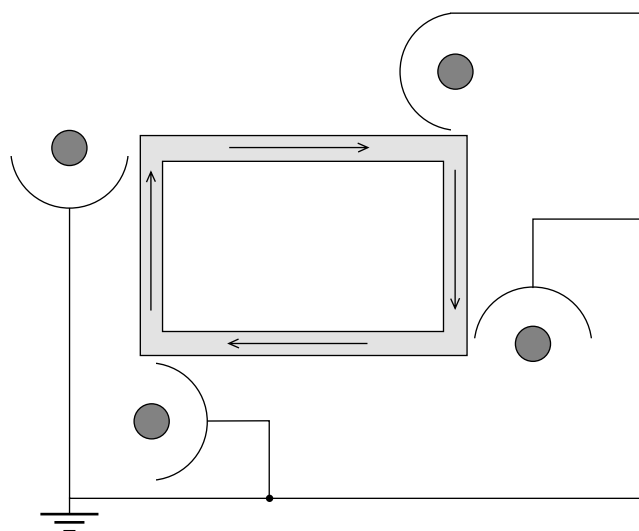


Fig. 1b

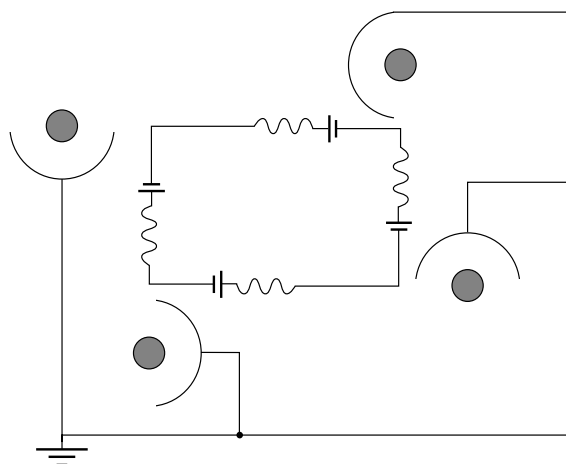


Fig. 2

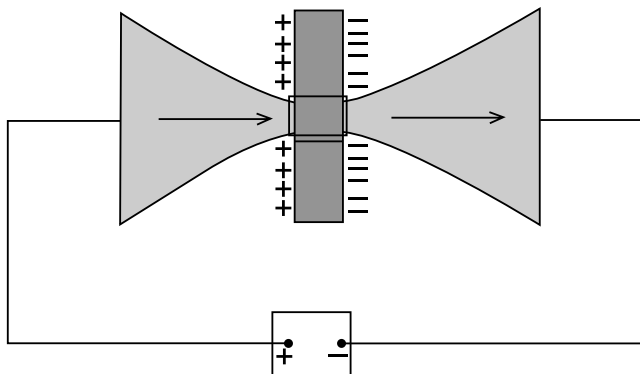


Fig. 3

3. We can use another device as a potential source (see Fig3.). Let us take an electret and make a hole at the centre. A hollow thin walled metal cylinder is fitted in the hole and a metal frame is taken as shown in the Fig. 3. We can use this metal cylinder as an electric field shield which may affect the direction of the force influencing on the electron. We may use this device as a potential source of electricity which will give electricity until the charges on the electrets vanish. The charge on the electrets remains constant for many years. Thus we can create energy and the problem of energy shortage can be solved by this method forever. We are trying to make a prototype of this but due to lack of equipment facility we are not able to demonstrate a working model. However we are trying to modify it.

NEWS REVIEW

Russian scientists are preparing new application of energy of geothermal waters

<http://www.sciteclibrary.ru>

A way for economical use and utilization of energy of geothermal waters was found in the Institute of Geothermal Problems (Russian Academy of Sciences). The new technology can be applied for heating in different purposes, and can compete with the power engineering, which uses the conventional energy carriers.

Geothermal springs are ideal for generating electricity by means of using of their permanent heat. This is especially important for Kamchatka, which is rich in these springs; however they are almost never used in mass power engineering, but only serve as an attraction for tourists, who admire beauty of Kamchatka geysers. At the same time the region itself freezes every year because of shortage of fuel for electric power stations.

What prevents us from using the geothermal springs?

The problem is that the storages of most of geothermal water fields have low and medium temperatures. This does not allow providing their competitiveness as regards conventional energy carriers. During tens of years this fact was an obstacle to the development of geothermal energy.

A solution was found in the Institute of Geothermal Problems. It was brought out that at many exploited geothermal fields wellhead overpressure exceeds 5-10 MPa and more. These waters contain fair quantity of dissolved organic gases. The scientists have found out that methane content of these waters exceeds 90 %. And until now at exploitation of the fields these types of energy have not been properly utilized.

The scientists of the Institute of Geothermal Problems have developed a technology of the optimum utilization of energy of geothermal waters and have increased the thermodynamic effect of the process.

This aim was fulfilled by means of transmission of thermal energy of geothermal water through the intermediate heat exchangers to the secondary heat carrier. Chemical energy of dissolved gases was used as an additional source of energy. The transmission was held by the use of primary and secondary separators. The distinctive feature of their technology is that associated potential energy of geothermal water is used as an additional source of energy. Expander and compressor placed on the same shaft are used as potential energy converters. Gas-holder and gas control point are used for utilization of energy of dissolved gases.

Thus on the bases of this technology geothermal energy can be effectively developed that will be competitive with fuel hydrocarbon energy.



Tilley Electric Vehicle



Tilley Foundation, Inc.

131 Hiwassee Road
Lebanon, TN 37087
<http://www.tilleyfoundation.com>
E-mail: cktilley@bellsouth.net

Editor: The advantages of electric vehicles were proved more than once. No fuel is required to set them in motion. Along with evident advantages of electric vehicles, such as their powerful characteristics and harmlessness for environment there is a side benefit, i.e. much less maintenance as compared with gasoline or diesel-fueled vehicles is required. Moreover it is easier to manufacture such vehicles.

In the previous issues of New Energy Technologies magazine we have already acquainted our readers with Tilley Electric Vehicle designed by Carl B. Tilley (USA). Below there is some up-to-date information and photos from the inventor. Besides we also publish an article devoted to the similar types of fuel-less motors.

After several years of personal accomplishments in the alternative energy industry, Carl B. Tilley was convinced that it was possible to build an electric car that could be powered without the help of external power to keep the battery charged.

The concept to produce a useful electric performance car that would last more than a few hours and would be economical to run, safe to drive around town or across the United States and never use a drop of fuel challenges the future of transportation as we know it today.

With the establishment of the Tilley Foundation, Inc., in the year 2001, Carl Tilley set out to prove it could be done. It was an ambitious project and it broke ground on the facility in Tennessee that would build the first self generating electric car.

...you have no need for fuel and you do not have to stop the vehicle to charge it after driving.

Construction of a 1,800 square foot building, that was powered with another recently developed electric device, began in the year 2002. Electricity from the building built the car from a different energy invention, that was void of any outside power supply. It is ironic that one alternative energy device actually built the invention to power and build the electric car.

From the selection of the proper car to be converted, to the advanced technology which is on board, the **Tilley Electric Vehicle TEV** performs comparably to gasoline powered vehicles. The difference is you have no need for fuel and you do not have to stop the vehicle to charge it after driving. There is no pollution and you can cruise the highways at the same speed as any other vehicle.

The rear mounted electric motor provides over 130 SAE net horsepower at 5,500 rpm. It offers a 3 speed automatic transmission that is smooth shifting and totally silent running. All this is combined with rack and pinion steering and a 35/65 rear weight bias that enables fast, sensitive handling and needs no power assistance.

...battery system will be fully charged at all times while in use.

It has 4 wheel disc braking for fast progressive, fade-free stopping. Counterbalanced gull-wing doors need only 14 inches of clearance. The rear sporty louvers are aerodynamic designed so that it almost eliminates any drag effect. All this with a stainless steel body makes for a great car.

Control center for the battery bank only allows what is needed to keep the batteries charged while in operation no matter what the speed or discharge from the battery bank. Your battery system will be fully charged at all times while in use. Simply get in, start the car and drive like any other vehicle.

A 1981 DeLorean was converted as the Tilley Electric Vehicle. Conversion of the car began in late June of 2002. State of the art metal fabrication to construct support for the electric motor, battery bank, control center and the TEV device was completed in July of 2002.

Several tests were made to validate the TEV technology. One of the last tests was made on September 7th, 2002. It has been demonstrated that after 17.3 miles driven on the Superspeedway at speeds ranging from 80MPH to 96MPH independent engineer certified batteries were full.

Assembly Pictures (see also the cover page)

Photos by Robert Gaither



Fig. 1
Removing Gas Motor



Fig. 4
Fitting Parts



Fig. 2
Fabrication



Fig. 5
Transmission Work

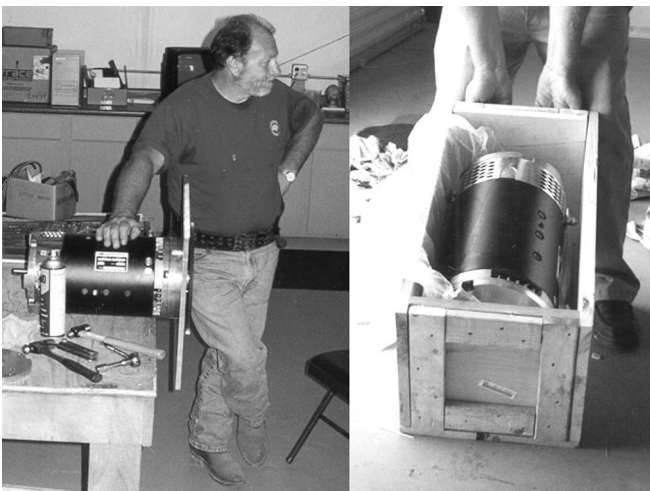


Fig. 3
Drive Motor



Fig. 6
Motor Mounted

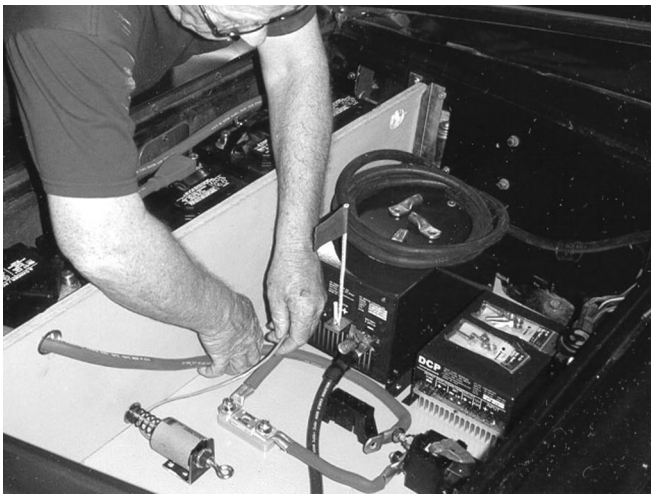


Fig. 7
Making Connections



Fig. 9
Special Wiring & Guages



Fig. 8
About Ready



Fig. 10
Car Unveiling

Trends in the Application of Motor-Generators

Adrian Akau, USA

E-mail: adrianakau@aol.com

If the Tilley generator-motor should enter into the world market, some curious consequences may result, the most important being the transition of the Honda and Toyota hybrid cars into full fledged electrics.

First of all, a comparison should be drawn between the Tilley and the two hybrid cars presently being sold, the Honda Civic and the Toyota Pirus should be made.

The Honda Civic and the Toyota Pirus both use charging systems with a gasoline motor for better mileage. The Tilley motor-generator is a stand-alone electric vehicle. The Honda motor-generator is just

60mm thick and provides (10kW or 13hp). The Toyota Pirus has a 44hp unit (American Version) which feeds power into electric motors at the wheels. Both Honda and Toyota gasoline motors are off at 0 mph. Only the electric system is used until the power demand reaches 10 kW; then the gasoline motor automatically kicks in. The Pirus is able to get higher milage in city driving than in country driving from the fact that the ratio of the power from the electric part to power to the gasoline part of the motor is greater at lower than at higher speeds, that is, less power is needed to run the car in city driving than in country driving because of the lower speeds and air resistance.

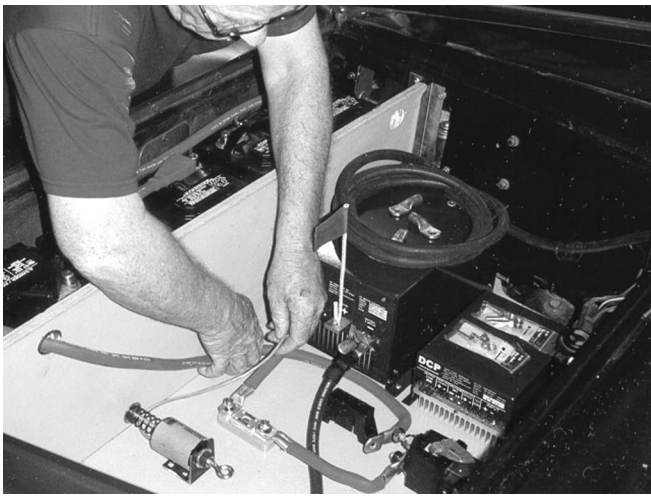


Fig. 7
Making Connections



Fig. 9
Special Wiring & Guages



Fig. 8
About Ready



Fig. 10
Car Unveiling

Trends in the Application of Motor-Generators

Adrian Akau, USA

E-mail: adrianakau@aol.com

If the Tilley generator-motor should enter into the world market, some curious consequences may result, the most important being the transition of the Honda and Toyota hybrid cars into full fledged electrics.

First of all, a comparison should be drawn between the Tilley and the two hybrid cars presently being sold, the Honda Civic and the Toyota Pirus should be made.

The Honda Civic and the Toyota Pirus both use charging systems with a gasoline motor for better mileage. The Tilley motor-generator is a stand-alone electric vehicle. The Honda motor-generator is just

60mm thick and provides (10kW or 13hp). The Toyota Pirus has a 44hp unit (American Version) which feeds power into electric motors at the wheels. Both Honda and Toyota gasoline motors are off at 0 mph. Only the electric system is used until the power demand reaches 10 kW; then the gasoline motor automatically kicks in. The Pirus is able to get higher milage in city driving than in country driving from the fact that the ratio of the power from the electric part to power to the gasoline part of the motor is greater at lower than at higher speeds, that is, less power is needed to run the car in city driving than in country driving because of the lower speeds and air resistance.

American car companies are beginning to develop their own starter-generators to "save an extra 10% on the gas milage". Are they doing this because they don't want to be left behind in the milage competition or because they really understand the nature of the starter-generator motors used by the companies producing the hybrids?

With the advent of the Tilley motor-generator, a new factor enters into the situation. If the system proves valid, does this mean that Honda and Toyota are out of the running? Hardly not! It is likely that these companies have allowed or even planned for this contingency with larger capacity motor generators which would do a similar job. With their fine cars and superb engineering, the transition from a hybrid to a pure electric might be costly but not too difficult to engineer. Each of the two hybrid companies may already have been built, tested vehicles of this nature. However, since the primary purpose of the car companies is to make money it is doubtful if this full-fledged fossil fuel-less type will be placed on the market unless competition so requires. A car using the Tilley motor-generator might certainly push them in this direction.

Should the Tilley remains undeveloped, one might expect the second level hybrid car to arrive in a few years from Honda and Toyota. These cars should have greater electric generator-motor capacities and smaller gasoline engines. These systems could give small cars much higher gas milage and could also be placed in larger, more elegant vehicles such as the Honda Accord and the Toyota Camrey.

The transition to fuel-less motors should hopefully be slow and painless for both the pocket book as well as the human psych. If scientists cannot be convinced by studying conventional scientific laws on how these motors work, perhaps they will better see the need for the promulgation of new laws in this area.

We know that at the present time, both Honda and Toyota motor generators (M.G.) have a powers assist function while the Tilley stands alone. Let us look at

the present situation (we will use the Toyota U.S. M.G. because it is the more powerful version):

Honda and Toyota classify their M.G.'s as permanent magnet types; Carl Tilley says his is an advanced D.C. motor.

Power output:

Honda is given at 10 kW at 3,000 rpm or 13 hp

Toyota is 33 kW at 1,040-5,600 rpm or 44 hp

Tilley is up to 135 hp depending on rpm's

Voltage/Battery (Ni-MH=Nickle Metal Hydride, AH=amp hours)

Honda: 144V, 120 Ni-MH cells@1.2V ea., 6.5 AH

Toyota: 274V, 228 Ni-MH cells@1.2V ea.

Tilley: 144V, 12-12V lead acid (Wal-mart), 1200AH

Physical Characteristics of each M.G.

Honda: 60 mm wide

Toyota: unknown

Tilley: 9" dia., 146 pounds

The main effort should be to implement the transition away from the use of fossil fuels. We know this can be done but it takes proper attitude. Proper attitude takes knowledge and knowledge takes willingness to learn. Willingness to learn takes desire to learn and desire to learn takes humility. Unfortunately, humility is a characteristic that many people, especially learned ones lack. *Editor's: Carl Tilley's comments are also given below.*

Very Good...you seem to know what we already were aware of...before we could mass produce our Tilley car I am sure some auto company would come out with basically the same thing...I do believe they already have it and they are just waiting for the right time. The good news is that at least the Tilley car lighted their fire to get them started.

Carl Tilley

Read in the next issue!

In April 12 of 2003 scientific conference "The Time Machine" was organized by Faraday Laboratories Ltd in Moscow. There were presented the reports by V.A. Chernobrov, A.V. Frolov, A.V. Rykov, E.D. Sorokodum, V.J. Kosyev, A.N. Solonyi, V.A. Atsukovsky. There was discussed design of the device made by Faraday Laboratories Ltd. as well as main principles of control on temporal characteristics of physical processes by changing of density of space energy, i.e. aether density according to patent claim.

Details are in the next issue!



Electric Vehicle in Russia



Review by Correspondent Alla Pashova, Russia

The director of *EV (Electric Vehicles)* company located in Tolyatti (Russia), Alexander Mukhanov states: "If during 2 centuries intellectual efforts of a scientific thought were concentrated on an electric engine instead of the internal combustion engine then now we would have driven electric vehicles, and the greenhouse effect would not have exist".

The electric vehicle has driving-wheels which are set in motion by an electric engine, and it is powered by an electric battery. The electric vehicle appeared in Great Britain and France in 1880 and it is significantly older than the automobile equipped with the internal combustion engine.

At the beginning the speed and the fuel distance of the electric and gasoline vehicles were approximately the same. The main disadvantage of electric vehicles was a complicated system of recharge since there were no usual transformers of alternating current into direct one. Hence, the electric vehicle was recharged in a quite difficult way. An electric engine operated on alternating current was used to recharge it. The electric motor rotated a shaft of the generator which was connected to batteries of the electric vehicle. However in 1906 a rectifier which was simple to operate was invented. Despite its principle of operation was quite complicated (mercury vapor was used for transformation of alternating current into direct one) it has given a great stimulus for development of automobile industry.

There were no essential proves of advantage of gasoline vehicles as compared with electric vehicles. Nevertheless, even at that time there was an opinion that electric vehicles run more slowly and to shorter distances. However "gasoline" records were also insignificant and comparable with results produced by the electric vehicles. At the same time producers of electric vehicles did their best to demonstrate the advantages of these vehicles. If you remember, Walter Baker, one of the most famous American constructors and producer of the electric vehicles, achieved the speed of 130 km/h driving his car. An electric vehicle produced by Borland Electric company run from Chicago to Milwaukee (the distance of 167 km/h along non-asphalted road) without recharge. Next day after recharging the electric vehicle returned to Chicago by its own power without meeting any incidents. During the journey its speed came to 55 km/h.

In 1899-1900 a hereditary Russian nobleman Ippolit Romanov made an experiment on designing of the first Russian electric vehicle. Since these vehicles had been

designed to run in Saint Petersburg then the city council required to produce them in the same place. In 1899 Romanov's first electric vehicle was made. Its general design was borrowed from English cabs in which a cabman sat on a high dickey placed behind passengers. Romanov's electric cab had two passenger seats situated in front of the dickey in a half-cabin having side and back windows. The cabin was equipped with a hood. The seat of a driver was placed behind and above the cabin; a box containing an accumulator was located under the driver's seat. The vehicle was four-wheeled. Diameter of the front wheels was smaller than those of the rear wheels. The front wheels were fixed by elliptical springs and were driving ones. They were connected to two independent electric motors by a roller chain drive. The regulated rear wheels had a smaller diameter and were fixed by spiral springs.

This first electric vehicle was equipped with lead accumulator which had 36 banks. It required recharging every 60 versts (1 verst – 3500 feet). The total power of both the electric motors was equal to 4 hp. Design of the vehicular part of Romanov's electric vehicle was borrowed from the models produced by an American company named *Morris-Salom*. This company had produced electric vehicles since 1898; however those models had wheels of greater diameter as they were equipped with pneumatic tires, while Romanov's vehicle had wheels with light rubber rims. Both the electric vehicles had two electric motors, but the distinction of Romanov's electric vehicle consisted in the presence of 6-row ball bearings in the wheels.

Romanov's second cab was built in 1900. This model had entirely closed and glazed cabin for passengers. The chain drive was replaced by a gear; however the basic sizes remained the same. This model was equipped with an accumulator designed by Romanov. The general weight of the electric vehicle was 45 poods (750 kg), and the weight of the accumulator came to 22 poods (362 kg). It should be noted that weight of American and French electric vehicles exceeded these figures. The speed of both Romanov's models of the electric vehicles came to 15 km/h.

Romanov's first electric bus was built in the same 1900. The electric bus weighted 100 poods (1600 kg) could make speed up to 10 km/h. For reasons beyond Romanov's control, traffic of the electric vehicles in Saint Petersburg was not organized.

A vehicular company named "*Frezer and Co.*" participated directly in production of Romanov's

electric vehicles, i.e. a running gear of these vehicles was created by this company. In January 1900 *The Cyclist* magazine reported that this company had built an electric vehicle which had already been tested. A picture of this first electric vehicle by "*Frezer and Co.*" can be found in advertising publications of those years. Various firms proposed the innovation for sale and described its technical characteristics.

Frezer electric vehicle was four-seated, had two engines whose total power came to 7 hp. The advertisement booklets reported as following: "The accepted system of accumulator is remarkable for its solidity and life-time. Capacity of the elements is about 15 Amperes/ hour per a kilogram of electrodes. The size of the battery is defined according to calculation of 120 W/h per one ton and per one-kilometer of the distance; its weight is equal to 30-40% of the total weight of the vehicle including a payload". Weight of *Frezer* electric vehicle came to 70 poods (1120 kg). It made the speed of 15-18 km/h and required recharging every 35-50 versts of the path. The second variant of *Frezer* electric vehicle differed from the first one for less weight of the accumulator which was located above the rear axle.

In addition to the four-seated vehicles, *Frezer* Company produced two-seated electric vehicles equipped with engines of 3.5-hp power. The two-seated electric vehicle was remarkable for its more perfect steering tube. There is known one specimen of this model purchased by somebody from Riga (Latvia). Moreover, on the territory of "*Frezer and Co.*" there was a station for recharging accumulators of the electric vehicles.

In the period of the Soviet Union pilot batches of electric vehicles began to be produced only after the II World War. In general there were small lorries applied for transportation inside great buildings, for example, in a main post office or an airport.

Now there is a great probability that Moscow will be the first Russian city where the electric vehicles can find mass application. Russian capital suffers from gas pollution which is especially heavy in the center of the city. At the same time the budget of the city allows acquire own ecologically appropriate transport. Now financing of production of the electric vehicles is realized through the Fund of Ecologization of Moscow Transport. The means are assigned due to income taxes coming to the budget of the city.

To tell the truth, citizens of big cities know electric vehicles very well, i.e. usual trolleybuses and trams are electric vehicles despite they are not autonomous. An autonomous public electric transport has one advantage which is especially valuable in the conditions of the cities overcrowded by cars. This advantage is their mobility. Trolleybuses are inseparable with their wires that causes decrease of their maneuverability. For example, they cannot pass several cars which have been parked wrongly. In this

case a maneuverable and autonomous electric vehicle will run to the center of the road and pass the obstacle with ease.

A Moscow company named *Eltran* which deals with exploitation of electric transport has developed a model of EV which runs the distance of 60 kilometers without recharging. Total recharging of this electric vehicle takes about 5 hours, however a half of required energy they can obtain for 1 hour. Hence, if the accumulators are recharged before their full discharge then this vehicle can operate constantly. However, a developed infrastructure of charging stations is necessary for this aim.

From the economical point of view, EV does not yield to trolleybuses and trams which house more passengers but run twice more slowly than the autonomous and compact EV. Therefore EV does not experience difficulties in jams in the conditions of the traffic of the city. It maneuvers easily in thick traffic current.

Unfortunately, now EV cannot replace automobiles equipped with internal combustion engines. Imperfection of its accumulator batteries does not allow it to become a public vehicle. The battery imperfection causes a small run on one recharging, long cycle of recharging, and high price of the electric vehicle.

To tell the truth, EV has important advantages. Maintenance charges of EV are lower than the charges of the standard automobile requiring expenditures for support of cooling systems, powering systems and exhausting systems. The lifetime of the electric engine comes to 10 thousands hours. Quantity of operations for maintenance of the engine is minimal. For example, it is necessary to change brushes in the dc motor from time to time. As for a modern three-phase electric motor and synchronous ac motor they are practically maintenance-free.

EV is easy to drive. To start the car you should only insert the key, turn it and press the accelerator pedal. You do not need to make any manipulations with adherence or gearshift.

Use of EV is justified in so called zones of higher environmental requirements that are cities, parks, vacation resorts. Electric buses, developed by *Eltran* run in the public green space of All-Russia Exhibition Center. There are about ten compact commercial EV operating in Moscow.

Taking care of environmental sanitation the management of AZLK (big automobile plant) has developed EV on the basis of two production automobile models "Moskvich-2141" and "Moskvich-pikup-2335". "Moskvich-Elektro" (Fig. 1-2) at fully loaded mass of 2060 kg accelerates up to 60 km/h at 15 seconds. Maximum speed of the load-free vehicle is 110 km/hour. Cruising range at one battery charging

is 100 km, and it comes to 80 km with 400 kg of load. At present Electrical Vehicle "Moskvich" is filled with imported component parts, which are cheaper but functional. In time it will be supplied with Russian equipment that will make it cheaper.



Fig. 1



Fig. 2



Fig. 3

The model of truck equipped with electric motor "ZIL-Electro", the authors of which being called "AVEKS" and "Optimum-electro", also enjoys the support of the Fund of Ecologization of Moscow Transport. Various privileges and free passage to any location in public green zones are promised to the future owners of "ZIL-Electro".

Forty-eight lead-acid traction batteries of roll type (Optima battery) are hanged in pairs along the ramps of the truck. They are united into 4 sections (Fig.3). Capacity of these batteries is enough for 70 km running. Probable charging station for these machines is the loading/unloading point. Charging time varies from 30 to 60 minutes. Substantial disadvantage of

the model is that batteries take away a great percentage of carrying capacity. Among the advantages of the model there are small internal resistance, fast recovery (to 400 A), discharging to zero level without serious consequences.

A traction induction unit "ATAD-Optimum 50/120" serves as the engine for "ZIL-Electro". Its weight is only 100 kg and it doesn't require any diesel generator or transmission that compensates a little the loss of carrying capacity.

The engine is very simple. It is a non-contact rotor of a "squirrel cage" type rotating on the bearings. No brushes are used. Thus expensive maintenance is postponed for uncertain date. On the other hand there is asynchronism. It means that some equipment is needed for converting into three-phase current and further frequency and amplitude adjustment. However it is expensive and complicated.

In spite of all existing disadvantages, Electric Truck is considered to have a bright future ahead of it. There several reasons for that:

- 1 The vehicle is manufactured from cheap production component parts.
- 2 The system of optimum vector control of the drive is introduced. (The torque and shaft speed of rotation is regulated precisely, energy of the batteries is used rather efficiently.)
- 3 Microprocessor system with feedback coupling and great number of sensors (current sensor, heat sensor, velocity sensor, voltage sensor) minimizes losses, prevents the motor and batteries from overheating, protects mains from short circuit in case of an accident.
- 4 The vehicle is reasonably priced (for such an exotic object) – about \$26 000 USD subject to serial production.

Volzhsky automobile plant has already been engaged in research of EV for a quarter of a century. Over 10 original models have been designed and produced for these years. They have been appreciated abroad as well as in Russia. These are electric vehicles "Poni", "Oka", "Elf", "Gnom", "Niva", "Rapan" "Lada-golf", etc.

The models manufactured on the basis of VAZ-1111 "Oka" became the most popular among them. These EV received many different rewards, and became world-renowned. For example, VAZ-111E "Oka", manufactured in 1993, kept all merits of a production midget car. Use of electric motor makes it a non-toxic and noiseless vehicle. Efficient fast-acting short circuit protection eliminates current rush, providing absolute car operating safety.

In EV of VAZ manufacture two direct-current motors are commonly used as a power-generating set. The first is a 25kW capacity motor with torque of 110 Nm.

Another one has 40 kW capacity and torque of 190 Nm. Motors of the first type are usually mounted on light vehicles, such as "Golf", "Oka-Electro", "Elf", while high-power motors are usually used for VAZ-2108, VAZ-2109, "Niva".

The first models of electric vehicles used to be equipped with nickel-zinc batteries. But as life time of these batteries is not long, it was decided to start using nickel-cadmium batteries, manufactured at Saint-Petersburg plants "Rigel" and "Istochnik". Nickel-cadmium batteries are power-consuming, they withstand temperature of -40°C . The only drawback of these batteries is their cost, and as a consequence a high cost of the vehicle itself. Because of that the final choice has been made in favor of lead-acid storage batteries, which were mounted at "Gamma Golf" in particular, thus reducing its price by several times. The batteries are located under the driver and passenger seats. They allow discharge of 80-85% and provide cruising range without recharge of up to 100 km within city area and several times more on a highway. Power current is transmitted from the electric motor to the front wheels through single-reduction gear unit, which substitutes the transmission.

For the present time electric vehicles are not developed to take the place of automobiles with internal-combustion engine in all industries and spheres of application, but only as a specific vehicle for highly specialized utilization. They are utilized when use of internal-combustion engine is objectionable or impossible.

It is considered that so-called hybrid models of EV would be able to replace automobiles with internal-combustion engines. These are vehicles with two motors, an electric motor and an internal-combustion engine usually running on diesel oil. In this case the combustion engine works constantly, but under the operation modes of little air pollution. Besides, fuel consumption is also much reduced.

In this direction real commercial success is possible. For example, "Toyota-Pirus" has already been chosen as a personal vehicle by tens of thousands of customers, this being a good result for such an original construction.

Nowadays three circuits of hybrid propulsion system are generally known. The simplest one is a series circuit, in which combustion engine operates together with a generator, and battery or generator powers electric motor providing propulsion. Actually this is the same circuit of electric transmission that is used at quarry trucks. Its main disadvantage is great losses of energy at transmitting the torque to the wheels. In parallel circuit the output shafts of the motor-generator and combustion engine are rigidly bound, and it doesn't allow working in steady-state mode (i.e. with permanent rotations and load).

In the third circuit, which is also the most commonly used there are an electric motor, combustion engine and a generator. The output shafts of all these units are bound by planetary differential. This allows almost lossless distribution of power between the units, and provides sustained performance of the combustion engine. The disadvantage of this circuit is the extreme complexity of coordination of units operating.

A hybrid EV was produced in Russia by automobile plant "Izhmash" though it has not been put in mass production yet. At the developing of the propulsion system instead of unique components there were used units of Russian mass automobile production that is one of the fundamental design solutions. "Orbit" Izh-21261 was used as a base for the device. It was equipped with gasoline engine (of 30 hp power and 650 cm^3 capacity), drive dc motor ПТ-125-12 (of 120V voltage and 49 H/m torque) and eight accumulators 6CE-55. Twin-engined propulsion system works according to the parallel circuit of engine joint. Electromotor serves as starter and at the acceleration it operates simultaneously with internal-combustion engine. On reaching some definite speed the electromotor changes its operation mode to the mode of generator and charges the accumulators. When the loads at gasoline engine increase then the electromotor begins to operate together with it. Operation of the hybrid propulsion system is controlled by starting regulation electronic equipment. Control unit, speed transducer of crankshaft of the internal combustion engine, detector of the accelerator pedal etc. are responsible for coordinated work of the engines.

During the tests fuel consumption of the hybrid vehicle "Orbit" was less by 20% than that of the usual model. For Russian prototype it is a good qualitative characteristic, however foreign designers reach better results, for example, "Crysler ESX3", which was presented in 1998 at Geneva auto show, consumes 3.3 liter of diesel oil per 100 km of path.

Representatives of specialized Moscow companies producing EV assert unanimously that these are hybrid electric vehicles which should change public transport with internal combustion engine. To encourage the automakers it is useful to create the proper laws drawing on foreign experience. For example, in California, USA, automakers wishing to present their production in the state market should put out 2% of automobiles with null blast. Legal system also supports an automobile user who is provided for free parking and free or cheap recharge. The user is granted with maximum of discounts to encourage him buying EV which is still twice as expensive. However it is said that in one of the villages situated near Moscow where the so called new Russians live, everybody drive electric vehicles leaving their cars with gasoline engine outside the gates. It would be quite good if EV turns to the real vehicle from the extravagancy of nouveau riches and beloved creation of ecologists.

The Richard Clem Motor and the Conical Pump

An Investigation of the Clem Motor

Robert Koontz, USA
rdkoontz@attbi.com

In December of 1992 Jerry Decker posted an article on the KeelyNet BBS, about a self-running motor that developed excess useable power. The information, gathered from newspaper and individual sources, gave an anecdotal account of the motor invented in 1972 by Richard Clem of Flower Mound, Texas. New information has since been added and can be found on <http://www.keelynet.com/energy/clem1.htm>.

Richard Clem worked with heavy machinery for the city of Dallas. He used asphalt-spraying equipment, which pumped liquid asphalt. He noticed the asphalt pump would continue to run for up to 30 minutes after the power was turned off. It was this discovery that led to the development of the motor. Modifications he made eventually resulted in a substantial 350 horsepower output from a 200-pound motor. Clem is said to have often driven a car, powered by this motor, up and down Central Expressway in Dallas. He claimed it didn't use any fuel, and only needed a change of oil every 150,000 miles.

The motor had only one moving part, a cone shaped rotor mounted vertically on a hollow shaft. Spiral channels cut into the cone wound around its length and feed into peripheral nozzles at its large end. When fluid flowed through the spiral channels it was ejected out the nozzles and caused the cone to spin. At a certain velocity, the rotating cone became independent of the starter pump and began to operate by itself. At an operating speed of 1800 to 2300 RPM the fluid heated up to 300 F, requiring a heat exchanger. Vegetable oil was used because at 300 F water boils and conventional engine oil breaks down.

A 12-volt battery was the only other power source. Clem never applied for a patent because his motor design was derived from the asphalt pump that was already patented. Fifteen companies turned him down before a large coal company offered to back him and signed contracts to sell the motor. Soon after the deal was signed, Richard Clem died of a heart attack.

The above account contains only what I considered to be relevant for analysis of the Clem motor. Visit <http://www.keelynet.com/> for the original material.

The gear pumps, typically used for asphalt spraying, do not match the description of the pump used by the city of Dallas back in 1972. There should be public records showing what equipment manufacture the asphalt sprayer was purchased from. Since the asphalt pump was patented, I searched for a pump patent that met the following criteria:

- 1) Patent issued on or before 1972.
- 2) Delivered pressure equivalent to a positive displacement gear pump.
- 3) Cone shaped rotor with spiral channels.
- 4) Self-propelling action.
- 5) Capable of pumping a viscous fluid like asphalt.
- 6) Large heat transfer to pumped fluids.

The following illustration (Fig.1) is from US Patent 3,697,190 (Truncated Conical Drag Pump). The patent was issued October 10, 1972 (criteria 1) and appears to match the description of the asphalt pump that Clem converted into his motor.

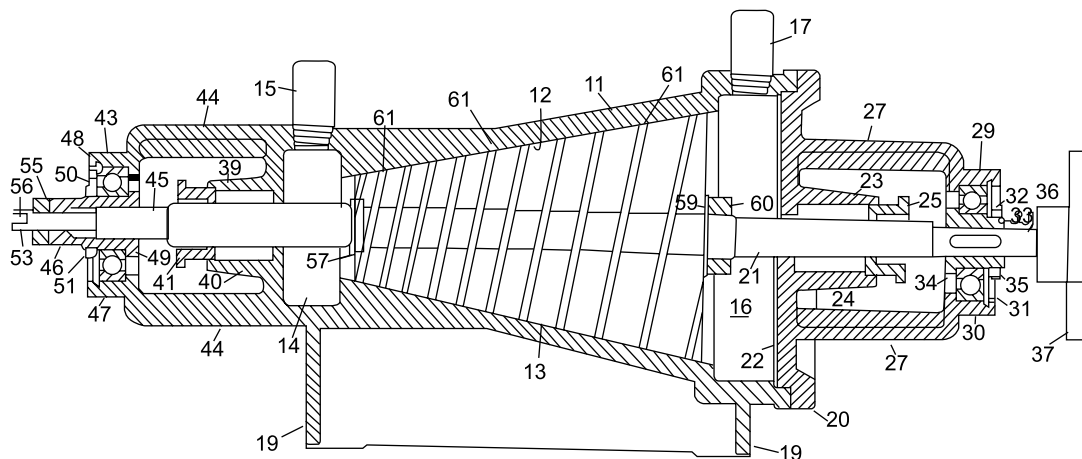


Fig.1

Housing 11, Conical interior wall 12, Conical rotor 13, Inlet chamber 14, Inlet pipe 15, Outlet chamber 16, Outlet pipe 17, Support feet 19, Detachable end cap 20, Rotor shaft 21, End cap wall 22, Boss 23, Packing 24, Adjustable gland nut 25, Bracket arms 27, Bearing boss 29, Bearing 30, Snap ring 31, Inner race 32, Sleeve 33, Shoulder 34, Retainer nut 35, Reduced diameter outer end 36, Coupling 37, Packing 39, Retainer 40, Gland nut 41, Bearing boss 43, Integrally formed bracket 44, Shaft reduced diameter 45, Bearing sleeve 46, Bearing 47, Snap ring 48, Inner flanged 49, Inner race 50, Nut 51, Shaft reduced diameter 53, Lock nut 55, Flat faces 56, Snap ring 57, Washer 59, Nut 60, Helical channel 61, Channel base 63, Channel sidewalls 64.

This is a high-pressure, low volume drag pump that can be used in place of conventional positive displacement pumps (criteria 2). It has a conical rotor that has a close fit clearance with the stationary housing wall. Delivered pressure is limited by back flow across the radial clearance and is inversely proportional to the square of the clearance. As a result, even a small increase in radial clearance would rapidly reduce pressure. The rotor is cone shaped so that the clearance can be controlled by axial adjustment of the rotor relative to the housing wall.

The conical rotor has two helical channels (criteria 3), in the form of square threads, spaced 180 apart for balance. The channel depth decreases as the rotor diameter increases. Fluid enters the channels at the small end of the rotor. The fluid is induced to rotate with the channel by boundary layer drag. The boundary layer is the thin layer of fluid adhering to the channel surface. Molecular cohesion tends to drag the adjacent fluid with the boundary layer. The fluid is also in contact with the housing wall. The boundary layer drag against this stationary wall slows the rotation of the fluid in the channels. Because the fluid rotates slower than the rotor, it is forced through the channels towards the large end of the rotor. In addition the fluid is forced towards the large end by centrifugal force.

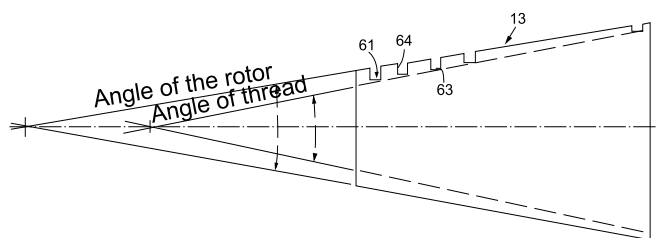


Fig.2

The above drawing illustrates the proportional decrease in channel depth as the rotor diameter increases. Why was this done? Note that as the diameter doubles so does the circumference. This means the fluid has to travel twice as far in the same time to maintain a constant slip velocity. By

reducing the channel depth in half (cross-section area = depth x width) the fluid velocity is doubled thereby keeping the slip constant.

The spiral channels could be thought of as very long convergent nozzles. The increase in fluid velocity is in the opposite direction of the rotor spin. We should expect a reaction force from the acceleration of the fluid. This thrust would be directed tangent to the circumference and would increase the spin torque on the rotor. Even without the peripheral nozzles, that Clem later added, the pump rotor experiences a thrust force in a direction that would self-propel it (criteria 4).

Because fluid drag is the primary pumping force, it is well suited for viscous fluids like asphalt (criteria 5). The long channels also represent a large sliding surface area with frictional losses that would transfer heat to the pumped fluid (criteria 6).

All six of the patent search criteria have now been met. Of course this doesn't prove that it is the asphalt pump Richard Clem worked with.

A peculiar condition indicated by the patent is that as the velocity increases in the channels the pressure also increases. Bernoulli's Law requires the pressure to drop proportionally as the velocity increases. Assuming an ideal fluid without losses, when the channel depth is reduced in half, the cross section area is also half and this doubles the fluid velocity and the fluid pressure should drop in half. So what is going on here? There is a centrifugal component that would add to the fluid pressure.

My guess is it's too small to overcome the predicted pressure drop. Here is what I think may be going on. As the diameter and velocity increases the drag force propelling the fluid through the channel is proportionally greater. Energy is being added all along the length of the channel. Whatever the reason, if this high-velocity, high-pressure fluid is feed into tangent peripheral nozzles at the rotor large end, the energy will be converted to shaft horsepower.

The Clem motor is producing 350 shaft-horsepower and a large heat energy component. Where is this huge amount of energy coming from? Recent quantum mechanics zero-point field (ZPF) theories may point to the answer. From an article available at "BEYOND $E=mc^2$ " Bernhard Haisch, Alfonso Rueda & H.E. Puthoff [1]:

"Our work suggests inertia is a property arising out of the vast, all-pervasive electromagnetic field we mentioned earlier, which is called the zero-point field (ZPF). The name comes from the fact that the field is held to exist in a vacuum-what is commonly thought of as "empty" space-even at the temperature of absolute zero, at which all thermal radiation is absent."

ZPF researchers theorize that mass, inertia and gravity are not intrinsic properties of matter but the interaction of matter with the zero-point field. By all pervasive it is meant that the ZPF exists not only in empty space but it is passing through your body right now and everywhere else. When you throw a stone you are interacting with this field since the ZPF resists change in motion. In essence the ZPF is the modern day aether.

The amount of energy making up the ZPF is thought to be enormous. Is the fluid acceleration in the Clem motor interacting with the ZPF in such a way as to rectify it and draw energy from it? Is it a hydraulic aether-diode? The fluid, in the Conical Drag Pump, flows through long convergent channels. Disregarding the boundary layer, is this accelerated flow laminar? Would such a long orderly flow entrain the aether energy?

From the perspective of the rotating channels the fluid appears as the discharge from a long nozzle. To

exaggerate, if the fluid was held fast to the housing wall, the rotating channel would travel through the stationary fluid. This would be equivalent to achieving 100% efficiency. In reality the fluid is slipping against the stationary housing wall so that the rotating channel (nozzle) is moving faster than the fluid discharge velocity. Assuming the reaction thrust as the only propelling force, this would give efficiency greater than 100%. So, as the slip increases the reaction thrust decreases, but the efficiency increases.

Assuming the Conical Drag Pump is the pump Clem used, can it answer the following?

- 1) Why was a hollow shaft used?
- 2) Why was the cone mounted vertically?
- 3) Why was a starter pump needed?
- 4) How were the peripheral nozzles added?
- 5) How was the motor RPM regulated?
- 6) How did a large coal company get involved?
- 7) Was this kind of pump ever used in asphalt sprayers?

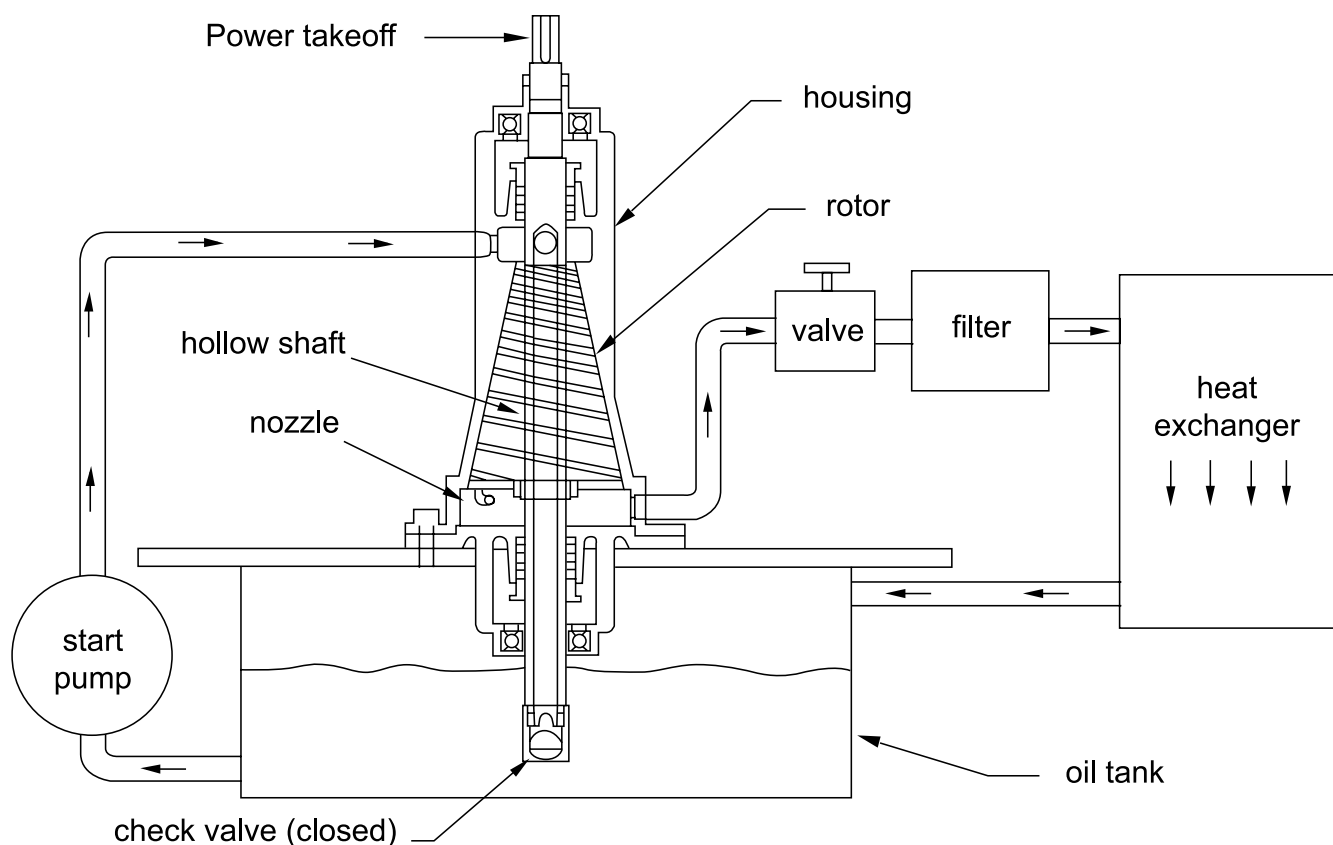


Fig.3

Clem motor shown in start mode
The arrows show oil flow

The above drawing shows a hypothetical Clem motor based on the Conical Drag Pump. The motor is mounted vertically so that the check valve on the hollow shaft is submerged down in the oil tank. The hollow shaft extends from the oil tank through the rotor into the inlet chamber. The start pump draws oil from the tank and forces it up

the external feed line connected to the inlet chamber at the small end of the rotor. This fills the hollow shaft and forces the check valve closed. The oil flows into the spiral channels and out the peripheral nozzles. The reaction thrust of the nozzles spins the rotor. The oil flows through the return line, through the valve, filter, and heat

exchanger and back into the tank. The start pump is most likely a standard hydraulic gear pump. It continues to pump until the rotor spins up to its operating speed. The combinations of a start pump and check valve would be a simple way to both prime the motor and spin up the rotor.

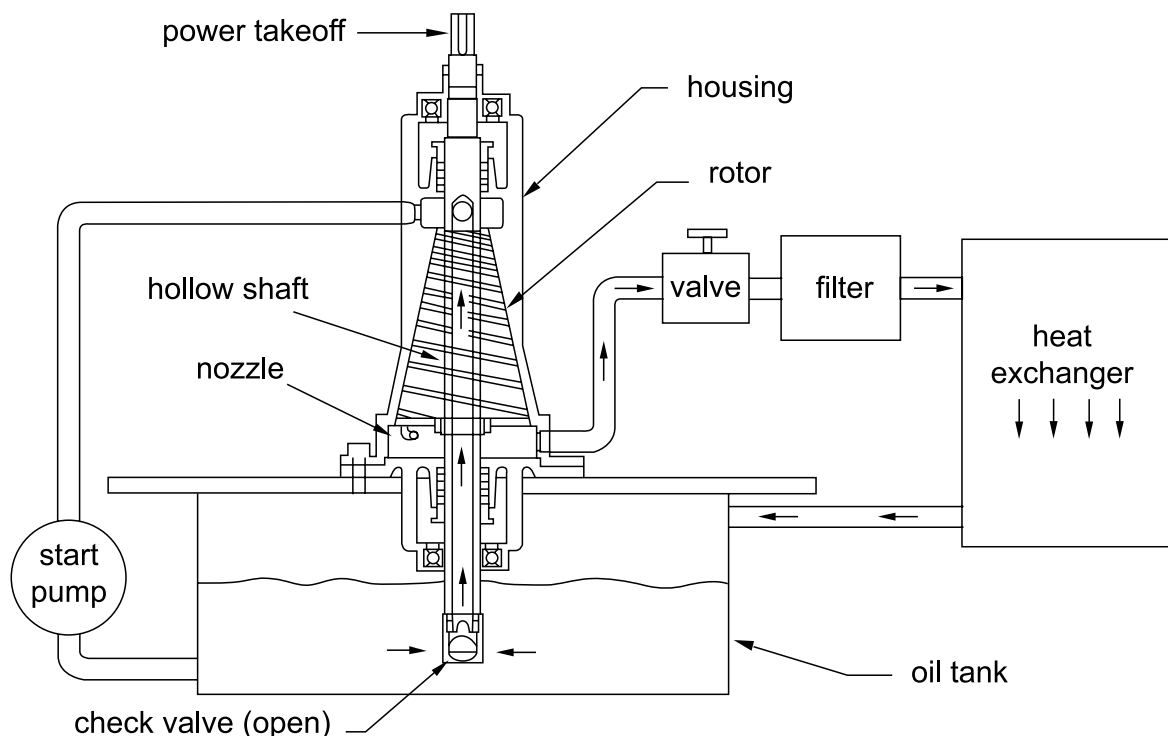


Fig.4

Clem motor shown in operation mode
The arrows show oil flow

Once the start pump is shut off the check valve is free to open. Oil is drawn up into the hollow shaft to the inlet chamber at the small end of the rotor. The spiral channels pump the oil down towards the large end of the rotor. A plate is attached to the large end of the rotor and fits with a close clearance with the housing wall. Nozzles attached to the outer edge receive high-pressure oil from the spiral channels. The jet reaction thrust from the nozzles delivers shaft horsepower to the power takeoff at the shaft top. Adjusting the valve to create hydraulic backpressure regulates the motor RPM. Closing the valve stops the motor.

When I first read about the Clem Motor I found it odd that a deal had been made with a coal company. Was there a connection with the pump? After finding the Conical Drag Pump patent, I wanted to contact the inventor Walter D. Haentjens of Barrett, Haentjens & Co., Hazleton, Pennsylvania. Otto Haentjens founded Barrett Haentjens & Co., in 1916. The business began in the coalmines of Pennsylvania with Otto Haentjens original patent on the balanced opposed impeller multi-stage volute pump. The company still supplies pumps to the coal industry.


They have expanded to other markets and their pumps are installed in many industries worldwide. It is now known as Hazleton Pumps Inc., after its acquisition by The Weir Group.

I contacted Peter Haentjens, the VP/General Manager of Hazleton Pumps, by e-mail to find out if this pump had ever been put into production. He replied that they had not done anything with the patent.

An unusual pump design would have a tough time competing in the market with an industry standard like gear pumps. The Dallas asphalt sprayer may have been a one of a kind field test of the pump design. Or the pump manufacturer offered it for testing to an asphalt equipment company in the hopes of generating interest in it.

References

Bernhard Haisch, Alfonso Rueda & H.E. Puthoff, "BEYOND $E=mc^2$ " //The Sciences, Vol. 34, No. 6, November / December 1994, pp. 26-31 copyright 1994, New York Academy of Sciences.

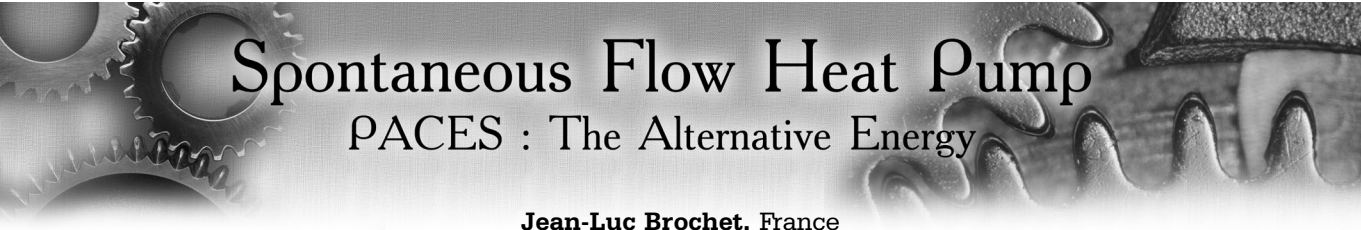

Spontaneous Flow Heat Pump

PACES : The Alternative Energy

Jean-Luc Brochet, France

<http://www.new-energy-paces.com>

Email: brochet.jean-luc@wanadoo.fr

"Paces" is a new high performance electronic process. It is not a traditional heat pump fitted with some electronic gadgets to improve its output, but a truly revolutionary process totally unused up to now. There are no moving parts, not even a moving fluid in it. "Paces" is an electronic process because for its development the pump's fundamental element uses micro-electronic techniques.

...an average of 9000MW could be produced, that is to say the equivalent of several nuclear power stations.

The principle consists in attracting the gas neutral molecules onto a so-called "electrostatic" plate, to accelerate them and heat the plate. An intense electric field is applied in a capacitor with micro-pores covering the plate. The neutral molecules are polarized and accelerated when they penetrate these micro-pores where the intense electric field exists. Each molecule accelerates and absorbs electrical energy when it enters into a pore. But in turn it decelerates and gives off an equal amount of energy upon its exit from the pore.

The molecules, by going back and forth between the plates, continually give off and take energy, thus resulting in a total consumption equal to zero.

The gas fluid does not undergo any change of thermodynamic state, contrary to all other heat pump processes. A thermodynamic cycle remains at the level of each gas molecule, but not at the level of the entire set of molecules.

There is more to this new process, it is not just heat pump process added to an already long list: **these new characteristics also enable some new applications.** Besides the traditional heat pump applications, due to its excellent coefficient of performance this process makes it possible to produce electricity by cooling the environment.

For instance, if the Rhine was equipped with heat exchangers into which diverted water could flow, thus cooling its temperature by just one degree, an average of 9000MW could be produced, that is to say the equivalent of several nuclear power stations. Please

note that this process would also enable **both electricity and fresh water to be produced from seawater**, an interesting application for areas of the world where water is a scarce resource.

Thus we have at our disposal an ecological process for producing electricity, it would become conceivable to produce hydrogen in great quantities; vehicles would be hydrogen powered. Ozone, CO₂ or any other type of pollution would become a thing of the past.

It will most probably be the energy source of future generations, ecological and excellent, inexhaustible, powerful yet completely harmless, stable and steady (contrary to the sun and wind); an invention capable of re-launching the world economy, in particular giving impetus to the currently depressed new technology sector.

However, you have probably noticed that this invention requires advanced technology, and the few French laboratories capable to develop this process have proven inaccessibility to do it for independent researchers such as the author of the article. Besides, the invention's claimed qualities, the revolutionary aspect was very often interpreted by examiners as 'utopian', even before they read the document! Having tired of battling against concept fixed for the past two centuries, the author of the article **has now decided to place this project within the hands of the international scientific and technological community**, in order to give the best chance of success to the invention.

It will most probably be the energy source of future generations!

Initial development requires the construction of a prototype; three possibilities are described on the website (<http://www.new-energy-paces.com>). As there is no longer legal protection abroad, anyone is free to experiment and to market, as he or she wishes, in all other countries outside of France.

Please help me to spread the word about this project, for example through scientific forums on the Internet. This will allow you to receive feedback and gather other opinions. Your participation, even the most modest, will be of use. To those of you who help this project to see the light of day, all of humanity will be indebted.



Registration of Gravitational Waves

Vladimir N. Petrov, Russia

173001, apt. 76, 10 Bolshaya Saint-Peterburgskaya st., Veliky Novgorod

E-mail: petvn@km.ru

Registration of gravitational waves is one of fundamental problems of physics. At the beginning of the last century A. Einstein's works predicted existence of these waves. Nevertheless, despite numerous attempts are made in different countries of the world these waves have not been fixed up today. Josef Veber, an American physicist working in 60th of the XX century, is sure to be called as the first experimenter who disclosed gravitational waves. Nowadays lots of many-million projects on registration of gravitation waves are developed and realized (LIGO (USA), GEO-600 (Germany-England), VIRGO (Italia), and TAMA (Japan)). However no positive results were achieved.

Failures in registration of gravitational waves can be explained by the fact that researchers have erroneous notion of the essence of these waves. This erroneous notion is laid in an experimental project that causes negative results.

Many researchers believe that influence of gravitational waves on the bodies should be resulted in deformation of these bodies (i.e. in change of mutual place of particles of a material body). All the attempts to disclose the gravitational waves are based on this notion. Now two types of ground gravitational antennas are supposed as priority.

The first type supposes the registration of mechanical oscillations of a massive test body that is initiated by influence of gravitational waves on it.

The second can register changes of a distance between space-apart free masses when gravitational waves act upon them. Great attention is paid to the second type of antennas in the developed projects. Failure attempts of registration of gravitational waves can be explained by their low intensiveness and insufficient accuracy of existing measuring equipments. Therefore, now there are made various attempts to register gravitational waves produced by such great cosmic phenomena as confluence of black holes. More accurate instruments and measuring equipments, for example, a laser interferometer, are developed. Nevertheless, positive results are hardly to be obtained.

Here is one of the fallacious explanations of action of gravitational waves on a body: *"Passing of gravitational waves changes an interval between*

objects transferring them one from another like two boats sometimes are approached sometimes moved from each other by sea waves".

Following this example to explain influence of the gravitational waves on bodies placing on the Earth, it can be said that all bodies are in one boat and raising or sinking of the boat on sea waves does not cause change of the distance between the bodies. However, this example seems to be very simplified for explanation of influence of the gravitational waves on bodies. In fact, the case is much more difficult.

According to A. Einstein's theory, bodies moving with variable acceleration will radiate gravitational waves. **Gravitational waves represent the essence of changes of gravitational field occurring at light speed.** Since the gravitational field is a deformed space-time then the gravitational waves cause change of deformation of the space-time. Change of deformation of the space-time is accompanied with change of deformation of geodesic lines (i.e. lines by which all the bodies move).

A body moving by a geodesic line whose deformation is changed changes its acceleration. Change of acceleration of the body will change gravity applied to the body in this area of space. Hence, influence of gravitational waves on the body occurs through gravity which influences on it.

It is known that a fundamental difference between gravity and other forces appearing at a direct contact with a body consists in the fact that gravity provides all the elements of the body (all its points) with equal acceleration (deformation can not occur), and other forces influence on certain parts of the surface of a body and so cause its deformation.

Hence it is senseless to try to measure deformation of a body or change of a distance between test bodies occurring under influence of gravitational waves. It is necessary to note that, in particular, when a body is placed on an unmovable support relatively to the Earth, value and the direction of gravity coincides with weight of the body. Therefore, in this case gravitational waves can be registered at measuring of changes of the body weight.

An experiment on registration of the gravitational field of the Earth by measuring change of weight of

a test body was made. Before the beginning of the experiment there was set a problem to register gravitational waves produced by the Mercury and the Venus at approaching to the Earth. The gravitational field in which the Earth moves changes due to superposition of gravitational waves of other planets on it. These changes were necessary to be registered.

The experiment was as follows: a test body (a 100 grams weight) was weighted on an electronic balance in equal time intervals of 14 days. The experiment was lasting for 12 months. In the experiment it appeared that change of a distance between the Earth and the mentioned planets causes change of weight of the test body. The change of weight of the body occurred in proportion to the distance between the planets. The test body was weighted in the same conditions and in the same place. The performance of the experiment is so easy that every person can made it.


It is known that weight of a body changes (decreases) at moving along the Earth surface from its pole to the equator. Change of weight of a body locating in the same place has not been fixed until now.

The fixed change of weight of the test body proves change of gravity applied to it and, consequently, change of the gravitational field in which the test body moves as well as the Earth does. **These changes of the gravitational field were caused by motion (superposition) of the gravitational waves produced by the mentioned planets at their**

approaching towards the Earth at the distance of the existent gravitational field.

Hence, the Earth and all the bodies locating on it move in the constantly changing gravitational field, therefore, constantly change their weight. Nevertheless, as it is known, change of the gravitational field is the influence of gravitational waves on it. Hence, measuring changing of weight of bodies we can speak about registration of gravitational waves.

In search of the 4th dimension

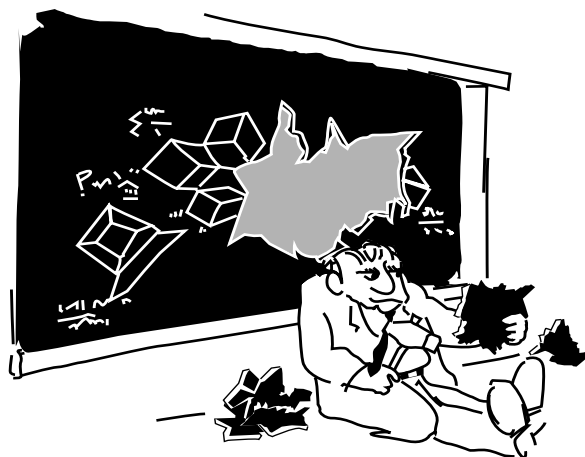

From <http://home.ural.ru/~meop/index.html>

High-Energy Hyper-Low-Frequency Electric Field

Yury V. Ivanko, Ukraine
E-mail: ux01w@hotmail.com

The article represents a practical and theoretical research on possibility of existence of a high-energy hyper-low-frequency electric field which is interpreted by modern measuring instruments and subjective perception as a static field. Besides there are observed a problem of the field registration, a hypothesis of relic origin of the registered field and a hypothesis of wave nature of the Universe.

A passenger on board a ship sailing in the ocean will never notice action of waves of high and low tide. At the same time, weathering waves of several numbers produce a dangerous storm. However, an ocean liner is designed for such a storm therefore the passenger would just experience some discomfort. It is another case if tide wave hides reefs... I wish our ship, i.e. the

Earth, the Solar System, the Galaxy, and the Universe, not to be lead to such a place by any ignorant "navigator"!

One of the most mysterious persons in the history of electricity physics was an outstanding inventor Nicola Tesla (1856-1943). When the majority of scientists developed researches of microworld particles he followed the opposite scientific path. He was interested in the electrical potential of the whole Earth. He researched ways to influence on it, control its state and methods of its regulation. Therefore many of his patents, experiments as well as a purpose of constructions and devices built according to his ideas arouse perplexity and misunderstanding of modern scientists.

a test body was made. Before the beginning of the experiment there was set a problem to register gravitational waves produced by the Mercury and the Venus at approaching to the Earth. The gravitational field in which the Earth moves changes due to superposition of gravitational waves of other planets on it. These changes were necessary to be registered.

The experiment was as follows: a test body (a 100 grams weight) was weighted on an electronic balance in equal time intervals of 14 days. The experiment was lasting for 12 months. In the experiment it appeared that change of a distance between the Earth and the mentioned planets causes change of weight of the test body. The change of weight of the body occurred in proportion to the distance between the planets. The test body was weighted in the same conditions and in the same place. The performance of the experiment is so easy that every person can made it.


It is known that weight of a body changes (decreases) at moving along the Earth surface from its pole to the equator. Change of weight of a body locating in the same place has not been fixed until now.

The fixed change of weight of the test body proves change of gravity applied to it and, consequently, change of the gravitational field in which the test body moves as well as the Earth does. **These changes of the gravitational field were caused by motion (superposition) of the gravitational waves produced by the mentioned planets at their**

approaching towards the Earth at the distance of the existent gravitational field.

Hence, the Earth and all the bodies locating on it move in the constantly changing gravitational field, therefore, constantly change their weight. Nevertheless, as it is known, change of the gravitational field is the influence of gravitational waves on it. Hence, measuring changing of weight of bodies we can speak about registration of gravitational waves.

In search of the 4th dimension

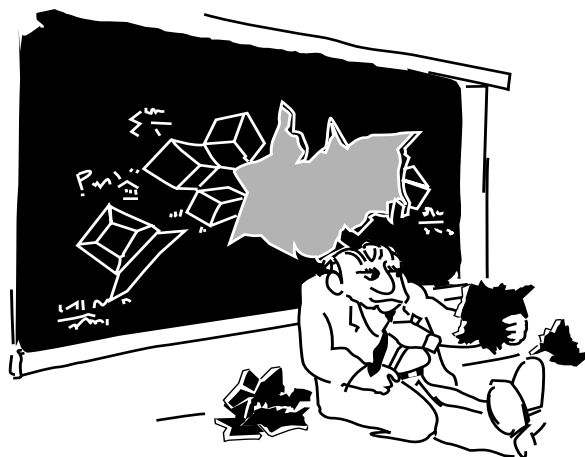

From <http://home.ural.ru/~meop/index.html>

High-Energy Hyper-Low-Frequency Electric Field

Yury V. Ivanko, Ukraine
E-mail: ux01w@hotmail.com

The article represents a practical and theoretical research on possibility of existence of a high-energy hyper-low-frequency electric field which is interpreted by modern measuring instruments and subjective perception as a static field. Besides there are observed a problem of the field registration, a hypothesis of relic origin of the registered field and a hypothesis of wave nature of the Universe.

A passenger on board a ship sailing in the ocean will never notice action of waves of high and low tide. At the same time, weathering waves of several numbers produce a dangerous storm. However, an ocean liner is designed for such a storm therefore the passenger would just experience some discomfort. It is another case if tide wave hides reefs... I wish our ship, i.e. the

Earth, the Solar System, the Galaxy, and the Universe, not to be lead to such a place by any ignorant "navigator"!

One of the most mysterious persons in the history of electricity physics was an outstanding inventor Nicola Tesla (1856-1943). When the majority of scientists developed researches of microworld particles he followed the opposite scientific path. He was interested in the electrical potential of the whole Earth. He researched ways to influence on it, control its state and methods of its regulation. Therefore many of his patents, experiments as well as a purpose of constructions and devices built according to his ideas arouse perplexity and misunderstanding of modern scientists.

Having formulated my own hypotheses I often think why such a Great Genius as Nicola Tesla took his invention away with him.

Danger of this invention lies in simplicity of production of devices for generating (detecting) energy.

Practical Prerequisites

Prerequisites of this and other hypotheses were some undeclared effects occurring in practical wireless communication as well as investigation of devices for distant transmission of electric power.

Distant energy transmission was demonstrated by Nicola Tesla in 1892 in London and in 1893 in Philadelphia. However, even now the way he did it remains unknown.

In 1977-1985 I had to work a lot with radio transmitting equipment of different power of middle-wave (MW) and short-wave (SW) diapasons. According to fundamentals of physics, intensive electromagnetic field is produced around antenna curtain connected to a radio-frequency transmitter. There are brightly glowing gas-discharge electrovacuum devices at the distance up to several meters in this field. Attention was paid to the fact that more than ten daylight lamps of 80 W were successfully "glowed" at 40 W power of a transmitter. In this case a distant correspondent did not note significant decrease of a level of a received signal at the indicator of the receiver. It had to return to this fact in many years. The data of this experiment are represented in a particular document.

There is one more interesting effect which is disclosed when transmitting equipment (TX) and antennas (ANT) are adjusted. An incandescent lamp, which is connected to a certain place of a break of the antenna curtain or of a power feeder (L), glows brightly. The antenna circuit is not closed as galvanic element. (See Fig. 1).

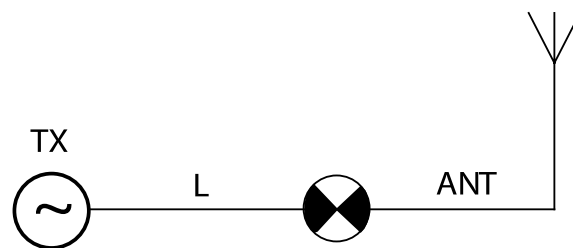


Fig. 1

Hence, the power line of the incandescent lamp is as if it is single-wire. It also had to return to investigation of this effect in many years. The data of this experiment are represented in a particular document. As in the case of the incandescent lamps, the correspondent did not note significant decrease of the level of the received signal at the indicator of the distant receiver.

S. V. Avramenko designed a plug of semiconductor diodes. Connecting this plug to a generator of alternating voltage of 10-10000 V by means of a single-wire line in the load of the plug he discovered current, which was continuous by the direction but pulsating by the value. Electric current measured in the single-wire line is very little, hence, the impression of superconductivity is produced, i.e. it is possible almost to avoid energy losses in the wires.

My experiments also represent a visual demonstration of the effect. For example, several links of light-emitting diodes connected inverse-parallel glow in the single-wire line. Garlands of light-emitting diodes and lamps having a single-wire power line can be produced. It is interesting that in this case power consumed by the generator do not increase practically (See Fig. 2, 3, 4). It was noted that if a standing wave is created around the generator "then an unlimited number of consumers would be able to apply a change of a value of this field to produce power in a load in their place" (*Editor: This phrase is in inverted commas since it is a part of the well-known article "Free Energy" by Alexander V. Frolov (Read in this issue, p. 15)).*

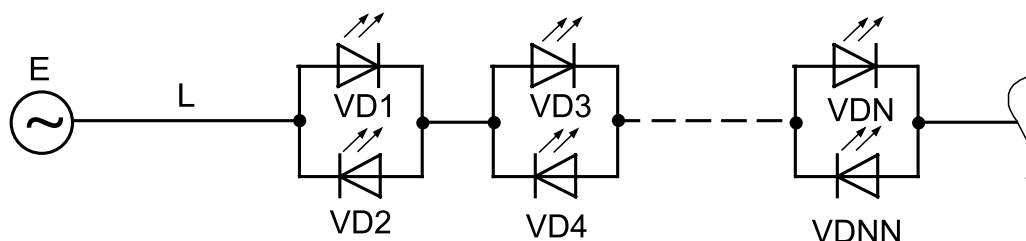


Fig. 2

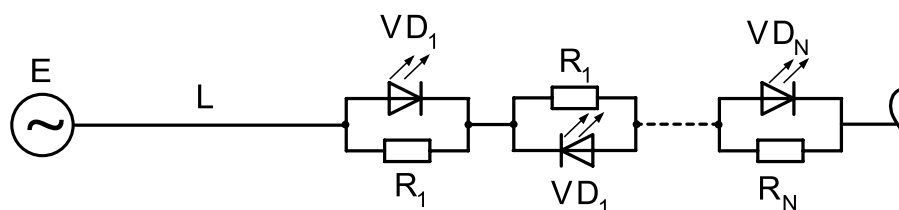


Fig. 3

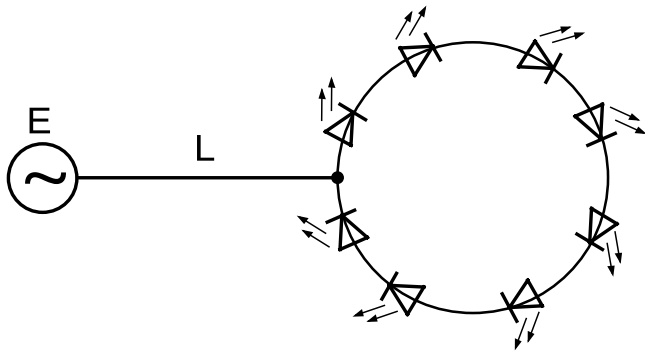


Fig. 4

Russian scientists investigated this phenomenon and proposed an explanation of producing active power in the load by means of reactive capacitive current. This was made applying resonant properties of the single-wire line made of a metallic conductor. Further, possibilities of application of nonmetallic conducting mediums for transmitting electric power were investigated. However, the researchers pay attention for the fact that this explanation is insufficient.

A task group named "Analysis" from Voronezh city (Russia) made a qualitatively new explanation of results of S. V. Avramenko's experiment. The works of this group from Voronezh are devoted to the comparison of properties and characteristics of so-called inertial and inertialess currents occurring in circuits at low frequencies. Their general and particular features have been disclosed. In the works there are demonstrated conditions at which conductivity caused by inertialess discharges predominates in conductors and conditions at which currents caused by conduction electrons predominate. There are demonstrated a description of S. V. Avramenko's experiments and the conclusions made by the researchers. The authors cite data of their test experiments which prove a part of conclusions made by S. V. Avramenko and his colleagues.

However this explanation does not have a right to exist as it does not have variants for practical application.

Results of my theoretical and experimental researches allow provide a **fundamentally new (!)** explanation of energy "transmission" having occurred in the experiments performed by S. V. Avramenko, investigations by D. S. Strebkov, V.A. Kuligin and other investigators. (*Editor: See publications of these works in previous issues of our magazine*). Moreover, they allow explain origin of many physical phenomena and processes including the origin of non-inertial charges and currents and their visualization.

First Hypothesis

Recently a number of scientists all over the world have declared a thought that surplus power is produced in the systems having overunit output due to inability to identify correctly all the existent energy sources. And

a so-called phenomenology is observed due to the inability to deal with different types of energy (or fields).

In physics a negation of an overunit device follows a well known state which is considered to be true in other fields of knowledge, i.e. energy conservation law. It should be noted that it is formulated for isolated (closed) systems. I have devoted some time to the investigation of this state and to practical experiments and come to the following conclusion: there are **no isolated (closed)** systems in the nearest cosmos which can be observed by us!

Particular physical, chemical and other processes may actually be observed in closed circuits for making calculations with sufficient approximation.

Show me an isolated system, and I will prove that it is open.

Hence, according to fundamental physical laws, energy does not appear from nothing and not disappear to nowhere. However, the source of oscillations, i.e. our generator, does not provide a load with energy; nevertheless, power is produced in the load. Energy conservation law must be fulfilled! The classical formulation of the energy conservation law is as following: total energy of an isolated system is not changed in the course of time. According to this, the only fact remains valid, i.e. the single-wire system is not isolated from outer influence, hence, energy is consumed from some other source which is outer in relation to the system?! In this case our generator is one of sources of information about an amplitude, frequency, and phase.

Calculations and experiments have allowed made a following supposition. Avramenko's diode plug is a particular case of a device known in radio engineering for a long time, i.e. AM detector (a peak-detector, a limiter, a frequency mixer). I have examined the other known circuits of AM detectors and frequency mixers. The investigations are continued and by this time the supposition has been confirmed.

Let us accept an artificial generator (Tesla's transformer or any other one) as a main generator (or a main oscillator) and a hyper-low-frequency (HLF) oscillation of a huge amplitude as an envelope curve. Let us name it as RW ("relic wave") without placing emphasis on the sense of the name.

Let us suppose that the field can be of:

- local origin (artificial radio transmitters);
- atmospheric origin;
- geomagnetic Earth origin;
- the Moon – the Earth;
- the Sun – the Earth (the Sun as a nuclear reactor producing electromagnetic radiation, the Solar System);
- galactic origin;
- Universal origin – the Relic Wave; in contrast to the relic radiation occurring in the diapason of SHF (i.e. in

contrast to the convenient notion) it is the diapason of HLF.
- Etc.

The researches have demonstrated that the field of local and atmospheric origin may be excluded. The other variants require to be developed. Nevertheless, the variant of the Universal scale seemed to be the most probable. There is some reason for this supposition: the modern notion of the birth and the state of the Universe, i.e. the Big Bang and the expanding Universe. The known variants of scenarios of the Big Bang are based on a nuclear explosion of enormous power. The nuclear explosion is accompanied by an electromagnetic impulse (disturbance). It can be supposed that the Big Bang caused forming of a field having enormous amplitude values and long (great) period of oscillations. Probably, we deal with this field.

The second hypothesis about inconstancy, i.e. about wave nature of the Universe

A Russian proverb says: "Everything passes, everything changes". Constant electric voltage does not exist (!). That, what is considered as the constant voltage, really is a constant component (occurring at a certain time interval). This component is formed by combining of variable sinusoidal oscillations and/or is a quite low frequency fundamental. Hence, it is a non-sinusoidal "changing" having amplitude linear part at the time interval of the observer.

For example, in reality a usual storage battery of "direct current" can not support invariable voltage, i.e. when a discharge appears the voltage decreases (changes in time, oscillates with a non-sinusoidal oscillation and a quite low frequency fundamental), when a charge appears the voltage increases.

It is necessary to observe the constant voltage occurring after a rectifier and even a stabilizer as a constant component existing in the time interval from switching on to switching off. This will correspond to that is proposed by Fourier!

Show me a device producing constant voltage, and I will prove that the voltage is not constant.

Conclusions

If the supposition is totally confirmed then the statement that an electric field plays a fundamental role in the Universe will be valid.

We live in an electric field of a huge potential but we do not notice it. Since **our reference point is the amplitude value of RW field in our point of space** then the potential is equal to zero for our perception and for measuring instruments. Besides, **RW has an amplitude linear part at the time interval of the**

observer. Hence, we consider RW field existing as unrevealed or as weak interactions in natural processes. Nevertheless, this influences directly on the whole surrounding material world.

Artificial production of heterogeneities in the RW field can cause its significant visualization.

According to the concept of the physical field, which was called by Einstein as the most important discovery in physics since Newton's time, every body generates a force field in the ambient space (for example, the electric field occurring if the body has an electric charge). This force field becomes apparent when a test body located in a certain point is influenced by a force.

Discovery of the fields of this scale allows define this concept more accurately. I would like to restate the information mentioned above in the following way: every non-homogeneity of physical vacuum (aether), which is registered by our perception or by measuring instruments as a physical object or a physical field, interferes with RW (according to other interpretations, it absorbs or rereflects RW, or becomes excited) producing new wave fields. This perceived physical field has frequency which is higher than RW frequencies. It is perceived as static in the time interval of observation. Hence, the field generates a charge and not the reverse. Any linear or non-linear transmission (motion) of a material or field object changes non-homogeneity which is generated by this object.

A question about measuring of parameters of the Universe remains open. Can an oscillation of the period of $T=14$ billions years and of the amplitude of $A \sim T$ be seen, perceived, registered or measured?

The used literature and references are not cited in the article due to its great volume. The reader can familiarize with them at the web-site of <http://www.efir.com.ua>. The complete text of the article and other materials can be received from the author.

EAGLE-RESEARCH

Energy Solutions
since 1984

**A Research Organization that
Develops & Distributes
Practical Energy-Saving
Methods & Devices**

4 Energy Way, P.O. Box 118
Porthill, Idaho 83853
FAX: 250/492-7480

Technical questions to:
wiseman@eagle-research.com



History pages

To the Question of Work Made by Electrostatic Field

Alexander V. Frolov, Russia

General Director, Faraday Lab Ltd

Tel./Fax.: 7-812-380-3844

Email: office@faraday.ru

We know some simple examples of work making due to the forces, which appear in electrostatic field. Since the field itself does not require energy consumption from the source (not taking into account the charge leakage), then free energy can be received with these forces. The first phenomenon that we are going to consider is a phenomenon of **electrostriction**. Mechanical forces appearing in dielectric under the influence of electrical field tend to deform it. Sometimes these forces are small, but they can be huge in special dielectrics. The character of deformation also depends on non-linearity of electrical field. Suffice it to remember that heating of a body takes place during deformation, and we can make a conclusion on possible using of the given effect in practice. Periodical deformation can be created due to the rotor or any other methods to change the field.

The second effect is not so popular. It was found by Hertz in 1881 that there is a rotation of dielectrical cylinder (or ball) in permanent electric field if it is created in some liquid or in gas (see Fig.1).

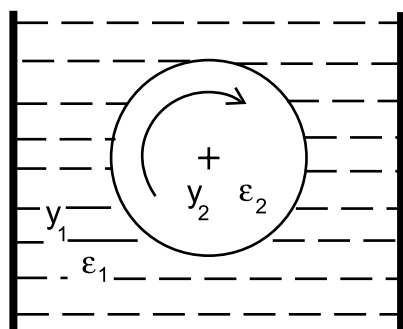


Fig.1

Here ϵ_1 is a dielectrical permittivity of the liquid, ϵ_2 is a dielectrical permittivity of the rotor, γ_1 is a conductivity of the liquid and γ_2 is a conductivity of the rotor. This effect was discovered by Hertz, then it was described by G. Quincke, Germany. Also Japan scientist I. Sumoto studied the effect in 1955. Modern research work was made by K.M. Polivanov, Moscow. There is the so called equation by Polivanov describing special conditions, which are necessary to begin rotation ($\epsilon_1/\epsilon_2 = \gamma_2/\gamma_1$ is the Polivanov's condition).

Forces of electrostatic field produce this rotation and it is a real free energy system that can trap energy from inner structure of potential field. Let's try to describe the mechanism of this effect and then we'll be able to increase the power of the system up to the level of industrial application. So, why does it work? To my mind, there are some differences in conditions for polarization of the rotor and molecules of liquid or gas those are surrounding the rotor since there is a difference in permittivity and conductivity.

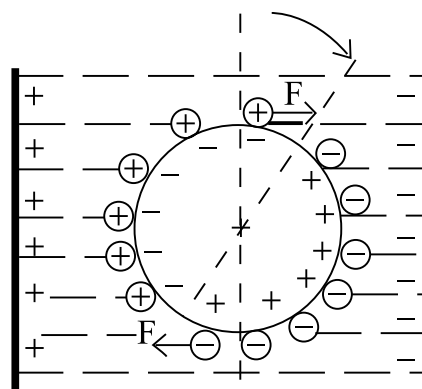


Fig.2

Due to this reason the molecules are polarized both by the field of electrodes and by the field of rotor. The rotor is polarized in the electrical field of electrodes, and molecules of liquid on its surface are polarized by the electric charge of the rotor, but not according to direction of the field. So, the rotor is surrounded by "screen" of molecules on its surface. The electric charge of this screen partially compensates the field of electrodes.

When some angle is created by the first initial turn, there is some part of the rotor surface, where molecules of liquid on the surface of the rotor are attracted to electrodes and it is the reason for future rotation. After some angle of the turn the polarization in this point of the rotor surface is changed but new molecules are incoming in the so called "sector of attraction" and the rotation is always accelerated. This well-known effect of 1881 is a very good example of possibility to produce useful work in load by means of electrostatic field only.

Letter On Hertz-Quincke-Sumoto Effect

from Doug Marett

Email: doug.marett@sympatico.ca

One more interesting effect is known as Faraday effect. In 1836 Faraday noted that raising of liquid upwards takes place in condenser with liquid dielectric (plates are installed vertically). During this process electrostatic field makes the work against gravity. A. Gyemant in 1926 established that value of this force is proportional to the square of voltage on condenser. Later in 1955 this phenomenon was studied in details by I. Sumoto, Japan. That's why in physical encyclopedias this effect is called "Faraday-Sumoto effect". In Tareev's book [1] it is pointed: "Under high voltage this phenomenon leads to flowing and turbulent boiling of liquid". I should remember for those, who see nothing unusual here, that it does not necessary to consume the power from initial source. Creating an initial field in electric capacitor, then we can use the received mechanical work. It is evident that the gradient of electrical field creates the conditions for movement of liquid dielectric. A task to create conditions for liquid circulation is more complex, but it has solution, if we take into account the presence of one more static field, i.e. gravitational field. Joint action of electrostatic and gravitational fields stipulates the circulation of liquid dielectric even in the simplest constructions. Besides, electrostatic field can be partially screened.

The analyzed examples should draw attention of experimenters to these obvious ways of how to create useful work by means of electrostatic field.

References

1. Tareev B.M. Physics of dielectrical materials, Moscow, Energoisdat, 1982, p.199 – 200.

Editor: Below we publish the comments of our reader.

...As far as I can tell, the original reference by Hertz is "On the Distribution of Electricity over the Surface of Moving Conductors", Wiedemann's Annalen, 13, pp.266-275, 1881. Hertz's discussion of this phenomenon is cursory at best, having very little experimental work included. The real phenomenon appears to have been discovered by W. Weiler in 1893 (Zeitschrift für den Physikalischen und Chemischen Unterricht, Vol.6, pp.194-195). Weiler observed that a glass cylinder placed in a poorly conducting liquid between two spherical electrodes began to rotate when the electrodes were connected to an electrostatic generator. In 1896, George Quincke reported the same phenomenon and published a comprehensive report on it. This was in Annalen der Physik, Ser.3, Vol. 59, pp.417-486. Subsequent investigators have tended to attribute the discovery to Quincke, when in fact Weiler was the first to pioneer the work.

I do know that P.E. Secker et al. performed work on this field, references of which are available in the English language. These are:

- P.E. Secker, et al., (1968) Journal of Applied Physics, Vol. 39, pp.2957-2961, and
P.E. Secker, et al., (1970) Journal of Physics D: Applied Physics Vol.3, pp 216-220.

I hope that this information might be of use to you.



The Foundations of Physchemistry of Micro World

Ph. M. Kanarev

The Second Edition

**The book was published in Russian and English;
you can also read it at <http://book.Kanarev.innoplaza.net>**

The new axiomatic of natural sciences is given in the book; on its basis, quantum physics and quantum chemistry have been returned to the classical way of development. The first steps are made on this way, which have led to discovery of the structure of the photon, the electron, and the principle of the formation of the atomic nuclei, the atoms and the molecules.

The Planck's Law of radiation of perfect blackbody is given on the basis of classical concepts, and the connection of quantum phenomena with the laws of classical physics is proved.

The application of the new theoretical results to the solution of practical energy tasks on the basis of plasma electrolysis of water is shown. Due to this electrolysis, additional heat energy and the energy containing gases (hydrogen and oxygen) are generated. Cold Nuclear Transmutation of the atomic nuclei of alkaline metals and the atomic nuclei of the cathode material takes place during plasma electrolysis of water.

The book is intended for physicists, chemists and other specialists who are seeking the new directions for understanding the foundations of the micro world and the new energy sources.

Comments to Electro-Reactive LIFTER News

Alexander V. Frolov, Russia

General Director, Faraday Laboratories Ltd
E-mail: office@faraday.ru
<http://www.faraday.ru>

March 21, 2003 we got news from France about electro-reactive propulsion system.

Blaze Labs reached 100g PAYLOAD level.

You will find all the details of the Saviour's experiment at: <http://blazelabs.com/exp14.htm>.

This electro-reactive ionization-flying model requires 46 kVolt, 4 mA, i.e. about 200 watts to fly with 100 g useful load.

It is interesting to note that Jean-Louis Naudin's previous opinion of 1997 – 1999 about priority of the Frolov's asymmetrical capacitor now is changed. Sometimes people wish to re-write the history. It is possible and it is easy. Naudin's web page about <http://jnaudin.free.fr/lifters/story.htm> (see Fig. 1) is not started from the real beginning of the story. He forgot our discussion of 1997 and also photos and MPEG video I have send to him when he has started his way in electrograviticis.

If you remember the name of Naudin's first asymmetrical capacitor "Frolov's Hat" (see Fig.2) then you know why there is this name of this technology. But really it is not important to try for some serious reply from Jean since he has no personal post address, phone, or his photo on the web site...

Also it can be useful to visit this page <http://www.faraday.ru/t-cap.html> to know about something **more important than electric ionization flying models (Lifters)**, since it is just a reactive ionization way, which is similar to rockets.

Ideas now developing by us are not aimed to increase the power level (from 1 gram to 100 gram propulsive force). It is **a qualitatively new idea**; it is really electrograviticis instead of "electro-reactive Lifter".

So, **what is about real "history of the question" instead of the French version?** The question here is not about a priority, it is nonsense after T.T. Brown's

patents. As an example the NASA patents on asymmetrical capacitors can be mentioned since the ideas were opened before the NASA patent and there is nothing new in it. The problem is that people who develop reactive ionization Lifters develop only primitive reactive technology. **It is not essence of T.T. Brown research but it is the distortion of his ideas.**

So, the team in France is working to develop and support ideas of secondary and wrong method. Why? Perhaps they either do not see the real way or have payment for the wrong way **to mask a real work.**

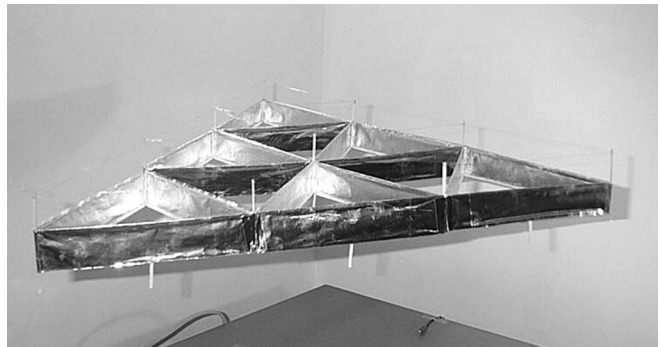


Fig. 1


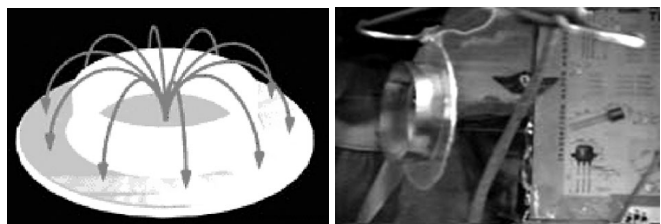


Fig. 2

Josh Werrmann (Email: jsh111@yahoo.com): I wanted to ask you a few questions about an article titled "Highly Efficiency Electrolysis" by A.V. Frolov. In this article it is stated that Dmitry A. Latchinov patented a method for electrolysis, where one of the electrodes is insulated completely from the water. It is also stated that another scientist, Igor Goryachev, used a method of pulsed electric fields. I don't know if you know, but inventor Stanley Meyer has a patent that covers both of these processes together, in a way. His patent is U.S. patent number: 4936961. Take a look at this. In the patent it states EXPLICITLY that there is a pulsed electric field, where a condition of NO CURRENT is preferred. This is very similar to the above to Russian scientists, except that the patent states a condition of resonance is necessary. I am wondering do the two scientists that are described require resonance in their devices? Or just plain pulsed electric fields, where one electrode is insulated from water.

Another patent I would like to refer you to is Archie Blue's electrolyser, U.S. patent number: 4124463. This device is similar to A.V. Frolov's idea, to get the oxygen and hydrogen bubbles off the electrodes, except he uses a blower to blow air in the cell, instead of rotating the cell like A.V. Frolov does. His invention also uses the conductivity current to work.

Alexander V. Frolov: As far as I know resonance is not created in this case. The main idea is the removal of gaseous film which appears on the surface of electrodes by rotation or some other methods.

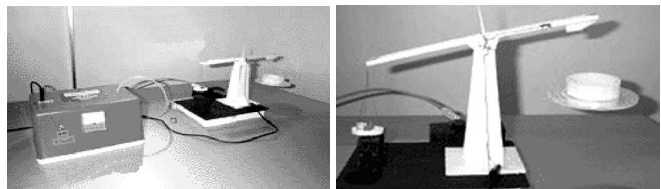


[http:// www.sciteclibrary.ru](http://www.sciteclibrary.ru)

The system of 150-tons magnets which have been developed by scientists of the USA, Japan and Russia opens a new era of safe and unlimited energy. In this system nuclear fusions serve as a source of energy. They accumulate heavy chemical elements not by means of nuclear reactions but by ultrahigh plasma pressure.

After supplementary research is held which aims to reduce manufacturing costs of the giant magnet weighing 925 tons, this magnet will be produced and demonstrated at the opening of the International Thermonuclear Experimental Reactor (ITER). This magnet in its turn will become a part of a bigger system, that is combined into a magnet weighing approximately 10 000 tons. The task of ITER is the demonstration of the process of nuclear fusion, as an energy source. During the process of nuclear fusion the light elements are combined by immense pressure, thus producing heavier elements. During this production process a lot of energy is emitted. The task of giant high-power magnets is to create magnetic fields, which must hold and control plasma, or to charge electrically the gas, in which the fusion is being held.

In Japan the system of 150-tons magnets serves as adjustment system of 925-tons magnets, which will be finally put into operation and heat up the ITER plasma. Two additional giant magnet systems will confine the plasma and will control its form. The model for one of them is presently being examined in Germany; the model of the other is in project.

Cylindrical 150-tons magnets have three main parts: external module, built by the Japanese team, internal module, built by the American team and a thin rod in the core which is equipped with process control equipment. Three different rods were separately checked, two of them were built in Japan, another in Russia.

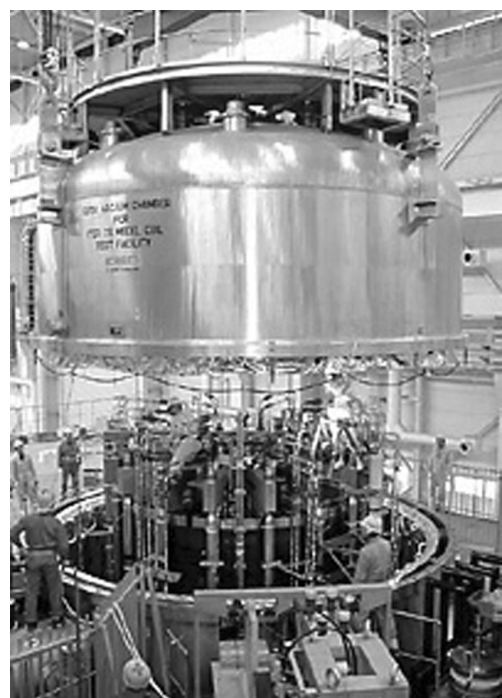


BOOKS REVIEW

Harnessing the Wheelwork of Nature

(340 pgs. Adventures Unlimited Publishers, 2002)

Thomas Valone

Email: iri@erols.com

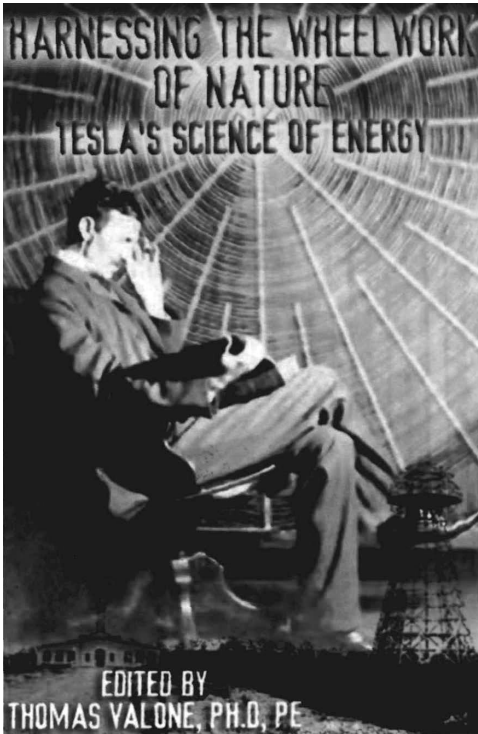

It is a new book by **Thomas Valone**, who edited this anthology in time for the **Wardenclyffe Tower Centennial (1903-2003)**. This book presents for the first time, the feasibility argument for Tesla's most ambitious dream, the wireless transmission of power. Pictured on the book's cover near his feet, the 187-foot Wardenclyffe Tower was Tesla's means to deliver natural 8 Hz electricity anywhere in the world, by longitudinal waves.

Unknown to most electrical engineers, Nikola Tesla's dream answers the energy crisis worldwide, saves electrical conversion losses, and provides a real alternative to transmission lines. In Dr. Corum's contributed papers, he explains Tesla's magnifying transmitter, which Tesla compared to a telescope. Corum points out that "the tuned circuit of his magnifying transmitter was the whole earth-ionosphere cavity resonator." This fact helps explain why Tesla stated, "When there is no receiver there is no energy consumption anywhere. When the receiver is put on, it draws power. That is the exact opposite of the Hertz-wave system...radiating all the time whether the energy is received or not." Thus, with Tesla's futuristic transmission of power, source dissipation will only be experienced when a load is engaged in a tuned receiver somewhere on the earth. This fact alone represents **a major leap forward** in electrical transmission efficiency, even one hundred years later.

Why wasn't the prototype of Wardenclyffe finished in 1903? Tesla offered this visionary conclusion: "The world was not prepared for it. It was too far ahead of time. But the same laws will prevail in the end and make it a triumphal success... Let the future tell the truth and evaluate each one according to their work and accomplishments. The present is theirs; the future, for which I really worked, is mine."

Up until now, there has been a general malaise regarding the lack of scientific comprehension of Tesla's greatest dream. For example, the Serb National Federation notes, "With the exception of the first biography of Tesla by John J. O'Neill, science editor of the *New York Herald Tribune*, and published in 1944, unfortunately no biographer since has had the necessary scientific/engineering academic credentials to discuss Tesla's work in the various fields." Contributors to ***Harnessing the Wheelwork of Nature*** are primarily physicists and engineers who are experts in Tesla technology. Their wealth of knowledge demonstrates their mastery of this extraordinarily progressive and technical subject. Finally, the best academic credentials have been brought to bear on the world's greatest electrical futurist.

This is a very readable and profusely illustrated reference volume on wireless transmission of power, besides being an excellent biographical gold mine of Tesla history. Nick Cook, editor of *Jane's Defence Weekly* and author of *The Hunt for Zero Point* says, "Tesla is one of the great overlooked geniuses of science and electricity. His full story deserves to be told. Tom Valone sheds important new light on his life and work."

Integrity Research Institute will hold a Tesla Energy Conference & Expo on November 8-9, 2003 to celebrate the Wardenclyffe Tower Centennial (1903-2003) in conjunction with the Tesla Wardenclyffe Project, Inc. (www.teslascience.org).

See www.IntegrityResearchInstitute.org for more details.



Experiment on the generation of gravitational field

by Dmitry Yu. Tsipenuk



Sergey S. Abramov




Model of Adams Motor-Generator



Electrolytic photoaccumulator for the XXI century energy systems

Read the new article by Anton I. Egorov



Flynn Generator

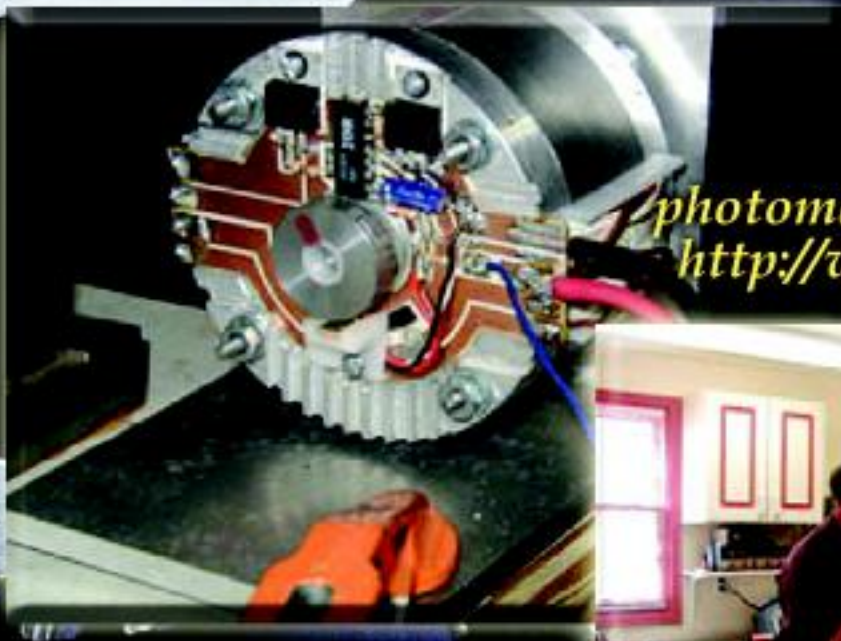

*Original version of
photomaterials is presented at
<http://www.flynnresearch.net>*



Joe Flynn Laboratory, USA

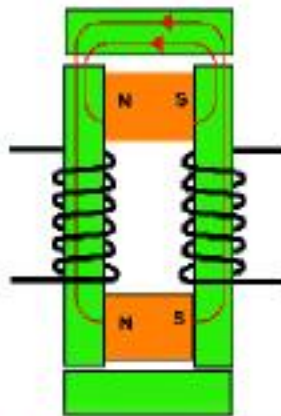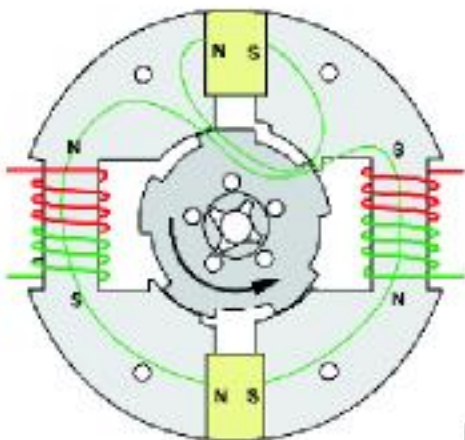


Electric generator by Joe Flynn

***More than 350%
efficiency generator
operating on
permanent magnets***

ISSN 1684-7288



9 771684 728801

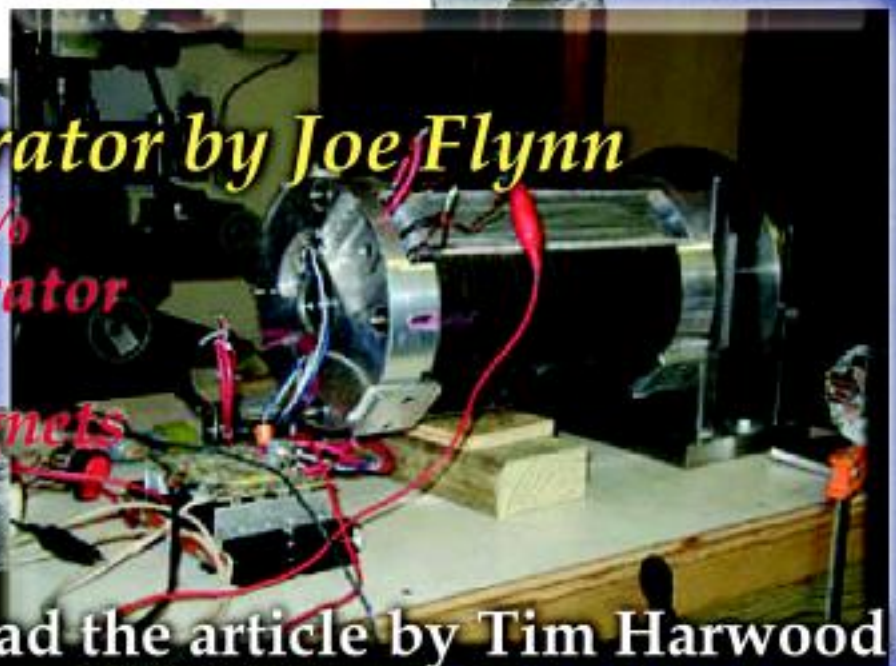

**Read the article by Tim Harwood
in this issue**

NEW Energy Technologies

Printed version ISSN 1684-7288
Online version ISSN 1684-9698

Published by Faraday Laboratories Ltd.

Issue #3 (12), 2003

Research on advanced aerospace systems and new energy sources

Time Machine

*Conference in Moscow:
discussion of the patent application
on the method and device to control
temporal parameters of matter*





Time Machine

Experiments by research group "KOSMOPOISK"
Summer, 2001



Device designed
by Faraday Lab Ltd, 2002

Alexander V. Frolov
Vadim A. Chernobrov
April 12, 2003, Conference hall
Hotel "Cosmos", Moscow



NEW ENERGY TECHNOLOGIES #12

1. Works on the Designing of Time Machines. Vadim A. Chernobrov (Russia)
2. Control of Temporal Parameters of Physical Processes. Alexander V. Frolov (Russia)
3. Etherodynamics as a New Field of Physics. Vladimir A. Atsukovsky (Russia)
4. Electromagnetic Gravitational Interaction Vadim Ya. Kosyev (Russia)
5. Medium For Existing of Matter in Nature. Anatoly V. Rykov (Russia)
6. Adams Motor. Sergey S. Abramov (Russia)
7. Field Transformation in the Model of Extended Space. Dmitry Yu. Tsipenyuk (Russia)
8. Joe Flynn's Parallel Path Magnetic Technology. Tim Harwood (USA)
9. Flynn Laboratory Photos
10. Flux-machine and Its Analogies. Review
11. Russian Patents on Alternative Energetics.
12. Gravitational Spaceships. Gregory R. Uspensky (Russia)
13. On Velocity Of Drive-Free Motion. S.A. Gerasimov , V.V. Stashenko (Russia)
14. Electromagnetic Self-Action. S.A. Gerasimov, A.V. Volos (Russia)
15. Uranium Photoaccumulator. Anton I. Yegorov (Russia)
16. Global Energy Prize (reportage)
17. Teleportation. Alla V. Pashova (Russia)
18. "Mass Defect" in Home Conditions. Prokofy V. Sherbak (Russia)
19. Aether as Unified Field. Alexander M. Mishin (Russia)
20. Global Energy. Philip M. Kanarev (Russia)
21. Fusion Processes Of Molecules Of Oxygen, Hydrogen And Water. Philip M. Kanarev (Russia)
22. Plasma Energy Power Generation. Bruce A. Perreault (USA)
23. News
24. The Marcus Device Controversy. Tim Ventura (USA)
25. Systems of conversion of thermal energy to mechanical one. Review
26. I. Prigozin
27. Letters

CONFERENCE "THE TIME MACHINE"

Editorial: On April 12 of 2003 a scientific conference "The Time Machine" was organized by Faraday Laboratories Ltd in Moscow, Russia. It was devoted to the experiments on control of space-time physical properties. At the conference there were discussed problems of time and gravitation in the context of etherodynamics, experiments and applied aspects of these technologies. Below we publish a review of the main reports presented at the conference.

The First Results of the Works on the Designing of Devices to Control Parameters of Physical Processes (of Time)

Further Plans on Designing of the Time Machine

Vadim A. Chernobrov, Russia

"KOSMOPOISK", Nagatinskaya 19A, 111533,
Moscow, Russia

E-mail: chernobrov@kosmopoisk.org



To conduct the experiments on the influence upon physical Time (density of space energy) some special devices were used as a general method of such influence. These devices can create converging waves which can cause the appearance of quasi-monopole in the confined space. *Quasi-monopole* is a part of space which has some parameters of hypothetical unitary monopole or bunch of such particles (in particular, it allows registering one magnetic pole by means of measuring equipment from the outside at some distance from this pole).

The pilot experiments have shown that it is very difficult (if not impossible) to create long-living quasi-monopole

by means of permanent magnets or electromagnets operating on direct currents (in this case quasi-monopole represents a space with one outer and one inner magnetic pole). It can be explained by the fact that lines of force of the "inner pole" invariably find a weak spot in the heterogeneous surface of magnets and break out. As a result, at the device along with one "outer" magnetic pole there is a local output of magnetic lines of the "inner" pole.

During the designing of new devices there was a task to create a quasi-monopole situation in the confined space. This situation should be created not uniformly but transiently by pulsation method. Frequency of work of electromagnetic oscillators first of all was selected depending on linear dimensions of the devices. Selection of the frequency was made in such a way that one period of pulsation does not exceed the period of time which is necessary for electromagnetic waves to reach the center and opposite waves of the device.

At the designing of laboratory devices, which generate converging longitudinal waves, several different principles to obtain required parameters were considered in the multi-layer quasi-monopole, which works in high-frequency mode. Several types of the devices were realized at different degrees of development and with different success. It was shown that the simplest devices were that ones which used electromagnetic (solenoid) oscillators connected in series and in parallel. In different experiments between 3 and 5 such surfaces were used. These surfaces were called electromagnetic work surfaces (EWS). All layers of EWS of different diameters were mounted in series in each other (like *matreshka*). The outer layer was either mounted at force shell or simultaneously represented such a shell by itself.

The size of the maximal EWS was about 0.9 m, the diameter of the minimal (inner) EWS was equal to 115 mm that was enough to place laboratory animals inside the control detection devices. Laboratory animals were used to determine the consequences of the influence of converging spherical electromagnetic waves. Payload, (i.e. that which was directly used for transfer in Time-Space), included the afore-mentioned detection devices and (occasionally) laboratory animals. The term “payload” was coined by analogy with the term which is used in cosmonautics. Volume of payload section was placed in the center of symmetry of the Time Machine (TM). In all the earliest Machines (except the 7th model) this volume still has not exceeded the volume of a football. The device with an outer diameter of 2.1 m and inner payload section of 1 m has the maximum size. It allows making human-aided experiments.

At different stages of the experiments the calculations were made by all available known modern methods to fix time. All types of electronic, quartz, mechanical and several specially made doubled quartz generators were used (there were compared frequency readings of measuring and etalon heat-insulated generators which were placed at a distance). Certain experiments used lightguiding diodes and some other methods. Before and after the experiment (more rarely during the experiment) readings of measurement clocks were periodically compared with those of an etalon clock and with signals of exact time which were transmitting by radio. Other physical factors causes side effects upon some types of measuring devices, for example, upon quartz-crystal clocks. However, doubling of measurement methods allowed essentially decreasing inaccuracy of measurements.

At some operating modes (which were not always predicted) the change of Time speed was attained (Prof. Nikolay A. Kozyrev called it density of Time t/t_0). This change came to about a fraction of a second per an etalon hour. Let us take usual “etalon” earth time as $t_0 = +1$ then it becomes clear that it is speed range of $+0.99 < t/t_0 < +1.01$ which is researched in the experiments. Thus being placed inside the device, the inanimate objects and animals were transferred in the Future (with “above-zero” speed) more slowly or faster than those around them. It occurred at all operational modes of the device (deceleration or acceleration).

Difference of Time (gradient of Time speed or curvature of Space-Time field) was observed not only inside the TM, though there is no doubt that a maximal value of changed Time was registered inside the smallest

“matreshka”. As was expected, during the experiments Time change was also registered outside the device. However such change which had an opposite sign was smaller than the change inside the device approximately by an order of magnitude. It entirely corresponds to geometric laws, i.e. in proportion to the cube of the distance).

In other words, TM influences not only its inner part and pay load but also the environment. It bears a strong resemblance to jet propulsion but in Time and not in Space. It is a flight which is realized by rejection of Time instead of mass.

Thus it was determined that the processes of deceleration and acceleration of Time distinctly differ in their nature and consequences. In such a way the deceleration was considerably smoother and more stable. During acceleration there were observed sudden changes in readings and this operational mode was characterized by general instability and dependence on any (or many) external factors. Particularly, acceleration instability also consisted in the following: at fixed power the value speed of Time depended on the time of day and situation of the Moon. Possibly it also depended on some other factors including the presence of an operator or other people near the device. Even insignificant external influence, for example, mechanical shaking, caused the change of speed value which sometimes was rather significant.

Inside the laboratory devices there was also registered that **Time can change with some sluggishness**. After the changed Time speed influenced some physical object (for example, soil) then residual effects were observed at it for some period of time. These effects can be eliminated only by the influence of another speed of Time.

Preliminary general conclusions

The Present is the transfer or transformation of the polyvariant easily changeable Future into the univariant unchangeable Past. Thus flights in the Past (at “negative” density-speed t/t_0) and in the Future will happen in different ways. They can be compared with the motion of an ant along the tree: from any point of the tree (i.e. from the Present) there is only one way downwards open to the ant (i.e. in the Past) and many different ways upwards (i.e. in the Future). However among all the ways to the Future undoubtedly there are most probable, low-probable and almost improbable variants for development of the Future. The less probable this variant of the Future the more unstable and energy-intensive the motion to the Future will be. According to

the “law of the crown of tree”, return to the Present is possible only if when being in the Past the traveler does not interfere in the course of events and does not change the course of the past History. Otherwise the chronotraveler will return to the parallel Present from the Past by another branch of History. Penetration to the Future from the Present is hampered by the choice of the branch for transference. However return from any variant of the Future into the Present is possible at any scenario if there are no fusions of different variants of History...

In other words, we have a circumstantial evidence of the assumption that Time has more than one dimension. Thus there is an affirmation of the theoretical inferences

of R. Bartini who believed that Time has 3 dimensions. Hence we can consider our terrestrial globe as 6-dimensional where the dimensions are: length; width; height; age or date of Time; variant of History or blur of Time; density or speed of Time. Thus the notion of “Arrows of Time” is completely absent in the fourth dimension (date of Time) but it is a special case of the notion of the sixth dimension i.e. speed of Time. At the same time the notion of speed of Time also relates to the physical notions of gravitation and energy. Thus the notion of “Einstein-Rosen bridge”, which was introduced in 1916, or notion of “worm course”, which was introduced by John Willer in the end of the fifties, are connected with transference in the 5th and 6th dimensions.

Method and Device to Control Temporal Parameters of Physical Processes by Means of Changing of Energy Density of Space

Alexander V. Frolov, Russia

General Director, Faraday Lab Ltd

Tel./fax: 7-812-380-3844

Email: office@faraday.ru



This invention belongs to the methods and devices to provide control on rate of physical processes (that includes the process of the existence of matter in space-time) by means of increasing or decreasing of energy density of space (i.e. energy density of physical vacuum or density of the aether).

Let us consider the history of the invention:

Earlier there were proposed some methods and devices to influence the rate of physical and chemical reactions,

biological processes or period of oscillation of the system. In the works by N.A. Kozyrev [1] there is a description of the experiments on the influence of some process (for example, process of evaporation or crystallization of matter) upon the period of another process, which serves as a detector and can be compared with reference oscillation process. In one case, the rate of oscillations of the detector decreases in the surrounding area near the process of matter evaporation. In another case, the rate of detector oscillations increases in the surrounding area near the process of matter crystallization. If we use a term of “entropy” then it is possible to say that the processes which are accompanied with entropy increasing (for example, conversion of matter from solid state into liquid one) influence on the matter (surrounding processes) in such a way that entropy of systems decreases. In another case, for example, near the process of crystallization, entropy of systems increases in the surrounding area near this process. Kozyrev used the term “wave of density of time” and he made a conclusion that in addition to “directivity” of time (time course) there are active properties of time, for example, “density of time”.

To develop this approach for applied purposes it is necessary to use in-depth analysis of the physical sense

the “law of the crown of tree”, return to the Present is possible only if when being in the Past the traveler does not interfere in the course of events and does not change the course of the past History. Otherwise the chronotraveler will return to the parallel Present from the Past by another branch of History. Penetration to the Future from the Present is hampered by the choice of the branch for transference. However return from any variant of the Future into the Present is possible at any scenario if there are no fusions of different variants of History...

In other words, we have a circumstantial evidence of the assumption that Time has more than one dimension. Thus there is an affirmation of the theoretical inferences

of R. Bartini who believed that Time has 3 dimensions. Hence we can consider our terrestrial globe as 6-dimensional where the dimensions are: length; width; height; age or date of Time; variant of History or blur of Time; density or speed of Time. Thus the notion of “Arrows of Time” is completely absent in the fourth dimension (date of Time) but it is a special case of the notion of the sixth dimension i.e. speed of Time. At the same time the notion of speed of Time also relates to the physical notions of gravitation and energy. Thus the notion of “Einstein-Rosen bridge”, which was introduced in 1916, or notion of “worm course”, which was introduced by John Willer in the end of the fifties, are connected with transference in the 5th and 6th dimensions.

Method and Device to Control Temporal Parameters of Physical Processes by Means of Changing of Energy Density of Space

Alexander V. Frolov, Russia

General Director, Faraday Lab Ltd

Tel./fax: 7-812-380-3844

Email: office@faraday.ru



This invention belongs to the methods and devices to provide control on rate of physical processes (that includes the process of the existence of matter in space-time) by means of increasing or decreasing of energy density of space (i.e. energy density of physical vacuum or density of the aether).

Let us consider the history of the invention:

Earlier there were proposed some methods and devices to influence the rate of physical and chemical reactions,

biological processes or period of oscillation of the system. In the works by N.A. Kozyrev [1] there is a description of the experiments on the influence of some process (for example, process of evaporation or crystallization of matter) upon the period of another process, which serves as a detector and can be compared with reference oscillation process. In one case, the rate of oscillations of the detector decreases in the surrounding area near the process of matter evaporation. In another case, the rate of detector oscillations increases in the surrounding area near the process of matter crystallization. If we use a term of “entropy” then it is possible to say that the processes which are accompanied with entropy increasing (for example, conversion of matter from solid state into liquid one) influence on the matter (surrounding processes) in such a way that entropy of systems decreases. In another case, for example, near the process of crystallization, entropy of systems increases in the surrounding area near this process. Kozyrev used the term “wave of density of time” and he made a conclusion that in addition to “directivity” of time (time course) there are active properties of time, for example, “density of time”.

To develop this approach for applied purposes it is necessary to use in-depth analysis of the physical sense

of the “time density” notion. Connection of notions about “time directivity” and “entropy of the system” was demonstrated in the work “Introduction into thermodynamic of irreversible processes”, 1964 by Ilya Prigozhin [2]. In the work “Quantum fluctuations of vacuum in curved space and theory of gravitation” by A.D. Sakharov [3] the conception of vacuum structure was suggested. In the USA the work “Can the vacuum be engineered for space flight applications?” by H.E. Puthoff [4] is well-known. The author considered the applied aspects for study of vacuum structure and described the method and device to obtain propulsive force by means of changes in vacuum properties.

A substantive conception of time and methods for creation of waves of energy density were also considered by Prof. K.P. Butusov in the work “Time is a physical substance”, 1991 [5]. In the book “What is The Time?” by Yu. G. Belostotsky [6] the connection between the notions of time and aether was demonstrated. This connection was considered from the point of view of astrophysics there.

We can also say that the modern conception of aether is successfully developed by V.A. Atsukovsky in his works [7].

In my articles, for example, “Physical principles of the Time Machine” [8], it was demonstrated that to develop experimental works on the topic it is useful to clarify the terminology and to consider **“waves of time density” as longitudinal waves of energy density in space**. In this case the notion of “time density” has a physical sense of energy density (aether density).

This approach can be realized practically by means of classical electro-technical and radio engineering methods and it is a development of aether-dynamical conception on the nature of electricity and magnetism by M. Faraday, “Experimental researches on electricity”, volume 3, [9].

Let us consider a usual bipolar magnet from the point of view of aether-dynamics. Then it is possible to say that it is inflow and outflow of aether, i.e. it is a balanced energy system which does not change energy density in space. In this case it is evident that creation of magnetic monopole or modeling of quazi-monopole by means of electro-dynamical methods is a technical basis to create some local change of energy density in space.

Electric processes could also be used alongside with the magnetic phenomena. For example, in another book “Symmetrization of Maxwell-Lorenz equation” by Prof. Butusov [10] the creation of longitudinal wave was also

considered. It was demonstrated that an electrically charged sphere can radiate longitudinal wave when the sphere radius is changing, i.e. when its surface is changing while the value of electric charge is constant.

One more well-known method is described in the book “Experimental gravitonics” by Polyakov [11]. There is a consideration of the generation of gravitational waves at the high-frequency magnetization and demagnetization of ferromagnetic material, i.e. at the powerful volume magnetostriction. Since at this phenomenon there are changes of matter density (i.e. changes of energy density in space, which is occupied by matter), then volume magnetostriction is a special case of changes of energy density.

Earlier Vadim A. Chernobrov had described a method and device to control temporal characteristics of physical and chemical processes by means of creation of the magnetic monopole (quasi-monopole). In this magnetic mono-pole there is a convergent wave, which is created by several sources situated in the spherical frame. According to this method in the multilayer spherical structure where every layer (the so called “electromagnetic work surface”) is an assembly of electromagnets, by means of series connection of the layers the wave is created, which converges to the center of the device. The device has the same outside magnetic poles of the electromagnets (and the same inner poles) and thus a model of macroscopic magnetic monopole is created.

We assume that at in-phase operation of all sources of waves, interference of longitudinal waves provides some change of value of energy density of space in the focus of the system.

Experimental facts prove that detectors installed in the center of the device (for example, mechanical or electromagnetic oscillators) show change of period in their own oscillations. We have protected them by shielding them from heat radiation as well as from other kinds of electromagnetic influence. Thus it is possible to assert that the detectors decelerate or accelerate their oscillation period depending on the energy density, which is generated in the center of the device.

However for the experiments made by means of such a device, accurate adjustments of all wave sources are required to provide their in-phase operation. At the same time, operational stability of the system depends on the operational stability of each of the wave sources. Increase of the impulse frequency causes increase of

the effect; however, it is limited by the parameters of electromagnets and generator of impulses. Besides, to increase the effect it is necessary to use more powerful energy sources since the current in the windings of electromagnets determines the value of the magnetic field of the created quasi-monopole.

Since the efficiency of such systems directly depends on the frequency and the value of changes of energy density in space, then in the next version of realization of this technology we suggest using of plasma shells instead of electromagnetic working surfaces. This will allow significant improvement in the specific parameters of the device.

Thus let us consider general engineering principles of operation and outline the ways to develop this method. Fig 1 represents a three-layered electromagnetic emitter. This electromagnetic emitter is designed according to the invention in which the directed radiation of wave of energy density is created along the axis of the device.

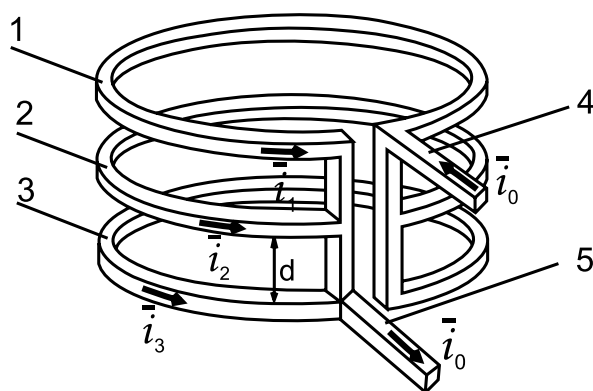


Fig. 1

Three-layered electromagnet

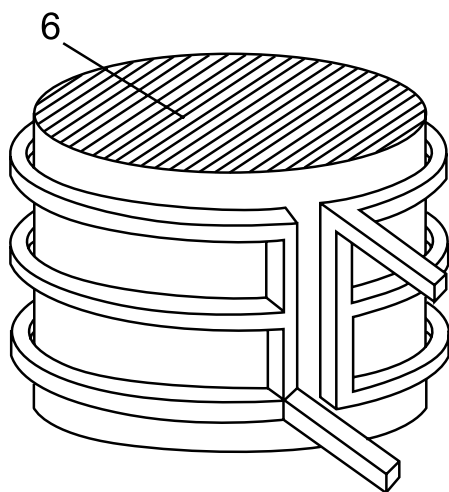


Fig. 2

Three-layered electromagnet with ferrite core

The device is designed according to the idea by Vadim A. Chernobrov for creation of the directed wave of energy density by means of phase shift in propagation of impulse front in three current branches, namely i_1 , i_2 , i_3 . These branches are displaced along the electromagnet axis at some distance d .

The device works in the following way. When the pulsed generator is activated, front of current pulse i_0 appears at the output 4. Impulse front at branch 1 advances impulse front at branch 2 that is caused by spatial shift of current branches 1, 2, 3 relatively to each other along the electromagnet axis at the distance d . Impulse front at branch 2 in its turn advances impulse front at branch 3 for a certain time T . The second output of the electromagnet 5 is placed in such a way that impulse front at branch 1 will phase lag behind the impulse front at branch 2 (which in its turn will phase lag behind the impulse front at branch 3) for the same period of time T . Therefore at branch 5 the united impulse front is generated again.

Time T can be calculated in the following way:

$$T = d/c \text{ (seconds)} \quad (1)$$

where c is a constant of propagation of impulse front. This constant is known as velocity of light.

At each impulse the T (i.e. the value of relative lag of impulse front) is a constant value. Thus high-frequency consequent excitation of layers of the electromagnet appears at each impulse. The frequency of the excitation is calculated in the following way:

$$f = 1/T \quad (2)$$

where T is relative lag of impulse front in seconds.

There is an example of frequency calculation: for the shift distance $d = 7$ mm we can calculate a lag $T = (7/2.997924) \times 10^{-11} = 2.335 \times 10^{-11}$ (seconds) and frequency $f = 1/T$ approximately comes to 4.28×10^{10} (Hertz).

Thus this design of three-layered electromagnetic emitter allows creating the waves of super-high-frequency band (for example of millimeter range) without the use of a semiconductor or other radio components.

It is very expedient to use the electromagnets designed with magnetostrictive material cores, that will significantly increase energy density of the longitudinal

wave, which is generated by the multilayer electromagnet. In Fig. 2 there is an emitter with the core. In the case of high-frequency ferromagnetic magnetostrictive materials 6 the efficiency of emitter operation significantly increases.

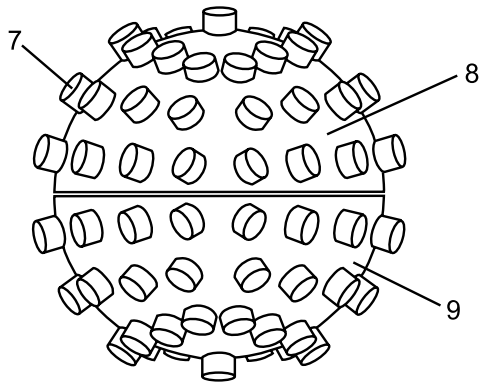


Fig. 3
Spherical design

Fig. 3 represents the spherical distribution of emitters 7 at the upper 8 and lower 9 hemisphere of the frame which could be opened in order to place detectors and different objects inside. It can also allow to establish in what way the changes of density of space energy influence the properties of different materials, velocity of physical and biological processes as well as chemical reactions. The installation of detectors 10 inside the device is shown on Fig. 4.

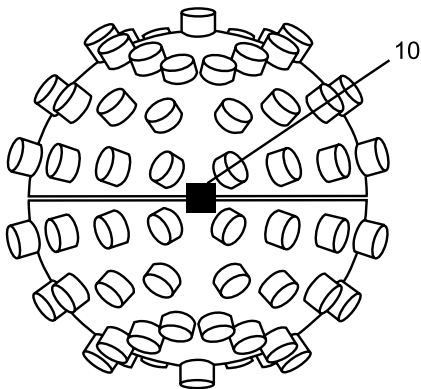


Fig. 4
Detectors inside the system

Another version of design is represented in Fig. 5, where the suggested method is realized by means of a spherical electric capacitor with three coats 11, 12, 13. Each capacitor coat is connected to the outlet of three-phase pulsed generator 14.

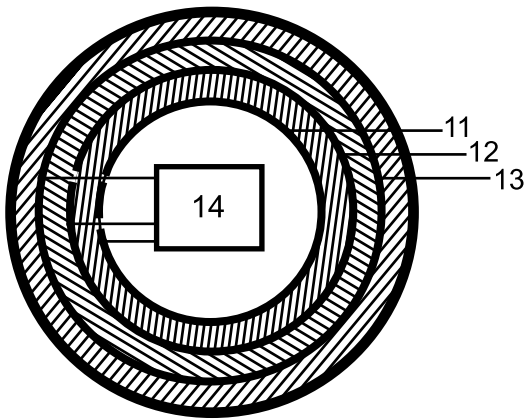


Fig. 5
Three-layered spherical capacitor

In this case the wave of energy density is created without electromagnetic emitters and this principle is not related to the modelling of magnetic quasi-monopole. The device operates due to the control unit, which provides the high-frequency changes of electric potential at each coat in such a way that the mode of high-frequency converging or diverging wave of energy density is created. In fact it is a standard three-phase generator but it produces not the rotation of the rotor of some electromotor but **“compression” or “decompression” of aether**. Aether is “pumped” in the center of the device or “pumped out” of the center.

In this case there is no need to tune separate sources of waves to make the device work in in-phased mode. It ensures reliability of the device operation if to be compared to the quasi-monopole. Besides, much less energy is necessary for the processes of charging and discharging of multi-layer spherical electric capacitor than for creation of magnetic field by means of conductivity currents.

Since the efficiency of such systems directly depends on the frequency and value of changes of energy density in space, we suggest the use of plasma shells instead of electromagnetic work surfaces for the next version of the device. It will allow significantly improvement in the specific parameters of the device. For that it is enough to place the electrodes of the multi-layers capacitor in a low-pressure gas area and these electrodes should be made as gauze electrodes. At that the wave is created in plasma, which is excited layerwise by several gauze electrodes placed in a spherical space between the inner and outer spherical bodies of the device. Therefore this version of design of the device can be considered as **the manipulation of the plasma method**.

Fig 6 is a plan of one more design version. It is made as an inner frame 15 and outer frame 16, the space between them is filled with some gas 17. Three electrodes 18, 19 and 20 are connected to the three-phase pulsed generator 21. **Consequent excitation of plasma layers by electrodes 18, 19 and 20 creates the wave of energy density.** Propagation of this wave can be directed both to center of the device and from the center of the device.

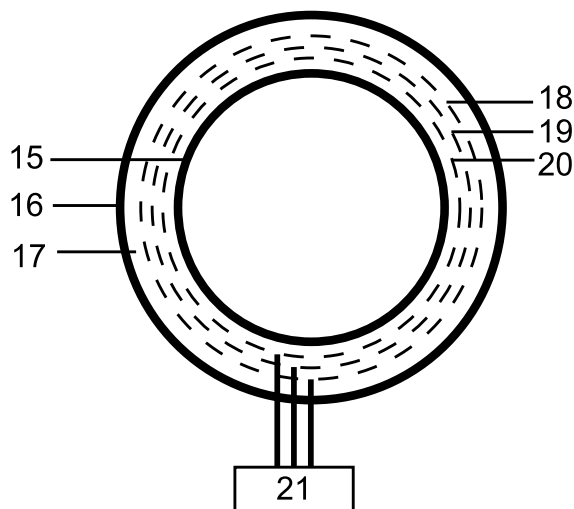


Fig. 6
Wave in plasma

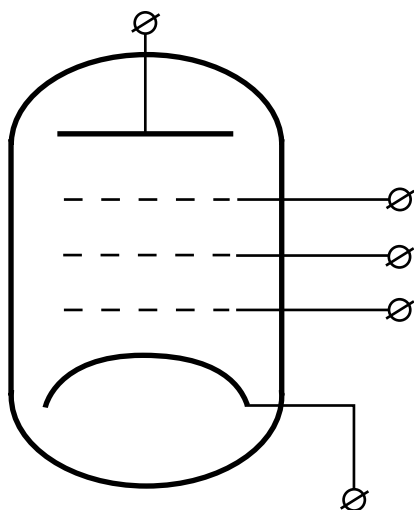


Fig. 7
Schematic electric circuit

In Fig 7 there is a schematic electric diagram of the design.

To conclude. The work on time control has just started. We have clearly determined the main physical principles of operation of such devices, which can change the aether density in some given volume of space and thus influence temporal parameters of any physical process. The small experimental results today allow us to make real positive conclusion on availability of this method and on the possibility of its practical application in applied aspects. The first aspect is antigravitation propulsion technology and we are developing the methods to detect mass (weight) changes in the time control experiments to prove this applied possibility. Another area is medical applications of the changes in the aether density

Russian Federation patent claim #2003110067 was filled April 9, 2003. At present time we are interested in marketing for this technology as well as in search of additional investment and partners.

References

1. N.A. Kozyrev, Selected works, Leningrad State University, 1991
2. I. Prigozhin, Introduction in thermodynamics of irreversible processes. M., 1964
3. A.D. Sakharov, Quantum fluctuations of vacuum in curved space and theory of gravitation, Reports of USSR Academy of Sciences, vol. 12, 1968, p. 1040
4. "Can the vacuum be engineered for space flight applications & Overview of theory and experiments", Dr. H.E. Puthoff, Infinity Energy, July-November, 1997
5. K.P. Butusov, Time as physical substance. Collection of articles "Problems of space and time in modern natural science", Issue 14, L. 1990, pp. 301-311
6. Yu.G. Belostotsky "What is The Time?" Saint-Petersburg, 1991
7. V.A. Atsukovsky "General etherodynamics", M., 1990
8. A.V. Frolov, Physical Principles of The Time Machine, New Energy Technologies #3(6), pp. 8-10, Saint-Petersburg, 2002
9. M. Faraday, Experimental researches on electricity, vol. 3, M. 1959
10. K.P. Butusov, Symmetrization of Maxwell-Lorenz equation. Problems of Space and Time in modern natural sciences, vol. 15, L. 1991
11. S.M. Polyakov, O.M. Polyakov "Introduction in experimental gravitonics", pp. 58-59, M. 1991
12. V.A. Chernobrov "Mysteries of Time", M. 1999

Aetherodynamics as a New Field of Physics

Theory and Experiments

Vladimir A. Atsukovsky, Russia
Email: atsuk@dart.ru



A crisis exists these days both in Natural science on the whole, and, in its basis, i.e. physics. This situation is caused by fundamental errors in the methodology of its theory. The postulate method and predominance of mathematics above physical sense can be also considered as the reasons for this. Crisis situation has also taken place in the past and the way out was always to use a deeper level of matter organization than the accepted one.

A large amount of material on elementary particles of matter is collected in physics. It was discovered that all these particles can be transformed in each other. Besides that, there was discovered the ability of vacuum to create such particles at strong electromagnetic fields. In this connection it becomes clear that all these particles and vacuum have a common building material, i.e. a physical medium which fills all the world space. This medium was renamed **aether** and the element of the medium was renamed **amer**.

The worked out methodology of aetherodynamics allowed determining that aether is a usual viscous coercible gas for which all laws of usual dynamics of gases are valid. It has allowed to determine its characteristics for near-Earth space and then to describe the structures of primary stable elementary particles (i.e. proton, neutron, electron, photon, atomic nuclei, atoms and some molecules) as well as physical essence of general fundamental interactions (i.e. strong and weak

nuclear interactions, electromagnetic and gravitational interactions) and some physical phenomena.

Also developed was the model of aether circulation in the Universe within the limits of perpetually existent matter, usual Euclidean space, and evenly flowing time. Formation and decay of matter, formation and decay of celestial bodies and galaxies as well as functional classification of galaxies are also included there.

To confirm some theses the author and his research team conducted several experiments mainly on electromagnetism that gave positive results. The research was conducted on testing of the presence of aether wind. These research works have confirmed the results obtained by D. Miller in 1925.



Report by Vladimir A. Atsukovsky

Electromagnetic Gravitational Interaction

Vadim Y. Kosyev, Russia

<http://uft.h1.ru>; <http://uic.nnov.ru/~kovy2>

Email: uft@inbox.ru

In the article some mechanisms of electromagnetic gravitational interaction will be considered in the view of the Unified Theory of Field, Space and Time. See the complete description of The Unified Theory of Field, Space and Time at <http://uic.nnov.ru/~kovy2>; <http://uft.h1.ru> or in the book [1] which has the same title.

First of all, let us consider the structure of Space-Time where the radiation propagates. In our World gravitation is the unique substance which exists everywhere and gets over any obstacles. There are no known methods of insulation of gravitational field in modern science. It is impossible to imagine space and gravitation separately. Gravitation exists everywhere where there is some space. The gravitational field created by all masses of our metagalaxy is the aether in which cosmic objects move and electromagnetic oscillations are propagated. The space surrounds us since the whole matter carries gravitational charge of only one sign. From astronomical research of cosmic space it follows that radius of metagalaxy is equal to the critical (gravitational radius) and hence gravitational potential is equal to $c^2 \sim 10^{17} [m^2/c^2]$ in each point of space.

In our space the sum potential of the electric field is equal to zero. All bodies and space-time as a whole are electrically neutral. This assertion follows from two unique properties of gravitational space-time:

1. Values of electric charges of different signs of elementary particles are exactly equal.
2. There is an equal number of elementary particles which carry electric charges of different signs.

If electric potential is equal to zero in the given point of space then energy of alternating magnetic field passes entirely to the electric field and radiation gains the parameters of electromagnetic oscillations. However electric potential of positive and negative signs can prove its properties at the simultaneous charging of different local spatial regions. In the electric field the character of radiation differs from that one which is observed in ideal gravitational space-time (without electric potential).



In the presence of electric potential some part of magnetic energy is spent to create gravitational alternating field. Radiant energy is absorbed. Electrically charged spatial regions are perceived by us as filled with a strong absorbing substance. At the same time if the potential of the electric field can be compared to the potential of the gravitational field then spreading of radiation becomes impossible.

Change of both electric and gravitational field results in the creation of a magnetic field in the region of space-time which has a dual electrogravitational nature. Change in the magnetic field results in the creation of both electric and gravitational fields. The amplitude of electromagnetic and magnetogravitational constituents of the unified electromagnetic gravitational oscillations depends on field potential of opposite nature. The electromagnetic constituent is determined by gravitational potential and the magnetogravitational one is determined by electric potential. Transference of gravitational masses of matter in electrogravitational field-aether causes the creation of the proper magnetic field. Coming from the direction of magnetic field some force influences upon the moving electrically neutral masses. This force is similar to Lorentz force.

Electromagnetic gravitational converter designed according to the Searl Effect (Fig 1) visually demonstrates the mechanisms of electromagnetic gravitational interaction. A detailed description of the experiment is presented in the article [2] by Vladimir Roshchin and Sergey Godin (see <http://www.n-t.org/tp/ts/dms.htm>).

The device consists of a cylindrical stator of about 1 meter in diameter which is surrounded by 24 cylindrical rollers. Stator and rollers are made of magnetic material and they are magnetically linked (there is no contact between them). Vector of the magnetic field of the stator and rollers is vertically oriented along the axis of the cylinder but it has opposite direction. Rollers are mounted on the movable separator which circles round the stator. Each roller rotates on its axis in the same direction. The weight of the device is 350 kg. During rest, the device is electrically neutral and has proper gravitational charge, inertial mass, magnetostatic field of the stator and rollers.

On rotating of the magnetic system the following effects were observed:

- Depending on the frequency (up to 35%) the weight of the device was decreased.
- At a frequency of 550 rpm there is a spontaneous acceleration of the system and turns of the rotor abruptly increase (in quadratic dependence). To stabilize the mode it had to take off the excess energy to active load (up to 7 kWtt) by means of electromagnetic transducers.
- Magnetic field was distributed in a room as concentric surfaces of 5-8 cm thickness and 50-60 cm period. Depending on speed of rotation of the magnetic system there was a fixed temperature decrease from 0 to 8° within the regions of space which were curved by magnetic field.
- The glowing (corona discharge) appeared around the working converter.

Appearance of all mentioned effects is caused by the simultaneous presence of electric, magnetic and gravitational fields in the area of the converter.

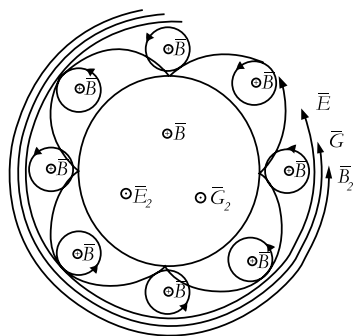


Fig. 1

Electromagnetic gravitational converter

Because of the Searl Effect a very complicated configuration of electric, magnetic and gravitational

fields appears in the device. Rollers having their own field $\mathbf{B}$ rotate around the stator which has its field $\mathbf{B}$. Cycloidal motion of numerous magnets which are built in the rollers causes change in the magnetic flux. EMF $\mathbf{E}$ appears in the area of rotation of the rollers. EMF is directed along the perimeter around the device. The electric field creates stationary waves which are registered around the device as concentric electromagnetic gravitational walls. Magnetic rollers should be made non-conducting in such a way as to allow electric field penetrating inside. In the presence of the electric potential change of the magnetic flux causes appearance of gravitational field $\mathbf{G}$. This field is directed along the perimeter around the device. In the presence of electric potential the Lorenz force influences the gravitational masses of the rollers. These gravitational masses move in the external magnetic field of the stator. The Lorenz force is directed transversely to the velocity along the cycloid and in the direction of the field $\mathbf{B}$. The value of the Lorenz force depends on the electrical potential, magnetic intensity, mass of the rollers and their traverse speed. The electric potential in its turn depends on speed of rotation of rotor of the magnetic system. As a result the Lorenz force depends on speed according to square law. Rotating gravitational masses of the rollers generate magnetic field $\mathbf{B}_2$. Field $\mathbf{B}_2$ generates derived fields $\mathbf{E}_2$ and $\mathbf{G}_2$ etc.

Spontaneous acceleration of the system does not depend on the direction of rotation. Directions of fields and forces change at change of the direction of rotation that corresponds to acceleration in the opposite direction. When the direction of rotation is changed the weight of the device changes. When rotation is in one direction the field $\mathbf{G}_2$ is directed upwards (decrease of weight), when rotation is in another direction, it is directed downwards (increase of weight). In the presence of electrical potential many other interesting but still unstudied phenomena are observed (for example, curve of space, change of speed of time-flow, changes of ambient temperature...). Magneto gravitational converter transforms gravitational energy of space-time into energy of electric field which in its turn is transformed into mechanical energy of the rotating magnetic system and electric energy of the load. Energy resources of the future are not coal and gas reserves or nuclear power. They are in the inexhaustible energy of gravitational aether of our space-time.

Reference

1. V.Ya. Kosyev. Unified Theory of Field, Space and Time. Nizniy Novgorod, "Arabesk", 2000.
2. New Energy Technologies #1, 2003, p.35.

Medium For Existing of Matter in Nature

Anatoly V. Rykov, Russia
Email: rykov@uipe-ras.scgis.ru

By medium for existing of matter in Nature we understand physical vacuum which is a category determining all spheres of matter “life” (from particles of microworld to gravitational interactions in the Universe). Matter can not exist without this medium. Thus a question emerges, viz: how physical science can be developed without taking this fundamental aspect into consideration?

According to the Einstein postulate, in a void light always propagates with limited speed, which does not depend on the motion mode of a radiating body. It is a statement of deep physical sense which lies in the fact that only some physical medium can possess such a property. Indeed, if velocity of light, which was radiated by a body, further does not depend on speed of this body then it is possible only in a certain medium. For example, in air sound propagates with a certain speed which does not depend on the speed of the source and is determined only by density and volume elasticity of air. Thus, according to the Einstein postulate, there is a physical medium instead of void and velocity of light depends on the parameters of this medium (as is well known, velocity of light is equal to the square root from the product of inverse values of electrical and magnetic conductivity of vacuum).

The author of this article made an attempt to research this physical medium [1]. The author used a well-known experimental fact that at interaction of a photon with a charged real particle this photon transforms to electron-positron pair. Besides, it was taken into consideration that photon is an electromagnetic phenomenon. The research allows the following conclusion: the medium named in physics as vacuum (before the XX century it was called aether) is created by electric dipoles from (+) and (-) elementary charges. These dipoles are surrounded by magnetic (mass) continuum. There were determined dipole intervals, elasticity of decompression and ultimate strength of this interval. What does this model of medium mean?

1. This model is a physical validating for the “birth” of electron-positron pair at energy which is necessary to break dipole and create the “clot” of mass of

these two particles. A certain model for the “birth” of mass must exist. It is not clear as yet but can be represented as a vortex of magnetic continuum inside the charge shell of electron and positron.

2. Let us suggest that values of (+) and (-) charges differ at 7.848981×10^{41} Coulomb, then this difference is sufficient for the medium to be a source of gravitation and inertia. According to Newton’s law of gravity, a weak electric charge of medium (all material bodies exist in this medium) causes all bodies to attract one another (under Coulomb’s law). On the other hand, weak medium charge of a like sign creates repulsive forces which manifest themselves in the form of the expanding Universe. Thus it becomes clear the amazing uniformity of gravity and forces of negative pressure for the Universe. The mentioned difference of values of (+) and (-) charges of medium dipoles is not used as arbitrary parameter but it logically follows from its electrical structure [2].

3. Hypothesis of nature of gravitation is confirmed by calculations of the deflection angle of electric waves by the Sun. Calculated angle differs from the experimental value only in the fifth sign, which depends on the accuracy of several physical values used in calculation formula. There is practically an absolute coincidence with Einstein’s theory. The difference is that it is a concept of space and time (i.e. geometry) which prevails in the general theory of relativity while in the nature of gravitation physical basing is used. Velocity of light is unstable and determined by medium state which depends on electric, magnetic and gravitational potentials.

4. The existence of “black holes” relates to medium structure and nature of gravitation. At the edge of “black holes” the ultimate acceleration from gravity is realized. It causes breakdown of connections in electric dipoles of medium, creation of matter and antimatter (the so called “evaporation” of black holes which was theoretically predicted by E. Hoking, England). However at the border of a black hole the velocity of light is equal to zero since its propagation

medium disappears. According to Einstein's theory it is such a deceleration of time that electromagnetic oscillations gain zero frequency.

5. Naturally the medium is a carrier of all types of electromagnetic radiation, beginning at stationary electric voltage and ending with super-high-frequency "photons", which can be determined not as electromagnetic but as magnetoelectric phenomenon. In the latter case magnetic continuum of medium has a crucial importance since it determines very small degrees of magnetoelectric disturbance. These degrees are thousands of times less than those of a hydrogen atom. It is reasonable that such small degrees creates illusion that a photon possesses properties of particles.

6. Medium structure directly leads to the notions of Quantum Mechanics, beginning at quantification of electronic "orbits" in atoms. This medium determines the "allowed" spots for electrons to be placed around a nucleus. Thus medium is a necessary place for the existence of all matter or matter of the Universe. The so called Compton length of electron wave is one of the validations of this statement. It is directly calculated to a high accuracy according to electric structure of vacuum.

7. Thus Plank's constant is not a mysterious "quantum of action", on the contrary it is entirely determined by medium parameters. Thereby the crisis (which conventional physics is accused of) can be logically overcome by the introduction of medium which is capable to take radiation in electromagnetic region only by quanta. Plank's constant is always presented at all quantum approaches. It is additional evidence in favor of the necessity to take into account the medium as natural place for existence of all the matter in Nature.

8. It is still a question what processes take place in the centers of galaxies. The observations show that the centers of galaxies create star matter. They often flow out the centers and settle themselves at approximately the same plane. It is an evidence of the fact that centers of galaxies quickly rotate and the favorable conditions for stars to reject matter are created. Similarly planetary systems are created around the rotating stars. It is thought that centers of galaxies are gigantic black holes. In the context of the concept of medium for matter existence it can be set up a hypothesis that being at some special state the medium creates stellar systems, i.e. galaxies.

9. Astrophysicists more and more trend to accept the existence of unknown "dark" matter, which occupies approximately 70% of all matter. It is said that due to antigravitation property this dark matter is responsible for the expansion of the Universe. Hypothesis on the nature of gravitation gives the affirmative replies to such suggestions as: expansion of the Universe is caused by weak electric charge of the medium and distributed mass of magnetic continuum is the very dark matter.

10. All elementary particles (electrons, positrons, mesons, protons, neutrons etc.) are in the medium and interact with it. In the case of electrons and positrons this interaction causes the great extension of dipoles of medium which directly adjoins to borders of particles. This extension helps photons to break the particles. In case of protons, there is such a breakdown of the medium at their borders that protons turn to be dressed in "coats" of virtual electrons and positrons. And medium is shown to be in entire state only when reaching the first Bohr orbit. This interaction of the medium and particles leads to the factors which determine the life time of some of them. Thus life time of a neutron is up to 30 minutes depending on the state which it has while leaving the nucleus. For mesons "the tearing" Coulomb forces, which exist between the medium and particles, are very powerful that makes the life time of mesons very short. However if the particles moves with a high speed relatively to the medium, then these forces noticeably decrease and if the speeds of motion is close to velocity of light then these forces become very small. The life time of such particles noticeably increases. In Einstein's theory it is said about "deceleration" of time. Finally the life time of particles is determined by the inner steadiness and outer influence of the medium. Protons have fantastic binding energy and they cause such great external destructive effect that their life time becomes immense.

11. When particles move in medium with high speeds, there is a concentration of magnetic continuum which is recognized as increase of mass of particles at increase of their speed. Evidently, we can continue the list of physical phenomena which relate to the presence of medium for existing of matter in Nature. However it seems to be enough to admit that medium (physical vacuum, aether) is of a great importance for the very existence of the Universe and for the processes which take place there. "Mechanism" of gravitation and inertia has a special importance since

it is the only thing which can make clear the real mechanism of Nature. It is possible that the methodology, which is accepted in physics, is necessary for more accurate description of phenomena but it is not enough for understanding of the nature of “space” and matter. Research of the medium for existing of matter will be able to meet the conditions sufficiency.

The understanding of vacuum structure, which is created by electric lattice from charge dipoles, surrounded with magnetic continuum, gives an opportunity to control the forces of gravitation and inertia. The medium of vacuum can be influenced by:

1. The radiation which has frequencies coming to the frequency from point #11 of the list of parameters.
2. Electric voltages which exist in vacuum (it is not

very promising because of real matter breakdown).

3. Magnetic intensities (magnetic flux density). It is the most promising influence method (1-10 Tesla is enough to compensate terrestrial gravity).

4. Transformations of low accelerations to high accelerations of impact type.

Potential electric and magnetic energy is immense in vacuum medium. Reasoning from energy of one dipole, which is equal to 1.6×10^{-13} Joule, we will derive the value of electric energy equal to about 10^{+31} Joule per one cubic meter of the medium that is equivalent to mass annihilation of 10^{+15} kg!

References

1. Rykov A.V. Foundations of aether theory// RAS, M., 2000, p. 54
2. Rykov A.V. Hypothesis on the nature of gravitation// MSU, M., 2001, pp. 59-63

Spartak M. Polyakov

(09 January, 1931 – 04 June, 2003)




Spartak M. Polyakov, a legendary physicist-experimentalist, known for his research in the field of gravitation, has died. Polyakov was the author of more than 50 research works, among them “Introduction into experimental gravitonics». Polyakov was the creator of the new model of photon. He also conducted numerous research in the field of electrodynamics, gravitational phenomena and superlight connection.

Spartak M. Polyakov graduated from Kishinev State University with degree in “General Physics”. For many years he worked at the top secret military engineering department “Istok” (Russia).

Polyakov’s alternative physical theory allows explaining such phenomena as magnetostriction and optical magnetization. The basic postulate of this theory states that the speed of propagation of gravitational waves is dozens of times faster than velocity of light regarded by the traditional science as the limit. In his experiments Polyakov demonstrated such methods of generation of gravitational waves as precession of gyroscope and remagnetization of ferromagnetic.

While working for “Istok”, Polyakov designed on his own a device which is possibly the first gravitational motor in history. Total specific thrust produced by rotation of gravitating mass comes to 2.5 kg/kWt. This index is close to that produced by the engines of modern helicopters, which is equal to 8 kg/kWt. Practical application and further development of Polyakov’s ideas can provide humanity with new kinds of communication, gravitational engines and free energy devices.

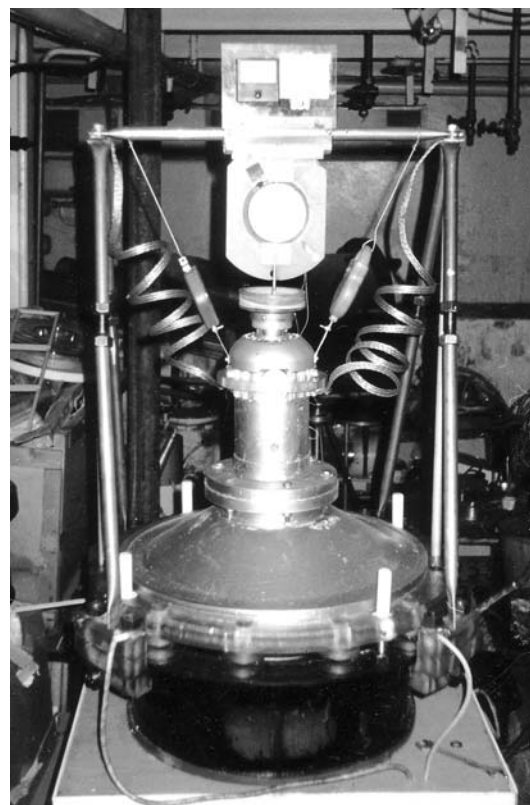



Principle of Operation and Experimental Data

Sergey S. Abramov, Russia

Email: a_serge@cards.lanck.net



Adams' motor-generator represents the type of devices which use, as their creators claim, so-called "free energy". The term "Zero point energy" is also used in some sources [1, 2]. Due to quanta-mechanical fluctuations, this energy exists even at zero temperature. Adams' motor-generator belongs to the group of Switch reluctance motors [3]. Robert Adams, **former Chairman of the Institute of Electrical Electronics Engineers, USA (New Zealand section)**, designed this machine in the late sixties of 20th century. Similarly to all the devices utilizing free energy (referred to in some sources as "overunity devices"), Adams' device remains practically unknown to the general public. **The device is rather simple to assembled even at home, which I experimentally proved. However, it is necessary to be very careful while choosing the model parameters. As to the latter I have managed to collect quite a big number of instructions from existing sources; the summary of these instructions is presented below in this article. Based on these instructions, a low-power model can be assembled even without a mathematical analysis and modeling of electromagnetic field. Such model would certainly facilitate optimization of the device.**

Adams' motor is most frequently a DC machine; however, it can also use an AC source through a rectifier. In the latter case only the adjustment of the device and its control system can be provided.

Editorial: We disagree with some assertions of the author; however this article is of great interest.

My experiments on my own model do not yet allow me to make an unambiguously positive conclusion concerning the possibility to generate excessive energy. Experiments with my new control system designed on the base of AVR controller AT90s2313-10PI (it is

produced by Atmel company (<http://www.atmel.com>) will allow to be more specific. Below there is a general analysis of the motor principle of operation and a number of recommendations concerning the construction and technology. I do not propose to take this as compulsory rules to follow; other technical solutions are possible.

Basing on the principle described in this article, R. Adams (the link to his articles is available at: <http://www.aethmogen.com/wri/intro.shtml>) created a few DC motor-generators which operate on permanent magnets. Some of them, according to information found on the Internet, have manifested 690% electrical efficiency and 620% mechanical efficiency. These devices operate at room temperature without overheating. My device has shown between 1 and 3 degrees overheating after an hour of functioning. However, it is easy to prove that such overheating is predictable for an average current of 0.15 A in coils of 35 mm long and 25 mm in cross sectional diameter. I have not been able to prove the data published on the Internet concerning the Adams motor capability to operate when the stator temperature is a few degrees lower than that of the environment. The temperature of the coil and of the power transistor is a good indicator of correctness of the circuit set-up and of functioning of the control circuit. There were cases when transistor and coil were noticeably heated after adjustment. Usually this was explained by a bad choice of points of transistor switching or by too extensive current impulses in the stator (which must amount to approximately 25% of period length). After the required adjustment the motor continued to operate almost without overheating.

Adams' motor was first mentioned in Australian Nexus Magazine in 1992. Later, Harold Aspden (Britain) proposed a slightly improved version of the motor and received Great Britain patent No. 282708 [4], which strongly reminds of the original version published by the above magazine. **Adams' device** represents an electrical motor and/or generator consisting of a rotor

with radially directed permanent magnets and of a stator also constructed with a few radially directed and periodically magnetized cores with winding. (Fig. 1). In some models axial orientation of magnets and coils are also used.

Permanently magnetized poles of rotor can include any number of poles, even an odd number. Analogous poles of the magnets (all N poles or all S poles) are directed outside. A version with alternating poles is also possible; such model allows the torque to increase. In this case, after passing a rotor pole the stator is demagnetized by the current impulse and begins to be attracted by the magnet of different polarity. This circuit requires a more complicated control; on the other hand, it manifested rather good results in certain models.

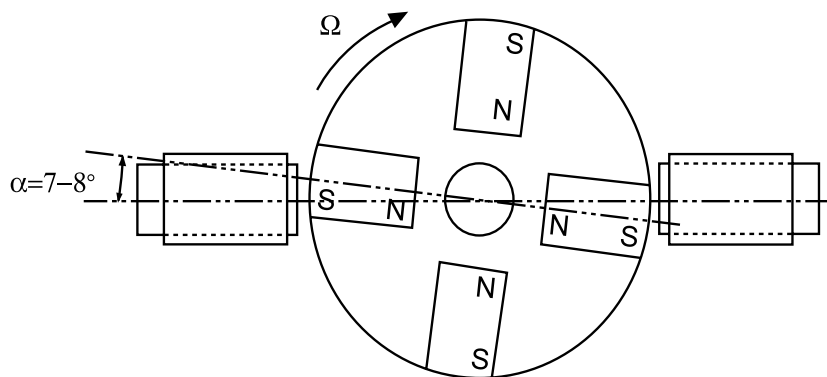


Fig. 1

Poles with winding placed on the rotor are radially oriented in order to obtain a supply of energy emerging as a result of the influence of counter emf from the rotor poles. Steel or iron cores are used for the poles of the stator with winding. It is also possible to use other materials, at that the core must have high magnetic inductivity and low level of magnetization reversal losses. The stator winding consists of a few hundred turns. The current induced by the magnet in this winding will have the polarity which will cause repulsion of the magnet. Since the electromagnetic state of stator changes quite significantly and quite fast, then the stator core can be considered to be the most crucial element of the device. Ignoring this fact was one of the most frequent mistakes made by those who tried to reproduce Adams motor.

The current induced in the stator is the function of:

- field size,
- number of winding turns,
- speed of flux changes.

Resultant parameters of this device cause each pole to

be attracted or repulsed by stator poles when the rotor is in certain position in case when the rotor is unbalanced. To achieve this effect it is required to switch the input current in control coils after the signal from sensor of rotor position. R. Adams used a mechanical switch as a sensor. My device and a number of other devices use the signal from two Hall sensors. However, according to experimenters' information, better results are achieved if a position optical sensor is used.

Time of switching of impulses is determined by the size of the motor itself, i.e. the speed of motor rotation, location of rotor magnets towards the stator windings and the distance the rotor magnets pass while moving by the poles with stator winding.

It is necessary to take into account that any part of this motor can be modeled based on the existing electromagnetic theory and no part of the motor is in conflict with any laws of electromagnetism. There are so many ways to construct Adams' motor that any version may be considered to be correct.

One can say that the frequently pulsating electromagnetic process in the stator core is what allows Adams' device to function as a kind of diode which borrows energy from the field

of permanent magnet but then does not return that energy in full.

5 stages can be defined in the periodical process which takes place in stator:

1. The magnet is attracted to the stator core. The permanent magnet is attracted to the iron core of the stator with winding. While doing so no consumption of electrical current takes place. It is as if kinetic energy is borrowed from an internal ferrite magnetic source and is supposed to be returned into the stator.
2. Stator core is magnetized. During the period when the magnet is positioned in front of stator core they both comprise a single magnetic conductor with an air gap and the stator core becomes an extension of the magnet side it faces. It is usually supposed that the energy "borrowed" on the first stage is getting back now.
3. Stator core is demagnetized. When the stator core becomes rotor magnet extension, the circuit closes and current impulse gets to stator windings. I have seen the instructions saying that the angle between

stator axles and rotor magnet must amount to 7-8 degrees as shown in Fig. 1. However, my model made it clear that at increase of speed of rotation it is necessary to start the coil a little earlier, when the magnet axle has not reached the stator axle. Probably this applies to the circuit with a Hall sensor only and if an optical switching is used the making angle will be different.

Magnetic field of this current acts to compensate magnetization of the stator, which is caused by the field of rotor magnet. Consequently, the summed current significantly compensates attractive force between rotor and stator and the rotor can freely rotate by using the inertia obtained at stage 1. This process is characterized by the fact that this current impulse is amplified by the current induced in the stator winding by rotor magnet which, in accordance with Lenz law (1834), counteracts the power which induced it. Consequently, kinetic energy obtained as a result of attraction of the rotor to the stator at stage 1 is transformed into electrical demagnetizing impulse in stator winding during the period when the rotor and stator directions are congruent. This is the unique overunity characteristic of this model. However it is obvious that instead of returning this energy the motor transforms it into electromagnetic demagnetizing field.

4. Restoration: when the rotor is removed from the stator attraction zone the latter loses energy and returns to its initial demagnetized state. Decreasing electromagnetic field creates a current wave of reverse polarity which can be stored in the capacitor.

5. Reiteration of the process: This periodical process is renewed as described in stage 1 during the next magnetization of the stator, excluding the fact that emf preliminarily stored in the capacitor, on term of presence of suitable electrical circuit, can be used for facilitating stator demagnetization or even used to supply the load.

It may be briefly summarized that the frequently pulsating electromagnetic process in the stator core is what allows Adams device to function as a kind of diode which borrows energy from the field of the permanent magnet but does not return that energy in full. The important characteristic of such motors is that the stator windings are used for demagnetizing and not for magnetizing as it could seem from the first sight.

It is noteworthy that there is a small pause between attraction to the stator and repulsion from the stator. The effect of attraction to the core takes place a split second before the repulsion effect manifests clearly. This pause being the reason of electromagnetic asymmetry

creates conditions necessary for achieving overunity effect. If the attraction to the core and repulsion by means of Lenz currents were taking place simultaneously and with the same power there would not be any overunity characteristics. That is why the rotor must be as lightweight as possible. From this point of view, T. Harwood's model is the most lightweight of the known models. In Harwood's device the magnets are mounted between two CD disks fixed on the shaft by means of plastic washers and glue. My model is heavier, which can be considered as one of its disadvantages.

The principle of operation of Adams' motor is based on the balance, which creates the electromagnetic asymmetry. To get the motor to operate the magnet must be attracted to the stator core which must have a smaller cross-section area in order to create attraction without any significant repulsion effect from the stator windings mentioned above. When stator and rotor axles are congruent the Lenz induced current must be sufficient for compensating the natural attraction of the magnet to the stator core. Consequently, stator windings must have enough turns for demagnetizing effect, but not to the extent that this effect fully manifests before the rotor reaches the stator axle when Lenz current has its maximal value.

During my experiments at 12 V voltage and on using two independently controlled stator coils the speed of rotation reached 3400 rpm. Please note that while reproducing such device it is necessary to take certain measures in order to ensure safety in case of possible breakdown. **The magnet disconnected from the rotor may be dangerous!**

Technological recommendations are as follows:

1. The device must be low power. It is better not to try to begin with a motor functioning in kilowatt range. This is feasible only on condition of having all necessary technological documentation which is not available at the moment.
2. The preferable voltage for the first model is 12 V. If the voltage is less the speed of rotation is too slow for indicating the expected characteristics of the device.
3. The best magnets are ferrite ones with dimensions 4x4x5 (where 5 is the magnet length). The practice has shown that at 12 V voltage neodymium-iron-boric (NdFeB) magnets cause a jerky rotation of the rotor.
4. The side of the stator core facing the rotor must

Control circuit with hall sensors


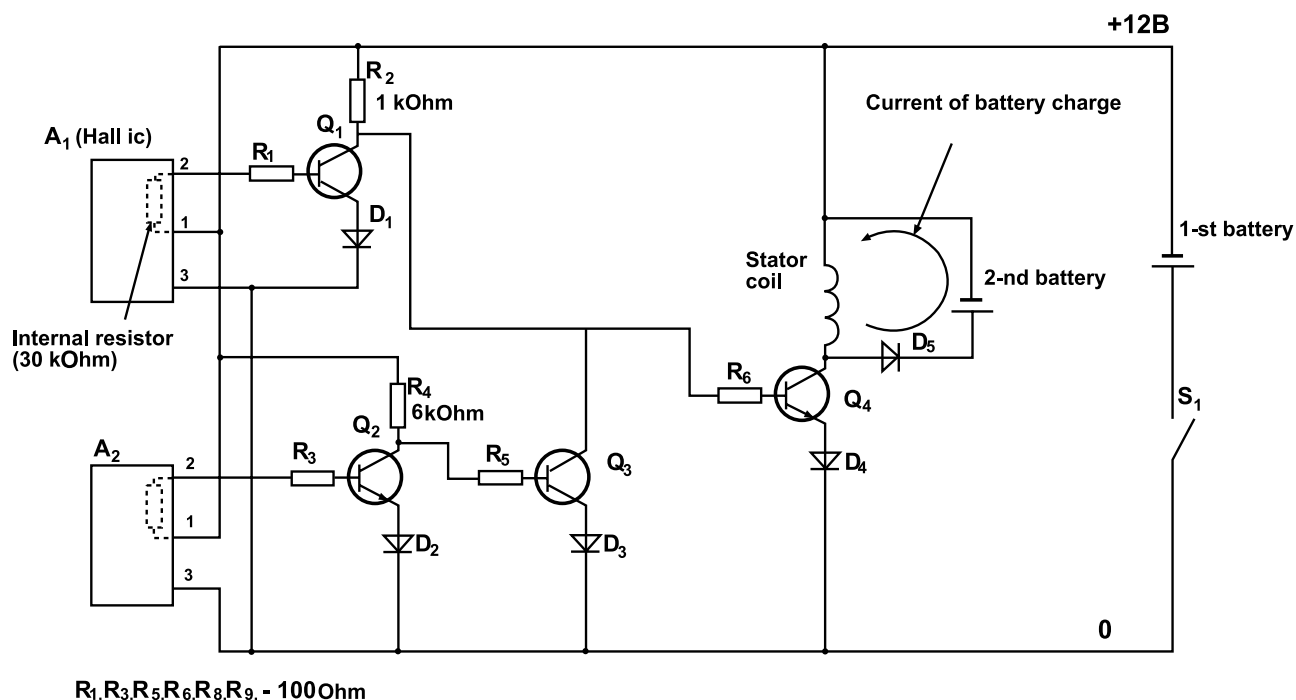


Fig. 2

have the size which is 4 times smaller than the corresponding side of the magnet. If cross-section area of the stator is larger, a bigger part of magnet field comes to the stator core when their axes coincide and thus there is nothing to induce Lenz' currents in the stator windings. It is a common point of view that it is necessary to try to minimize the volume of a

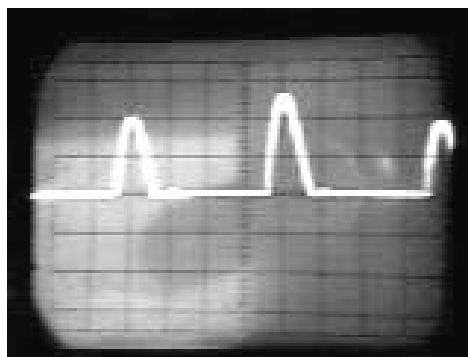

device and to obtain the maximum efficiency at minimal material expense. In practice, it has always been the goal while designing electrical machines to decrease losses in stator I^2R . As for the Adams motor, it requires not only the use of disproportionate magnets but also stator windings with disproportionate number of turns specially designed to obtain maximum Lenz' currents that is achieved by hundred of turns of winding.

5. It is necessary to define approximately the effective zone of the magnet field. If practically applicable magnet field is equal to, for example, 8 cm, and the stator has a 10 cm long winding, then more than 20% of turns will not be efficiently crossed by magnetic force lines and will only create an excessive mass of the device. To define the degree of effective action of the magnet we can put a

paperclip on the table and move it gradually in direction of the magnet until the paperclip is attracted to it. Actually if we take into account friction losses then the magnet influence zone will be a little larger. That is why the stator winding in the axle direction can be 10% larger than that in this experiment. The description of this test has been found on Tim Harwood's website

(<http://www.geocities.com/theadamsmotor/cdmotor.html>).

6. The air gap clearance between the stator and the rotor must not exceed 1.5 mm.

7. Use as little metal in the device as possible. It is preferable that the metal is used in the core and stator windings only.

In order to increase the efficiency of this motor, it is necessary to build it in a manner, which allows removing the counter emf from the stator windings. To do that, this emf may be taken off and stored in the capacitor. The article published by Nexus magazine and Great Britain patent No. 282708 consider special generator windings; however, no sufficiently detailed data on operating rules are provided. Michael Smith (Australia, <http://www.Fortunecity.com/greenfield/bp/16/content1.htm>) has unequivocally informed me in one of his letters that

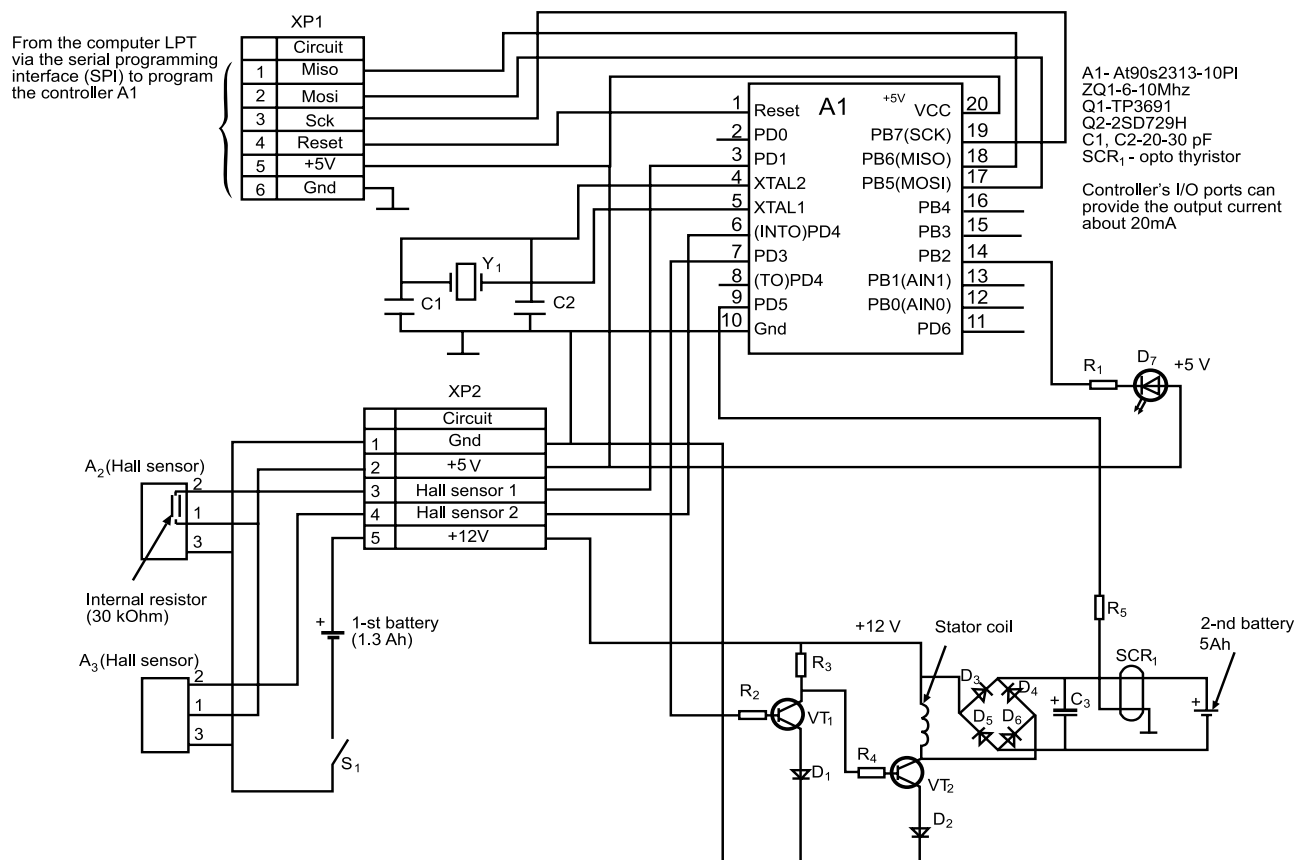


Fig. 3

he has not achieved generation of excessive energy in such a system. During his experiments a two-battery circuit proved to be more effective. In this circuit, during a part of periodical process the energy is stored in the capacitor and then a command is transferred to a thyristor, which discharges it into the second battery. At that capacity, the second battery must be no less than 4 times more than the capacity of the first one. Otherwise the excessive energy does not have enough time to be stored during the discharge. I have also managed to provide the charge of the second battery, but the control circuit has not been assembled fully yet, as it is shown below in Fig. 4. Better results are expected when its final adjustments together with AT90s2313 controller program have been made.

I managed to start my first model of the motor in April, 2002. Afterwards, I spent approximately six months increasing its rotational speed from 750 to 3200-3400 rpm, decreasing vibrations and improving control

circuit. In order to achieve a better rotor balance I had to re-construct it twice. It is very important to align the axes of the bearings with maximum precision; otherwise a considerable decelerating torque will manifest. The shaft penetrates the lower moving base. It is possible to rotate the base at a small angle for the precise alignment of axes and then to fix it with screws and nuts.

In order to increase the efficiency of this motor, it is necessary to build it in a manner, which allows removing the counter emf from the stator windings.

In order to decrease aerodynamic losses, two veneer parts are mounted between the magnets. Thus I managed to increase the speed, although the rotor weight has also been increased.

Stator cores are made of plates taken from a disassembled radio transformer. Tim Harwood used nails with winding, however, my own results with such core proved to be poor. Dimensions of the core are 10x11x50 mm.

The type of power source is also important. First, I connected a 9 Volt accumulator of "Krona" type in series

with three metal-hydride 1.2 V accumulators. The speed of rotation did not exceed 1500 rpm. But when I used a lead/acid accumulator with 1.3 Ah capacity, the speed increased to 2600 rpm if there was one coil on the stator.

Four magnets mounted on the rotor have the dimensions of 20x20x35 mm and are fixed on a 105 mm glass fiber laminate disk. The current impulses proved to be too wide, by up to 40%. In order to make them shorter (down to 25-30%), I had to use the control circuit (Fig. 2) with two Hall sensors. At the signal from the first sensor the stator current is started, the second sensor switches it off. Many experimenters used a timer to control the impulse length while working with Adams' motor that is more practical since impulses are supposed to be wider during the start. I took this factor into account while designing the controller circuit. Current impulses are shown in Fig. 3. Their fronts are supposed to be shorter; it is probable that the coil has more inductivity than necessary. The impulses amplitudes are slightly different which is explained both by the difference in volume of induction of the magnets and by difficulty in achieving similar air gaps while working at home.

I have provided the charge mode of the 2-nd battery at my two-battery design. After 75 minutes of operation of the device the source lost 0.17 Volt whereas the second battery was charged at 0.36 Volt. The capacity of both batteries in this experiment was equal. Besides after such charging the second battery started to discharge quickly. The circuit where stator current charges the battery directly has to be considered ineffectual (see Fig. 1). To evaluate the charge, which is gained in non-hermetic accumulators, the density of electrolyte can be measured.

To obtain a more uniform torque I added the second stator which is controlled independently. This required installing two more Hall sensors and an additional power transistor. The angle between axes of the coils amounts to 135 ($180-90.2=135$) degrees. When the current is present in one part of the stator it is absent in another and vice versa. The speed has increased up to 3200-3400 rpm, and I deemed the further increasing of this characteristic unnecessary.

Increasing the number of circuit elements does not seem a good idea. Furthermore the adjustment process becomes more complicated. In order to improve the circuit of battery charge adding a timer circuit is required. Thus, I decided to use a controller circuit. A simple Basic program has been developed for AVR controllers. This

program operates in mode similar to transistor circuit, but its capability can be significantly increased due to the built-in processor timers. Today program improvement is the most efficient way to solve the task of generation of excess energy in this circuit.

This article is meant to elucidate the principles of operation of one of the simplest devices which pretend to become an "overunity device", "free energy machine", "perpetual motion machine", whatever you call it. Probably someone will try to create such motor-generators on their own. I hope that my article will serve as a guide and will help to avoid the mistakes made by many experimenters (including myself) before they managed to build their own model.

References

1. Puthoff H.E. Source of vacuum electromagnetic zero-point energy. Phys. Rev. A 40:4857-4862; also 44. 3385-3386
2. Bernard Haich, Alfonso Rueda, Puthoff H.E. Physics of the zero-point field: implications for inertia, gravitation and mass. Speculation in Science and Technology, Vol.20, p.p. 99-114, 1997 (preprint version)
3. Miller, Switched Reluctancy Motors & Their Controls, ISBN: 10881855-02-03
4. Patent No. GB 2,282,708 (from NEN, Vol. 4, No. 8, December 1996, pp. 1-7).

INFINITE ENERGY

Cold Fusion and New Energy Technology
Including Conventional and Renewable Energy

Infinite Energy Magazine



* Cold Fusion * New Energy
* New Science
* New Technology
Subscriptions, 6 Issues Per Year
\$29.95 North America
\$49.95 Foreign
Single Sample Copy
\$5.95 North America, \$10.00 Foreign

Infinite Energy Magazine
P.O. Box 2816-FV
Concord, NH 03302-2816
Phone: 603-228-4516 Fax: 603-224-5975
<http://www.infinite-energy.com>

Prediction and Experiment on Field Transformation in the Model of Extended Space

Dmitry Yu. Tsipenyuk, Russia

119991, Vavilov str, 38, Moscow

E-mail: tsip@kapella.gpi.ru



A series of preliminary experiments on checking the possibility of generation of gravitational field at deceleration of charged massive particles in matter was carried out.

Introduction

In previous works [1-3] generalization of the special theory of relativity (STR) for the five-dimensional extended space with metric (+;-;-;-) was offered.

The model of extended space (ESM), combining electromagnetic and gravitational interactions, was made. For this, there was made (1+3)-dimensional space extension $M(T; \vec{X})$ of Minkovsky to (1+4)-dimensional space $G(T; \vec{X}, S)$. Let us call it extended space. As the 5-th additional coordinate the value already existing in Minkovsky space, i.e, S interval

$$s^2 = (ct)^2 - x^2 - y^2 - z^2 \quad (1),$$

is used.

Let us note that attempts to combine gravitation and electromagnetism have a substantial background.

Modern approaches to this problem trace back to the work of F. Klein [10] in which he proved that classical Hamiltonian mechanics can be represented as optics in the space of a great number of dimensions.

Then T. Kaluza tried to generalize Einstein's theory of gravitation to include electromagnetism in this theory as well [11]. He proposed to consider (1+4)-dimensional space with metric depending on potentials of the electromagnetic field. Kaluza's idea was evolved by O. Klein [12], G. Mandel [13] and V. Fock, and the model they had created got the name of the Kaluza-Klein theory. They proved that the trajectory of a charged particle has the form of a geodesic line with zero-length in 5-dimensional space.

In his works on 5-optics Y. Rummer [15] proposed to assign action dimensionality to the new dimension and to consider it periodical with the period equal to Planck's constant. Note that rest mass of particles in all these constructions unlike the model of extended space evolved in the works [1-7] was considered a fixed value. Subsequent development of multidimensional theories is given in the monograph [16].

A separate approach is represented by multidimensional constructions in the theory of strings and superstrings [17].

Approach to construction of (1+4) dimensional space evolved in [18] is close to the proposed model of extended space. Here it is proposed to use mass (matter) as the 5-th coordinate. However, in this model, as its originators admit, it is impossible, for example, to create the energy-pulse tensor. There is no such disadvantage in the extended space model [8].

Mechanics of a material point [1, 2, 7] and electrodynamics [1, 8] were made in the introduced extended space. Besides Lienar-Vihert potentials [6, 19] corresponding to such a model were also considered and properties of solutions of Maxwell augmented system of equations which are in conformity with these potentials were analyzed there.

Gravitational effects in extended space, such as the second orbital velocity, red shift and light deflection [4, 20, 21] were considered. It is proved that the formulas received in the general theory of relativity for calculation of values of these effects can be received by an absolutely different method within the framework of the extended space model as well.

It was proved [6, 19] that the fields in the model of extended space can change their signs. Such change of field-intensity sign and, consequently, change of sign of Lorenz force can be associated with radiation reaction of these fields which occurs when charged particles move with acceleration.

Thus, on the one hand, it was proved in the model of extended space that it is possible to get certain formulas describing gravitational effects of the general theory of relativity [4,20] using the technique of turns in extended space. On the other hand, it was proved that the electromagnetic field can be a source of gravitational field [6, 19].

Besides, a moving massively charged particle under deceleration can create a variable gravitational field around itself [9, 6, 19]. The following experiment was offered for experimental check of the latter assumption. In this experiment probable occurrence of gravitational field at deceleration of relativistic electrons was determined by change of oscillations of a massive torsion pendulum.

Experimental device

A narrow bunch of relativistic electrons from a microtron 1 (average power of the bunch is 450 Wt, electrons energy is 30 MeV) was directed to a brake target (position 2 or 3) made of wolfram exactly where deceleration of accelerated electrons took place.

A special torsion pendulum suspended on a vertical suspender 5 made of a springy metallic string with 1,8 mm diameter was placed near the brake target to register gravitational field which could probably appear at electrons deceleration. The length of the suspender made is 85 cm. The pendulum could rotate freely on the suspender only in horizontal plane.

The pendulum consisted of a light aluminum rod 4 (with a length of 120 cm) on the ends of which massive loads 6 and 7 made of non-magnetic material were fixed. The weight of each load was equal to 4kg. In the center a pendulum was fastened to a vertical suspender 5 by a special mounting preventing slippage during turns. To reduce the influence of magnetic inducings the pendulum was grounded and additionally screened by metallic grid from all sides. The period of free oscillations of the pendulum made were about 40 s.

Rigidity of the pendulum vertical suspender could be changed by means of limiting the length of effectively operating part of the suspender. As a result, the period of oscillations could be continuously changed within the limits of 40 to 27 s.

To reduce the influence of mechanical noise and to introduce additional attenuation in pendulum oscillations two liquid dampers 10 and 11 located near the pendulum massive loads were used.

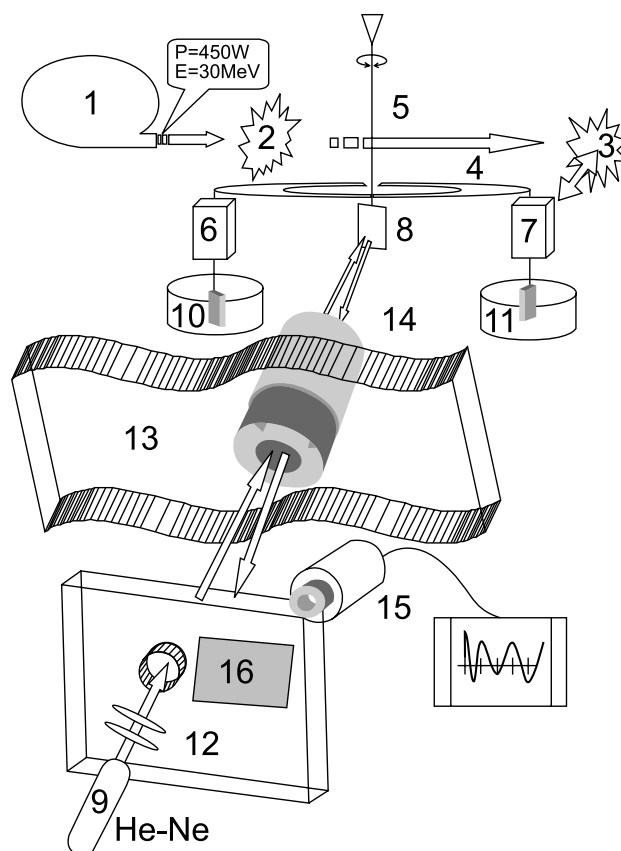


Fig. 1

Experimental device

1 – microtron, brake target made of wolfram – positions 2 or 3, 4 – rod, 5 – vertical suspender, 6 and 7 – massive loads, 8 – mirror, 9 – He-Ne laser, 10 and 11 – liquid dampers, 12 – optical system, 13 – concrete protection, 14 – observation channel, 15 – video system, 16 – screen.

Pendulum deflections were observed on a graduated screen by deflection of a laser beam reflected from a flat mirror 8. For this, the beam from a continuous He-Ne laser 9 through the optical system 12, which constricts the divergence angle of the laser beam, was directed to the mirror through a special narrow channel 14, located in concrete protection 13 around the microtron. By means of a video system 15 the beam reflected by the mirror was registered on the screen 16 located at a distance of 500 cm from the mirror. The video system allowed remote checking of vibrations of the laser spot and additionally enlarged the visual angle up to 12 times. The diameter of a focused laser beam on the screen was made 0.15 mm. The maximum turn angle of pendulum for the reflected beam to remain within the receiving channel was approximately 2 degrees. The accuracy of turn angle registration of the whole system was 5×10^{-4} degrees.

The pendulum was placed in such a way that one of the massive loads were close to the brake target at a distance

of about 20 cm. There was also an opportunity to move the brake target from one end of the pendulum (position 2) to the other (position 3). This allowed changing the place of deceleration of electron bunch at constant parameters of all unaccounted mechanical noise and magnetic inducing. Thus, direction of pendulum torsion was changed under probable exposure of occurring gravitational radiation.

Below there is a photo of the experimental plant (see also the colored photo on the cover page).



Calibration Measurements

To make measurements it was necessary to select optimal parameters of the pendulum (masses of loads, suspender rigidity and the value of oscillations attenuation). On the one hand, while carrying out the measurement it is desirable that the amplitude of pendulum oscillations should be as maximal as possible. On the other hand, the beam reflected from the mirror should not go outside the limits of observation, restricted by the diameter of the narrow observation channel in radiation protection around the accelerator. Besides, the typical operating time of the loaded accelerator usually is 10-15 minutes. Necessity to accumulate the minimum of sufficient statistical data within this time limited oscillations period and the time of setting of the pendulum in a new equilibrium position at outside influence. All these requirements were as far as possible taken into account during selection of the final setting parameters.

An example of free oscillations of the pendulum in the presence of minor mechanical vibrations caused by the operating of vacuum pumps is given in Fig 2, series I (the experiment took place on 31 May, 2001). The diagram shows the amplitude of laser beam oscillations on the screen 16 (upper and lower rows of values) depending on the number of oscillation. The laser beam is reflected from the mirror 8 which was fixed to the pendulum. The diagram also shows the current central equilibrium position (the central row) calculated by these amplitudes. Series I represents oscillations at influence

of the background mechanical noise. Series II represents the response of the pendulum to minor permanent outside force. Accuracy in determination of position of the center of a light spot was 0.1 mm.

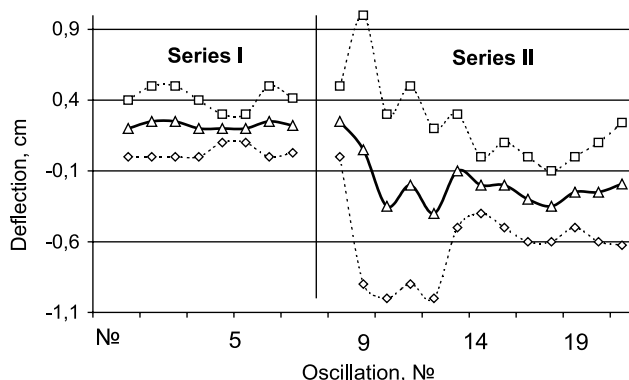


Fig. 2

Calibration Measurement 31 May, 2001

Measurement was carried out with one liquid damper in service and with increased rigidity of suspender (it was made by means of limiting the effectively operating suspender length). The period of free oscillations in these series was 29 sec. In this case there were set continuous oscillations of the pendulum around the average value of balance of 2.2 mm with the average amplitude of values fluctuation of about 0.2 mm.

Air cooling of one of the massive loads by a very light continuous air flow was carried out to study response of the pendulum to a minor constant external force. In this case (Fig 2 Series II) noticeable change of pendulum oscillations already took place after 3-4 periods. Absolute setting of a new balance took place after 7-8 oscillations.

In the case of another series of calibration measurement (held on 7 June, 2001) both liquid dampers were used and rigidity of suspender was decreased. The period of free oscillations of pendulum was about 40 sec.

Addition of the second damper and decrease of suspender rigidity caused, on the one hand, increase amplitude of pendulum oscillations at influence of the external force and, on the other hand, in that case noticeable change of the equilibrium position of the pendulum took place after 1-2 oscillations.

Periodical checking of the invariability of initial central position of pendulum balance in time was also carried out. Thus, for example, in the series of measurement of 7 June 2001 measurement of equilibrium position was checked not only before the start of the main series of measurement, but also 2 hours after completion of the main works.

Experimental Results and Their Analysis

Within the period from 17 May, 2001 to 7 June, 2001 7 measurement series were carried out at various operation modes of the accelerator and at various pendulum parameters.

A record of check of equilibrium position of the pendulum was carried out before and after switching off the electron bunch (as well as during calibration measurement). At the same time, all electric inducing and mechanical noise remained stable within the whole measurement period. This was achieved by means of additional switching on all the devices which were used during measurement (water and vacuum pumps, magnetron, deflecting magnets, etc.) and their switching off only on completion of the measurements.

In Fig. 3 there are results on measuring the central position of the pendulum when brake target is in position 3 (see Fig. 1). Series I and III on the diagram correspond to check measurement directly before switching on and several minutes after switching off the electron bunch. Series II-A and II-B totally reflect pendulum oscillations at the time when the accelerator is operating (for about 10 minutes) and for some time after the bunch is off. Additionally, a trend line is drawn (averaging by 3 points).

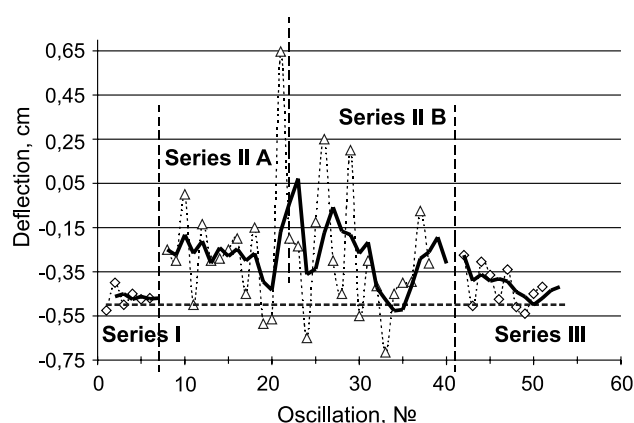


Fig. 3

Measurement of central position of pendulum equilibrium when brake target is in position 3.

Results of a similar experiment are given in Fig. 4. The only difference in this experiment is that the brake target is in position 2. Also a trend line is added (averaging by 3 points). Series I and III are check measurements made directly before switching on and after switching off the electron bunch. Series II are pendulum oscillations at the time when accelerator is operating.

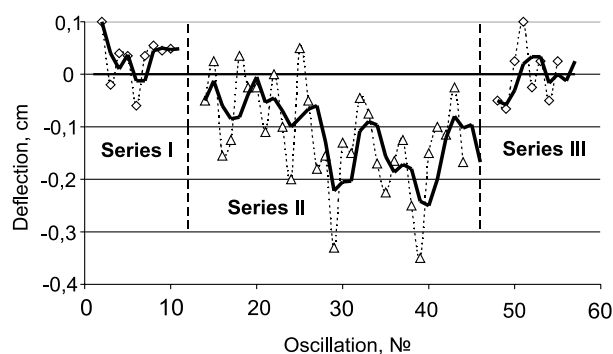


Fig. 4

Brake target in position 2

From qualitative comparison of trend lines (Fig. 3 and Fig. 4) it can be derived that there is a correlation between switching on the electron bunch and the average deflection of the pendulum from equilibrium position if compared to checked series before and after switching on. At that, direction of deflection changes depending on what pendulum load the brake target is close to.

Unfortunately, due to circumstances beyond the control of the author it seems to be difficult to improve experiments accuracy or to accumulate much of statistical data by now. Estimate of the value of the force which may cause such a shift of position of pendulum equilibrium was carried out. In the experiments this deflection did not exceed 1-2 mm (in the units of registering scale). Calibration of a rigid suspender (if it applies to a massive load at a pendulum end) gives the upper boundary of this force of not more than 10^{-6} N.

Conclusion

A series of experiments were made on checking the possibility to generate a field at deceleration of charged massive particles in matter.

Electrons accelerator was used as a source of charged particles. A narrow bunch of relativistic electrons (average beam power is 450 Wt, electrons energy is about 30 MeV) was directed at a brake target made of wolfram where deceleration of accelerated electrons took place.

Measurement proved appearance of statistically reliable deflection of a torsion pendulum, one of massive loads of which was located close to a brake target by the time of deceleration of relativistic electrons.

Change of direction of pendulum torsion at shift of a brake target from one end of the pendulum to the other was also registered. The value of the force which causes pendulum deflection has the upper boundary of N.

Of course, these first experimental results on checking the predictions made on the basis of development of the model of extended space are of preliminary nature and need more thorough checking. That will be the basis of future experiments.

References

1. Tsipenyuk D. Yu. Andreev V. A., "Extended space and model of combined interaction", Short reports on physics FIAN, No.6, pp. 23-24, (2000); gr-qc/0106093
2. Tsipenyuk D. Yu., Andreyev V. A., "Explored in Russia" E-magazine, 60, (1999); <http://zhurnal.apelarn.ru/articles/1999/060.pdf>
3. Tsipenyuk D. Yu., Andreyev V. A., "Structure of extended space", Preprint IOFAN, 5, 25p., Moscow, (1999)
4. Tsipenyuk D. Yu., "Field transformation in the model of extended space: prediction and experimental test", Gravitation&Cosmology, Vol.7, No.4(28), pp336-338, (2001); physics/0203017
5. Tsipenyuk D. Yu., "Field transformation in the extended space model: prediction and experimental test", Short reports on physics FIAN, No. 7 p.39-49, (2001); physics/0107007
6. Tsipenyuk D. Yu., Andreyev V. A., "Lienar-Vihert potentials for the extended space model", Short reports on physics FIAN, No 6 p.3-15, Moscow, (2002); physics/0302006
7. Tsipenyuk D. Yu., "Explored in Russia" e-magazine, 81, p.907-916, (2001); <http://zhurnal.apelarn.ru/articles/2001/081.pdf>
8. Tsipenyuk D. Yu., Andreyev V. A., "Electrodynamics in extended space", Preprint IOFAN, 9, 26p., Moscow, (1999)
9. Tsipenyuk D. Yu., Andreyev V. A., "Interaction in extended space", Preprint IOFAN, 2, 25p., Moscow, (2000)
10. Klein F. Zeits.f.Math.a.Phys., 375, (1901) (see translation in collection "Variation principles of mechanics", M.: Physmatgis, 1960)
11. Kaluza Th. Sitz.d.Preuss.Akad., 966, (1921) (see translation in collection "Albert Einstein and gravics", M.: Mir, 1979)
12. Klein O. Zeits.f.Phys., 37,895, (1926)
13. Mandel H. Zeits.f.Phys., 39,136, (1926)
14. Fock V. Zeits.f.Phys., 39,226,1926
15. Rumer Yu. B. Investigations on 5-optics, M., Gostehizdat, 1956
16. Vladimirov Yu. S. Dimensionality of physical space-time and integration of interactions. M., MGU, 1987.
17. Green M., Schwartz G., Vitten E. Theory of superstrings, v.1, 2, M.: Mir, 1990
18. Wesson P.S. Space, time, matter: Modern Kaluza-Klein theory. Singapoure, World Scientific publishing Co.Pte.Ltd, 1999
19. Tsipenyuk D. Yu., Andreev V.A., "Lienar-Vihert potentials and Lorenz force in extended space", Preprint IOFAN, 1, 20p., Moscow, (2001)
20. Tsipenyuk D. Yu., Andreev V. A., "Gravitational effects in extended space", Preprint IOFAN, 4, 15p., Moscow, (2001)
21. Tsipenyuk D. Yu., "Field transformation in the model of extended space: prediction and experimental test", Preprint IOFAN, 5, 24p., Moscow, (2001)
22. "Tsipenyuk D. Yu., report "Electromagnetic and gravitational interaction in extended space" at the Conference of Nuclear Physics Department of the Russian Academy of Sciences (RAN) "Physics of Fundamental Interactions", 27 November-1 December 2000, ITF, Moscow, <http://www.itep.ru/>
23. Tsipenyuk D.Yu. and Andreev V.A., "Interval as the fifth coordinate" proc. of 5-th Int. Conf. on Gravitation and Astrophysics of Asian-Pacific Countries, PFUR, Moscow, 2001, pp.29-30. <http://rgs.da.ru/>
24. Tsipenyuk D.Yu., "Direct transformation of the electromagnetic field to gravitational field in the model of extended space: predictions and possible way of its experimental test", proc. of 5-th Int. Conf. on Gravitation and Astrophysics of Asian-Pacific Countries, PFUR, Moscow, 2001, p.28. <http://rgs.da.ru/>
25. Tsipenyuk D.Yu., "Model of extended space: Prediction and test experiments on possible transformation of electromagnetic field into gravitational field", proc. of XVIth Workshop on High Energy Physics and Quantum Field Theory (QFTPE), Moscow, Russia, 2001, pp.398-405. <http://theory.sinp.msu.ru/~qfthep/2001/Proceed2001.html>
26. Tsipenyuk D.Yu., "Model of extended 5-d space and possible checking experiments", presented at 5-th Moscow international ITEP school of physics (30-th ITEP winter school of physics), 20-28 Febr., Moscow, 2002, <http://www.itep.ru/>
27. Tsipenyuk D.Yu., report "Second experiment on checking prediction on field transformation in extended space" at the scientific conference of nuclear physics section OFN RAN "Physics of Fundamental Interactions", ITF, 2-6 December 2002, Moscow, <http://www.itep.ru/>
28. Urbah V. Yu., Mathematical statistics, M., USSR Academy of Sciences Publishers, 1963.

Joe Flynn's Parallel Path Magnetic Technology

Tim Harwood, USA

Email: timharwood@usa.net

There is a widespread opinion common to the mainstream academic community and also to various alternative scientific forums, that some kind of exotic new physics will be required to design and implement over-unity technologies. That is to say electrical motors, electrical generators, or other apparatus, which produce an excess of magnetic force or energy above the value actually inputted.

However, this has recently been experimentally demonstrated not to be the case, as I have validated myself in simple \$20 experiments undertaken at home with parts bought from the local hardware store. It is the purpose of this article to educate readers that with care, thought, and a little work, it can be demonstrated that existing textbook physical law, freely allows for the extraction of excess electrical energy from magnetic systems.

The Flynn Research Project

Joe Flynn has been engaged in magnetic flux research for over 25 years now. His work is long standing, comprehensive, and in later years, well funded. It is reported \$7m has been spent to date, with over \$1m alone developing a revolutionary high performance magnetic motor. His equipment is validated, and apparently already in mass production for select customers. Yet few researchers have heard of Joe Flynn. This surprising situation will hopefully shortly be changed, and Joe Flynn awarded the scientific accolades he deserves, for being the genius master mind behind one of scientific history's most outstanding research projects. Since many lines of research have been formulated and explored by Joe Flynn, the following article presents only a brief summary of some of his best art apparatus, but is nonetheless sufficient to convey the basic ideas.

The first illustration (Fig. 1) is taken from Joe Flynn's US patent 6,246,561, and explains a simple magnetic force multiplication experiment, which forms the basis for the Flynn magnetic art. If the windings on either side of the central magnet, which are normally connected in series, are properly pulsed, the field of the permanent

magnet in the center will be diverted to the opposite side of the core flux path provided. Or in alternative language, the side of the core that is pulsed is demagnetized, relative to the field of the permanent magnet used in the apparatus. This is elementary textbook physics anyone can understand.

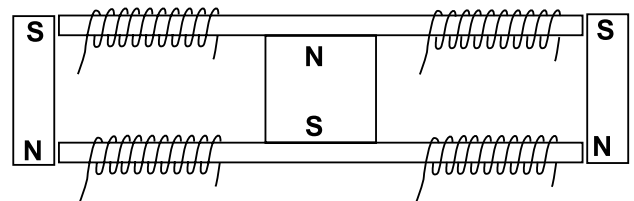


Fig. 1

1.75 times more force is delivered to the legs of the core than is provided by the electrical input to the control coils

So what is surprising about this apparently simple apparatus is that the armature on the side of the flux core will contain 1.75 times more units of magnetic force, that could be manifested by the electrical input to the apparatus alone. Since the ability to arbitrarily move the force from one point to another is the basis for motion or work, however simplistic, we therefore have a basis for a system that can be developed for practical technological purposes. Expressed in alternative language, we also have the capability to engineer a time varying magnetic field, without the need for moving parts, which will allow development of systems that output electrical energy. Both capabilities are highly desirable, and offer substantial opportunity for technical development.

Following on from this basic experiment, there is a second simple and logical improvement in layout illustrated in Fig. 2, which should be obvious, but has been shown not to be the case. In this instance, the pulse is centrally located, and a dual flux field layout employed, which both demagnetizes the core relative to one magnet, and magnetizes it relative to the other. Since the two actions are complementary, the input required to manifest the flux switching effect is halved, therefore doubling 'efficiency.'

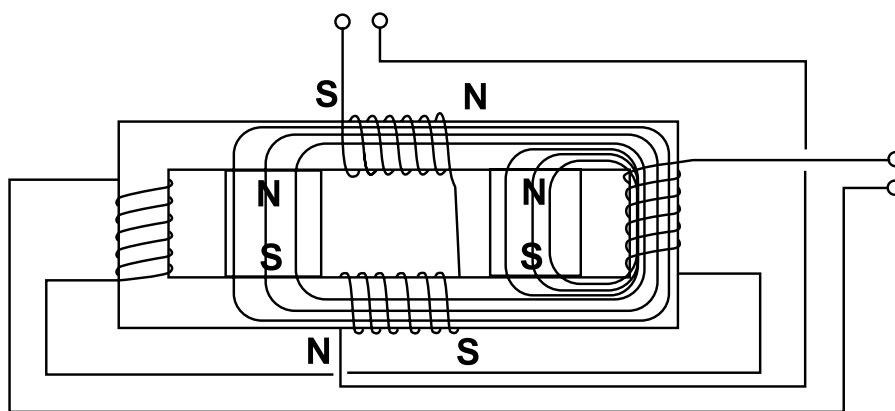


Fig. 2

3.47 times more force is delivered to the legs of the core than is provided by the electrical input to the control coils

It should be noted that while the efficiency is doubled, the absolute output may not be significantly improved. This is because the major weakness of this effect and technology is flux saturation of the core, with values depending upon the specific properties of the B-H curve of the core material employed, limiting the absolute output of both layouts the same.

The previous statements are not required to be taken on trust, and simple experiments have been proposed by Joe Flynn, such that anyone can validate this effect for themselves. Figure 3 is a simple experiment taken from the Flynn website (<http://www.flynnresearch.net>), that can be used to validate the principals put forth in this article.

Simple Magnetic Force Multiplication Experiments

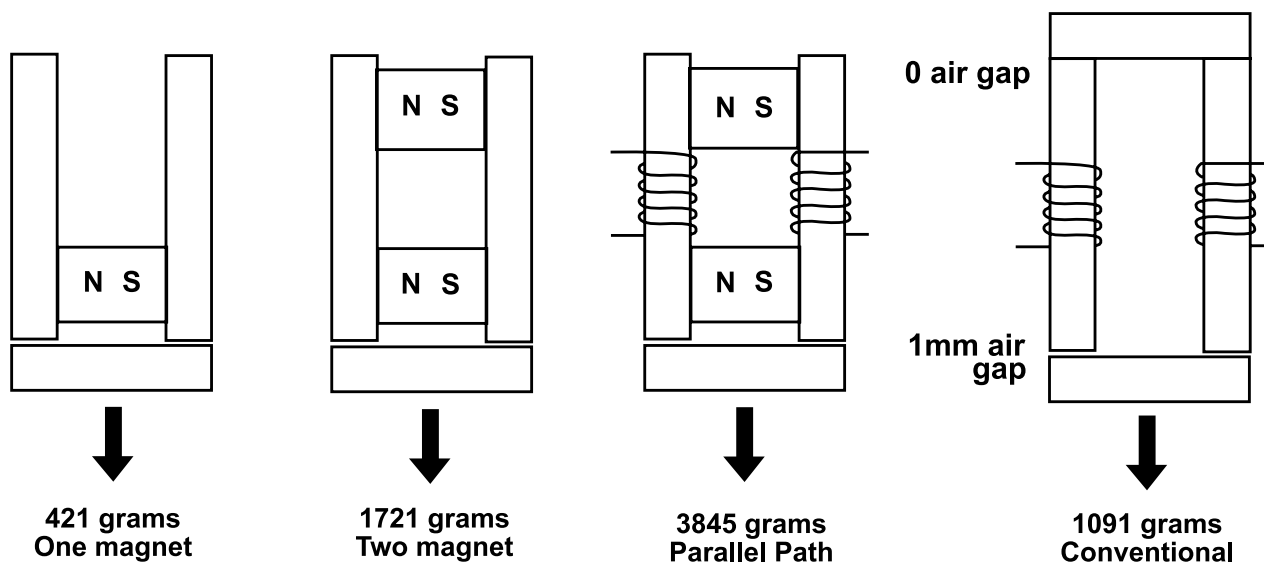


Fig. 3

Parallel Path can deliver 3.47 times more force to the legs of cores than any competing conventional technology

An even simpler non electrical flux experiment was proposed by GM in the Parallel Path Egroup. My apparatus is illustrated below in Figure 4. It is no more than magnets and steel staple strips, bought from a local hardware store for a total of under \$10. The Parallel

Path effect can be replicated with identical apparatus, at only a slight increase in cost and complexity, with the addition of a simple 12V polarity reversible power supply, such as those commonly sold to power computer speakers, among other applications.

Simple Magnetic Force Experiments

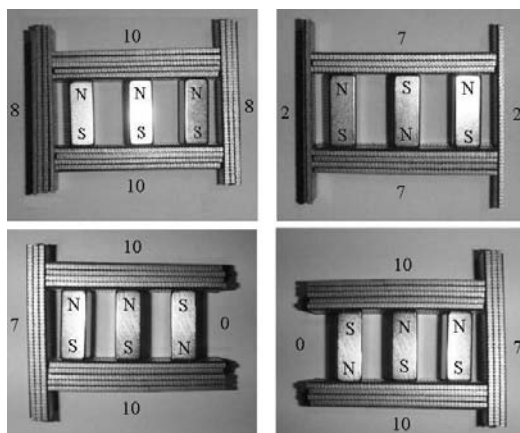


Fig. 4

Relatively small changes in layout produce large changes in force

Conservation of Energy / Field Potential

One of the aspects of the Flynn technology people find most difficult to understand, is how you can have a device that delivers 3.47 times more magnetic force than is electrically inputted, yet not violate accepted principals of text book physics, as stated in the introduction. The key point here is conservation of energy. Magnetic fields do not gain energy – they are conservative. You can only ever obtain less energy from a magnetic field minus losses, than is in fact present. I feel this apparent puzzle can not be better explained, than by reference to Joe Flynn's own words:

“Since the Parallel Path System produced 3.47 times more force than the conventional system, with the same electrical input, it appears to violate conservation, this is only true when observed from a traditional view point. The system contains three flux producing sources (2 magnets and an electromagnet) which together are capable of producing a far greater force than is actually produced. All of the flux sources together can produce a force of 13.11 units, therefore in the physical sense a loss of $1 - (9.01 / 13.11) = 31\%$ is realized.”

So the system is 350 % efficient, in terms of delivered magnetic force compared to net electrical input, yet still conforms to the accepted physical principals of energy conversation, by being only 69 % efficient, in terms of the fields present in the system. However surprising this result may appear, the analysis presented is in outline correct, with the difference between fields present in the system, and net electrical input, being the important concept presented.

Losses in the System and Optimisation

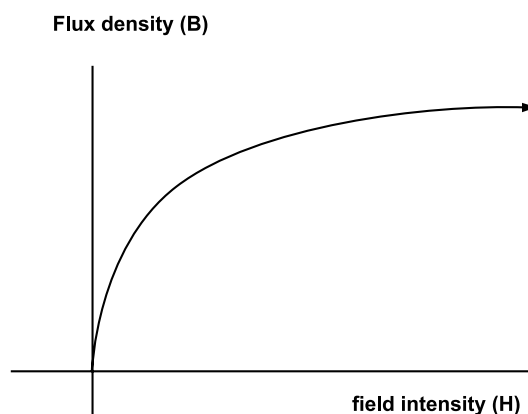


Fig. 5

In order to properly optimise flux cores, an appreciation of the physics that underlies the transfer of flux within a core is required. The normal magnetization curve, or B-H curve, is a mathematical relationship between applied field intensity H, and resultant flux density manifested in the core B. It varies according to core material, and the curve will shift, if there is a starting magnetism within the core, such as that provided by the field of a permanent magnet. If the start magnetism is excessive, the core is saturated, and will not properly respond to the applied force H. A simple B-H curves is illustrated in Fig 5.

Hysteresis is a delay between applied magnetic force H, and resultant flux density B, that again varies according to material type. It also manifests as a delay between the termination of force H, and the manifestation of flux density B. So, the system will not turn on instantly, and will not turn off instantly, in simple terms. This is because the magnetic memory of the core, means a flux vector remains within it, even when the application of magnetic force H has been terminated. If we apply a reversed force H to the core, the basic B-H curve is now expanded as in Fig 6, with the memory effect also illustrated.

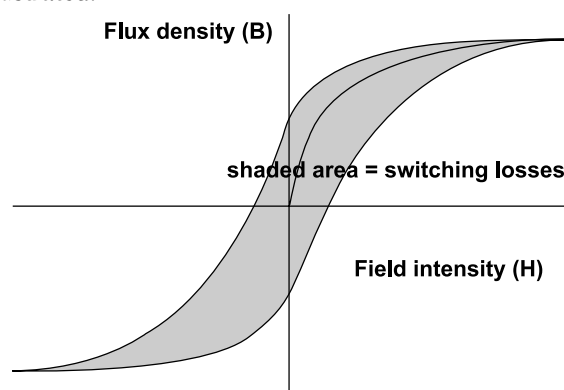


Fig. 6

Thus as can be seen, to return to the initial switched state, the remnance magnetism must now be overcome, hence input once in operation, will be greater than that required for the

very first pulse. The area within the hysteresis curve gives a rough estimate for the amount of wasted energy, and along with other conventional sources of losses

resultant in flux transfer within a core, is what reduces the efficiency of flux cores from maximum values of 2, or 4, down to values such as 1.75 or 3.47, typically.

Motor Apparatus

Simple Parallel Path Technology Demonstrator Motor

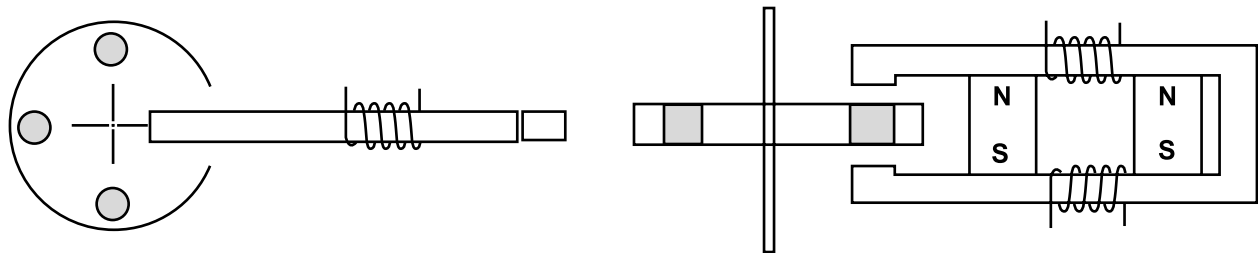


Fig. 7

Designed to demonstrate core principals, not provide over-unity

Although numerous practical applications abound for this effect, electric motor design remains the most outstanding opportunity. To this extent, again a few simple images, should be sufficient to explain how the basic flux switching apparatus, can be turned into a highly efficient electrical motor.

The first motor shown in Fig. 7 is one I have proposed to validate the flux switching effect at a most basic level. It illustrates the point made in the Flynn patent, that the armature of the core can be removed, and replaced with a motor flux path. This first motor is not claimed to be highly efficient, but it helps one to understand how the transition from simple flux core to motor takes place.

The next motor shown in Fig. 8 is again taken directly from the Flynn patent, and illustrates the next intermediate step to motor design. The fields of the permanent magnets are alternatively switched from one side of the surrounding flux cores to the other, alternately interacting with N and S poles on the rotor, imparting motion to the central rotor shaft.

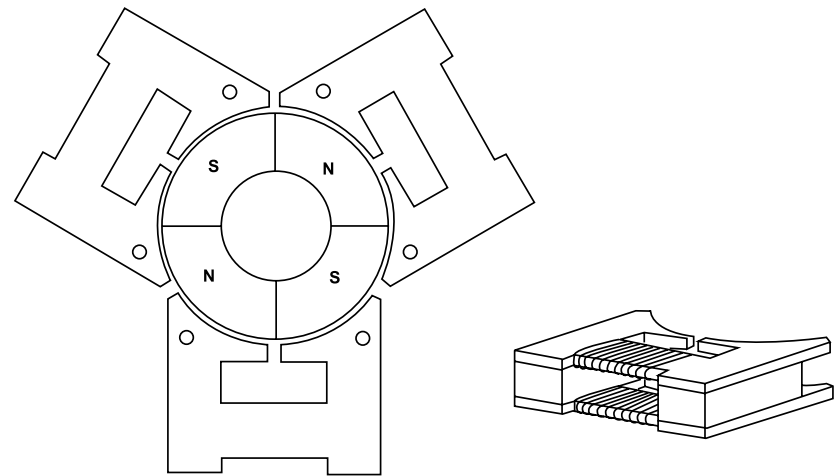


Fig. 8

Magnetic force is alternately switched from one leg to the other, imparting motion to the rotor sections

With proper financial support, and the facilities to have metglas cores custom moulded, Joe Flynn was able to develop his final best art, shown in Fig. 9. No detailed performance numbers have been released for this motor, whose precise performance characteristics remain proprietary to Joe Flynn at this time. But the optimisation is so expert, it is stated to posses certain exotic properties, such as cool ambient operation, even during prolonged periods of continuous load. This ‘cold running’ is said to be of great interest to the American military, as it offers excellent stealth performance characteristics.

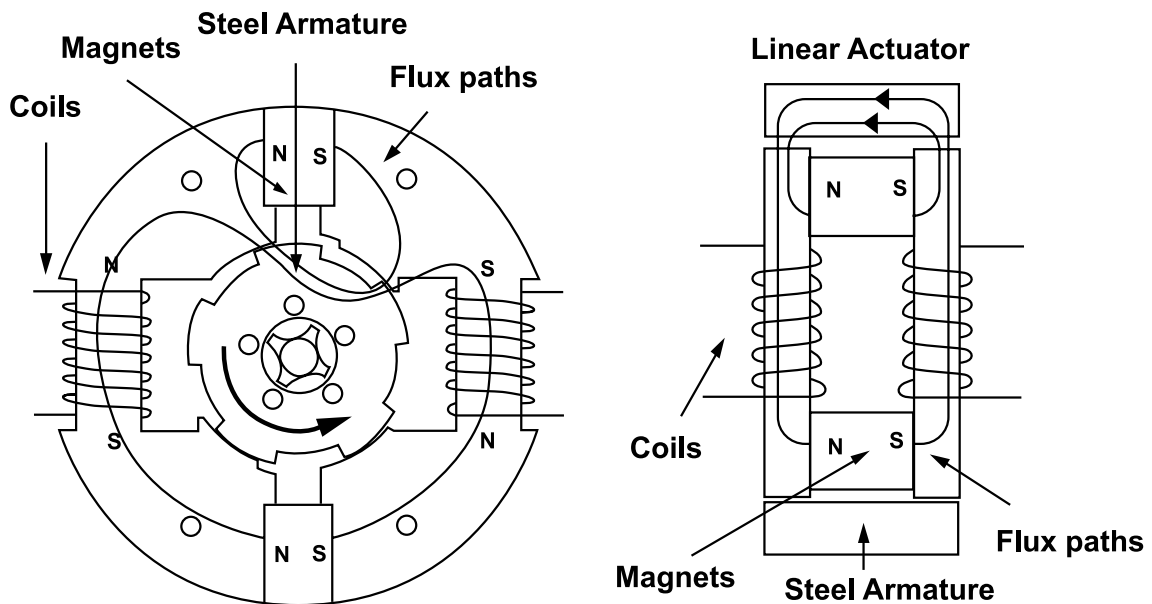


Fig. 9
Optimal Flux Core Motor Construction

Electrical Apparatus

Many readers will no doubt have noticed the similarity of the first illustration presented in this document, to the so called ‘Tom Bearden MEG.’ This is fair comment, and Joe Flynn has always highlighted this issue. However, it has been commonly stated Joe Flynn has simply developed mechanical apparatus, and the MEG with its electrical functionality, is distinct art, more advanced than the mechanical Flynn apparatus. However, this is shown not to be the case by a careful examination of the Flynn patent, in which the following is stated in the ‘Power Conversion’ section:

‘The construction (shown in Fig.10 A) utilizes four control coils and a single permanent magnet and the construction (shown in 10 B) uses two control coils and two permanent magnets. The flux that would normally be supplied by a primary winding is supplied by the static flux of the permanent magnet or magnets and the control coils convert this static flux into a time

varying flux in a novel way. Both arrangements use two secondary coils, the secondary coils are placed in the region of the continuous flux path that would be occupied by an armature or rotor in the linear or rotary arrangements. The regions of the flux paths that perform work are the same in all cases’

‘By alternating the polarity of the control coils during one cycle, one working region experiences an increasing flux and the opposite region experiences a decreasing flux and during the next cycle the opposite occurs. This results in the induction of a voltage in the secondary coils that is decided by the magnitude of the change in flux in the working region and the time in which this change occurs. The novelty of this discovery is that the primary flux inducing the voltage in the secondary coils is supplied by the permanent magnet or magnets and is far greater than the flux supplied by the control coils.’

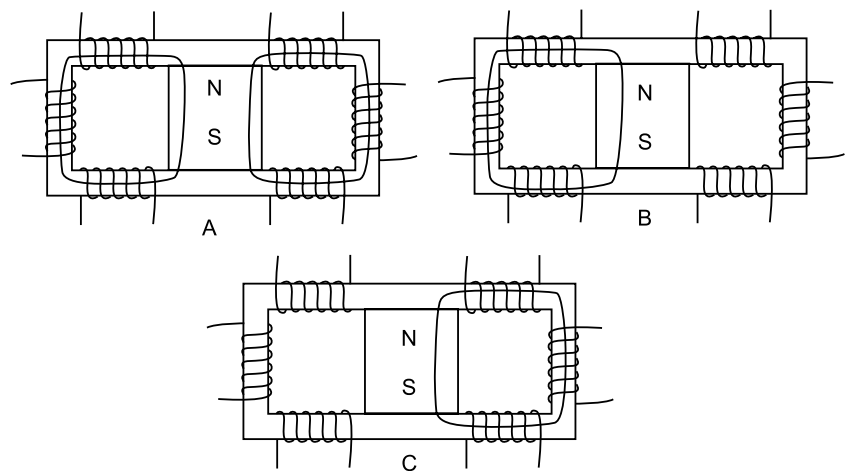


Fig. 10

Fig10 taken directly from the Flynn patent makes the point even clearer. As can be seen, the device illustrated is in all functional respects absolutely identical to the so called 'Tom Bearden MEG.' This identical prior art, therefore calls into question the intellectual property rights of Magnetic Energy LTD, as the same invention can not be patented more than once. Joe Flynn has also stated that his intellectual property rights will be robustly defended, by legal action if necessary, and he regards himself and his company as being in possession of exclusive rights to the so called 'MEG' unit.

As regards replication of electrical output orientated flux core devices, certain important details need to be stated. For example grade 8 ceramic magnets should be used, so as to avoid flux saturation of the core. A basic error, many early experimenters wasted time on. The requirement for strong magnets to obtain over-unity results, is as much of a myth, as the idea new physics is required.

But perhaps the greatest trade secret of the electrical devices, one which several lengthy non disclosure agreements are required to be signed before it can be disclosed, is that the input and output circuits must be closed in series. The disclosure of this technique amounts to putting the basic MEG methodology fully into the public domain.

The reason for this circuitry requirement is obvious enough, with only a little analysis. If the output circuit is closed when the input circuit is activated, then the input energy simply leaks into the output circuit, as in an ordinary transformer. So no flux switching effect is manifested, and the field of the permanent magnet is static in time. Thus you have an ordinary transformer, with reduced efficiency, because of the core flux saturation effect provided by the permanent magnet.

This is one of the most important point to make about the Flynn apparatus. If you approach it as if it is a normal piece of scientific equipment, then proper optimisation is not greatly problematic. For example more turns on the output coils, simply means more voltage and less current, exactly as standard textbook equations predict. Generally, problems only occur, if you imagine the effect is based upon exotic scalar type or vacuum energy physics, when in fact it is ordinary flux manipulation within a core.

Present Status of the Flynn Project

Initially Joe Flynn was remarkably open about his work and research. However, since performing a working demonstration of various advanced hardware samples for the American Department of Defence, little has been heard.

I want to clearly emphasize I do not speak for Flynn research, nor am I in any way connected with Flynn research, and by consequence, have no inside information whatsoever as to the present status of the project. But we all sincerely hope, that the project has not been

swallowed whole by the American deep black military industrial research complex.

However, even if this is the case, it does not mean the technology is lost. Extensive and generous details have been provided by Joe Flynn of his research, both in his patent deposition, website, and other comments, such as to enable persons of scientific training and skill, to replicate the effects stated.

While replication of the electrical effect remains extremely demanding, the mechanical apparatus is very easy both to understand and replicate. There is no reason why scientists and home tinkers together, can not build Flynn type flux core motors, and explore over-unity flux manipulation for themselves. The future has arrived, and it is simpler and cheaper than anyone imagined to be possible.

the input and output circuits must be closed in series. The disclosure of this technique amounts to putting the basic MEG methodology fully into the public domain.

Raum&Zeit

EhlersVerlag GmbH,
Geltlinger Str.14e,
82515 Wolfra tshausen
Telephon: 08171/41 84-76,
Telefax: 08171/41 84-66
Internet:
<http://www.raum-und-zeit.com>



Institut für Raum-Energie-Forschung (IREF) i.m. Leonard Euler

- | | |
|--------------------------|----------------------------------|
| - Global Scaling Theory | - Hydrogen-Helium Energetic |
| - Gravitation theory | - Information technologies |
| - Mathematic Biology | - Telecommunication technologies |
| - Gravitation energetics | - Transport technologies |

Flynn Research Company

<http://www.flynnresearch.net>

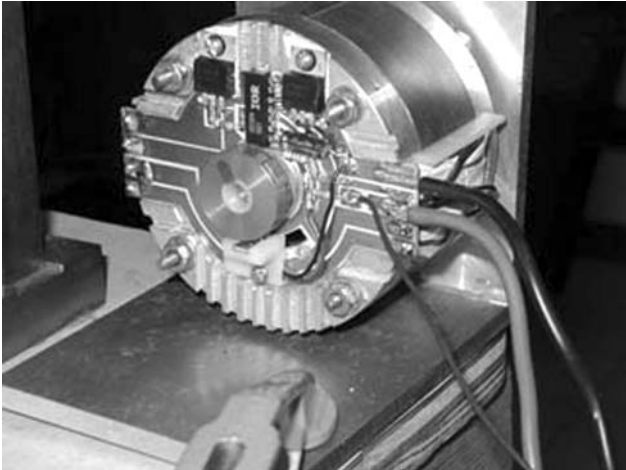


Photo 1

3.3" 1.2" stack height 1/2 hp weight 59 oz



Photo 2

Dynamometers, Power Analyzer etc.

Editor: Below we publish information and photos, represented on Flynn Research Company website (<http://www.flynnresearch.net>), and a description of the patent on methods for controlling the path of magnetic flux.

Flynn Research is dedicated to research focused on the novel application of permanent magnet and electromagnetic technology. Magnetism is a field that has potential for tremendous growth from both a science and application perspective. The researchers of Flynn Research Company believe that magnetism is one of the least understood and most misinterpreted of the natural forces, with the exception of gravity.

Even though much work has occurred in the advancement of magnetic materials, little advancement has occurred in the basic understanding of magnetism. The field of magnetism is based on both theory and 'myth' and is generally described as a 'phenomenon'.

Everything known about magnetism is based on "effect and relationships" without a clear understanding or provable definition of what is a line of magnetic flux.

We still do not know what a line of flux is and how it travels through space. We know flux "appears" to originate within a permanent magnetic material, forms a loop from one end to the opposite end of the magnetic material, appears to occur without a time constant, produces a force (attractive and repulsive) between other permanent magnets and "magnetically permeable materials and has a relationship to current flow. Everything known about magnetism is based on "effect and relationships" without a clear understanding or provable definition of what is a line of magnetic flux.

The research is based on the "magnetic force of attraction effect" that is related to magnetic flux by the number of lines of flux occupying a given area or flux density squared. The simple fact that if the number of lines of flux occupying a given area "doubles" the force of attraction becomes four



Photo 3

8" dia x 8" height motor presentation



Photo 5

Technology Discussion

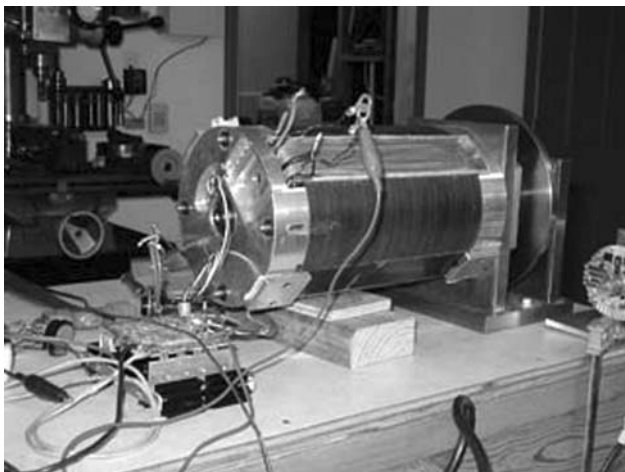


Photo 4

8" X 8" motor testing



Photo 6

Parallel Path Test Apparatus

times greater. The basic model shows that with specific structures electromagnetism acting with permanent magnet materials can divide and multiply force in a manner that cannot be explained with conventional physics.

Rotary devices, linear devices, reciprocating devices and power conversion devices are now a patented product of this research. The goal of the Company is to commercialize their devices for use in an energy dependent world. Flynn Research is a research & development company and in cooperation with Magnetic Revolutions LLC licenses their technologies for use in the electric motor and power conversion industries.

The researchers do not construct their own test equipment nor write capture and data evaluation programs but use industry / scientific accepted products. Close to \$1.5 million has been expended developing, protecting and evaluating the technology. Many fine minds have been involved in the development and evaluation of the technology. Many presentations have been given both to motor companies and academic groups. The prototypes have all been professionally built, which include a 1/2 hp 3.3" dia 1.2" stack height, the assembled motor weighs 59 oz and a motor 8" dia with a stack height of 8" currently undergoing testing.

United States Patent No. 6,246,561

June 12, 2001


Methods for controlling the path of magnetic flux from a permanent magnet and devices incorporating the same

Inventors: Flynn; Charles J. (Greenwood, MO)

Assignee: Magnetic Revolutions Limited, L.L.C (St. Louis, MO)

Appl. No.: 127056

Filed: July 31, 1998

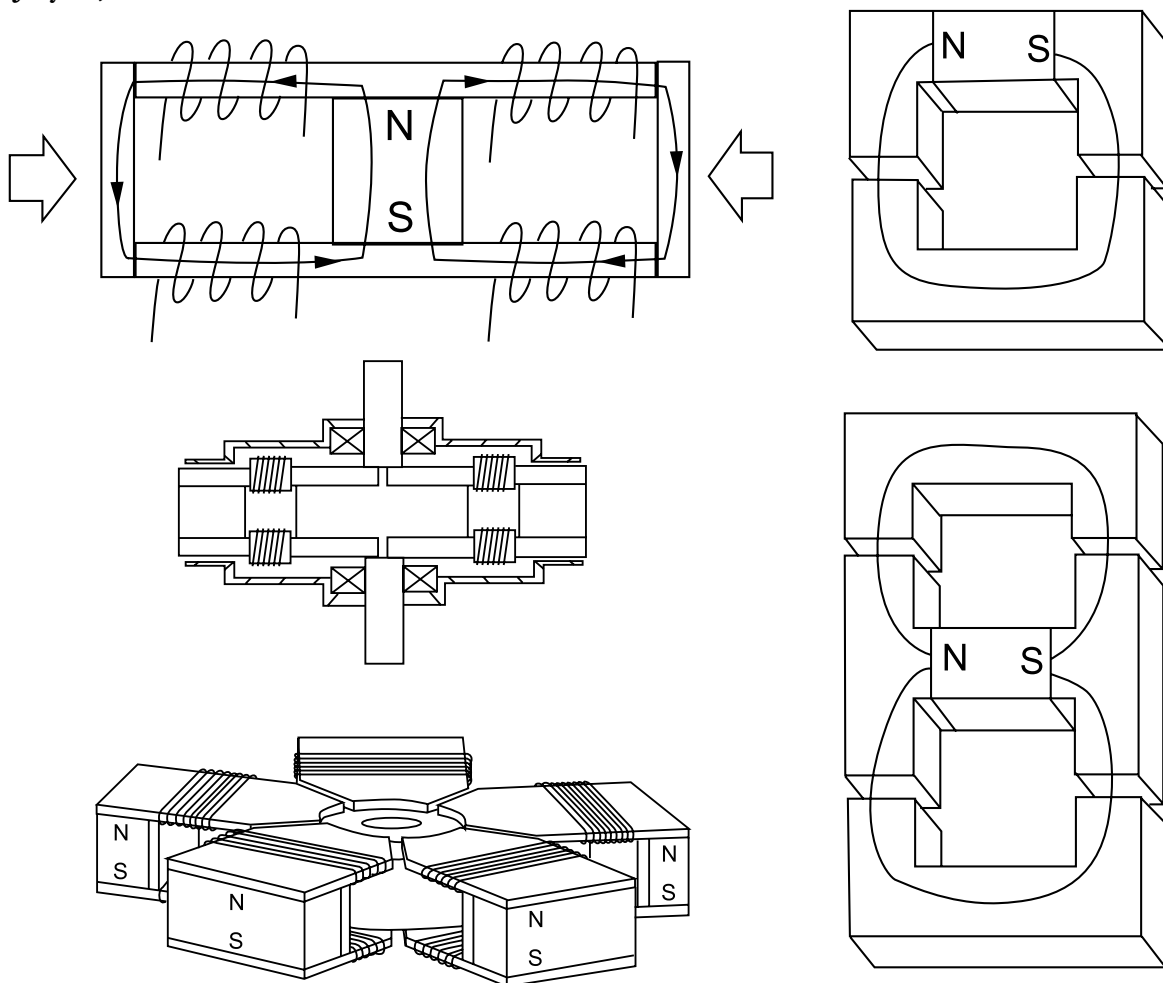

A permanent magnet device includes a permanent magnet having north and south pole faces with a first pole piece positioned adjacent one pole face thereof and a second pole piece positioned adjacent the other pole face thereof so as to create at least two potential magnetic flux paths. A first control coil is positioned along one flux path and a second control coil is positioned along the other flux path, each coil being connected to a control circuit for controlling the energization thereof. The control coils may be energized in a variety of ways to achieved desirable motive and static devices, including linear reciprocating devices, linear motion devices, rotary motion devices and power conversion.

Editorial: The principle of designing of the device (two counter parts of the flux are used) resembles Φ -machine or Gramm's generator. Read in this issue more details on these devices.

Flux-machine And Its Analogues

Review prepared by correspondent Alla Pashova, Russia

Flux-machine (or Φ -machine, since configuration of its field resembles the Russian letter “ Φ ”) was designed by Alexander V. Frolov during the first half of 1990s. Φ -machine description was published more than once on the pages of scientific periodicals (1994, Institute of New Energy, Newsletter, June 1994, p.9.; 2002, New Energy Technologies, 2002, p.3), and it is well known to many researchers concerning themselves with such kinds of engineering.

Let us consider the arrangement of Φ -machine; see Fig. 1 (first published in 1994). A report was presented at the conference «New ideas in natural science», 1996 in Saint Petersburg (see photo in Fig. 1). The primary coil is mounted in the center of generator; two secondary ones are diametrically wound on a ring core. An air gap between ring and central magnetic circuits are of particular importance. **Two magnetic fluxes from two coils are balanced, and, thereby, there is no reaction in the primary circuit.**

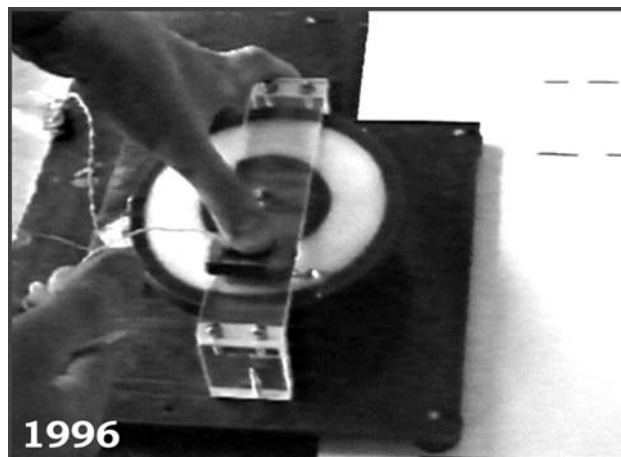
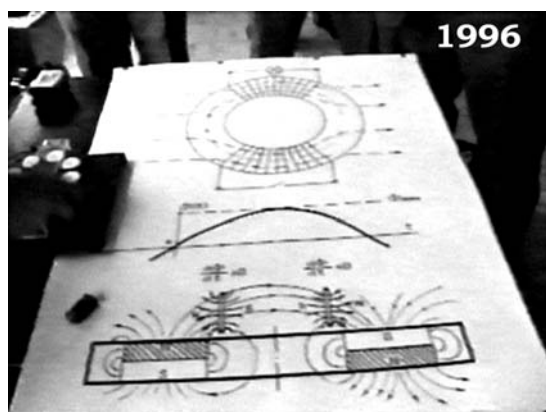
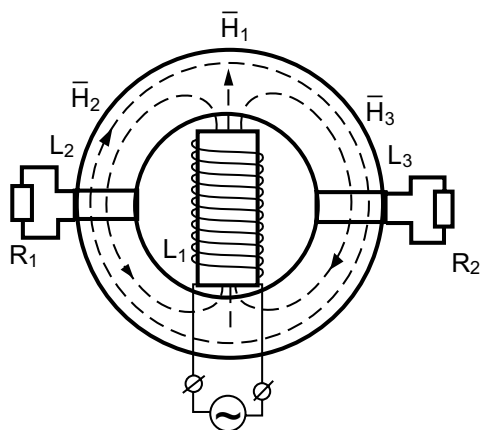


Fig.1

See also Fig. 7, p.29 – the analogy is evident

The device bears some similarity to the Gramm's generator (Zenob Theophyl Gramm, 1826-1901, Belgium-France, took out a patent for an electric ring-rotor generator in 1869). In Gramm's generator (Fig. 2) the ring rotor with a toroidal winding rotates. The toroidal winding touches two diametrically located conducting brushes. It turns out that in the ring of the rotor all winds of one rotor half create a field which is directed towards a field created by the other rotor half.

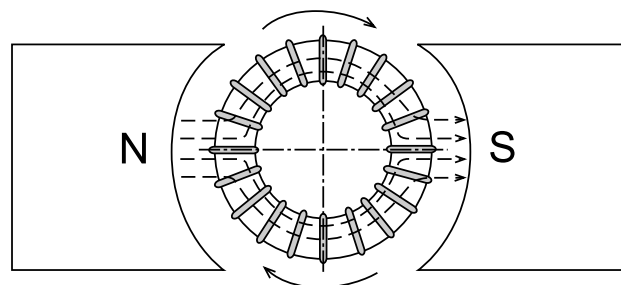


Fig. 2

An example of analogous device is represented in Fig. 3 (information is from the website: <http://www.skif.biz/energy/arhiv1-6.shtml>), and also in Fig. 4 (we have written about this invention in New Energy Technologies, Issue #5 (8), 2002, article by V.I. Boryak, Email: spin@i.com.ua).

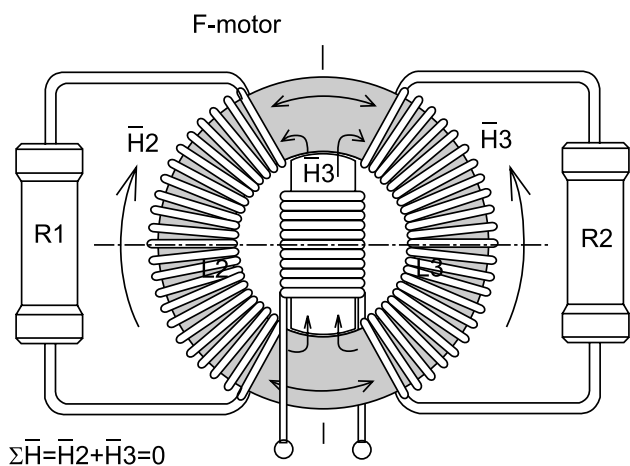


Fig. 3

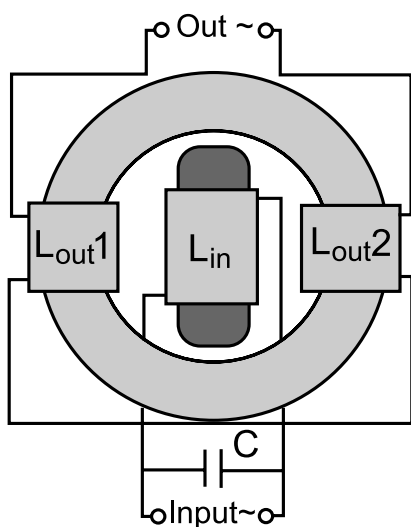


Fig. 4

In August 1999, according to Stephen Hartman (Hartman Multimedia Service, Email: hart@harti.com, info@ccard.net), a German research team designed a toroidal generator. As stated by the researchers, it obtained more than 1.200 W by load while efficiency exceeded 100%!

This subject has become very popular among different researchers. Fig. 5 illustrates a design with a magnet rotating in the center (designer - Olaf Berens, Email: olaf.berens@prognost.com).

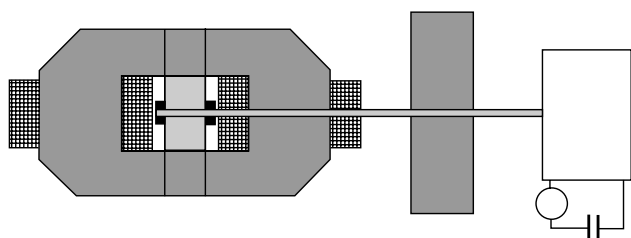


Fig. 5

One more example from the USA: in February, 2003 Donald Hofmann (USA) filed an application for patenting "Generators and transformers with toroidally wound stator winding». Below we publish the description of the patent.

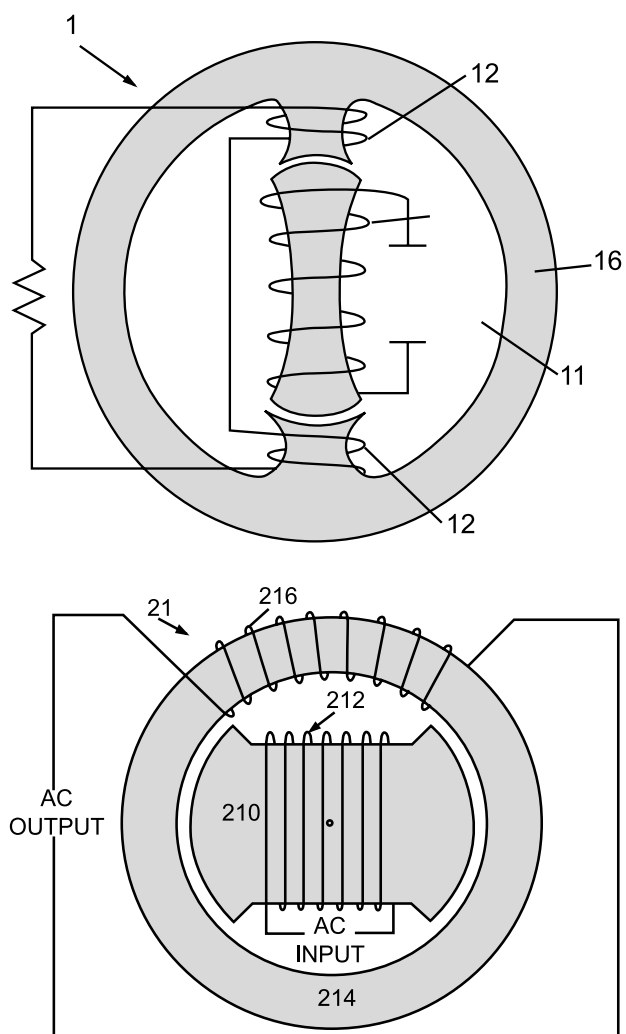


Fig. 6

Inventors: Steven L. Sullivan, USA; David L. Goulet, USA; Donald Hofmann, USA.

Electrical generators are provided with toroidally wound stator windings electrically connected in series; a high permeability stator core, preferably an amorphous magnetic alloy material, glassy metal or HYPERCO™ 50 laminations; and a rotor. The toroidally wound stator coils and the stator core trap essentially all of the flux fields generated by the stator coils within the stator core. Since there is essentially no magnetic field leaving the stator, there is essentially no flux field interaction with the field generated by the rotor. The reduction of flux field interaction also reduces counter torque.

According to another embodiment of the invention, open positions of a rotor may be filled with magnetic material, preferably iron. Filling open portions of the rotor may assist in reducing undesirable flux leakage from the rotor. By trapping substantially all of the flux within the rotor, interaction between rotor and stator flux is reduced. In this manner, counter torque is reduced thereby increasing the overall efficiency of the device.

A prototype of this embodiment was constructed using a standard 10 kWt gas-powered generator. The stator was removed from the generator and its housing. The stator windings were removed from the stator and rewound by hand using a No. 10 size copper wire with 180 winds wrapped in a toroidal fashion around approximately 180 degrees of the stator.

The stator was then reinstalled in the modified housing and re-attached to the gas-powered generator. A standard 12 volt car battery was attached to the input of the rotor. A 12.92 volt input with 0.8 Amps was measured as the input to the rotor. The output was measured as 6.5 volts with a 40 Amp output. A series of input and output measurements were taken for various inputs.

Editor: Thus input power is 10 Wt, and output power is 260 Wt.

So, the old well-known ideas have found new ways of embodiment, though their essence remains unchanged. Let us note that Faraday Labs Ltd has been working on creating a prototype of Φ -machine with a toroid of 200 mm in diameter.

Please, read more about this in the next issue!

Editorial: We publish the specification of several interesting patents, which were taken out by Russian inventors for recent years.

Russian patents on alternative energetics

- №93001754, 1996.06.27, Converter of gravitational forces into energy, V.V. Mironov and others
- №92008720, 1995.02.10, Slavic method to produce energy by conversion of gravitational forces, V.V. Mironov
- №93006696, 1995.04.30, Supporting converter of gravitational forces into energy, V.V. Mironov
- №2001121071, 2003.04.10, Method to create energy in liquid, heat-generator and heat-and-power device, A.Yu. Baurov and others
- №2132109, 1999.06.20, Generator of mechanical energy, A.Yu. Baurov and others
- №2001125794, 2003.05.10, Generator of static electricity, S.I. Danilov
- №2001120796, 2003.04.10, Electric power device, D.M. Beliy
- №98116077, 2000.05.10, Heat engine (monotherm, "perpetual mobile of second-type"), V.I. Likhachov and others
- №93048971, 1996.04.20, Float engine, I.P. Tchinarev
- №94023174, 1996.03.27, Gravitational-hydrostatic engine, I.P. Tchinarev
- №98112650, 2000.03.20, Water engine, V.A. Gylchuk
- №2001115953, 2003.03.20, Potential engine by Prokopenko, V.F. Prokopenko
- №2001115954, 2003.03.20, Potential amplifier by Prokopenko, V.F. Prokopenko
- №2001124364, 2003.04.20, Drum of gravitation (gravity), I.A. Strelnikov
- №95107181, 1997.02.20, Method to convert energy of physical vacuum into energy of physical space, O.K. Polev and others
- №92008695, 1995.04.20, Method to get overunity efficiency, Yu.V. Karasev and others
- №93006851, 1995.04.30, Principle, method and device for circulation of mass by force of gravitation and inertia, G.S. Kirichenko
- №93039885, 1996.05.20, Hydro-gravitational electric power station, L.S. Konkov
- №93036371, 1995.11.27, Method to convert energy created in result of interaction of earth's gravity force and air bearing capacity into electric energy, V.I. Kovalenko
- №93025690, 1996.07.27, Method and device to convert heat energy into mechanical one, A.I. Lendyaev
- №2001122885, 2003.04.20, Rotary method to convert magnetic energy into mechanical one, L.N. Mezentsev
- №2001106783, 2003.02.10, Gravitational source of energy, A.D. Yurik and others
- №2001115968, 2003.03.20, Method to convert energy, V.S. Gorelyuh

According to another embodiment of the invention, open positions of a rotor may be filled with magnetic material, preferably iron. Filling open portions of the rotor may assist in reducing undesirable flux leakage from the rotor. By trapping substantially all of the flux within the rotor, interaction between rotor and stator flux is reduced. In this manner, counter torque is reduced thereby increasing the overall efficiency of the device.

A prototype of this embodiment was constructed using a standard 10 kWt gas-powered generator. The stator was removed from the generator and its housing. The stator windings were removed from the stator and rewound by hand using a No. 10 size copper wire with 180 winds wrapped in a toroidal fashion around approximately 180 degrees of the stator.

The stator was then reinstalled in the modified housing and re-attached to the gas-powered generator. A standard 12 volt car battery was attached to the input of the rotor. A 12.92 volt input with 0.8 Amps was measured as the input to the rotor. The output was measured as 6.5 volts with a 40 Amp output. A series of input and output measurements were taken for various inputs.

Editor: Thus input power is 10 Wt, and output power is 260 Wt.

So, the old well-known ideas have found new ways of embodiment, though their essence remains unchanged. Let us note that Faraday Labs Ltd has been working on creating a prototype of Φ -machine with a toroid of 200 mm in diameter.


Please, read more about this in the next issue!

Editorial: We publish the specification of several interesting patents, which were taken out by Russian inventors for recent years.

Russian patents on alternative energetics

- . №93001754, 1996.06.27, Converter of gravitational forces into energy, V.V. Mironov and others
- . №92008720, 1995.02.10, Slavic method to produce energy by conversion of gravitational forces, V.V. Mironov
- . №93006696, 1995.04.30, Supporting converter of gravitational forces into energy, V.V. Mironov
- . №2001121071, 2003.04.10, Method to create energy in liquid, heat-generator and heat-and-power device, A.Yu. Baurov and others
- . №2132109, 1999.06.20, Generator of mechanical energy, A.Yu. Baurov and others
- . №2001125794, 2003.05.10, Generator of static electricity, S.I. Danilov
- . №2001120796, 2003.04.10, Electric power device, D.M. Belyi
- . №98116077, 2000.05.10, Heat engine (monotherm, "perpetual mobile of second-type"), V.I. Likhachov and others
- . №93048971, 1996.04.20, Float engine, I.P. Tchinarev
- . №94023174, 1996.03.27, Gravitational-hydrostatic engine, I.P. Tchinarev
- . №98112650, 2000.03.20, Water engine, V.A. Gylchuk
- . №2001115953, 2003.03.20, Potential engine by Prokopenko, V.F. Prokopenko
- . №2001115954, 2003.03.20, Potential amplifier by Prokopenko, V.F. Prokopenko
- . №2001124364, 2003.04.20, Drum of gravitation (gravity), I.A. Strelnikov
- . №95107181, 1997.02.20, Method to convert energy of physical vacuum into energy of physical space, O.K. Polev and others
- . №92008695, 1995.04.20, Method to get overunity efficiency, Yu.V. Karasev and others
- . №93006851, 1995.04.30, Principle, method and device for circulation of mass by force of gravitation and inertia, G.S. Kirichenko
- . №93039885, 1996.05.20, Hydro-gravitational electric power station, L.S. Konkov
- . №93036371, 1995.11.27, Method to convert energy created in result of interaction of earth's gravity force and air bearing capacity into electric energy, V.I. Kovalenko
- . №93025690, 1996.07.27, Method and device to convert heat energy into mechanical one, A.I. Lendyaev
- . №2001122885, 2003.04.20, Rotary method to convert magnetic energy into mechanical one, L.N. Mezentsev
- . №2001106783, 2003.02.10, Gravitational source of energy, A.D. Yurik and others
- . №2001115968, 2003.03.20, Method to convert energy, V.S. Gorelyuh

- №2002131190, 2003.04.20, Method to convert heat energy into useful work, G.R. Umarov and others
- №2001122676, 2003.05.27, Device to get energy by conversion of energy from one state to another, T.A. Trushina and others
- №2131636, 1999.06.10, Fuel-less engine, V.E. Alekseenko
- №5037775, 1996.10.10, Magnetic engine, V.E. Alekseenko
- №94003087, 1995.12.27, Gravitational engine, A.A. Voznyukov
- №93058095, 1996.06.27, Perpetual mobile, Yu.S. Parshutin
- №93056706, 1996.07.27, Perpetual mobile, A.V. Remezovich
- №93039002, 1996.01.20, Gas-dynamic perpetual mobile, A.I. Lendyaev
- №94011000, 1995.11.27, Perpetual mobile by Makagyan, V.S. Makagyan
- №97114829, 1999.06.27, Perpetual mobile by Makagyan, V.S. Makagyan
- №95114965, 1997.08.10, Electric perpetual mobile by Abrakito, V.E. Abrakito
- №9512209, 1998.02.20, Perpetual mobile, V.V. Sharov
- №99111572, 1999.09.27, Perpetual mobile, N.M. Rotar
- №98116343, 2000.05.10, Engine-electric saw (perpetual mobile), V.V. Smirnov
- №2000101256, 2001.11.20, Perpetual mobile, V.D. Rykov
- №2000120592, 2002.07.20, Perpetual mobile, K.I. Harazov
- №2001117783, 2003.03.20, Magnetic perpetual mobile, S.N. Verevkin
- №2001123502, 2003.04.20, Magnetic engine, A.E. Ryumin
- №5032711, 1995.02.20, Ferromagnetic engine, V.P. Levkin
- №94019782, 1996.01.10, Device for demonstration of conversion of permanent magnet energy, M.F. Ostrikov and others
- №95103846, 1996.11.27, Magnetic generator, M.F. Ostrikov and others
- №95112010, 1997.06.27, Method to convert permanent magnet energy into rotary motion, A.V. Starostin and others
- №2143170, 1999.12.20, Method to convert energy of mechanical loading into energy of repeated transference, V.I. Rahovsky and others
- №2000119415, 2002.06.20, Method to convert energy of fields of permanent magnets into mechanical work, Yu.S. Pilipkov
- №2001109811, 2003.02.27, Method to capture and convert energy of physical vacuum into electric energy, S.N. Kovalev
- №99121374, 2001.11.10, Perpetual mobile, E.M. Volodin
- №94026259, 1996.05.20, Device to convert magnetic field energy into kinetic energy, P. Imrish

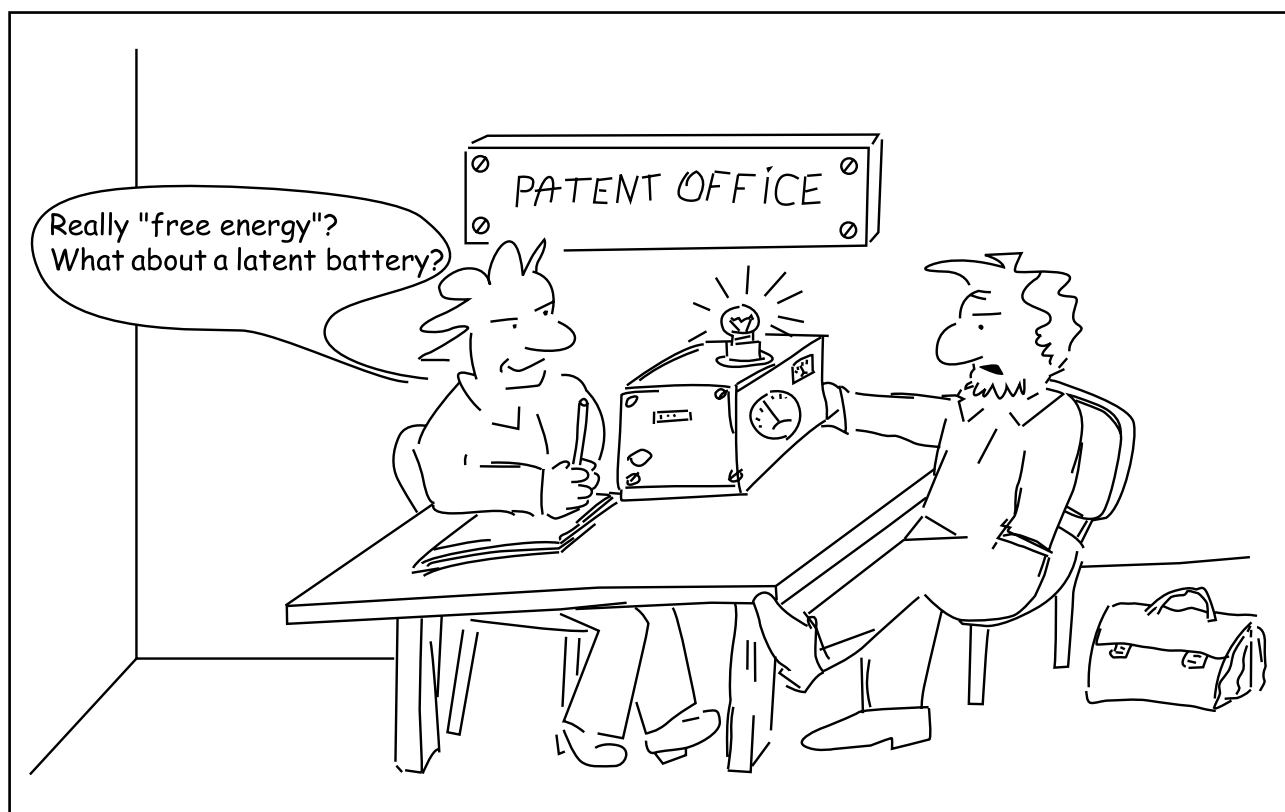

Device for conversion of magnetic field energy into kinetic energy

No. 94026259, 1996.05.20

Author: Pavel Imrish

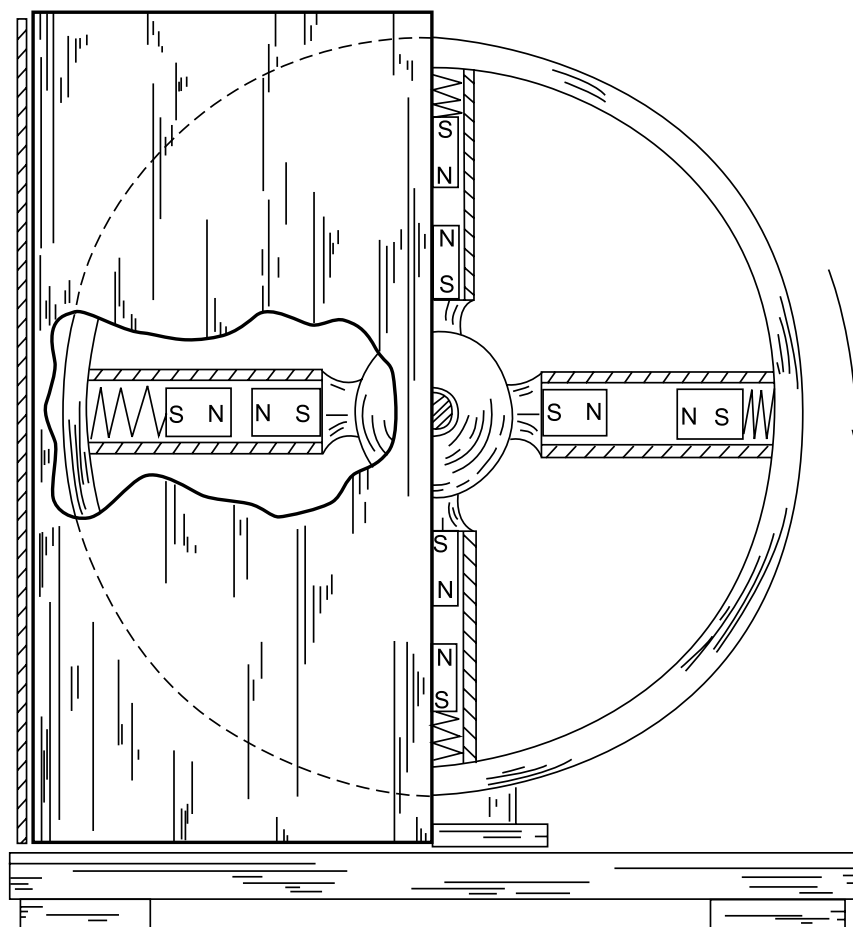


Fig. 1

The invention refers to a device for conversion of magnetic field energy into kinetic energy. The device has a rotating wheel with at least two radially opposing non-magnet holders used as guide ways for at least two permanent magnets, respectively. The permanent magnets are mounted in the holders so that there is a possibility to remove them. From the both sides of the wheel plates made of magnetic material are mounted axially; the plates surround the wheel partially. Depending on direction of the both poles, namely on location of the similar and opposite poles towards each other, compression element is situated on the holders, or between the wheel and the outer end of the permanent magnet located at the furthest radial distance from the axle of the wheel, or between two permanent magnets. (The device operation principle is obvious from Fig 1).

Editor: We have found an example of a similar device whose description is presented in the book by R. Ford The Perpetual Motion mystery [1].

In this case, there is an analogous process, during which half of the cycle is screened and the rotor is supposed to rotate permanently (see Fig. 2).

1. R.A. Ford, The Perpetual Motion mystery. Lost Technology Series, p.23.

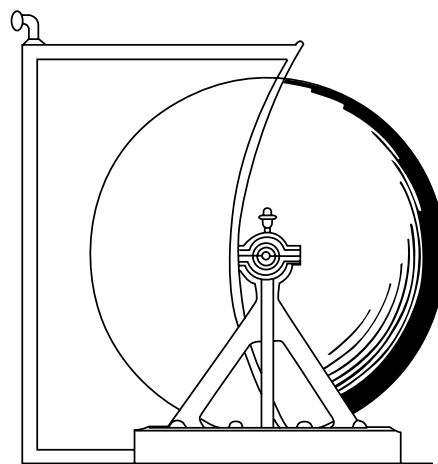


Fig. 2

Gravity spaceships

Review on Grigory R. Uspenskiy's works, Russia

<http://space21.boom.ru/gravity.htm>

The level of development of modern astronautics is primarily determined by the energy capabilities of space carriers. So, nowadays, the single-mission carrier rockets equipped with chemical engines allow space exploration within the solar system. These carriers have delimited the near-earth space in the form of a geostationary orbit, where the practical-purpose space complexes operate.

Newer and higher levels of quality will be reached by cosmonautics upon its mastering gravity power engineering. Flights towards the nearest stars will become possible and by the end of the next century this will be followed by travels throughout Galaxy.

Gravity engines are structurally simple (**two bodies of different density are rigidly connected**). To form some practicably significant value of thrust it is required to use absolutely new technology regarding creation and retaining of matter of high density which can be compared to that of atomic nuclei. For instance, at an engine mass of about 2 t, it is possible to attain 10 N thrust using bunches of aluminum and lead nuclei. The nuclei are approached to each other at a distance comparable with sizes of these bunches.

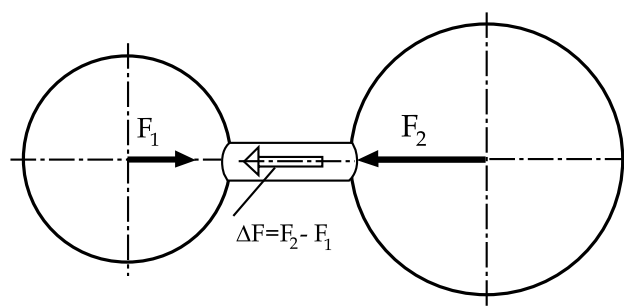


Fig. 1

Use of matter which is denser than nuclei bunch, increase of mass of the gravitating bodies, and reduction of the distance between the bodies causes increase of thrust. So, for a level of density of gravity holes (i.e. for extremely dense state of matter in which it is not attracted by other bodies) limit value of acceleration of the gravity engine reaches the order of 10^{100} ms^{-2} .

In engineering we usually use units of distance as meters, centimeters, millimeters, and microns. Let us consider one of them – millimeters. With such a size of the gravitating bodies and distance between them, it is possible to obtain substantial thrust forces of the gravity engine and, accordingly, accelerations of its motion.

So, using an engine of 20 ton mass we will get the thrust of $2 \times 10^4 \text{ N}$, with mass of 200 ton we will get the thrust of $2 \times 10^6 \text{ N}$, and so on. Thus, by increasing the engine mass by one order of magnitude, we obtain increase of thrust by two orders, while sizes of the bodies remain unchanged. But acceleration, in this occasion, remains constant and equal to approximately 1 m/s^2 .

Decrease in size of gravitating bodies of the engine leads to the corresponding increase of thrust by an order. Decrease of size is realized by increase of density of these bodies by 3 times up to 0.3 mm at the same masses. The acceleration they produce is increased by an order as well, i.e. up to 10 m/s^2 . Decrease of sizes of the gravitating bodies and the distance between them down to 0.1 mm results in further increase of engine thrust by one more order and also increase of acceleration up to 100 m/s^2 . If size of the bodies is 1 micron then acceleration increases up to 10^6 m/s^2 .

It is apparent that even with up-to-date technological possibilities of miniaturization the gravity engine with masses of dozens and hundreds of tons is capable to create great thrust forces and form accelerations considerable enough to fly across the Galaxy. Therefore, the problem of creating a gravity engine is, mainly, the problem of producing and retaining the high-density matter. It will be possible after studying the mechanism of interaction between matter & gravitational substance followed by developing techniques for synthesizing of high-density, large-mass, and small-size substance from this matter.

It is possible to control the value of thrust of the gravity engine changing the distance between gravitating bodies. Thrust direction can be changed by turning the rigid connection of the gravitating bodies. The engine can

be activated by bringing the gravitating masses together, and switching-off by moving them apart.

In a 24-hour period, such a ship can reach a speed of 10^6 m/s and cover a distance of about 10^{10} m. In a month, with a top speed of 3×10^7 m/s the ship will cover the distance of 10^{13} m; in a year, with a speed of 4×10^8 m/s the ship will cover a distance of 10^{15} m; in 10 years - 4×10^9 m/s and 10^{17} m, respectively. Apparently, the ship with sufficient over-load can be used for flights within the solar system and for manned flights towards the nearest stars.

When transporting unbreakable and non-urgent cargoes, the acceleration can be increased up to a few dozens of unities. The flight duration might be also increased by several tens of years. This extends the area of utilizing the gravity ships with over-loads of several unities. Besides these ships can be used for transporting operations within near vicinities of the Galaxy.

The high-speed flight will demand protection against approach flow of matter. So, per second (with a ship speed of 10^{10} m/s) 10^{-12} kg of matter will approach the ship. At that density of interstellar material is 10^{-24} kg/m³ and midship area is 10^2 m².

The great speed of approaching matter will create a substantial resisting force. At a speed of 10^{10} m/s, this force will come to the order of 10^{-2} N, whereas with a speed of 10^{18} m/s it will come to 10^{14} N. This is a great value, but as compared to thrust of such a ship which is to equal to 10^{17} N, the former value is a small one. That is why it is possible to overcome such resisting force.

Intercommunication with these ships might be, most likely, realizable by means of distortion of gravitational field. It is possible that the gravitational field distortion will be formed, on the contrary, by generating the matter from the gravitational field, and, most probably, by a method as yet unknown.



Monograph **“General Etherodynamics. Modeling of matter structures and fields on the basis of conception of gas-like aether”** by Vladimir A. Atsukovsky. 2nd edition, M., Energoatomizdat, 2003;
Brochure **“12 experiments on etherodynamics”** Zhukovsky, Publisher “Petit”, 2003.

On questions about purchasing, please, refer to Email: atsuk@dart.ru



Floyd Sweet Bench Test DVD

In order to demonstrate the reality of tapping free energy from the vacuum, we have now made available a very reasonably priced DVD of the bench tests of the late Floyd Sweet's Vacuum Triode Amplifier, with commentary by Tom Bearden.

During these two tests, the unit, which weighed about 6 lbs., can be seen to be putting out well over a million times more power than was put into it.

This DVD makes an excellent educational or instructional tool, and is priced at USD 9 including US domestic shipment. Running time is about 20 minutes.

Note: the full length Sweet DVD, which includes Sweet's proprietary conditioning process for the magnets, is also still available.

Order from http://www.cheniere.org/sales/order_by_credit_card.htm

On Velocity of Drive-Free Motion

S.A. Gerasimov, V.V. Stashenko, Russia

Physics Department, Rostov-on-Don State University,
Zorge St. 5, 344090, Rostov-on-Don, Russia

Editorial: We publish a summary of the article. The original text you can receive from the authors.

A drive-free system made on the basis of a planar mechanism is described. The experimental results on average velocities of the drive-free propulsive system are presented in a scaled view.

During usual motion, a system is repealed from the surface in the case of its motion on a plane or from the medium when it moves in a resistance medium. This kind of motion is achieved by using a drive mechanism. In contrast to the usual motion, the drive-free propulsive system moves due to interaction of a body of a system with another body of the same system. Sometimes such machines are called inertoids [1] or vibration propulsive devices [2]. To produce such kind of motion it is sufficient to provide anisotropy of the resistance force [3-5] or asymmetry of the internal force [6]. One of the simplest ways to do it is to use a simple two-link planar mechanism. A device for such a motion is shown in Fig. 1.

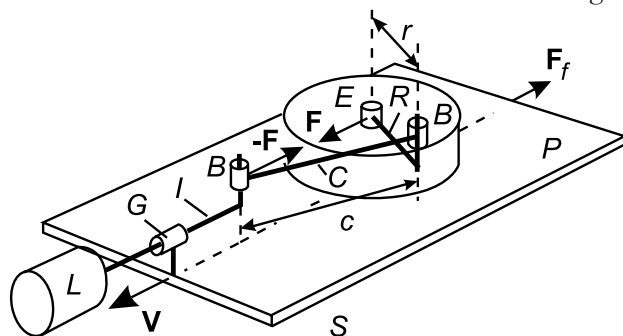


Fig. 1

Experimental device

This device with a total mass of $M+m$ consists of a platform P on which an electric motor E rotating a drive rod R of length r is mounted. This is only one part of the planar mechanism. Another link is the connecting rod C of length c which connects the unbalanced load L and the drive rod R by means of two bell bearings B. The unbalanced load L of mass m on the rod I slides in guide G. The basic distinction of this mechanism is in that this variant of drive-free machine allows us to analyze the experimental data on average velocities of

motion. Actually the only forces, which act on the platform and are collinear to the moving direction, are the force F caused by vibrations of the load L and the frictional force F_f . The platform starts to move when the force acting on the platform becomes greater than the frictional force.

Let us discuss possibilities of the real propulsive system shown in Fig. 1. Measurements were made at $r=0.01$ m and at three mass ratios m/M . The values of frictional coefficients were measured for each parameter of the system and vary from $k=0.25$ to $k=0.4$. The system starts moving when theoretically the drift does not take place. When motion becomes reversible, the velocity of drive-free drift does not decrease.

Thus drive-free motion is possible even if the frictional coefficients are very small. When increasing the frequency of vibrations velocity does not decrease. We can not discuss the existence of some third force acting on the platform (we can suggest the existence of frictional force F_f and the internal force F caused by vibrations). Let somebody else take the liberty of making such a conclusion!

References

1. Tolchin V.N. Inertoid. // Perm: Perm Book Publisher. 1977. Blekhman I.I. Vibrational Motion. // Moscow: Nauka. 2000. Nappo F. Sulla Influenza Indiretta Delle Forze Inertne sul Moto del Baricentro. // La Ricerca Scientifica (Rendiconti). 1965. V. 8. No 1. P. 3-14.
2. Gerasimov S.A. Anisotropy of Frictional Force and Vibrational Motion. // Problems of Applied Physics. 2001. V 7. P. 85-88.
3. Gerasimov S.A. Self-Similarity of Vibrational Motion in a Resistant Medium. // Journal of Applied Mechanics and Technical Physics. 2002. V. 43. No 1. P. 90-92.
4. Gerasimov S.A. A Real Model of Vibratory-Impact Propulsive Device. // Problems of Applied Physics. 2000. V 6. P. 117-118.
5. Langhaar H. L. Dimensional Analysis and Theory of Models. // New York: Wiley. 1951.

ELECTROMAGNETIC SELF-ACTION

S.A. Gerasimov, A.V. Volos, Russia

Physics Department, Rostov-on-Don State University,
Zorge St. 5, 344090, Rostov-on-Don, Russia

The torque of a self-action exerting on the mobile part of the reactionless engine is measured. It is shown that there exists a value of the height of the mobile electrode at which the torque of self-action is maximal.

There is an opinion that a body can not act on itself [1]. The existence of the so-called force of self-action is believed to contradict to the law of conservation of momentum. This is nothing but prejudice. Though the experimental confirmations of existence of self-action [2-4], conventional science is ready to refuse modern electrodynamics and make up a new theory of electromagnetism [1, 5] in order to save Newton's third law in use. It is comprehensible. First of all, these are the theoretical [5] and experimental [3] errors. The equivalence [5] of the Biot-Savart force is mathematically coarse since in this case the highest terms of expansion of force of self-action are cast out. This equivalence violates law of action and reaction and Ampere force law for which the principle of equality and collinearity of action and reaction forces is valid. Non-linearity of dependence of the torque of self-action on the current intensity [3] makes us doubt in the validity of these results. Moreover, typical values of force [2, 4] and torque [3, 6] are too small even if direct current in the circuit is significant. It is required to pass through the direct current of hundred amperes to produce the considerable displacement or turn of a body. As a result, small values of the effect caused ambiguity in the explanation of the phenomenon [1].

In fact, searching the reactionless propulsive devices we usually forget about the magnetic self-action which arises when a body consisting of a magnet and incomplete electric circuit can move violating law of action and reaction [7]. This violation is proved theoretically [8] but peculiarities of this motion are not well discussed. The principle of such a motion is shown in Fig. 1. This is the magnetic interaction between two current elements one of which is a part of a closed circular loop L and another is perpendicular to the first one. Since the force $d\mathbf{F}_{jm}$ acting on any current element of the loop L is perpendicular to the density of current $\mathbf{j}_m$ then the Z -component of the torque $d\mathbf{N}_m = [\mathbf{r}_m \times d\mathbf{F}_{jm}]$ is equal

to zero while torque which exerted on the second current element by the magnetic field of the loop, does not.

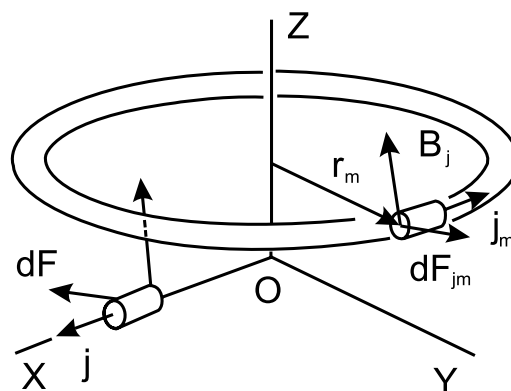


Fig. 1

Violation of law of action and reaction.

The force $d\mathbf{F}_{jm}$ with which the magnetic field $\mathbf{B}_j$ of another current element acts on the current of density $\mathbf{j}_m$, is not equal nor opposite to the force $d\mathbf{F}$ with which the magnetic field $\mathbf{B}$ of the first current element acts on the current of density $\mathbf{j}$.

An experimental device is shown in Fig. 2. A commercially available ring-shaped carbon-steel magnet $\mathbf{M}$ (inner radius – 20 mm; outer radius – 55 mm, height – 25 mm) of 2.2×10^5 A/m magnetization is located on the cover of a cylindrical electrode $\mathbf{E}$ suspended by thread $\mathbf{T}$. The electrode $\mathbf{E}$ is furnished with a central electrode $\mathbf{C}$ of the same height h and 5 mm diameter. The radius of the electrode $\mathbf{E}$ is 130 mm. The open end of electrode $\mathbf{E}$ and the central electrode $\mathbf{C}$ are submersed in a conducting liquid $\mathbf{L}_+$ and $\mathbf{L}_-$ placed in two volumes of a vessel $\mathbf{V}$ so that the depth of submergence of these parts is about 5 mm. In this experiment the conducting fluid is 10% solution of copper sulfate ($\text{CuSO}_4 \cdot 5\text{H}_2\text{O}$). The vessel $\mathbf{V}$ consists of two thin coaxial plastic cylinders of 2 mm thickness. The radii of the plastic cylinders having the common bottom are equal to 10.5 cm and 18 cm. The height of the vessel is 12.5 cm. A disk and a ring-shaped electrodes $\mathbf{S}_+$ and $\mathbf{S}_-$ of 1.5 mm thickness are placed on the bottom of the vessel to supply the direct electric current of intensity I . All conducting parts of the device are made of copper. The thickness of the electrode $\mathbf{E}$ is 1.5 mm.

When the direct current I of density j flows through the electric circuit, the magnet and the electrode E rotate in the direction of the magnetic force $d\mathbf{F}$ which is proportional to the vector product $[\mathbf{j} \times \mathbf{B}]$ as shown in Fig. 2. This is a force of self-action by means of which the mobile part of this device consisting of the magnet M and the electrode E acts on itself. However there is no force of reaction which could cause such a rotation. This is really true since a ring-shaped magnet is equivalent to two cylindrical surfaces with the surface current of density j_m . The force of self-action $d\mathbf{F}$ acting on the cover of the electrode is compensated by the force of self-action $d\mathbf{F}_*$ acting on the cylindrical part of the electrode E . Magnetic induction field $\mathbf{B}_*$ "does its part" as shown in Fig. 2. Therefore, it would be appropriate to find out how the height of the electrode E influences the value of the torque N . Such an influence is demonstrated in Fig. 3.

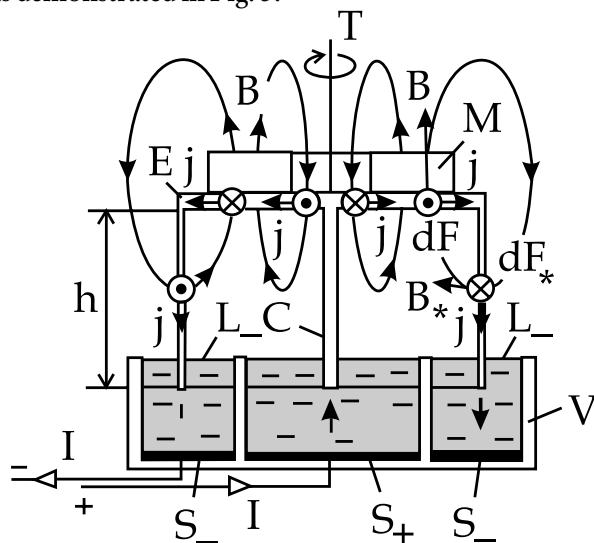


Fig. 2

Experimental device

(•) and (x) – directions of magnetic forces acting on various parts of the mobile electrode E

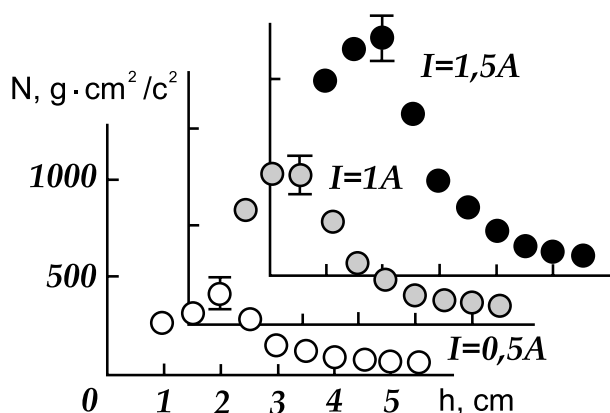


Fig. 3

Dependence of the torque N on the height of the electrode h at various values of the direct current I in the circuit

Thus there exists the value of the height h at which torque of self-action is maximal. This is the first result of the present work. At $I = 1 \text{ A}$ and $h = 2 \text{ cm}$ the electrode E turns at angle of 2.2 radian (126°) with respect to the equilibrium position. Such a turn corresponds to $3.4 \times 10^2 \text{ g} \cdot \text{cm}^2 / \text{s}^2 \cdot \text{rad}$, i.e. to the constant of torsion of the thread. The second result is that the maximum value of the torque of self-action N at the current $I = 1 \text{ A}$ is even larger than the value of the torque produced by the traditional unipolar device [3] at the current 50 A.

In fact, this work represents an attempt to draw attention to a more effective and simple practical application of the self-action. It remains only to transfer electric current in an unclosed electrical conductor and such a possibility really exists.

References

1. Graneau N. The Finite Size of the Metallic Current Element. // Physics Letters A. 1990. V. 147. N. 2-3. P. 92-95.
2. Sigalov R.G., Shapovalova T.I., Karimov H.H., Samsonov N.I. Magnetic Fields and Their New Applications. // Moscow: Nauka. 1976.
3. Das Gupta A.K. Unipolar Machines. Association of the Magnetic Field with the Field-Producing Magnet. // American Journal of Physics. 1963. V. 31. N 6. P. 428-430.
4. Cavalleri G., Bettoni G., Tonni E., Spavieri G. Experimental Proof of Standard Electrodynamics by Measuring the Self-Force on a Part of a Current Loop. // Physical Review E. 1998. V. 58. N 2. P. 2505-2517.
5. Christodoulides C. Equivalence of the Ampere and Biot-Savart Force Law in Magnetostatics. // Journal of Physics A. 1987. V. 20. N 8. P. 2037-2042.
6. Serra-Valls A., Gago-Bousquet G. Conducting Spiral as an Acyclic or Unipolar Machine. // American Journal of Physics. 1970. V. 38. N 11. P. 1273-1276.
7. Gerasimov S.A., Volos A.V. On Motion of Magnet in Conducting Fluid. // Problems of Applied Physics. 2001. V. 7. P. 26-27.
8. Gerasimov S.A. Self-Interaction and Vector Potential in Magnetostatics. // Physica Scripta. 1997. V. 56. N 3-4. P. 462-464.

JNET

New Energy Technologies
collection of articles
Japanese Version

Collection of articles from New Energy
Technologies magazine, 2001-2002 is published in
Japan.

On purchasing of the book, please, contact

Eiichi Yamamoto,
President Yama Trans Co. Ltd.

Email: admin@yamatrans.co.jp or
eyama@yamatrans.co.jp

Uranium Photoaccumulator

Anton N. Yegorov, Russia

St.Petersburg Institute of Nuclear Physics, Russian Academy of Sciences, Gatchina, 188350, Leningrad region, Russia
<http://www.pnpi.spb.ru>, Email: bti@isppd.pnpi.nw.ru



Photoaccumulators are galvanic elements consisting of two communicating vessels, one of which is exposed to light and another is kept in darkness. Ionic composition of electrolyte, which fills these vessels, depends on intensity of illumination. If an inexpensive electrode is placed in each vessel, then a potential

difference will appear. If the electrodes are closed at external working resistance the electron stream will begin to equalize ionic composition and the difference in illumination intensity will tend to disbalance it. As a result, a certain working mode will be established which will allow to utilize the photoaccumulator for production of industrial electrical energy. As distinct from the solar battery, which works while exposed to the light, the photoaccumulator stores some part of solar energy in its electrolyte which is supplied with electrical energy after sunset too.

The idea of photoaccumulator is not a new one. It was established in the end of 19th century that it is feasible to create a photoaccumulator containing electrolyte made of the following mixture: $\text{Fe}^{2+} + \text{Hg}^{2+} = \text{Fe}^{3+} + \text{Hg}^+$


This photoaccumulator was not adopted in practice because of high toxicity of the electrolyte and very low EMF (approximately 0.018). Development of technology is accompanied by a widening range of materials and matters which can be used in large scale production and power industry. Among such materials are, in particular, titanium, depleted uranium and rare-earth elements. Nuclear power industry uses U235 isotope only. Naturally occurring compound contains only 0.72% of U235. Hundreds of thousands of U238 from which U235 has been extracted are kept as useless stock.

In the end of sixties in one of radiochemical laboratories of LINP (Leningrad Institute of Nuclear Physics) P.N. Moskal'ov repeated the same experiment over a long period of time. In the morning he placed a tightly closed retort filled with uranyl-chloride soluted in compound of water, spirit and hydrochloric acid on the window-sill. The solution in the retort changed its color from yellow to emerald-green. Before leaving the laboratory Moskal'ov removed the retort with green solution from the windowsill to a closed chest. In the morning Moskal'ov retrieved the retort with the solution (which was already yellow) from the chest and placed it on the sill. The solution became green again and the whole process repeated daily.

Chemical processes in uranium electrolyte are rather complicated: first, under the light influence the uranyl ion oxidizes ethyl alcohol, which is then transformed to aldehyde: $\text{UO}_2^{+2} + \text{C}_2\text{H}_5\text{OH}^+ = \text{U}^{iv}(\text{OH})_2 + \text{C}_2\text{H}_4\text{O}$.

In the dark ions of uranyl-4 interact with aldehyde and are transformed to UO_2 uranyl ion and spirit again. Thus, **this cyclic process can take place over a significant period of time being supported by the energy provided by light quanta of visible light which are transformed into the heat.**

The idea of utilizing this process in order to obtain electrical energy emerged in the late nineties. The mechanism of uranium photoaccumulator is very simple (Fig 1): two glass vessels, one

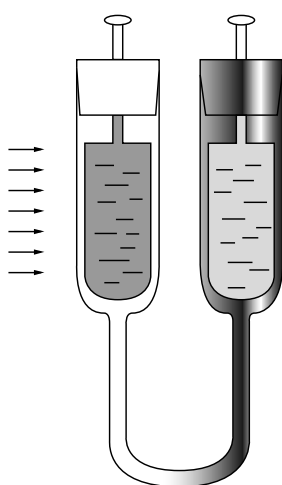

made of transparent glass and another of non-transparent glass, are connected with a black acid-proof rubber tube. The communicating vessels are filled with aqueous electrolyte containing 40% of spirit, 80-100 g/l UO_2Cl_2 and 0.2 m HCL. The electrolyte is previously activated by multiple cycles of exposing it to light and then placing it in darkness in order to obtain a significant volume of aldehydic fraction. The major difficulty of designing uranium photoaccumulator is connected with the choice of the material for electrodes. In galvanic elements carbonized platinum electrodes are usually used. For practical use platinized titanium gives the best fit. Titanium foil covered with superfine layer of platinum


is currently widely used in electrochemical industry and is procurable.

In the transparent vessel the titanium petal-shaped electrodes are parallel the light flow, so the light quanta move freely through the solution.

In working condition each photoaccumulator produces 10 mA of current at 0.3 volt voltage, so they are to be connected in large batteries, both in series and in parallel.

It is also necessary to consider the aspect of safety. Until now, the depleted uranium has been used for one purpose only, namely, for manufacturing of cores for armor-piercing shells. When used in this manner, the uranium is pulverized, which leads to environmental damage. The battery of photoaccumulators is placed in hermetic metal chest; the front panel of the latter must be made of solid safety glass. Such a system will protect the photoaccumulator battery from malicious intent and the security staff from weak uranium radioactivity.

International Prize on Power Engineering “GLOBAL ENERGY”

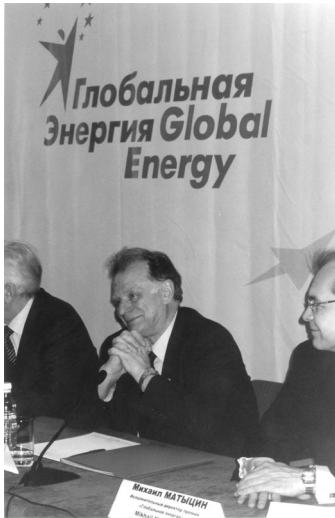

Zhores I. Alferov

Nick Holonyak, Professor at the University of Illinois (USA), was awarded for “fundamental contributions to the development of power silicon electronics and invention of the first semi-conducting light-emitting diodes in a visible part of the spectrum”. Thyristor invented by Holonyak allows the transformation of direct current into alternating and vice versa, to direct this process, to store and accumulate energy. This device is used for every electric locomotive, for frequency transformation. Such devices help to save significant amounts of energy, thus, about 30 percent of all energy produced in the world is processed through thyristors.


Nick Holonyak’s other invention, i.e. semi-conducting light-emitting diodes in a visible part of the spectrum, has led to development of a new field of the modern power engineering. Supposedly, efficient and safe light-emitting diodes will replace daylight lamps in the next ten years.

“Although Nick Holonyak’s invention dates back to the end of the 50ies of the last century, it remains current”

International Prize “Global Energy” was first presented in St. Petersburg on June 15, 2003. The bonus fund of \$900,000 was shared between three scientists “whose work has been and is still important both to the last century and future research”, said Zhores Alferov, Chair man of the Global Energy Prize Award International Committee.

said the Chairman of Expert Commission, Academician Vladimir Fortov. “This is one of the key inventions leading to the search of new ways of sustainable energy saving”.

Gennady Mesyats, Academician of Russian Academy of Sciences, and **Ian Douglas Smith**, Senior Scientist at The Titan Pulse Science Division, were awarded for giving birth to a new direction in the field of power engineering, i.e. power pulse energy. Due to their research, commutation of high-level currents at megavatt levels of voltage has become possible; a number of powerful current choppers have been created, furthermore, there have been developed transformer constructions which allow avoiding energy loss in power transmission lines. These research and innovations resulted in the creation of a number of unique pulse power machines and devices widely used in Russia and abroad (“Aurora”, “Helia” (USA), “Sinus”, “Gamma”, “Maus”, “Pik” (Russia) and others).

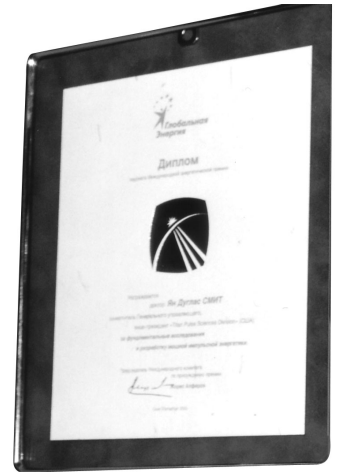

Diploma of Global Energy Prize laureate





Teleportation

Review prepared by correspondent Alla Pashova, Russia

For conventional science, the term “teleportation” is not worthy of serious consideration unless ascertained by compulsory “quantum” teleportation. Thus, teleportation is unconditionally referred to microworld phenomena and, in fact, comes to distant information transfer. Spatial transference of a macroobject of definite mass has been excluded.

Teleportation of states

What does **quantum teleportation** mean? During active development of quantum theory, in 1935, the so-called EPR-paradox (Einstein-Podolskiy-Rosen paradox) was formulated in the well-known work “Can quantum-mechanical description of reality be full?” written by Albert Einstein, Boris Podolskiy, and Natan Rozen.

The gist of the paradox is as follows. There are two particles interacting for some time, thereby forming a common system. From the position of quantum mechanics, this coupled system can be described with a certain wave function. When interaction is over and particles scatter within arbitrarily large distances, they still will be described by the same function as before. At that, state of each separate particle cannot be known in principle that is apparent from uncertainty relation. Only when one of the particles enters a receiver, which records its parameters, the relevant characteristics of the other one emerge (exactly emerge, but not become known!). Thus instant unlimitedly distant “transmission” of quantum state of the particle is possible. Therewith, teleportation of the particle itself and transference of mass do not take place.

Einstein and his colleagues believed that existence of such particles predicted by quantum mechanics prove theory incompleteness. Thereof, the scientists inferred the necessity of other parameters (besides wave function) to describe quantum states. Otherwise, from the local viewpoint, correlations between elements of such a system could not be understood. It was far much later, when Bell showed that some of measurements could define these correlations and exclude any local hidden parameters. It was not until early 1980-s that famous experiments were performed finally eliminating a possibility of local hidden parameters.

In 1980, Alan Aspect experimentally proved that EPR-paradox in quantum world takes place indeed. Special measurements of state of EPR-particles indicated that EPR-pair not only has a common origin, but in addition, that one of the photons somehow “get to know” the way the second one was changed. In further experiments, existence of EPR-paradox was affirmed, even if particles of EPR-pair were removed from each other over a distance of 10 kilometers or so.

In 1993, Charles H. Bennett and his colleagues worked out a method to transfer the quantum state of some object of the microworld to another quantum object by means of EPR-pair and called this method “quantum teleportation”. In 1997 a group of experimentalists under the direction of Anton Zeilinger for the first time implemented quantum teleportation of the photon state in the University of Innsbruck.

In such a way, researchers keep on improving the process of quantum teleportation. In 2001 Danish scientists managed to link gas particles spaced at a substantial interval from each other, by transmitting information about quantum state from one particle to another by means of laser. The quantum teleportation between two gaseous clouds were attained by Eugene Polzik and his colleagues in Orkhus University. They succeeded in coupling about million of cesium atoms, whereas the previous record was only four atoms.

Scientists of Australian National University destroyed a laser beam and nearly instantly recreated it in another point in space; in other words, they teleported photons of the laser beam. In contrast to previous similar experiments, the physicists managed to obtain the required result in 100 percents of cases. Ping Koy Lam, the head of the task group of Australian University, claimed that the first atom of solid substance was likely to be teleported within near three to five years. However, as most scientists admit, a task to teleport a human remains almost impracticable. Even teleportation of atoms, as compared to that of photons, is much more complicated process. It is even harder when dealing with molecules. It is basically possible (though practically very difficult) first to transfer a molecule to a minimum-energy state (ground state) causing it to radiate a certain

sequence of photons. These photons will find themselves in a certain superposition containing all the “quantum” information, which was available in the molecule. Thereafter, it is possible to teleport photon states by means of EPR-pairs. Moreover, it is also required that the classically measured information about a molecule. If molecule of minimum-energy state is present in the receiver, then this molecule, by interacting with teleported photons in a required order, will transform to the quantum state identical to that of the initial one. Consequently, the quantum state of molecule of a certain material will be transmitted, actually with velocity of light. When that happens, the quantum state at the transmitting side will be destroyed.

The human organism comprises about 10^{27} atoms. To save and transmit information on properties of that number of particles seems to be practically unachievable. “Theoretically, nothing prevents us from doing that, but complexity of the problem is such that now no one seriously thinks about the solution” – states Ping Koy Lam.

Being a method of information transmission, quantum teleportation has found its application in quantum computers, whose information is stored in the form of a set of quantum states. Impossibility to wiretap and copy transmitted information is considered to be an advantage of such computers. Those researchers, who, nevertheless, wish to answer the question of “How to teleport matter, but not its state?” have to seek for more perspective theories and techniques.

Teleportation of material objects

Those people, who really want to realize instant spatial transportation of objects, i.e. teleportation, should refer to studying properties of Space and Time. Quantum teleportation has a certain finite velocity that cannot exceed that of light. The genuine teleportation assumes that an object should set off from a starting point to a finishing point (these points differ by a certain distance X), at that the transference time comes to zero. The object to be teleported is not changed or taken to atoms to be gathered later at a distant point of space according to information transferred to this point. (Fig1).

The object disappears from one place and simultaneously appears in another place. How is that possible? A body will disappear from point A and appear in point B if to bend space in such a way as to let point A and point B coincide. Then the object will instantly appear in point B since there is no interval between points A and B. Teleportation could be realized by a device, which would make it possible to superpose points A and B.

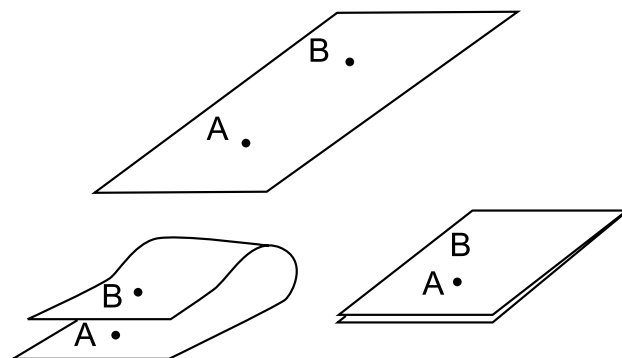


Fig. 1

Space is supposed to be unbendable without enormous energy consumption. However, Alexander V. Frolov points out that this issue is not so unambiguous: “Normally we consider space in connection with “natural” course of time existing in it. That is some degree of space curvature. Let us assume that it can be changed. The space curvature can be considered as acceleration or deceleration of time. Acceleration always demands, for instance in mechanics, some energy consumption. But if we “decelerate” time, energy is liberated and it can be accumulated for subsequent use”.

K.Z. Leshan suggests surrounding a transferred object with a closed surface consisting of vacuum holes. Inside such a “hole sphere” there is geometry similar to that of a black hole. This place is absolutely isolated from the external Universe. No radiation is able to penetrate through the hole in space and time. For an observer, who is inside the hole sphere, the distance between sphere center and its border is infinitely large, since spatial metrics is ever-varying from the center to the border. Distances between the points is continuously shortened so that the distance between any couple of points comes to zero at the very hole surface. A matter transmitter can have inner or outer hole surface. In the first case a teleportation station has a spherical chamber to place the object. Equipment to produce holes should be located upon the outer side of the sphere. Such a station is capable to provide hundreds of launches a day by instantly expulsing spaceships to deep space over distances of millions of light years.

From microcosm towards macrocosm

Simeon Bocharov (member of Chemistry and Biochemistry Department, University of Delaver, Newark, USA) considers teleportation phenomenon using microobjects as an example and applying an interesting conception of protomatter.

In S. Bocharov's opinion, many paradoxes of the present-day science could be solved under condition of considering the whole existing matter to be a single continuum, i.e. protomatter. At this approach, the microcosm objects are not independent ones, being represented in the form of distortions of the very continuum and its manifestations here and now. Protomatter, whose distortion degree is beyond modern possibilities of detection, corresponds to vacuum. In the present-day paradigm redistribution of protomatter distortion corresponds to motion of particles. The important peculiarity is a refusal of such concepts as structure, dimensions, mass and other macroscopic characteristics with respect to microcosm objects, since here they are not considered as separate entities.

For experimental justification of his theory, S. Bocharov suggests to consider teleportation of microobjects incorporated in fullerenes under low temperatures and pressure.

As a basis for reasoning he takes the fact that identical or similar conditions, whereon distortions are located, bring them to the state of identical or similar by lability/diffuseness. And vice versa, distortions, which are similar by lability/diffuseness, influence their near surroundings, creating, as a result, similar macroscopic states. In such a case protomatter distortion (in some spatial domains and under similar conditions) will cause appearance of similar distortions in another domain, whose degree of removal depends on presence of other distortions and their characteristics. In other words matter will be teleported from one spatial domain to another.

Possibility to realize teleportation of microobject causes the well-known phenomenon, which is nowadays described as embedding of particles into inner hollows of spheroid fullerene molecules without reacting with them. As object of teleportation there can be used distortions classified as elementary ones, such as hydrogen, helium or stable matters (noble gases). In both cases the influence of objects upon surroundings is minimized.

The researcher believes that in case of successful experiment, new pattern of matter structure will be confirmed, and valuable teleportation of microobjects (with prospects of such possibility for macrocosm objects) will be demonstrated.

One more approach to teleportation of physical macroobjects was considered in the work "Practical application of time rate control" (New Energy

Technologies No. 3, 2001) by Alexander V. Frolov. It is assumed that density of space (aether) energy determines rate of passing of any processes including the very process of matter existence. Changes of aether density (increase or decrease) must result in the emergence of a force analogous to that of buoyancy, though acting towards the fourth dimension. This "chrono-motive force" (CMF) is also an analogue of electromotive force (EMF) and can be generated by analogy with electrodynamics. According to Alexander V. Frolov, laws of quantum mechanics as to discretization of levels of energy of material system, which exist in the domain of increased or decreased aether density, are valid in the macrocosm as well. Teleportation (as a transition from one state of the system to another one) can be studied with electron transference from one orbit to another as an example with the only difference that for the teleported object not only its location, but also the very spatial properties are changed. In aether of different density (after discrete transition) the same object will have different space around it, wherein time is decelerated or accelerated. Experiments of this field have already been in development stage.

Therefore, modern theoretical physics has handed the problem of teleportation to researchers-experimentalists, who possess sufficient breadth of mind. Perhaps, using teleportation technologies, they will manage to fundamentally alter the process of space exploration and raise our civilization up to radically new development level.



an online and published
magazine about Electric,
Hybrid, Fuel Cell Vehicles,
advanced batteries, ultra
capacitors,

fuel cells, microturbines, free energy systems,
events and exhibitions worldwide

63600 Deschutes Mkt Rd,
Bend Oregon, 97701
541-388-1908 fax 541-388-2750
etimes@teleport.com
www.electrifyingtimes.com
Subscription \$13/3 issues

“Mass defect” in Home Conditions

Prokofy V. Sherbak, Russia

Mitinskaya Str., 40-1-244, Moscow, 123430, Russia

Tel.: (095)950-4135

Email: Prokofy@mail.ru

The idea to conduct experiments on “mass defect” demonstration appeared after a cycle of seminars, which took place in 1993-1996 at the Moscow Aviation Institute under the direction of V. I. Patrushev, Doctor of Technical Sciences, Professor of “Designing of aerohydrodynamic systems” Department (the author of the article is also a graduate of the Department). At the seminars, an enterprising group studied and developed an applied theory of “Displacing fields” by Alexis V. Murlikin and an associate “Theory of energy exchange processes”. Later the group was called **“Group studying non-inertial transference”** (non-inertial natural processes).

The experiment was aimed to test some theoretical suppositions, namely, that it is possible to influence on existent energy flows which input and output to the matter. At that the simplest way to influence indirectly is to change the medium the flows come through. In general, optic experiments on luminous flux refraction show the same. But light refraction and change of speed of light propagation at passing through different mediums is one thing; and change of mass of a material body is something new that has not ever been dealt with. Moreover you can consider light (i.e. electromagnetic radiation) to be the secondary manifestation of output energy flow. Besides mass defect is very important for nuclear physics because it “helps” to develop this branch and stimulates drawing “energy dividends” in splitting reactions, decay reactions and nuclear fusion reactions. But unfortunately we can not touch element nucleus and even million nuclei while we can easily touch metallic balls of 1 gram weight.

Let us note that a concept of mass is one of the most uncertain in physics. We can not measure mass directly. It is possible to do it only indirectly, by gravity, using scales (it does not matter what kind of scales are used), or by kinetic momentum (in this case mass is a measure of inertia) by means of dynamometers.

Thus it is evident that change of WEIGHT shown by scales is not MASS change as measure of matter

quantity. Since one of the most important points of the theory of “Displacing fields” is creation of a vehicle of new generation, then one of the major tasks is to overcome gravity (to decrease weight). And this “home experiment” shows the way to solve it. However we can call it “home” only in part, because for weighing there were used electronic scales (mass-comparator with measurement accuracy of 0.1 microgram. (See Fig. 1).

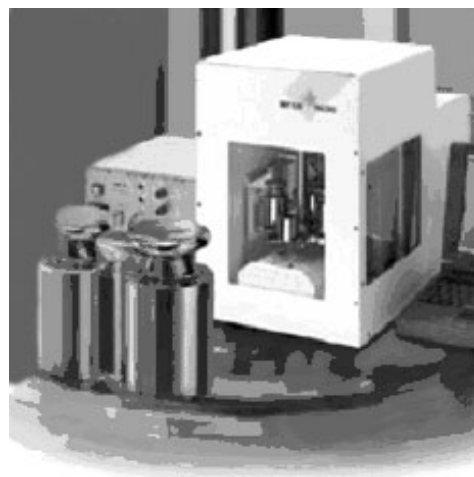


Fig. 1

Precision scales METTLER TOLEDO allows making:
High-accuracy weighing in the range
from 0.1 microgram to several tones
Measurement with resolution up to milliard points

Two sets were designed for weighing. The first one had an aluminum (Al) ball-kernel which weighed 1 gram and a lead (Pb) casing-shell consisted of two parts (half-spheres) which also has weight of 1 gram. The second set had on the contrary a lead kernel and an aluminum casing. The sets were disassembled and then hermetically assembled to make a single device with no gaps (See Fig. 2).

Since it had to be done with great accuracy and it was a piece article, not a Moscow product company undertook to produce it. And only one of the students, Nicholas Sorokin, a young boy with skilful fingers, had

helped. He invented a technology which allowed making balls of the necessary size at home conditions. He was literally pickling every micron of metal with acid and finally got the necessary size and weight.

So, the weight of a non-assembled set was: 1 gram (weight of kernel) and 1 gramm (weight of shell). Weight of an assembled set, according to the "Theory of energy exchange processes" by Murlikin, is not equal to the simple sum of the non-assembled components, and mass defect would be different for various sets right up to the change of sign.

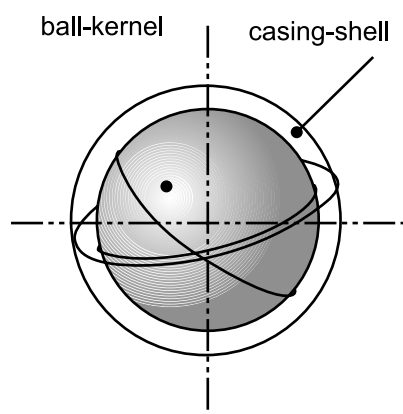


Fig. 2

Set of experimental balls

More than 50 experiments was carried out on weighing for every set. Assembled sets as well as non-assembled sets were weighed. **It was confirmed that there was an interaction between input and output flows for MATTER MAINTENANCE. It became apparent in the form of mass defect. Defect appeared in the sixth sign, i.e. it comes to the range from 0.0002% to 0.0007% of "kernel" mass (or "shell" mass). At that the lesser mass defect corresponds to aluminum shell, while the greater one corresponds to lead shell. Accuracy of weight**

measuring by the mass comparator exceeded the acquired result by 10 times. So we could not tell about inaccuracy of measurements. So we had to apply to the "Russian center of testing and certification" which was very famous all over the world (Rostest-Moscow).

In general that is all, we have got an answer for ourselves, and the period of testing is behind. We have to advance; very much is still to be done. In addition let us mention one more surprise we got during the experiments. The matter concerns some time delay in receiving final results of every weighing. A qualitative picture of it is represented in Fig 3. We did not expect that this effect would appear at such a rough level of measurement of energy exchange processes.

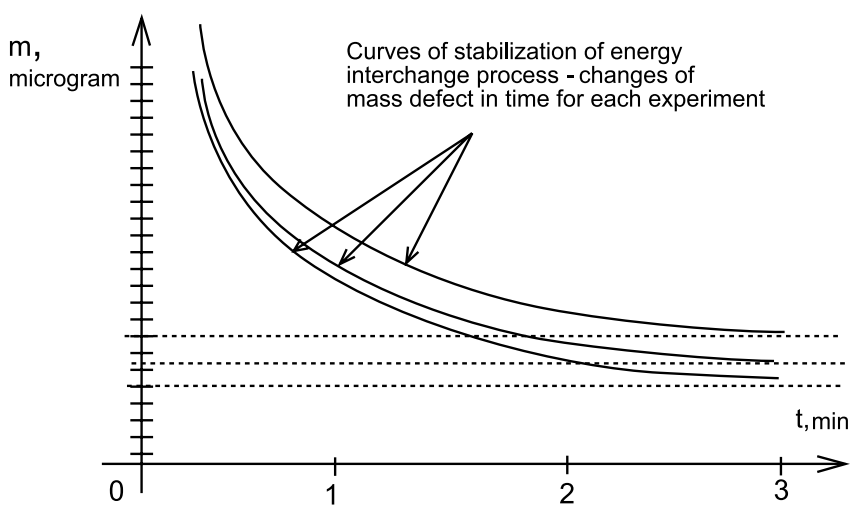


Fig. 3

Time stabilization of the process for receiving final weight

The subsequent report and detailed discussion of the experimental results by specialists (including physicists of various specializations) resulted in an unexpected non-recognition of facts and distrust. The main argument was a demand to increase the number of experiments up to 5-10 hundreds. And only then scientists would be ready to accept facts. It was quite a predictable reaction for the orthodox science in the middle of 90s. It remains to hope that if the discussion took place today it would have a paved way. However it is not a fact.

In conclusion let us note that this experiment on revealing mass defect ranks with famous experiments, in which rotating gyroscopes also demonstrate mass defect (decrease of weight) and even one of higher order than in our experiment. But in return we have no rotation, no chemical and nuclear reactions, while mass defect is presented.

Let us add that it is possible to complicate the task: to make a double casing and to choose other materials for "kernel" and "shell". (See Fig. 2). In our case low prices and availability made us use Al and Pb. The results will be more interesting, for example, with Li and Os (and with other supertransuranic elements).

Aether as Unified Field

Alexander M. Mishin, Russia

Planernaya Str., 79-208, St.Petersburg, 197373 Russia

E-mail: samish@mail.ru

Based on the original observations and experiments, the article gives more precise definitions of aether model, than which was previously elaborated. General laws of the Universe aetherodynamic are considered. There is described a new physical reality in the form of quasi-real aetherodynamic structures (“topological harmonics”) generated by dynamics of the substantial world.



At the present-day stage of physics development words of Maugham, an English philosopher, take on particular topicality: “The great verities are too important to be new”. Indeed, we are increasingly making certain that our remote ancestors were familiar with fundamental laws of the Universe; furthermore, they knew these better than we do. But which methodology of cognition of Nature and what kind of information sources did the ancient scientists have? Today, we can openly say: they had not ordinary experience only, but also esoteric, pretersensual one, without feeling any necessity to be divided into materialists and idealists. For more details on evolution of physical ideas, refer to work [1].

In discovering all over again, I also had to elaborate a “cellular taction” strategy, which enables the most important characteristics of aetherodynamic processes to be sensually perceived and evaluated. The main thing is that all my sensory observations are definitely reproduced at laboratory experiments while the simplest physical equipment is used.

We may get reliable knowledge about Nature from Nature itself only. Thus foundation of classical physics describing usual substantial world is also based on empirical facts studied by Galilei, Newton, Faraday and many other physicists-natural philosophers. I also would like to defend great Newton against attacks on his adherence to inductive methods which really brought imperishable values into science.

A new convolution of cognition is possible on condition of introduction into science of new concepts based on empirical study of physical entities previously unknown. Thereupon, I share the thought of Elena Ventzel, professional mathematician: “Mathematical methods are not useful, but harmful until phenomenon is not studied at a pre-mathematical, humanitarian level”. It is ideological and logical language that may be used today to discuss the aether problem, whose solution calls for comprehension of natural-science facts, which are beyond traditional notions settled over centuries.

The long-term investigations have confirmed that exhaustive definition of a fundamental natural entity was given by Rene Descartes: “Universe does not contain anything but aether and its vortexes”. This is not merely a postulate; this is an objective summary of empirical observations of Nature phenomena. In any academical model of microcosm there is no answer to the question: what kind of substance are electrons, quarks, strings made of? That is the very substance our forefathers called aether. Aether is unified field indeed; and it appears that for nearly his whole life Einstein had been searching for something that was under his foot.

It must be recognized that there is no undistorted, quiescent aether in Nature; as well as no zero-size vortexes exist. Therefore, in a customary sense, the aether concept is pushed behind transcendental horizon and turned into an inconceivable entity whose mystique is tantamount to religious ideas. However, all quantum vortex-wave distortions of the superfluid three-dimensional aether, which have an appearance of tori, threads, solitons and occupy spatio-temporal spectrum from zero to inter-universe scale, are material and contain energy under scientific interpretation. Any spaces such as turbulent fields, physical vacuum, gravitational fields and, of course, matter are material. All of them are etherodynamic structures of the real world. Spatial hierarchy of aether vortices is referred to as quantum stairs, fractal structure or “matreshka” [2-5].

To understand basic laws of aetherodynamics it is necessary to give a general definition for classical matter

and other aether states. As a first approximation, let us give the name of matter to aether microscopic **left-screw** self-oscillating vortex-wave systems (elementary particles), whose existence and parameters are conditioned by higher hierarchical systems. This is our displayed world, with its electromagnetic fields and fundamental constants. Let us refer to vortex-wave structures of any vortex size, which in the considered space domain are **balanced** by a number of left- and right-screw vortices corresponding to matter and antimatter with prefix “quasi” to a free aether. Stable vortex lattices with alternating direction of helicity can be also considered in this case. Under natural conditions everything but classical matter or electromagnetic and gravitational fields can be related to the free aether. In the first place, these are the so-called physical vacuum and vortex fields, which attend gravitation. They represent anisotropic nonlinear subspaces and occupy definite places on spatio-temporal spectrum of the world aether. Particular free subspace creates an aggregate of topological harmonics [5] attending all the physical processes. Satellite of the gravitational field is distinguished because it belongs to specific class of stable vortex lattices.

Apparently, in general case, energy of free aether is virtual for our world due to its helical symmetry and quasi-matter, from the view of difference in sizes of typical vortices which correspond to protomatter. But this is not the entire point. There is also superfluidity of aether, whose vortex viscosity has marvellous properties. As a result, there are created phenomena of inertia and energy-information barrier separating material world from constant influence of quasi-real structures or turbulated space.

Classical inertia, as vortex viscosity, arises in the microscopic and more fine-structure free aether (in Newtonian space) and ever regularly reveals itself during acceleration of material bodies. However everything is different at stage of macrovortex aether, where inertia has properties of adaptation. Here it is affirmed that inertia phenomenon is “spread” throughout the spatial-temporal spectrum of vortex distortions of aether field. At that nature of inertia is changed. Within topoharmonic subspace in laboratory scales, the inertia law “diminishes” in time according to exponential dependence, whose time constant is determined by specific conditions and varied over wide limits (from seconds to many days). On the expiry of this time, inertial intercoupling transforms to the law of flicker effect. It may be said that flicker effect specify

penetrability of energy and information barrier after expiry of time of paraphysical regular phenomenon [6]. Consequently, most of time the interaction with free macroaether is of random character and should be evaluated by mean observation.

To extend conceptual scope of our investigation it may be added that in classical hydrodynamics a liquid, along with ordinary inertia, has determined vortex macroinertia, which is created by vortices of the liquid itself. Therefore, it is necessary to keep on comparing processes at all levels of the unified field of aether. For instance, electric inductance is a kind of specific inertia, and topological harmonics of electromagnetic and other phenomena are subjected to the energy-information barrier (under laboratory conditions).

In the above arguments, the principle of relativity is latently and unconsciously presented. However, this complicated question needs to be separately considered. Physical nature of the energy-information barrier and reason for dependence of the inertia properties upon the size of vortices of free aether remain unclear, too. However, it can be supposed that classical elementary particles, as distinct from protomatter, have self-oscillating properties and are commensurable with vortices of the surrounding free world; and that the above-mentioned energy-information barrier does not exist for them on microscopic section of the spectrum. The gist of the barrier itself comes to “memorizing” topoharmonic processes by Earth’s gravitational fields and laboratory equipment. Turbulent fields (physical vacuum) do not have such a “memory”.

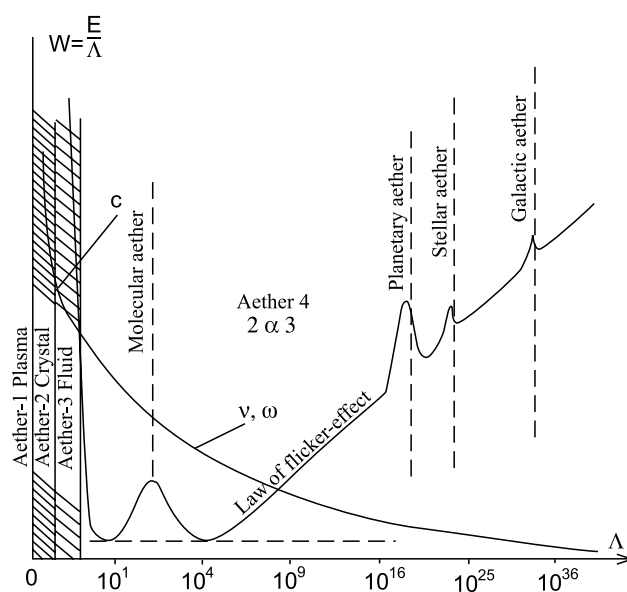


Fig.1

Fig1 depicts diagrams of spectral density of vortices' energy; diagrams of rate of interaction transfer ν and circular frequency ω depending on sizes of vortices of the world aether Λ (in picometers). As we can see, velocity of distortions propagation ν is equal to velocity of light C in the physical vacuum, i.e. in electron sizes, exceeds C in nanocosm and tends to zero toward megacosms. Circular frequency of vortices rotation and course of physical time have the analogous qualitative dependence. However, vortices energy W has a feature and grows toward both ways from the lab scales; the aether numbers have been assigned conditionally, but all the specified phase states reflect some physical reality.

One of the most complicated questions is a definition of vortex matter in each particular case. The diagram demonstrates energy of free aether in the form of protomatter (simplest elementary particles – vortexes), and energy of classical elementary particles as helically definite self-oscillating emissions of aether field is localized in the most nonlinear subspace (physical or substantial vacuum). Unification of the elementary particles into atoms and macrobody does not denote direct transition to parallel world with different fundamental constants, whereas change of vortex size in the diagram exactly implies such a transition, though at a level of protomatter. This is a very intricate and crucial point. For example, a star is, unconditionally, an elementary particle of the relevant level of the Universe, even though comprising the ordinary matter.

Left wing of energy spectrum reflects property of the turbulent field of aether to gravitate, to sink down to the “bottom” transferring energy to the vortices of lesser scales. This phenomenon of distributed “gravitation” is available in every space point and explains a least-action principle. An illustrative analogue of this regularity is represented by the Earth's gravitational field and structure. Dense plasma assumed as iron core is situated in the center, and higher - there are magma, solid crust, water and air. These phase states exist in free aether within universe scales as well. Consequently, in femtocosm, and maybe at an even deeper energetic “bottom”, there must be a plasmic subspace; evidently, it is assignable that aether translated from Greek means “fire”.

Increase of energy to the right is connected with extending a dynamic band of the vortices spectrum, as the scale increases. In our world, this increase follows the flicker effect law, but this is only what we perceive across the energy-information barrier. Actually, at this section the vortex energy must increase well more

strongly, because **our observation capabilities are limited** by accessible matter processes. Turning back to stars, one may affirm that modern science is unable to evaluate their real energy (evaluations are considerably underrated). The Galaxy vortex entrains such deep levels of multidimensional space-aether to its rotation that this causes violation of the Newton's law of inertia. Notion of “hidden mass” is unnecessary for explaining dynamics of galaxies. It is quite enough to take into account that differential rotation entrains the fine-structure aether (inertial subspace), and this process results in decreasing the inertia and external centrifugal forces. Unfortunately, Fig. 1 reflects only a characteristic size of the galactic vortex and does not visually demonstrate its active band of the spectrum. The finer is the space structure, the more inertial and closer to the absolute reference frame is the space. Obviously, the non-homogeneous, stereodynamically multidimensional and multiphase aether requires a perfectly new theory of random fields, which would also make allowance for the phenomenon of the material world.

Energy motion processes or spectral energy-cascades along abscissa axis are of decisive importance for existence of our world and the Universe. These processes have unusual properties. The “violet” cascade is attended with reduction of vortices size, absorption of matter energy and tends to increase energy concentration at the “bottom” of the world aether (near ordinate axis on Fig.1). This regularity experimentally confirmed in both spatial and temporal domains is a direct consequence of the above-mentioned phenomenon of distributed gravitation and clarifies an existence of the left wing of the spectrum. In classical physics “the violet” cascade effect is reflected in the least-action principle as well as in the thermodynamics laws.

The “red” energy cascade (right wing of the spectrum) corresponds to increase of vortices size and is accompanied with energy liberation. To start it up under earthy conditions special technologies are called for [7]. This has been confirmed with laboratory experiments and underlies the “perpetual motion” theory, where energy is pumped from nanocosm to the classical material world. Conception of artificial biofield [6], I have developed, considers methods of creating the aether vortex-wave macroscopic-scale distortions in physical systems. As a matter of fact, we deal with **ways of extending of natural spatio-temporal spectrum of aether (which settled into itself) by creation of a subspace of the topological subharmonics of the classical elementary particles, atoms and molecules**

(physical bodies), within the context of the etherodynamics fundamental law [5].

Even within action of fluctuating energy-information barrier, the spectrum right wing exhibits existence of natural processes in Nature that, supposedly, violate the known laws of thermodynamics [8]. But, as far as Nature cannot conflict with itself, we have to recognize that there is another physics, which “works” in geographic and greater scales, where role of the energy-information barrier demands to be reappraised. To all appearance, the universe vortex partially entrains plasmic subspace of aether into its rotation, and conditions for realizing “red” energy-cascade and generating matter are created on the sections of the maximum density gradient (“spectral” non-linearity). But the same way as a fish in ocean does not know reasons for storms and currents, we will never learn which force untwists the Universe handwheel, whose energy feeds our substantial world.

There are two components of free aether field that are the most essential for the present-day physics. The first one (left wing) is positioned on the spectrum beside the “bottom” in the form of dense liquid-crystalline “plasmatic” medium transforming to the Newtonian inertial subspace (physical vacuum). Since inertia is as regular as electric inductance is, the first subspace proves to be especially material and not such free, because it has properties which were imposed by the Universe rotation and distributed “gravitation”. Let us conventionally limit the spatial spectrum of the first component with a nucleon size. The second component of aether space (right wing of the spectrum) stretches towards larger scales.

Except for known cosmic objects, this is an unknown ocean of the macrovortex and really free aether, or topoharmonics, which are born by dynamics of the substantial world. It is an experimentally proven fact that topoharmonics are generated by photons, electrons, and all the moving bodies [5, 9].

The second component has an ability to conversely affect the matter it was generated by as well as other material objects via “flickering” forces [10, 11]. This special subspace turns out to be doubly virtual, a genuine phantom. That is why, it has been winning the status of a real physical entity with such a difficulty, while Chinese philosophers were familiar with the same thousands years ago, separating entities “yang” and “yin”.

The laboratory experiments indicate that topoharmonics have not only properties described in [5], but also an

ability to interact with the space, creating a static domain of the excited aether in the course of propagation of the vortices-waves. At that physical bodies placing within this space volume are “charged” [2, 9]. The mentioned active domain (horizontal route) is “separated” by the Earth’s gravitational field as follows: quasi-substantial constituent rapidly settles down creating vertical flow, but some phase structures are disintegrated very slowly (days, months, years).

The surprising thing is that biosystems equally belong to both aether components, not experiencing any constraint from the side of the energy-information barrier. The so-called human biofield is a topoharmonic part of physical body. It occupies its place on the spatio-temporal spectrum (Fig. 1). Quasi-substantial constituent (yang) and antiquasi-substantial one (yin) are strictly balanced, and acupuncture points and chakras are an analogue of Hartmann’s geophysical grid, which is well-known to parapsychists.

Conceptual generalization of physical ideas in the context of unified field of aether gives a constructive, cognitive impulse in solving of different problems, such as Nature’s choice of exclusive laws for existence of “left-screw” material world as well as the problem of flicker-effect. At that, researching into the physical processes responsible for proton positive charge is of fundamental importance.

In conclusion, let us take note of conventional character of dividing the aether field into two components by the form of energetic spectrum. As a matter of fact, topoharmonics are generated by matter towards both larger spatial frequencies (subharmonics) and smaller ones (harmonics) and fill all levels of the Universe. The aforesaid is aimed at making perception of the most studied aspect of the **new physical entity** (vague due to diversity of hypothetical descriptions which exist in publications on this subject) more accessible.

Reference

1. A.P. Smirnov, I.V. Prokhorov. Order principle. – Saint-Petersburg: ZAO «P and K», 2002. – 296 p.
2. A.M. Mishin. The aether model as a result of the new empirical conception. New ideas in natural sciences. (On materials of International Conference). Part 1 “Physical”. – St.-Petersburg: RAS, 1996, p. 95-104.
3. A.M. Mishin. Fundamental properties of aether. Fundamental Problems of Natural Science. Series «Problems of the Universe research», fascicle 21 – Saint-Petersburg: RAS, 1999, p. 176-176.
4. A.M. Mishin. Physics of parallel worlds. / Fundamental Problems of Natural Science and Technics. Series «Problems of the Universe research», fascicle 23 – Saint-Petersburg: Publishing

House of the Saint-Petersburg State University, 2001, p. 258-269.

5. A.M. Mishin. Etherodynamics basic law. / Fundamental Problems of Natural Science and Technics. Series «Problems of the Universe research», fascicle 26, part III. - Saint-Petersburg: Publishing House of the Saint-Petersburg State University, 2003, p. 206-218.

6. A.M. Mishin. Physical system with artificial biofield. / Fundamental Problems of Natural Science and Technics. Series «Problems of the Universe research», fascicle 23, - Saint-Petersburg: Publishing House of the Saint-Petersburg State University, 2001, p. 258-269.

7. V.F. Zolotarev, V.V. Roschin, S.M. Godin. About space-time structure and some interactions. - Moscow: Publishers «PREST», 2000. - 309 p.

8. V. Starr. Physics of phenomena with negative viscosity. - Moscow: MIR, 1971.

9. V.V. Kvartalnov, N.T. Petevozchikov. Discovery of a “non-physical” component of OKG radiation. Journal «Parapsychology and Psychophysics». - Moscow: 1999, No. 2 (28), p. 64-67.

10. A.M. Mishin. Longitudinal thermomagnetic effect. / Fundamental Problems of Natural Science and Technics. Series «Problems of the Universe research», fascicle 26, part III. - Saint-Petersburg: Publishing House of the Saint-Petersburg State University, 2003, p. 219-228.

11. A.A. Efimov, A.D. Shpitalnaya, Y.A. Zakoldaev. Eruptive prominences and earthquakes in the view of global space anisotropy. / «New Ideas in Natural Science». Series «Problems of the Universe research», fascicle 19, part II. - Saint-Petersburg: RAŚ, 1996, p. 403-413.



Philip M. Kanarev, Russia

The Kuban State Agrarian University, Department of Theoretical Mechanics
13, Kalinin Street, 350044 Krasnodar, Russia
E-mail: kanphil@mail.kuban.ru

Lately, the notion “Global energy” has become widely spread as a prize corresponding to this notion has been instituted in Russia. Since the Euclidean times, an unwritten law exists in science: to give definition to the notions, which are involved in scientific analysis. It is done for the purpose that everybody who uses this notion can understand the sense implied in it.

The Global energy problems have been discussed for a long time; they are well known. Depletion of natural energy carriers (oil, gas and coal) is the first problem. Environmental safety of energy carriers is the second problem. It is generally recognized that the solution of the issues connected with the aggregate of these two problems is of a global character. The results of scientific research, which should deal with global energy, originate from it. First and foremost, they are such scientific investigations, which result in the possibility to use an inexhaustible and environmental friendly energy carrier. It has been known for a long time. It is hydrogen produced from water.

Why hydrogen and why from water? At combustion of hydrogen, water is regenerated; thus, the energy carrier is inexhaustible. As far as inexhaustibility and environmental safety are concerned, hydrogen has no competitors. However implementation of these qualities

is restricted by large energy expenses for hydrogen production from water. For hydrogen production, modern electrolyzers use from 10 to 20% more energy than it is produced at combustion of hydrogen.

It is easy to imagine what financial and intellectual resources of the world are included in the search of the ways to reduce energy expenses for hydrogen production from water. In Russia many scientific institutions of applied research and educational institutions deal with this problem. There is a Research Hydrogen Institute.

The associations of scientists on hydrogen energetics have been established in USA and Europe. This year, they carry out their regular scientific conferences, to which the author of this article has been invited.

Editorial: Let us note that it is not necessary to coin new scientific term “global energy”, since quite for a long time the notion of “free energy” is used. This term represents the idea of the possibility to freely use energy by a consumer.

Energy problem is global not due to depletion of oil and gas, but due to their environmental unsafeness. However the confirmations exist that the world owners of energy resources do not bother about the problem of environmental unsafeness of modern energy carriers.

House of the Saint-Petersburg State University, 2001, p. 258-269.

5. A.M. Mishin. Etherodynamics basic law. / Fundamental Problems of Natural Science and Technics. Series «Problems of the Universe research», fascicle 26, part III. - Saint-Petersburg: Publishing House of the Saint-Petersburg State University, 2003, p. 206-218.

6. A.M. Mishin. Physical system with artificial biofield. / Fundamental Problems of Natural Science and Technics. Series «Problems of the Universe research», fascicle 23, - Saint-Petersburg: Publishing House of the Saint-Petersburg State University, 2001, p. 258-269.

7. V.F. Zolotarev, V.V. Roschin, S.M. Godin. About space-time structure and some interactions. - Moscow: Publishers «PREST», 2000. - 309 p.

8. V. Starr. Physics of phenomena with negative viscosity. - Moscow: MIR, 1971.

9. V.V. Kvartalnov, N.T. Petevozchikov. Discovery of a “non-physical” component of OKG radiation. Journal «Parapsychology and Psychophysics». - Moscow: 1999, No. 2 (28), p. 64-67.

10. A.M. Mishin. Longitudinal thermomagnetic effect. / Fundamental Problems of Natural Science and Technics. Series «Problems of the Universe research», fascicle 26, part III. - Saint-Petersburg: Publishing House of the Saint-Petersburg State University, 2003, p. 219-228.

11. A.A. Efimov, A.D. Shpitalnaya, Y.A. Zakoldaev. Eruptive prominences and earthquakes in the view of global space anisotropy. / «New Ideas in Natural Science». Series «Problems of the Universe research», fascicle 19, part II. - Saint-Petersburg: RAS, 1996, p. 403-413.



Philip M. Kanarev, Russia

The Kuban State Agrarian University, Department of Theoretical Mechanics
13, Kalinin Street, 350044 Krasnodar, Russia
E-mail: kanphil@mail.kuban.ru

Lately, the notion “Global energy” has become widely spread as a prize corresponding to this notion has been instituted in Russia. Since the Euclidean times, an unwritten law exists in science: to give definition to the notions, which are involved in scientific analysis. It is done for the purpose that everybody who uses this notion can understand the sense implied in it.

The Global energy problems have been discussed for a long time; they are well known. Depletion of natural energy carriers (oil, gas and coal) is the first problem. Environmental safety of energy carriers is the second problem. It is generally recognized that the solution of the issues connected with the aggregate of these two problems is of a global character. The results of scientific research, which should deal with global energy, originate from it. First and foremost, they are such scientific investigations, which result in the possibility to use an inexhaustible and environmental friendly energy carrier. It has been known for a long time. It is hydrogen produced from water.

Why hydrogen and why from water? At combustion of hydrogen, water is regenerated; thus, the energy carrier is inexhaustible. As far as inexhaustibility and environmental safety are concerned, hydrogen has no competitors. However implementation of these qualities

is restricted by large energy expenses for hydrogen production from water. For hydrogen production, modern electrolyzers use from 10 to 20% more energy than it is produced at combustion of hydrogen.

It is easy to imagine what financial and intellectual resources of the world are included in the search of the ways to reduce energy expenses for hydrogen production from water. In Russia many scientific institutions of applied research and educational institutions deal with this problem. There is a Research Hydrogen Institute.

The associations of scientists on hydrogen energetics have been established in USA and Europe. This year, they carry out their regular scientific conferences, to which the author of this article has been invited.

Editorial: Let us note that it is not necessary to coin new scientific term “global energy”, since quite for a long time the notion of “free energy” is used. This term represents the idea of the possibility to freely use energy by a consumer.

Energy problem is global not due to depletion of oil and gas, but due to their environmental unsafeness. However the confirmations exist that the world owners of energy resources do not bother about the problem of environmental unsafeness of modern energy carriers.

In history of science, the facts of annihilation of the scientists who have won success in reduction of energy expenses for production of hydrogen from water have already been registered. The requesters of these actions think that they will lose their profits with the coming of hydrogen energetics. They do not understand that this process cannot be abrupt. It is impossible to replace the infrastructure of the existing energy carriers by infrastructure of hydrogen energetics within one or even ten years. Besides, infrastructure of hydrogen energetics will not be created on a blank place. It will be integrated into the existing infrastructure of energetics gradually; and its owners will automatically become the owners of hydrogen energetics. The first step has already been made in this direction. In the USA, a decision has been taken to equip all filling stations with pumps to fill the cars with hydrogen.

It is known that a priority of results of theoretical investigations is their publication in press. Usually, such priority is a personal one. Generally a patent is a priority of the results of experimental investigations. As a rule, this patent belongs to a group of authors. A published patent is a genie released from a bottle. No finesse of the authors to hamper a reproduction of experimental data given in a patent without the participation of the authors can stop the process of their implementation. Thus, the authors or a group of the authors who have filed an application for a patent are deprived automatically of the opportunity to influence the process of practical realization of their ideas.

In Russia, the state is a main patent holder of the global patents. Due to the well-known reasons, it has proved to be unable to control the course of scientific investigations and to forecast significance of their results.

It is known that if it becomes possible to reduce energy expenses for hydrogen production of water fivefold, it will be the cheapest energy carrier. Russia has already got technology, which reduces these expenses tenfold and more. However another way of looking is more perspective. Is there any use to decompose water into hydrogen and oxygen and to use hydrogen as fuel for heating, for example, of water in heating systems? Is it possible to make water generate heat? It turned out that, it is possible.

In Russia, three firms ("Yusmar", "Termovikhr" and "Noteka") sell cavitation heating equipment with energy performance index up to 150%. Official science looks awry at this activity, since such results conflict with one

of the main laws of physics: law of conservation of energy. But market profit is stronger than this law.

Meanwhile, engineering practice has already proved that additional energy in the form of heat is generated in the ventilation systems and in the systems of water cavitation. Thorough scientific analysis of this problem shows that physical vacuum is the most probable source of additional energy in the systems of ventilation and water cavitation. Valence electrons of destroyed molecules of water take energy from physical vacuum and release it during repeated fusion of these molecules.

Why is additional energy generated in the air systems of ventilation and in systems of water cavitation? Because they are mechanical systems and mechanical destruction of chemical links requires half energy as compared with thermal destruction of these links. This is the main reason why one fails to increase energy performance index of cavitation processes over 200%.

Certainly, an increase of efficiency of any process by 30 or 50% is a good result; if it is obtained, it is possible to get even better one. But what if a water molecule is destroyed not mechanically, but electrodynamically? In this case, it becomes possible to find resonance frequencies of influence on the molecules and therefore to reduce considerably expenses of electrical energy for their destruction. Subsequent fusion of destroyed molecules will release determined quantity of energy unavoidably. It is a simple idea, and it has already been implemented. At electrodynamic influence on water molecules, electrical energy is converted into thermal energy with tenfold energy performance index. It means that if we spend 1 kWh of electric energy, we will get 10 kWh of thermal energy. To obtain such results, it is necessary to have knowledge of physchemistry of the microworld, which corresponds to knowledge of the 21st century, and it has already been published. Every month more than 1000 foreign scientists become familiarized with this knowledge at <http://Kanarev.innoplaza.net> and <http://book.physchemistry.innoplaza.net>. The Russian speaking readers get this information from: <http://www.n-t.org/tp/ns/if.htm>, <http://www.wikar.udm.ru/sb28-2.htm> and <http://www.n-t.org/tp/ts/eb.htm>.

I hope that now the readers will know the essence of the notion "global energy" and will understand those results of scientific researches which can really solve the related problems.

Energy Balance of Fusion Processes of Oxygen, Hydrogen and Water Molecules

Philip M. Kanarev, Russia

The Kuban State Agrarian University, Department of Theoretical Mechanics
13, Kalinin Street, 350044 Krasnodar, Russia
E-mail: kanphil@mail.kuban.ru

There is revealed the cause of appearance of additional energy during formation of covalent bonds in the fusion processes of oxygen, hydrogen and water molecules, besides the source of this energy is described.

Introduction

Engineering practice connected with servicing of ventilation systems allows revealing appearance of excessive thermal energy in circulated air. Similar phenomenon has been registered in systems of water circulation with the devices for its active cavitation. The results of our investigations explain not only a cause of these phenomena, but they give an opportunity to perform quantitative calculations for energy processes, which generate additional thermal energy [1], [2], [3], [4], [5].

Theoretical part

An oxygen atom is the eighth element of the periodic table. It is situated in the sixth group. The structure of its nucleus is given in Fig. 1 [1], [2], [3].




Fig. 1

Diagram of nucleus of oxygen atom: light – the protons, dark and grey – the neutrons

In Fig. 2 a diagram of the oxygen atom originating from the structure of its nucleus is given (Fig. 1). It has eight electrons. The electrons situated on the axis of symmetry are the most active ones (1, 2). Other six electrons situated in the plane, which is perpendicular to the axis

line (a line of symmetry), by means of their total electric field remove electrons 1 and 2 from the nucleus at a large distance at that forming conditions for their large activity during the interaction with the electrons of the neighbouring atoms [1], [2], [3].

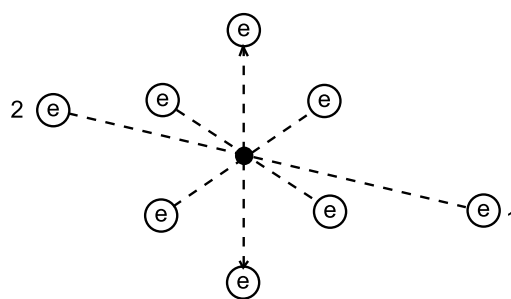


Fig. 2

Diagram of the oxygen atom

The least ionization energy of the electron of oxygen atom is equal to $E_i = 13.618$ eV. Binding energy of this electron with the atomic nucleus corresponding to the first energy level is equal to $E_1 = 13.752$ eV. Let us call this electron the first one. The calculation of energy indices of this electron, including its binding energies E_b with the atomic nucleus, according to the formulas (1) and (2), gives the following results (Table 1) [1], [2], [3].

$$E_{ph} = E_i - \frac{E_i}{n^2} = E_i - \frac{E_1}{n^2} \quad (1)$$

$$E_b = \frac{E_1}{n^2} \quad (2)$$

Table 1

Spectrum of the first electron of the oxygen atom

Values	n	2	3	4	5	6
E_{ph} (exp.)	eV	10.18	12.09	12.76	13.07	13.24
E_{ph} (theor.)	eV	10.16	12.09	12.76	13.07	13.24
E_b (theor.)	eV	3.44	1.53	0.86	0.55	0.38

The oxygen molecule structure is given in Fig. 3, a. It is formed by means of a connection of unlike magnetic poles of axis electrons of two oxygen atoms [1], [2], [3]. It is known that the fusion process of the oxygen molecules is accompanied with a release of 495 kJ/mole of energy, or in calculation for one molecule

$$E_b = \frac{495 \cdot 1000}{6,02 \cdot 10^{23} \cdot 1.602 \cdot 10^{-19}} = 5.13 \text{ eV}. \quad (3)$$

What principle does the Nature follow by distributing energy of 5.13 eV between the electrons of oxygen molecule (Fig. 3, a)? Energy of 5.13 eV is a thermal binding energy between the electrons 1 and 2' of two oxygen atoms (Fig. 3, a). When the oxygen molecule is formed, it is emitted in the form of the photons by the electrons, which enter into the bond. Hence it is equal to an amount of energies of two photons emitted by these electrons. Consequently, each contacting electron emits a photon with energies of $5.13/2=2.565 \text{ eV}=E_b$ (Fig 3). According to Table 1, in this case the valence electrons are situated between the second energy level and the third one [1].

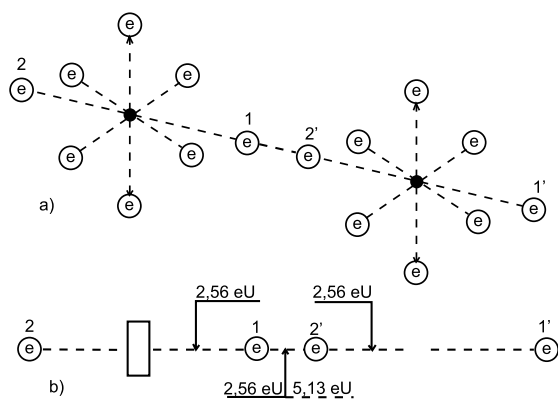


Fig. 3

Diagram of binding energy distribution between the electrons in the oxygen molecule

Two oxygen atoms are combined into a molecule in an excitation state. The excitation state is the state of an atom when its valence electrons are situated at such distances from the nuclei when the binding energy E_b between them is reduced to the thousandth of fractions of an electron-volt. In such state the atom can loose an electron and become an ion. Otherwise, without loosing electrons it is combined with an electron of the neighbouring atom by the valence electron, and a process of formation of oxygen molecule begins. It is an exothermic process when the axis valence electrons 1 and 2' emit photons, descend on lower energy levels and release $2.565 \times 2 = 5.13 \text{ eV}$.

Let us pay attention to the fact that energy 5.13 eV is released by two electrons, which form a bond with energy of $E_b=2.56 \text{ eV}$. In modern chemistry this bond is called a covalent bond. In order to break this bond it is necessary to use 2.56 eV of mechanical energy. For thermal deavage of this bond, double quantity of energy is required, i.e. 5.13 eV. It is explained by the fact that the photon energy of 5.13 eV is absorbed by two electrons simultaneously. Only in this case, both electrons will be transferred to the highest energy levels with minimal binding energy E_b when they are disconnected, and each oxygen atom becomes a free one.

Thus, energy expenses for destruction of oxygen molecule depend on the method of influence upon the bond. During thermal action upon the bond it is destroyed when energy is 5.13 eV. During mechanical effect upon the bond, it is necessary to spend 2.56 eV of energy in order to destroy this bond. Therefore energetic of fusion process of the oxygen molecule depends on method of its destruction.

After thermal destruction of the oxygen molecule process of its formation begins from emission of the photons with energies of 2.56 eV by both valence electrons, and the previous electrodynamics binding energy ($E_b=2.56 \text{ eV}$) is restored between the electrons of both atoms.

Thus during thermal destruction of the oxygen molecule the same amount of thermal energy is spent than that which is released during its further formation. No additional energy appears during thermal dissociation of oxygen molecule and at its further fusion.

If oxygen molecule is destroyed by a mechanical method, then it is necessary to spend 2.56 eV of mechanical energy for this purpose. Valence electrons of oxygen atoms are in a free state at lack of energy, which corresponds to such state, as there is no process of absorption of 2.56 eV of energy by each of them. The electrons cannot remain in such state; they should replenish immediately the energy, which they have failed to receive during a mechanical break of the bond between them. Where should they take it from? There is only one source: the environment, i.e. the physical vacuum filled with aether. They convert aether into energy of 2.56 eV immediately. The next stage is a connection of two oxygen atoms, whose valence electrons have replenished the reserves of their energy by means of aether. This process is accompanied by emission of the photons with energies of 2.56 eV by two electrons. Thus energy of absorbed aether is

converted into thermal energy of the photons. If we spend 2.56 eV of mechanical energy for destruction of oxygen molecule, we will get double quantity of energy ($2.56 \times 2 = 5.13$) eV during further fusion of this molecule. Additional energy is equal to 2.56 eV.

Much experimental data show that in ventilation systems thermal energy of circulated air exceeds electric energy spent for a fan drive. Now we know that this energy is generated at mechanical destruction of covalent bonds in the molecules of gases, which the air consists of.

Using the above-mentioned method, let us analyse energetic of water molecule, which sometimes generates additional thermal energy. A water molecule consists of one oxygen atom and two hydrogen atoms. Binding energies E_b of the hydrogen atoms with its nucleus are given in Table 2 [1], [2], [3].

Table 2
Spectrum of hydrogen atom

Values	n	2	3	4	5	6
$E_{ph} \text{ (exp.)}$	eV	10.20	12.09	12.75	13.05	13.22
$E_{ph} \text{ (theor.)}$	eV	10.198	12.087	12.748	13.054	13.220
$E_b \text{ (theor.)}$	eV	3.40	1.51	0.85	0.54	0.38

It is known that combination of hydrogen and oxygen is accompanied by an explosion, but its cause remains unknown. Let us try to find it.

Energy of fusion of hydrogen molecule is equal to 436 kJ/mole, or 4.53 eV per a molecule. As the molecule consists of two atoms, then the above-mentioned energy is distributed between them. Thus energy of one bond E_b between the hydrogen atoms is equal to 2.26 eV (Fig. 4). At mechanical destruction of this bond 2.26 eV is enough. At thermal destruction of this bond double quantity is required ($2.26 \times 2 = 4.53$ eV) [1].

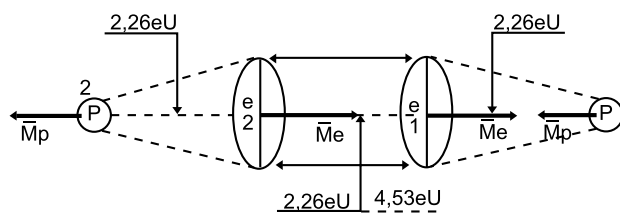


Fig. 4
Hydrogen molecule

In order to form two water molecules, it is necessary to break two hydrogen molecules and one oxygen molecule into atoms. At mechanical destruction of covalent bonds

$2.26 \times 2 = 4.53$ eV is required to break two hydrogen molecules and 2.56 eV to break an oxygen molecule. Sum of these energies is equal to 7.13 eV. If the destruction processes of the above-mentioned molecules are carried out with a thermal method, then $4.53 + 4.53 = 9.06$ eV is required for the destruction of two hydrogen molecules, and 5.13 eV is required for the destruction of one oxygen molecule. In total, it is equal to 14.19 eV. The difference between the energy spent for mechanical and thermal destruction of covalent bond of hydrogen and oxygen molecules is almost double.

It is known that during fusion of one mole of water 285.8 kJ or $285.8 \times 1000 / 6.02 \times 10^{23} \times 1.6 \times 10^{-19} = 2.96$ eV per a molecule are released. As a water molecule consists of one oxygen atom and two hydrogen atoms, $2.96 / 2 = 1.48$ eV falls per the bond (Fig. 5). Hence the electrons of hydrogen and oxygen atoms in water molecule are between the forth energy level and the fifth one at the usual temperature ($1.48 / 2 = 0.74$ eV = E_b), Table 1, 2 [1].

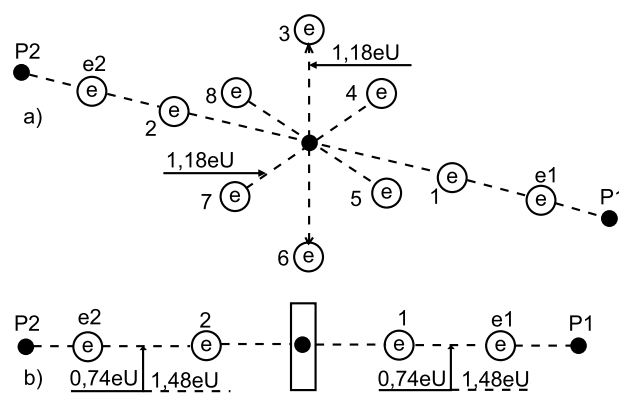


Fig. 5
Diagram of water molecule:

1, 2, 3, 4, 5, 6, 7, 8 are the numbers of the electrons of oxygen atom; P_1, P_2 are the nuclei of the hydrogen atoms (the protons); e_1 and e_2 are the numbers of the electrons of hydrogen atoms

Thus when two hydrogen molecules $2H_2$ and one oxygen molecule O_2 are destroyed by the thermal method, 14.19 eV are spent. As a result of fusion of two water molecules ($2H_2O$), $2.96 \times 2 = 5.98$ eV is released. There is some disbalance here since fusion process of water molecule is an exothermic one and 2.96 eV is released by one molecule. The given calculation shows that $(14.19 - 5.98) / 2 = 4.10$ eV is absorbed during fusion of one water molecule. What is the cause of this contradiction?

The oxygen atom in the water molecule should reduce its volume when the transition from gaseous state into

liquid state takes place. It will happen when the ring electrons of oxygen atom descend on lower energy levels (nearer to the nucleus). They will emit the photons and their total energy will be equal to energy spent to destruction of two hydrogen molecules and one oxygen molecule, i.e. 14.19 eV. Since two water molecules have 12 ring electrons, each of them will emit $14.19/12=1.18 \text{ eV}=E_b$ (Fig. 5). It is more than energy ($E_b=0.74 \text{ eV}$) of binding of axis electron with the nucleus, and it shows that the ring electrons are situated nearer to the nucleus than the axis ones.

In this case quantity of energy produced due to fusion of two water molecules $(14.19+5.98) \text{ eV}$ exceeds energy, which was spent for the destruction of two hydrogen molecules (9.06 eV) and one oxygen molecule (5.13 eV). Energy difference of 5.98 eV is divided between two water molecules. It means that $5.98/2=2.99 \text{ eV}$ or 285.8 kJ/mole fall per a molecule. It corresponds to the existing experimental data completely [1].

The above-mentioned facts clarify a cause of the explosion, which takes place when hydrogen is combined with oxygen. Simultaneous transition of six ring electrons of each oxygen atom in the nascent water molecules to lower energy levels is accompanied by simultaneous emission of the photons, which generate explosion phenomenon.

Let us pay attention to the fact that two binding energies E_b between valence electrons e2 and 2 and between 1 and e1 are shown in Fig. 5, b. Energy of one electrodynamic bond is equal to $E_b = 0.74 \text{ eV}$. If this bond is destroyed by the thermal method, $0.74 \times 2 = 1.48 \text{ eV}$ is required. This energy will be released during further fusion of the water molecule from hydrogen atom H and hydroxyl ion OH^- . In this case, no additional energy is generated.

Therefore the given bond is destroyed by the mechanical method spending 0.74 eV per a bond, each electron will have energy deficit equal to 0.74 eV after bond destruction. This energy will be immediately absorbed from the environment and will be emitted during the repeated fusion of the water molecule from the hydrogen atom H and the hydroxyl ion OH^- . At mechanical destruction of one bond of water molecule, the covalent chemical bond forms $E_b = 0.74 \text{ eV}$ of additional thermal energy, which is registered in systems of water cavitation constantly (as we have already noted) [1], [2], [3].

It is known that water molecules combine and form clusters. If the bonds between the molecules in the clusters are covalent ones, mechanical destruction of these bonds should be accompanied by a release of additional thermal energy as well [1], [2], [3].

Experimental Part

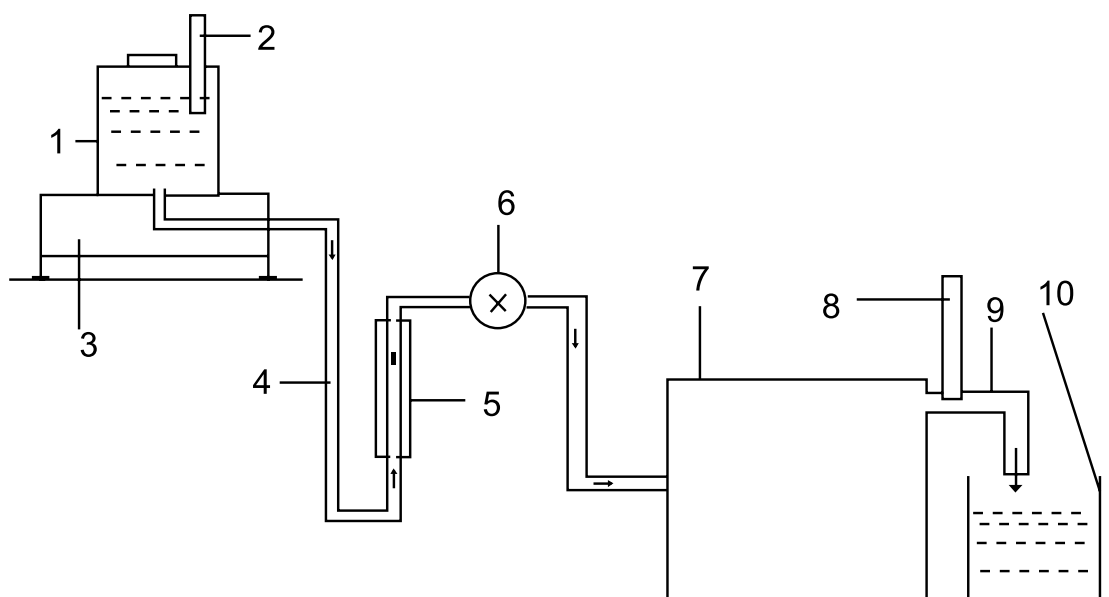


Fig. 6

Diagram of the experimental device: 1 - reservoir for solution; 2 - thermometer; 3 - electronic scales; 4 - solution supply duct; 5 - rotameter; 6 - feed solution regulator; 7 - a special thin plasma reactor is in the process of patenting; 8 - thermometer; 9 - discharge of heated solution; 10 - inlet reservoir

Thus, chemical bonds between the atoms in the molecules and the molecules in the clusters can be destroyed mechanically, by electrodynamic and thermal influence. We have already shown that the mechanical way of destruction of such bonds requires half energy as compared with thermal energy. It appears from this that energy expenses for electrodynamic destruction of these bonds should be less than thermal expenses as well. Electrodynamic impact on the bond gives the opportunity to form the resonance modes where energy

expense for the destruction of these bonds is reduced to greater degree. In order to check this hypothesis a special experiment was carried out. It was connected with electrodynamic destruction of chemical bonds of water molecules with a changing frequency of impact. To test this hypothesis the check experiment was prepared and carried out by (besides the author of this article) A.I. Tlishev, G.P. Perekotiy, D.A. Bebko, D.V. Korneev. A diagram of the experimental device is given in Fig. 6. The results of this experiment are given in Table 3.

Table 3
Protocol of control test

Indices	1	2	3	Mean
1 – mass of the solution, which has passed through the reactor m, kg.	2.112	2.153	2.118	2.128
2 – temperature of solution at the input of the reactor t_1 , degrees	24	24	24	24
3 – temperature of the solution at the output of the reactor t_2 , degrees	33.5	33.5	33.5	33.5
4 – differential temperature of the solution $\Delta t = t_2 - t_1$, degrees	9.5	9.5	9.5	9.5
5 – durability of the experiment $\Delta \tau$, s	300	300	300	300
6 – reading of voltmeter V, B	25.0	25.0	25.0	25.0
7 – reading of ammeter I, A	1.40	1.40	1.40	1.40
8 – electric power consumption according to indices of voltmeter and ammeters, $E_2 = I \times V \times \Delta \tau$, kJ	10.50	10.50	10.50	10.50
9 – power spent for heating of the solution, $E_3 = 4.19 \times m \times \Delta t$, kJ	84.10	85.70	84.31	84.70
10 – reactor efficiency index according to the reading of voltmeter and ammeter $K = E_3 / E_2$	8.00	8.16	8.03	8.06

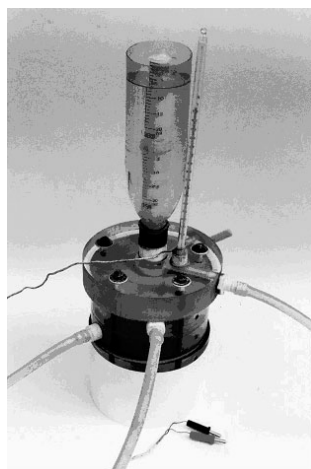


Fig. 7
Photo of heat reactor

In the Russian market three firms (Yusmar, Termovikhr and Noteka) sell cavitation water heating equipment with energy efficiency index of 150%. Soon, an air heating devices with the same efficiency will be produced. The processes of mechanical destruction of covalent bonds of the air gas molecules, molecules and clusters of water and their further fusion serve as a source of additional energy generated by these devices [1], [2], [3].

Conclusion

Analysis of energy balance of the molecules with covalent bonds shows the possibility of additional thermal energy formation during mechanical and electrodynamic destruction of these bonds.

References

1. Ph.M. Kanarev. The Foundation of Physchemistry of Micro World. Krasnodar. 2002. 320 pages. (In Russian).
2. Kanarev Ph.M. The Foundation of Physchemistry of Micro World. The second edition. (In Russian). <http://www.wkar.udm.ru/sb28-2.htm>
3. Kanarev Ph.M. The Foundation of Physchemistry of Micro World. The second edition. (In English). <http://book.physchemistry.innoplaza.net>
4. Kanarev Ph. M. Energy Balance of Fusion Processes of Molecules of Oxygen, Hydrogen and Water. (In English) <http://Kanarev.innoplaza.net>
5. Kanarev Ph. M. Energy Balance of Fusion Processes of Molecules of Oxygen, Hydrogen and Water. (In Russian) <http://www.n-t.org/tp/ts/eb.htm>

The Fourth State Of Matter (Plasma Energy)

Power Generation

Bruce A. Perreault, USA

[http:// www.nuenergy.org](http://www.nuenergy.org)

Email: nuenergy@cyberportal.net

Under the proper configurations and in the correct pre glow discharge environment more electrons can be released than what is required to trigger the release. This release of energy attains a high frequency oscillation that is indicative of the metal or metals involved in its release.

The release of high frequency energy from metals and semi metals (semi conductors) through the mechanism in the pre-glow discharge leads to the generation of radiant energy. This correlation has been identified through my findings. The release of high frequency energy from the atoms of electrical conductors is credited to my identification of the mechanism in the pre-glow discharge, or fourth state of matter. This has lead to extremely efficient alternative energy circuits.

The pre-glow discharge condition occurs when a sufficient amount of charge difference is applied across the gap of two electrical conductors. It makes a hissing sound if the electrodes are surrounded by air. The electrical properties between this gap change: electrons become “stripped” from their respective atoms and are liberated. In this state, air is **ionized** and is transformed into a **plasma** and is no longer a gas. It is now in the fourth state of matter, the other three being solid, liquid, and vapor (gas). The fourth state of matter is a good conductor of electricity, its average resistance being much lower than that of the same substance in its gaseous state.

A good readily available spark gap combination is lead and iron. This combination generates plenty of radiant energy and causes noise to be heard on a radio in its vicinity. As a general rule, the better the thermoelectric difference between the dissimilar couple the more radiant energy that will be generated when it is exposed to a plasma field.

Early in the summer of 1981, the pre glow had first caught my attention. This is where I had observed it between two plastic insulated hook-up wires from radio shack. The plasma between the two wires was called into existence because of a high voltage power supply that I had obtained for my electrogravitic experiments. The two wires were twisted together and given a charge of around ninety kilovolts.

The release of high frequency energy from the atoms of electrical conductors is credited to my identification of the mechanism in the pre-glow discharge, or fourth state of matter. This has lead to extremely efficient alternative energy circuits.

It was not until 1989 when I observed a high frequency signal on my oscilloscope coming from the pre-glow discharge phenomenon.

These signals were coming from across the room and originated from a crude component that I had built. This crude component consisted of a guitar wire that was centered through a section of PVC tubing. Around this tube was wrapped a coil of insulated transformer wire. This was my first ion-valve. It was excited with the same power supply where I had observed the plasma effect several years previous.

I knew that my ion valve was generating high frequency oscillations using air ions but did not find any practical applications for it until six years later. It was in this year (1995) when I realized the importance of the ion valve and its associated high frequency ion field, known as radiant energy to Moray, it being the essential principle behind his energy receiver.

In one experimental set-up, it was confirmed that when a charged capacitor is discharged through a spark gap that the stored energy is transferred by way of high frequency electrical oscillations. It was found that these oscillations occur directly before the discharge of the capacitor, thus the term, pre-glow discharge. It was found that during the pre-glow discharge plateau, energy is transferred from a primary to a secondary electrical coil. Directly after pre-glow discharge, a surge of current is measured. At the point of current surge is where most

of the stored energy in the capacitor is released as wasted heat. It was apparent that by maintaining the pre-glow discharge plateau a very efficient mode of energy transfer and conversion can be obtained. Logically what is required is a control mechanism. This is where my ion valve finds its niche. Upon further investigation, it is found that it keeps pre-glow discharge oscillations at their plateau, and suppresses current surge in a spark gap. It is a self-regulating quenching device. When it is placed in series with an air-core transformer and arc gap, its plasma hisses smoothly, the arc in the spark gap is almost silent and is very small. Continuous oscillations can be seen on an oscilloscope. A light bulb connected to the secondary will glow brightly. This result is not possible without the ion valve included in the circuit. The ion valve has the added feature of preventing back electromotive force, generated from inductive loads, from being discharged back through the circuit. Without the ion valve, energy is normally lost when it is discharged and is transformed into heat. Using the ion valve therefore has the effect of conserving energy.

Fundamental Radiant Energy Device

“Standard” scientific principles are not being violated. There is no fringe science involved with radiant energy power generation. This is a very old source of energy being extracted and harnessed in a unique way through my discoveries. What I have discovered is practically a limitless source of energy. Radiant energy has existed since the beginning of time. What I hold claim to is an improved method to generate and to convert radiant energy, kinetically active ions, cosmic energy, call it what you will, into useful electrical power. Think of the radiant energy power generator as a type of energy detonator that liberates great quantities of energy with only a small exciting spark. No laws of physics are being violated. No new laws are being implied. They are being expanded. The concept is not that much different from how a lighted matchstick is able to start a bonfire.

The power generated from my circuits comes from the transformation of matter into radiant electricity. It does not come from the splitting of atoms. To obtain high wattage from a spontaneously radioactive substance would require unsafe amounts of radioactive material.

Under the right conditions, ordinary matter can be made to generate intense surges of radiant energy that can be heard on a radio receiver as static noise. Build a device that can efficiently capture this energy and convert it into useful electrical currents and you will have yourself

a powerful source of electrical power. This device will be powered by artificially disintegrating matter as described by Gustave Le Bon in his book “The Evolution of Matter” and in his book “The Evolution of Forces”.

Energy and matter are two distinct entities of the same manifestation. Matter represents a stable condensed form of energy. Heat, light, electricity, etc., are uncondensed vibrations of matter oscillating at differing rates. “Cosmic Energy” is the term that Le Bon used to define matter and energy as being one and the same manifestation. He theorized that when stable matter is disintegrated it is transformed into energy that we recognize as heat, light, electricity, radioactivity, etc.

Semiconductors will generate intense surges of electron oscillations that become powerful sources of radiant energy. A simple **ion valve**, or call it what you will, can be used to generate and convert this form of radiant energy into useful electromagnetic oscillations. A tuned transformer can be used to directly convert these oscillations into a practical voltage and amperage. This unique valve is shown in Fig. 1. Before it can function it must be connected to a suitable voltage source. The circuit in Fig. 2 demonstrates the full working concept. Other embodiments are also possible. The proof of concept circuit reveals how radiant energy can be generated and converted into useful electrical currents. Many additional stages can be added for more power. Many other circuit and component configurations can also be used but the fundamental conversion principle remains the same. The circuit and components shown should give you a very clear idea of how the technology works. The actual mechanics and electronics of building and validating a radiant energy prototype are relatively simple. Contrary to what some people might think, dangerous levels of radioactivity are never used in my devices.

Ion-valve Converter Technology Explained

The ion-valve converter (ion-valve) shown in Fig.1 has an axial negatively charged tungsten cathode wire that extends the length its cylinder and is capable of emitting secondary electrons. The anode cylinder is positively charged and is made from a semiconductive material that will readily capture electrons.

Within a few milliseconds the accumulated negative ions are attracted to the positively charged onrushing atomic ions. When the negative and positive charges collide they

neutralize each other generating high frequency electrical oscillations.

There appears to be a common thread shared between several alternative energy devices. It is the pre-glow discharge. The report on the **Hans Coler** device released by the British Government indicates that there is excess energy released when electrical contacts are opened and closed. The **Lester Hendershot** device utilized a buzzer circuit that opened and closed its electrical contacts. In the **Alfred Hubbard** coil pre-glow discharge flowed through electrical contacts, a distributor cap and radium soaked spark plug. The **Joseph Newman** motor used a sparking commutator. **Thomas Moray** invented a glowing, cold cathode discharge tube that was the heart of his radiant energy device. **Hermann Plauson** was granted U.S. Patent No. 1,540,998 that used spark gaps to convert atmospheric energy. **Frank Wyatt Prentice** was granted Canadian Patent No. 253,765 that detailed his invention, which lighted 50 sixty-watt carbon lamps with an input of only 500 watts. His invention utilized a spark gap driven high frequency tuned resonant system. **Chancy Britten** used ion-valves constructed with a central wire that was surrounded by a coil of wire which is described in his US Patent No. 1,826,727. Britten's valve was said to have lit up his home in the 1930's according to a local newspaper article of that time period. **Alexander Chernetski** experimented with what appears to have been a type of ion-valve that was filled with hydrogen gas. It is said that he got up to five times more energy out of his device than what he put into it. **Edwin Gray** was granted U.S. Patent No. 3,890,548 for his efficient spark gap driven capacitive-discharge motor. He improved on this patent by replacing the spark gaps with a pre-glow discharge switching tube. His U.S. Patents No. 4,595,975 and No. 4,661,747 describes this tube in detail. Gray's patents claim to conserve battery power by sending unused energy back to the supply batteries. On close examination, we also find that his switching tube is actually a quenching device.

Radiant energy was generated during the pre-glow discharge cycle that also contributed to recharging the batteries. **Paulo N. Correa** and **Alexander N. Correa** obtained patents to a pulsed pre-glow discharge system that recovers energy and recharges a battery.

I have found that radiant energy is generated when a plasma field is in contact with the atoms of an electrical conductor. Most importantly, the quantity of radiant energy is greatly increased when the plasma field occurs between the inter-electrode couple of two differing electrical conductors. That, the wattage produced will depend largely on the type of electrode materials that

are used. I do not suspect that the above referenced inventors were aware of this amplifying mechanism.

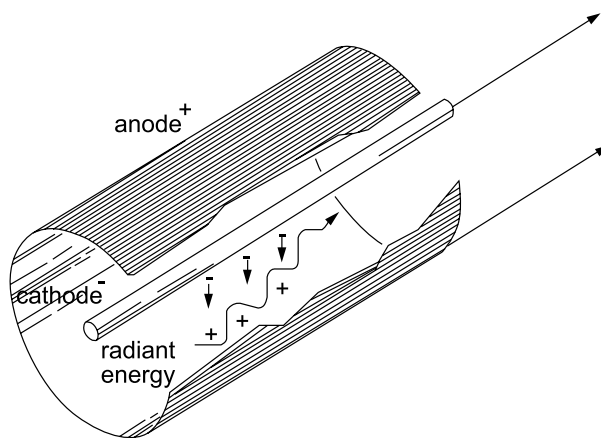


Fig. 1

Ion Valve

In the embodiment in Fig. 1 the negative charge on the wire in the ion-valve negatively ionizes any gas that contacts it. These ions rush towards the positively charged cylinder. When a metal ion that carries an excess electron hits head-on with an elementary differing positively charged onrushing metal ion a violent union of the two metals occurs. This causes the newly formed bimetallic alloy to violently oscillate, break up (dissociate) and to liberate a burst of electrons. The “sea electron model” helps to explain this effect. According to the sea electron model metals are bonded to each other through electron sharing. The model suggests that metal atoms be bathed in a sea of valence electrons. If this model is taken one step further it can be seen that when metallic atoms are dissociated from each other excess electrons are released in the form of electrical oscillations of high frequency (radiant energy). This occurs because the electrons no longer take part in the inter-atomic binding force that existed before the dissociation took place. It becomes clear that the freed electrons will add amperage to the output circuit to which it is connected. Henceforth, the equation $I \times E = P$ holds true in this system. Where, “I” represents the electrons (amperage), “E” electromotive force (ionic voltage), and “P” the power generated.

Obtaining Electrical Energy from the Transformation of Cosmic Energy

Matter is cosmic energy in a condensed state according to Le Bon and Moray. What this means is that matter can be excited its plasma state and caused to rapidly disintegrate transforming itself into electricity.

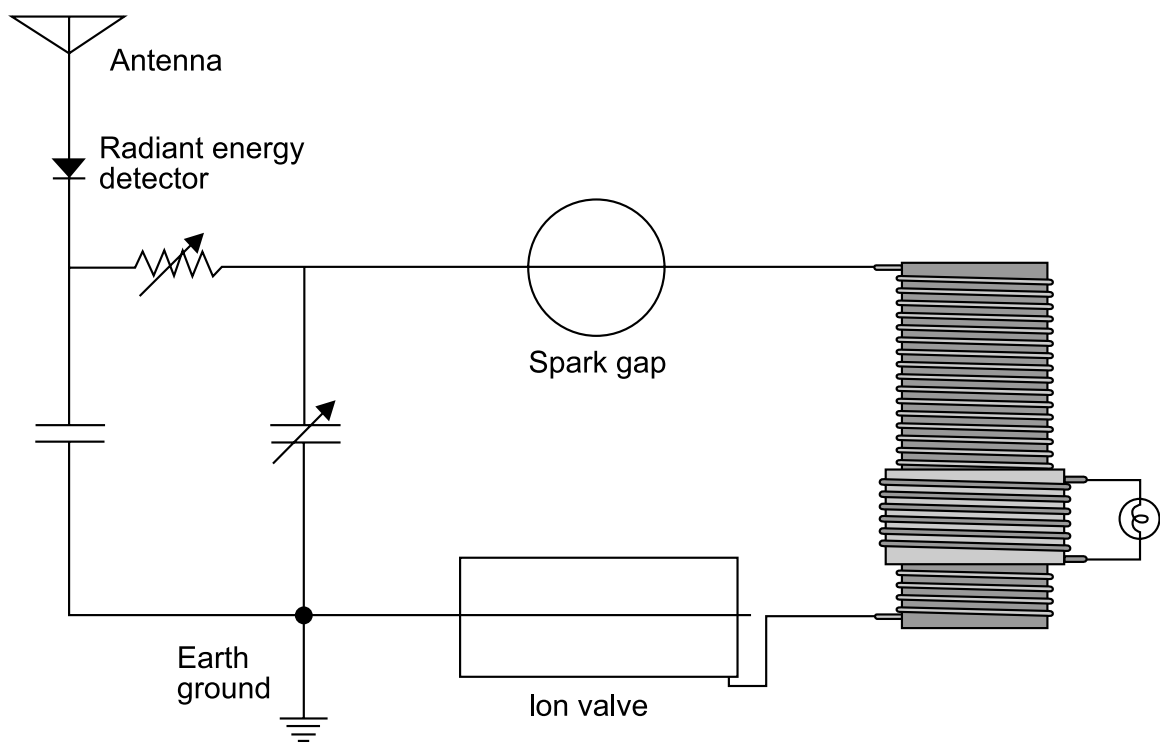


Fig. 2

Proof of Concept

The proof of concept shown will obtain energy from the dissociation of matter bringing the circuit to life. It does this by creating a plasma field between differing electrical conductors. Electrons are unleashed and feedback to the circuit where they are converted into useful power.

Plasma oscillating on the correct wavelength will act like a spark on a mass of explosive material but releasing electrical particles instead of heat. This is to say that the excited fourth state of matter (plasma) causes condensed energy (solid matter) to become uncondensed (radiant energy). The reaction will be far superior to the force that invoked it in the first place because the energy stored in matter is released. The energy that is condensed in the elements of matter is immense. The result is that an enormous amount of energy is released with only a slight loss of matter. Gustave Le Bon proved this when he demonstrated that the action of solar light and from electric arcs on bodies produced electric particles similar to those of uranium. He showed that it caused all bodies to disintegrate to different degrees.

the excited fourth state of matter (plasma) causes condensed energy (solid matter) to become uncondensed (radiant energy). The reaction will be far superior to the force that invoked it in the first place because the energy stored in matter is released

According to the law of conservation, when we give to a material body a determined quantity of energy, this energy might be transformed, but the body will never give back a quantity in excess of what it received. This principle is considered too self-evident to be disputed. It makes sense that matter can only give up energy that

is given to it and is unable to create excess energy. Without violating this law, matter can be excited into giving up its stored inter-atomic energy. Condensed matter can become uncondensed if its oscillations become

violent enough and henceforth transforming itself into radiant energy. No laws have been violated. They have been expanded. The first law of thermodynamics describes the principle of the conservation of energy. It states that "energy is not created or destroyed; it merely changes form". The fact is that the creation or destruction of energy is a result of matter being broken down or built up. They both go hand in hand.

Naturally occurring radioisotopes were created through the billions of years of **cosmic ray** bombardment of ordinary matter. Their matrixes became unbalanced. The

correct trigger will cause these isotopes to seek their original balanced state. Enormous amounts of electrical energy can be obtained from the transformation of stored cosmic energy. These isotopes contain a very old energy reserve that can be released in a unique way with my discoveries.

Have you ever wondered about spontaneous radioactive decay? Is it really a super charged state of matter? If an atom can become ionized by either gaining or by losing electrons then why can there not be a nuclear ionization too? I hypothesize that atoms do become ionized on the nuclear level by gaining or losing neutrons. This may appear incidental but could be at the very heart of an ultra-chemistry. It is highly probable that this hypothesized phenomenon is behind natural spontaneous radioactive decay and explains many unanswered questions about nuclear science.

Liberated Energy

With a slight excitement from a pre-glow discharge in a spark gap, or even with no excitement at all, as we observe in spontaneously disintegrating radioactive bodies, such as U235, we can obtain large quantities of energy. Clearly, we did not create this liberated energy, since it already exists in matter, but we release it under the right conditions. This is being done without violating the law of energy conservation. The idea that matter could be transformed into energy was absurd before the acknowledgement of nuclear transformations.

A Nu Science is on the horizon. It involves the means of transforming matter into energy without splitting atoms. This science recognizes several isotopes of matter that spontaneously liberate energy as observed in naturally occurring radioisotopes. My research indicates that it is also possible to artificially speed up the natural decay process of condensed energy (matter) using a minute plasma field, as from a pre-glow discharge, etc... With a very small quantity of energy, we will be able to produce a very large quantity of energy without splitting the atoms.

Capture Capacitor

Nature offers us cosmic energy that manifests itself in many different forms. Electricity is only one of its manifestations. From this knowledge, we can obtain electrical power with no moving parts. The natural world contains many storehouses of this cosmic energy. Energy is all around us just waiting to be transformed.

The capture capacitor is one such example. It is called a capture capacitor because it captures and transforms electrical charge into electrical current. It does this with the aid of naturally occurring radioactive matter (N.O.R.M.). Put a pair of dissimilar metal electrodes together with a porous ceramic dielectric material sandwiched between them, along with a weak electrolyte and you have built a capture capacitor. In a low power capture component there exists a minute impurity of N.O.R.M. It is always present in clays and is usually present in ceramic materials.

If you want a capture capacitor to generate more power all you have to do is to add additional amounts of radioactive material to the dielectric. Lead-210 is the optimum choice because it has a half-life of around 22.3 years and is a pure beta (electron) emitter. Its half-life is almost twice as long as tritium. This means that it is feasible to build a component that will put out power for several years with little maintenance. Lead-210 is a decay product of radon gas. The parent source of radon is uranium. Therefore, uranium ore can be powdered and mixed into the ceramic material.

The atomic ions emitted from naturally occurring or artificially induced radioactive transformations can be directly converted to electrical power. The circuit shown can be used to convert radiant energy into useful electrical currents. Additional stages can be added for more power. The circuit shown gives a general idea of how such an energy conversion device functions. By no means is this technology limited to this one circuit, configuration, or source of radiant energy.

EAGLE-RESEARCH

Energy Solutions
since 1984


**A Research Organization that
Develops & Distributes
Practical Energy-Saving
Methods & Devices**

4 Energy Way, P.O. Box 118
Porthill, Idaho 83853
FAX: 250/492-7480

Technical questions to:
wiseman@eagle-research.com




◆ A new type of high field superconducting magnet from Oxford Instruments has enabled physicists at the University of Nottingham to balance the force of gravity and levitate heavy and dense materials such as lead, gold and diamonds. The patented Minimum Condensed Volume™ (MCV™) Cryofree™ superconducting magnet, developed and manufactured by Oxford Instruments in collaboration with the University of Nottingham, is the first of its kind in the world. Unlike conventional superconducting magnets, the MCV magnet never needs to be refilled with liquid helium and yet can generate a field over 300,000 times stronger than the Earth's magnetic field. MCV has a very small footprint and, operating at 4.2 K with a room temperature bore, can generate highly stable magnetic fields up to 16 Tesla.

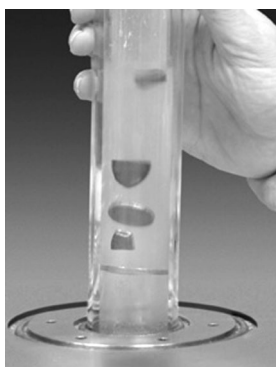

<http://www.oxford-instruments.co.uk>

◆ Polish inventor Zygmunt Orłowski called attention of the scientific society to his perpetual motion machine **METOOZ**, which according to the author after further improvement will be able to extract energy from the earth's gravitation.

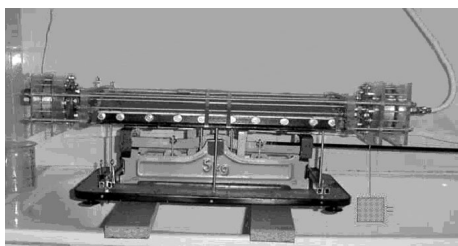

http://www.nets.pl/~metoozor/perpetual_motion_machine.htm

◆ It is necessary to change behavior of people in order to decrease environmental damage. This was the message of **"Green Week 2003"** which took place since June 2 through June 5 in Brussels.


The conference's key issues were three aspects of United Europe environmental policy: sustainable production and consumption, renewable energy and water supply.

Green Week is the first environmental forum of such a scale. Three thousand participants from all over the world represented

governments and funds, industry and mass media. The exhibition organized in the framework of Green Week included 62 displays from 14 European countries and were dedicated to the newest environmental technologies and projects. During the Green Week 26 conferences and seminars took place, as well as a great number of press conferences and actions for young people.

◆ **British researchers** (Gardner Watts company) **believe that they have made a groundbreaking scientific discovery after apparently managing to "create" energy from hydrogen atoms.**

The device represents "thermal energy cell" which appears to produce hundreds of times more energy than that put into it. If the findings are correct and can be reproduced on a commercial scale, the thermal energy cell could become a feature of every home, heating water for a fraction of the cost and cutting fuel bills by at least 90 per cent.

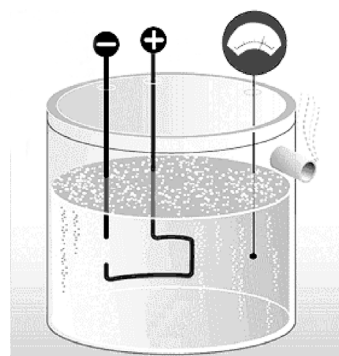

<http://www.telegraph.co.uk>

◆ **Gravity Conversion Rotary Device**

The below figure is from
http://www.theverylastpageoftheinternet.com/newclaims/GravityMotor/gravity_motor.htm



Does it really work?

THE MARCUS DEVICE CONTROVERSY

Tim Ventura, USA

Email: tventura6@attbi.com
<http://www.americanantigravity.com>
<http://www.americanantigravity.com/marcus.html>

Editorial: This overview is devoted to the fantastical device created by inventor Marcus Hollingshead that encountered more than its share of publicity and controversy between November 2002 and March 2003. You can participate in discussion on agggroup@yabooogroups.com.

The problem with Marcus has been that he was pressured by too many people to produce too fast results. I started talking to him in November, and he is always sounded like an honest, rational man with a good heart. The problem is that once people started to hear his private claims that he could lift something like 2 tons of weight, things kind of went south.

While people in general have been very well-meaning, they are desperate to solve many of our current energy-problems, and when Marcus appeared with a potential solution it got out of control. Pretty soon film crews were showing up at his house unannounced, and he was getting unwanted phone calls from people who had looked up his number online.

In my opinion, it is really a problem of a “social dynamic” at work here – too many people, with too much access, all at once. This also correlates to the type of person that different people are. For instance, I am a very open person, and I really do not value my privacy a heck of a lot — therefore, when TV crews drop by with 5 minutes notice (and they have), I tend to just let them in for a demo. However, Marcus, who is much more of a private person, seems to have become a bit overwhelmed at this proposition.

Also, keep in mind that I had initiated working with the media because I felt that it was time for the excellent work in the Lifters groups to see the light of day. There was some debate about this, but the Lifters group as a whole has greatly benefited from being about to tell people about this new technology.

Marcus had not actually “gone public” about his work. He had leaked information about his research to a few people, and from there it was leaked to several others, who in turn told their friends about it. Unlike the Lifter technology, which has hundreds of people that can talk

about how it works and where it came from, Marcus technology was represented solely by himself. That means that everything surrounding his device came back ultimately to him alone. Without any real group ownership of the expertise behind the device

As I said before, Marcus was new to the publicity, and did not have time to prepare the resources that the rest of us have had to answer questions, provide demo materials, etc. Naudin and Saviour have a masterful manner with regard to teaching people about Lifter technology, but they have had years to prepare this information and perfect a method of presenting it to people.

Most of us in the AG groups tend to proselytize for the technologies that we believe in. I know that I do, and if you haunt the newsgroups much you will notice that everybody there believes in something and can go on for months non-stop telling the world about it (again, I do this). Marcus, however, does not really have this personality — he is more of a “take it or leave it” type of person.

For me, this was another indicator that he was the “real deal”. You have to understand that I have never seen working prototype pictures of the Marcus device, and all that I had to go on was the feeling that I got from interacting with him on the phone and online. The fact that he did not try to “sell me” on the idea was a big plus. He told me about the device, and his story was always consistent. The other people that he talked to also had a consistent story – I have not talked to anybody and heard a different version than I heard from Marcus himself. That is a big plus from the credibility perspective.

Marcus initial goal (from when I started talking to him in November) was to gradually ease into working with

the public to tell them about the technologies he was working on. Unfortunately, I probably aggravated the issue a great deal, because his early descriptions of the technology might have gone unnoticed if it had not been for some of the things he had mentioned about his research.

When I read Marcus' firsts posts on the device, my very first thought about his claims was that they were bogus. Judging from the reaction of the Antigravity newsgroup, I gathered that a few other people also had the same initial reaction. The reason might be a little selfish – after you hear claims but do not see results for a long enough period of time, you tend to protect yourself emotionally by becoming skeptical to the idea that somebody can be lifting hundreds of pounds of weight using a completely new and revolutionary technology.

Nonetheless, something that Marcus had said resonated with me. I remember that he was talking about his results being based on a study of the Earth's fields, which is something that I had read about myself during the college years. Telsa had done a lot of work involving the Earth's electrical and magnetic-fields, and I had always felt that this research might come in handy later as a potential basis for Antigravity research. However, I did not have any specific ideas, and began asking Marcus questions offline to find out more about his research.

In reality, I am nobody special, so I think that perhaps this would have happened in any event no matter what my reaction would have been. Certainly I am not the only person that took an early interest in his work, and from what I learned later he had already been a little bit too honest in the BBC online newsgroup before he ever became involved with the Antigravity newsgroups.

From January to mid-February Marcus became like somewhat of an addiction in the newsgroups. This was a strange phenomenon to watch, but if he did not answer questions in the newsgroups for even a day people started asking whether he had been kidnapped or the government had assassinated him.

You have to understand that most inventors tend to segregate their time into "public" and "private". I do, Naudin does, and everybody does this. When you talk to the public about what you have built, you really get into it — but when you are actually working on it, you tend to hole up in the garage and put the entire world on "ignore" until you have finished with whatever it is that you are doing.

Marcus really started to get publicity in late November 2002, and it built up over a few week period of time. By mid-December, he had a healthy following in the Antigravity newsgroup and people in the 5 or 10 other AG newsgroups were developing more than just a passing interest. Great stuff for Marcus – he had thought that he was the only person doing this research, and it turned out that lots of people shared this common interest with him. We had lots of really valuable and productive exchanges.

Marcus bided his time working on the projects – he had initially stated that he could lift around 200 pounds of weight with his November version (prototype #161, if I remember correctly). He did not have a digital camera, and he did not want to publish photos until he had a better prototype anyways. That was OK with me – I am used to work with a variety of inventors and came to realize a long time ago that everybody has their own style. I was content to wait until Marcus had additional data, and the only thing that I insisted upon was that sooner or later he ante-up and provide some photographic evidence.

Despite lacking photos or video evidence, Marcus did have documentation. In fact, he wrote more documentation about his device than I had ever hoped to receive. He cranked out about the equivalent of 30-pages of "real" documentation in a very detailed form within 1-month, and had the email equivalent of many more pages in postings about how the device worked online. Marcus had already been publishing details online for about 2.5 months.

Despite the incredible amount of published data that Marcus was able to complete, in some ways it made things worse for him than not having anything at all. The reason was the nature of his research. My work, currently focused on Lifters, was in a technology that is easy to explain – the device is built like this, it works like that, and it can be described in a manner similar to some other thing basic, easy to explain, and easy to compare.

After all, Lifters have been accused by science of being ion-wind devices. If nothing else, rebutting this claim gives us someplace to start – something to compare against to provide people with an idea about how the device works. Additionally, we had tons of video and photographic evidence to back up our claims. In Marcus case, the documentation that he provided made things worse because his technology is so utterly different. It is not ion-wind, nor the Biefeld-Brown effect, nor

apparently the Searle effect. In fact, the more than you tried to pin down exactly what it was, the harder it became to describe it.

Also, its not like he could simply fall back onto describing the construction of the device – **reason being that it contained a series of interrelated coils with a unique configuration that were intrinsically tied to the operation of the device.** Every time he wrote a detailed summary of the construction of the device, we had come away with more questions than we had started out with. After a time I gave up trying to understand how it was constructed, because I only had bits and pieces.

Marcus was using an arrangement of 6-coils, and what are described as “bifilar windings”. Essentially, this means that you wind two wires together around a coil and then tie one of the ends to another, making the two wires essentially one long wire wound “against itself” down the length of the armature its on. There are 6 of these armatures on the device, mounted around a central RP (or reference point).

Marcus created all of the terminology for these parts – this lends additional credibility to the idea that he had had 7 years of experience with it. These are ideas that you just do not “make up” for publicity. For instance, the bifilar windings on the armature-coils are self-cancelling fields, and even a basic-electronics education will tell you that. However, the interesting thing is that once you really start to get into the advanced “post-scientific” research on magnetic fields you start to see self-cancelling magnetic coils all over the place. The reason is apparently that while the “B-field” (*Editor: i.e. magnetic field*) of the coils cancels, the “A-field” (*Editor: i.e. vector potential*) that Tom Bearden keeps talking about does not, which means that you can isolate the really interesting effects from the coil without having to deal with the high field-intensity effects from normal electromagnetism.

Marcus had described these six armatures as being activated in a series, or order, to obtain results. Each of the coils was spun by an electric motor mounted on the armature, and when the coil was spun up to a certain speed and “stubs” mounted a periodic intervals on the side of the armature were fired in sequence the antigravity effect was created.

Marcus Antigravity effect was a directional force that was applied in a unique manner depending on which

coils were activated. This means that by activating (for instance) coils 1 and 3, he could create an antigravity effect and move the device left – or something to that effect. Turning on and off each set of coils gave him movement on one axis of thrust, which corresponded to X, Y, or Z in a standard 3-D geometric graph. Since you can move in either direction down any given axis of thrust, this means that you have 6 axis of movement height (up and down), width (left or right), and depth (forward or backward). His device provided movement on any axis by either one coil or an arrangement of coils.

For a while Marcus did not want to talk about side effects, but I pressured him into it. The reason was that I have seen side-effects that were pretty darned strange in a number of different experiments, and I was willing to bet that if I pressured him a bit he would talk about what he had seen but did not want to reveal (for fear that people would not take him seriously). It turns out that I was right....

Marcus had talked about the RP, or “Reference Point” upon several occasions. This is a multi-layered device that acts somewhat like a capacitive element. It sits in the direct center of the Marcus device, and it is the reference-point for the entire device. The RP is manufactured from cast-iron, and Marcus says that he has a local company build them for a few bucks each by pouring iron into a mold based on one of his designs.

You can active the RP at the same time that you activate the coils. You have coils rotating around the RP, with “stubs” on the coils firing periodically at points corresponding to spots on the surface of the RP. Meanwhile, you also have an electrical charge on the RP itself, which means that there are a lot of elements interacting at once to create a very complex dynamic.

One of the interesting side effects was a darkening and “blurring” effect of the RP, as if light was being reflected off it. Another was a Star-Trek like “force shield” around the RP. These only occurred when all of the coils were activated at once. Also note that since the coils are opposing in nature (one for each direction on each axis), that when you are creating the force field effect the device cannot be levitating. However, the device is operational, and you have a force-field that you can apparently bounce a heavy hammer off without being able to penetrate it (Marcus description).

Another interesting note is that the force-field effect can be modified to create a vacuum. I am not sure how

Marcus noticed this, but he had said that it appeared to create a vacuum inside of the field's boundaries during operation. Interestingly, it also ran very cold – apparently down to a hundred degrees below zero, but only within the localized boundaries of the field.

I am not a professional physicist, but this is something that has been reported with the Searl effect and several other experiments, and the reason that I believe it occurs is because you are taking the kinetic energy of the device as well as some of the kinetic energy of its molecules (i.e.: heat energy), and injecting it into another dimension. After all, anytime we directly modify a gravitational field we are creating a dimensional effect, but in normal life we do not notice it because the boundaries between gravitational fields are very gradual.

Well, in the Marcus device the boundary between gravitational fields is not a several thousand mile-long gradient like the Earth's field is – instead of you have a gradient perhaps 10-times more intense focused within a 3 to 4 inch area. That means that you are creating essentially a rift in time and space (self-healing) that is kept open by the energy that you are pumping into the device.

To the best of my knowledge, this is the most accurate description that I have seen yet for why his device does this. Marcus himself could not explain why these effects occurred, and to be honest I scared him more than a little when I told him my theory.

In the hypothesis that I just put forth on the origin and functionality of the Marcus device effect, the interesting this is that there really is not a direct correlation between input energy and the effect itself. That is because you are not using the input energy to actually cause an effect – you are essentially using the input energy to translate the device into another dimension (although it is still partially within ours).

Einstein called these “frames of reference”. The idea is that the energy input is used only in putting the device into another frame of reference, but that any interaction between us and our “normal” frame would have to be modified for any interactions with the “modified” frame.

Again, this takes place in normal physics – but usually it involves motion, and normally it takes place over a vastly

larger gradient of time/space/whatever. The difference between two frames is the difference between two locomotives moving at different speeds – the energy input goes into accelerating each locomotive up to that speed, but the actual work is performed if those two trains interact is solely a product of the frame of inertial reference (mass & velocity = energy).

Another excellent example is a helium-balloon. You put the energy into condensing the helium and pumping it into the balloon, but it is not the helium that creates lift – it is the surrounding atmosphere. In a very real sense a helium balloon gets its energy from the surrounding environment. The energy that you put into “maintaining flight” in a helium balloon is only the strain on the fabric used in holding the helium into the confines of the bag

that encloses it. With the Marcus device, I would bet money that it is not the input energy creating these effects – it is instead the difference in frames of

dimensional/inertial reference between “our” environment and the “device's” environment, whatever that difference may be.

You see, even though this sounds like a load of BS, magnetism is not real. This is not an idea that I am making up – in fact, it is an entire chapter in the physics 101 textbook kicking around downstairs in my house. Take two magnetic fields, and project them in the same direction at the same speed. Field A can not interact with Field B, because neither of the fields really exists – they are merely ripples on a pond, and that pond is the background of the time-space continuum. People that believe in relativistic gravitational effects take for granted that things like this happen – after all, gravity is not a force per se in relativity – only a modification of the dimensions of time-space. Well, most people do not realize that Einstein based his theory of gravitational force on his study of magnetism. Magnetism is the same thing – it is a modification of the fabric of time-space.

Take two magnetic fields that did not interact from a moment ago, and now change the direction that one of them is traveling in. Suddenly, the two fields that could not even see each other a moment ago now create an incredible “torque” – this is the same thing that we see in bar-magnets and electric motors. This is the “torsion field” research.

the energy input is used only in putting the device into another frame of reference, but that any interaction between us and our “normal” frame would have to be modified for any interactions with the “modified” frame.

Bar magnets are different than pure fields because they are composed of the discrete fields of thousands of tiny magnetic “domains”. That is why the fields from bar-magnets are never “invisible” to each other – it is because that the fields in bar magnets are too jumbled to ever really “line up” to the point of being invisible. Pure fields can do this, however, reinforcing the supremacy of Einstein’s relativistic effects with relation to electromagnetism.

Anyhow, that is about it for now – I will try to come up with a more detailed picture for you on this if you like, but I expect that you will probably have more questions about Marcus theory and device in near future. It is a very complex idea underlying his research, but the basis of it is the idea of “rotating magnetic fields”.

If you want to do additional research on your own into related fields of study, I would definitely look up “relativity and magnetism” – it provides an excellent example of how to visualize relativity theory in the study of magnetic field interactions. This is something that electronics engineers are not taught, which is why you have never heard of this in an engineering sense before. However, in physics is a well-known concept, although most physicists prefer to work with quantum mechanics rather than relativity these days.

In terms of rotating magnetic fields, you can look up “torsion fields” – again, the Russians have the best understanding of advanced torsion field physics, although their best material probably has not been translated yet. Additionally, rotating magnetic fields are the basis for the Searle Effect and the Hamel device.

Marcus was intrigued by Searle’s claims, because they appear to have matched many of his own results. Interestingly, Marcus had developed his work within an “intellectual vacuum” and had never heard of Searle before I told him about the similarities. Nevertheless, force-fields, ice-cold operating temperatures, and antigravity seem to be a pervasive similarity between all manners of experiments that have been reported using rotating magnetic fields. I had assumed that Searle’s claims were bunk, but after hearing about similar effects from Marcus research it led to reconsider some of the criticism surrounding Searle lately.

One a final note – one group that may lend additional credibility to this research is Godin and Roshchin in Russia. They obviously benefit from the years of knowledge that the Russians accrued in magnetic field

systems theory, and they attempted a replication of the Searle effect device some years back (and claimed to get some results). I hear that they have been working on a revised version of their experimental setup recently and hope to have even better results in the very near future.

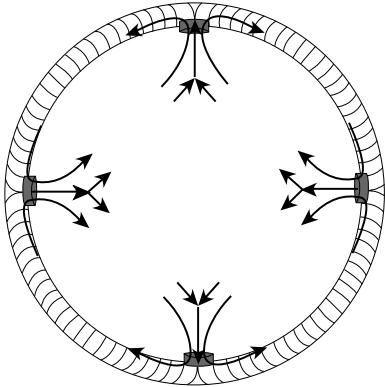


Fig. 1

Magnetic flow for a bifilar-wound toroid that is split at four points on the toroid. This configuration occurs when the coils in the nubs are charged to match the charge on the toroidal coil. The configuration is a quadra pole with a minimum magnetic field at the center



Fig. 2

Marcus recommends the Kikusui 6000L and 18000L multipurpose AC power-supplies

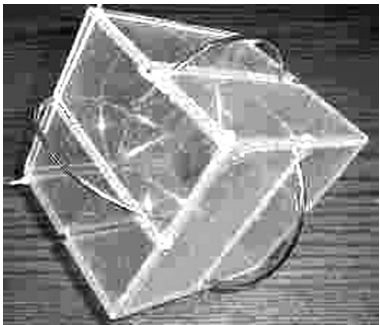


Fig.3

A scale-model mockup of the ring-arrangement within the Marcus device, showing the interlinking coils




History pages

Systems of conversion of thermal energy to mechanical one


Review prepared by correspondent Alla Pashova, **Russia**

There is a wide class of closed-cycle heat engines using differential temperature of water and ambient air. This kind of systems enables thermal energy to be directly converted to mechanical one so as to perform a useful work. We publish patent specifications of two analogous devices of this kind.

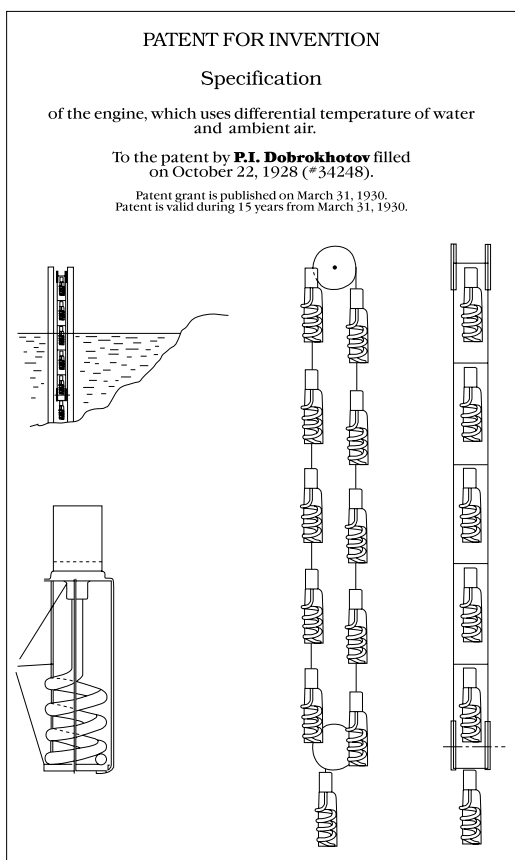

In 1928 **P.I. Dobrokhoto** proposed a design of such an engine. It represents an endless chain thrown over a pair of blocks and partly immersed into water. The chain consists of coiled pipes filled with a volatile liquid (such as sulfurous anhydride or ammonia). One end of each coil is fastened to a frame, while another end is fastened to a cylinder piston mounted on the same frame. When overwater elements are heated by means of ambient air, the liquid inside the coil evaporate. Vapor put pressure upon the pistons which being in motion compress air in the cylinder, and thereby reduce volume of each element. When submerging, the element gradually cools down, thereupon causing a decrease in pressure of vapor of the liquid, which is enclosed within coils. The pistons move in backward direction, and the volume of air available inside the cylinder increases. Increase of volume results in increase of water buoyancy force that sets the device in motion.

In 1980, **Y.S. Grigoriev** developed his forerunner's idea by improving the system described above. The inventor aspired to enhance the effectiveness of this method of conversion of heat energy to mechanical one. He suggested fixing the volume of chambers filled with a heat-sensitive actuating medium at its minimal magnitude before immersing of those chambers into warm water. In water the actuating medium heats and partially evaporates. At a maximum depth of submersion, the chambers are released from fixation to be expanded during emersion. Thus one may avoid expansion of the chambers during their submersion. Furthermore, there is a possibility to activate the device and get the useful work without preliminary spinup from an external drive.

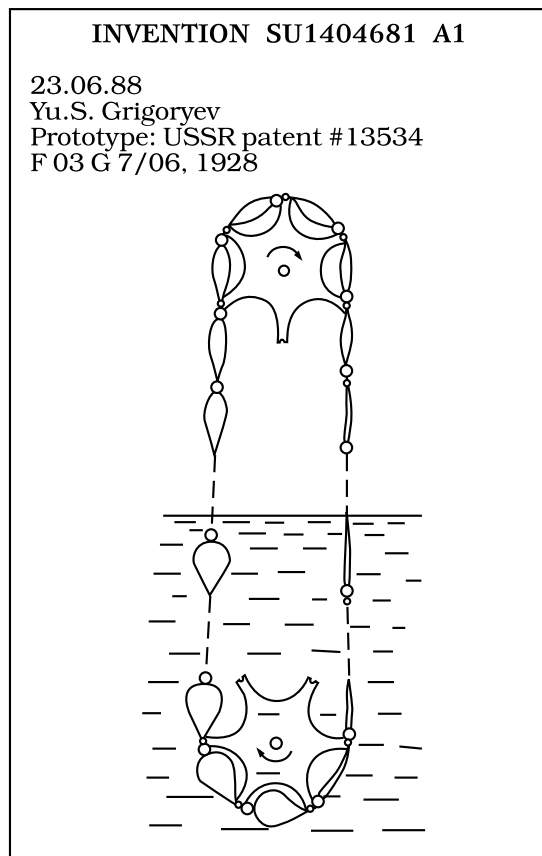



Iliya R. Prigozhin (25 January, 1917 – 28 May, 2003)

Iliya R. Prigozhin, aged 86, Nobel Prize Winner, Belgian scientist of the Russian origin, died on 28 May in Brussels. Prigozhin made a number of prominent discoveries in the field of thermodynamics and statistical mechanics of nonequilibrium processes. In particular, he developed a concept of irreversibility as applied to thermodynamics. Prigozhin was studying time as a physical phenomenon. In 1977, he was awarded the Nobel Prize for chemistry “for works on thermodynamics of nonequilibrium processes”.

The scientist formulated one of the major theorems of the theory of nonequilibrium processes. This theory was later named after him. According to Prigozhin's theorem, stationary state of the system corresponds to minimal entropy generation. The outstanding physicist was also an initiator of applying methods of theory of nonequilibrium processes in biology.

Thermodynamics principles were enunciated in the middle of the XIX century after the invention of a steam-engine, when interaction of heat, electrical, and mechanical work aroused a higher interest. In accordance with the first law of thermodynamics representing an energy conservation principle, energy neither disappears nor appears in any closed system, but transforms from one form to another.

The Prigozhin's theorem sounds as follows: stationary state of the system (under conditions impeding attainment of equilibrium state) corresponds to the minimal generation of entropies. If there are no such impediments, then production of entropy reaches its bare minimum, i.e. zero. The theorem was proved by Prigozhin in 1947.

In thermodynamics the nonequilibrium specifically open systems were of most interest for Prigozhin. In such systems either or both (matter and energy) interchange in reactions with an environment. At that, quantity of matter and/or energy increases or decreases in the course of time.

It is obvious that human society as well as the biological environment is an example of dissipative and nondissipative structures. In the 60s and 70s, Prigozhin developed his theory of dissipative structures and described the formation and development of embryos. Critical points of bifurcation in his mathematical model are correlated with a point, where a biological system becomes consecutive and stabilized.

For his scientific career time, the physicist was awarded over 40 scientific rewards and admitted as an honorary member into national academies of many countries all over the world.

New Energy Technologies *PRINT EDITION ADVERTIZING RATES*

Full Page Ad

B/W - \$400

Color - \$800

Half Page Ad

B/W -
\$200

Color -
\$400

Quarter Page Ad

B/W - \$100

Color- \$200

New Energy Technologies is distributed in the leading Scientific Laboratories in Russia and has subscribers in more than 20 countries all over the world

To advertise contact us:

Faraday Labs Ltd, Phone/fax: 7-812-380-3844

<http://www.faraday.ru>, office@faraday.ru

**Russian Academy of Sciences
Russian Physical Society
Nuclear Society of Russia
Mendeleev Chemical Society of Russia
Moscow Lomonosov State University
Russian People's Friendship State University**

The 11th Russian Conference on Cold Nuclear Transmutation of Chemical Elements and Ball-Lightning (RCCNT&BL-11) is to be held during September 28- October 5, 2003. The place of the Conference is in Dagomys near the city of Sochi.

The program of the Conference includes the following subjects:

- Experimental research in cold nuclear transmutation (fusion) and ball lightning;
- Theoretical models with respect to cold nuclear transmutation (fusion) and ball-lightning effects;
- Applied to these problems technologies and devices.

The Organizing Committee of the Conference is pleased to invite you to attend the Conference. The terms of your participation are as follows:

The full cast is \$900, which will include the registration fee, hotel reservation and living, three daily buffet meals, conference proceedings, transportation from the Sochi airport and back, social dinner and special excursion or entertainment.

The languages of the Conference are Russian and English.

The total cost can be reduced to \$800 if transferred before August 10 to the account of the Organizing Committee, which is to be announced on having received from you a confirmation about your decision to attend the Conference.

If you make a decision to take part in the Conference, please, let us know before July 1 about the title and abstract of your report.

Contact telephone: (7) (095) 196-9476 (ask Mr. Igor Goryachev), Fax: (7) (095) 196-6108

Email: gnedenko@kiae.ru; Bazhutov@erzion.madi.ru; bazhutov@izmiran.rssi.ru; bychvl@orc.ru

Address: I. Goryachev, Russia, 123182 Moscow, 1 Kurchatov Sq.,

Research Institute of High Technologies at RC "Kurchatov Institute"



Letters from our readers

Thank you for publication of my article. Your magazine becomes more and more popular.

My special thanks to Editor-in-Chief Alexander V. Frolov. Whatever they say or write in the press, he has done a great work and it is not only my own opinion. He has managed to do that everybody had been waiting for a long time. My colleagues (not only from Rostov-on-Don State University but also from other Rostov Institutes of higher education) ask me personally send the best regards to the editorial staff of your magazine.

Sergey A. Gerasimov

Free energy?




The scientific community says that it cannot exist. Where did we hear that before? Academician Valery Sobolev from the Academy of Sciences, the head of the research group working on the experiment says: "This is not some new physics, but just experiments that have been performed very seriously. Make surge of electrons from the environment, remove them, deplete the fused electrolyte with basic typical metals; what you derive from it is what cannot be produced by chemical methods. This is a new state of substance." As the researchers say, first they discovered a particular electrochemical process where high-temperature materials in a new state are the product. This in its turn allowed to discover a new state of substance, new class of materials, a new source of energy, a new method of cold plasma generation, a new superconductor. See whole article at: http://english.pravda.ru/science/19/94/379/9675_energy.html

Josef Hasslberger

Personal home page on physics, energy technology, social and economic issues: <http://www.hasslberger.com>

Interference disc generator with permanent magnets

*Inventor Alan Francoeur,
Canada*

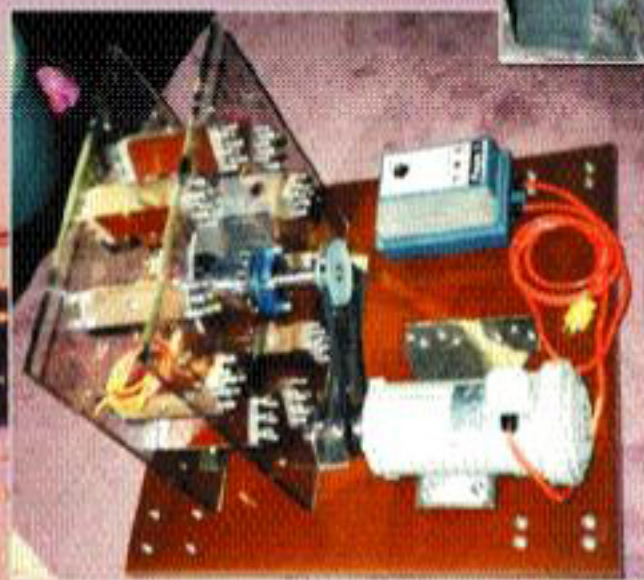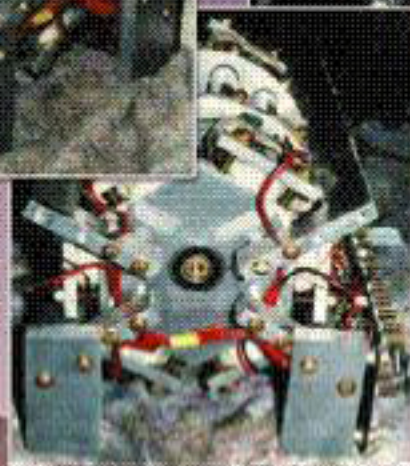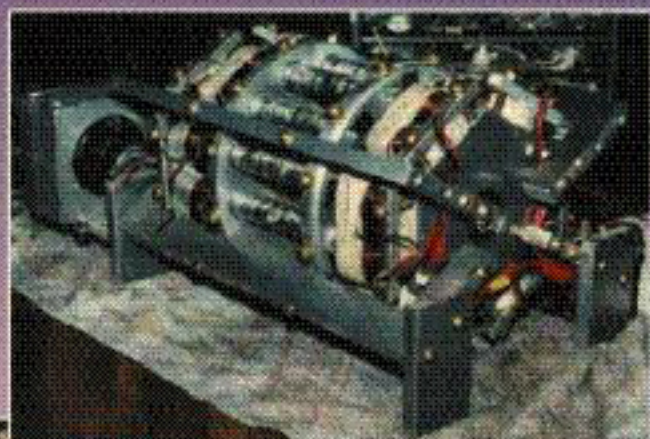

Carl Reich




Bud Johnson



Vortex heat pump



***Efficiency
200% and more!***

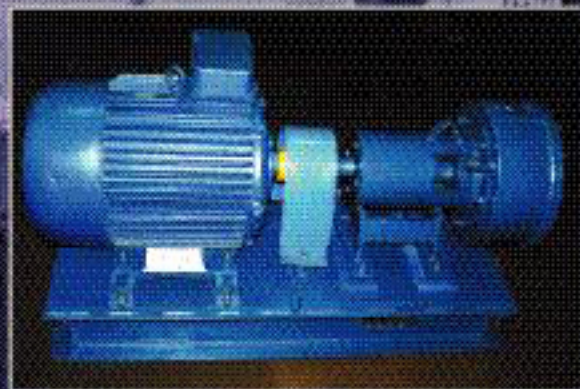

***Inventor: Vladimir Susorov
(812) 342-2652
8-901-976-5151
susorow@rol.ru***



Gravity-heat power system

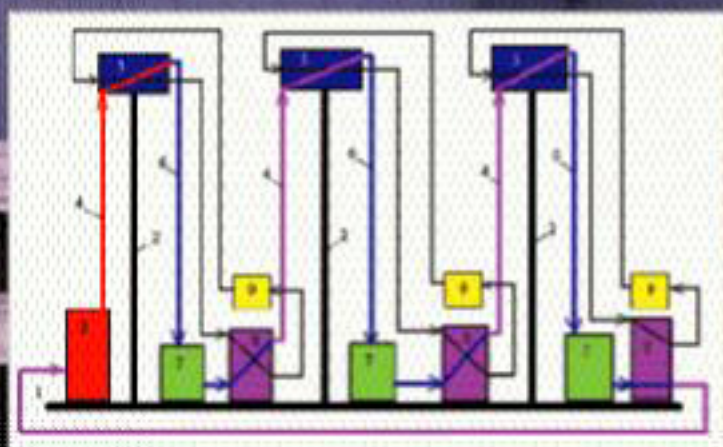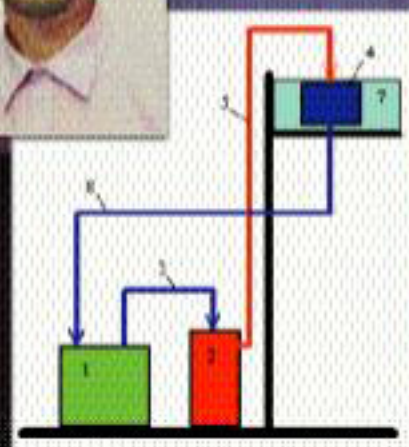

Author: Vladimir Sukhanov Wladimir.Sukhanov@soros.ksu.ru

New Energy Technologies

ISSN 1684 - 7288

Published by Faraday Lab.


Special Christmas Issue #5-6, 2003

Research on advanced aerospace systems and new energy sources

In this issue:

- *atomic hydrogen in power engineering*
- *magnetic generators*
- *capillary perpetuum mobile*
- *Hutchison effect*

*Photos from Faraday Laboratory:
test bench for measuring the effectiveness of
hydrogen dissociation and recombination processes*

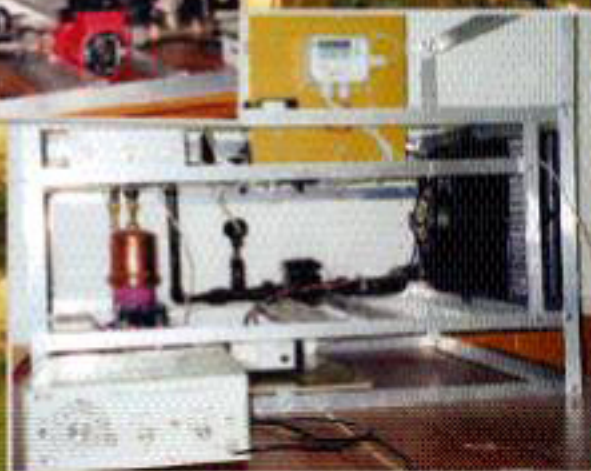




Bogomolov's Invention


Over-unity from elastic forces of spring, compressed by rotation.

Read in this issue!

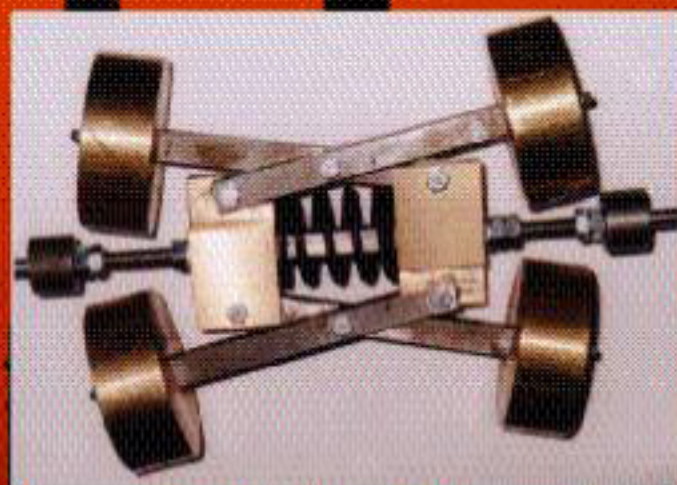


Spin Wave Laser of Ines Espinoza, USA

Spin Wave Technology INITIAL RELEASE

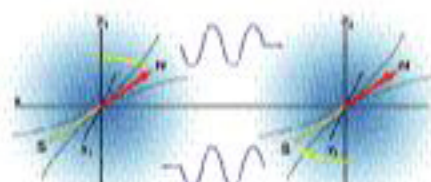

Electromagnetic interaction directly stimulates electron spin, from ground state, producing initial spin, which is the source of the field.

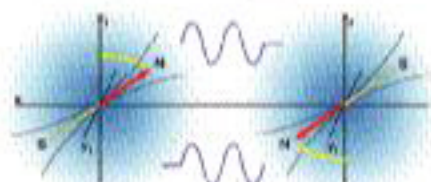


Electromagnetic interaction causes magnetization of electron spin, from ground state, producing initial spin, which is the source of the field.


George J. Burgh



Precession

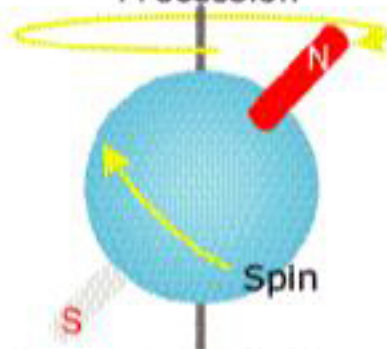

Electron Symbolic Diagram

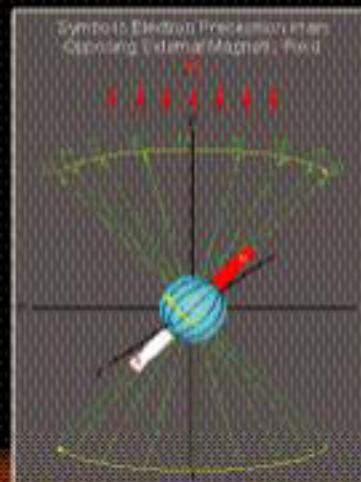

NEW ENERGY TECHNOLOGIES #14-15

1. News from our company
2. Novozhilov's motor, Y. Novozhilov, Russia
3. Self-action in the case of magnetic rotation, S. Gerasimov and others, Russia
4. Capillary motor, I. Elshansky, Russia
5. Gravity-heat energy system, V. Sukhanov, Russia
6. Modern perpetual mobile, Review
7. Free energy and antigravitation, (spin wave lasers), Ines Espinosa, USA
8. Mechanical analogies, Y. Ivanko, Ukraina
9. Cell of fine-plasma electrolyses, Ph. Kanarev, Russia
10. Smith Generator, Review.
11. Strategy of Over-unity Devices Marketing, R. Wood, USA
12. Hutchison effect, Mark Solis, USA
13. Heat energy conversion by means of non-linear dielectric, A Ries and others, Brasil
14. Gates motor, A. Akau, USA
15. "Cold electricity", A.Akau, USA
16. Gravity conversion rotary device
17. Torsion technologies, China
18. News
19. Antigravitation, B.Smith, USA
20. Electric levitation, MacLeod, Canada
21. Perpetual mobile, V. Likhatchev, Russia
22. Interference Generator, A.Francouer, Canada
23. New Paradigma of Time, D. Reed, USA
24. On the rotating permanent magnet system, A.Frolov, Russia
25. Inventor's week, USA
26. Patents on inertial drive topic
27. Bogomolov's experiment with spring drive, Russia
28. History of perpetual mobile
29. Tesla Energy Science Conference, USA
30. Perendev company, Review
31. Internet pages about free energy
32. Matveev's electrical generator, Russia
33. Perpetuum motor with magnets, France
34. The most interesting of 2003
35. Hydrogen power engineering, Review
36. News on hydrogen fuel cells
37. Electric discharge as part of the over-unity device, Review
38. Subscription page

Faraday Lab News

One of the most interesting research projects of our company in the year 2003 has been the research on hydrogen dissociation and recombination processes. It has taken us about half a year to build a special vacuum tube and in October, 2003 we obtained some experimental results on the heat output and efficiency of the system. The system we designed in our laboratory is shown in Fig.1 and also on the cover. The water-cooling system and the heat measurement system make it possible to measure the heat output within the range of 100 W to 5 kW with pinpoint accuracy. In the year 2004 we are planning to go on with our research work.



Fig.2

Our laboratory continues designing and perfecting a powerful “alternator”-type generator with permanent magnets and a drum-type rotor. We will give our readers more detailed information after we are aware of the patent examining result.

Our research on “The Control of Temporal Characteristics of Physical Processes by means of Ether Energy Density Change” is also awaiting the results of the patent examining group. This research on time and the construction of the “time machine” is not a pure theory but it has quite real prospects of being applied to the aerospace industry as a propulsion method.



Fig.1

It is worthy to note that now the alternative energy prospects in Russia do not entirely depend on financial factors. The cooperation is important between researchers, investors and organizations interested in the innovative development of Russian industry rather than in the development of Russia as the world primary natural resource is also important. Progressive political and public organizations should develop and introduce alternative energy programmes as well as render support to local researchers. The successful innovation of new technologies is impossible without this support and lobbying government. Let us hope that the year 2004 will bring along new opportunities and promising contacts.

Alexander V. Frolov
General Director Faraday Laboratory Ltd
<http://www.faraday.ru>

Novozhilov's Motor

Yury N. Novozhilov, Russia
Bratislavskaya Str., 25-6, 390035, Ryazan,
Tel: (80912) 72-12-72

An interesting but a very simple motor has been designed. It operates on the basis of heating differences of its components due to temperature variations of contacting environments or due to variable radiation intensity.

Motor structure

The motor structure (see Fig.1) includes a metal or plastic wheel (1). In the center of the wheel there is an axis (2), on which spoke ends are fixed (3). Other spoke ends come through a hole in the wheel rim. On the spoke end there are weights, for example, in the form of small balls (4).

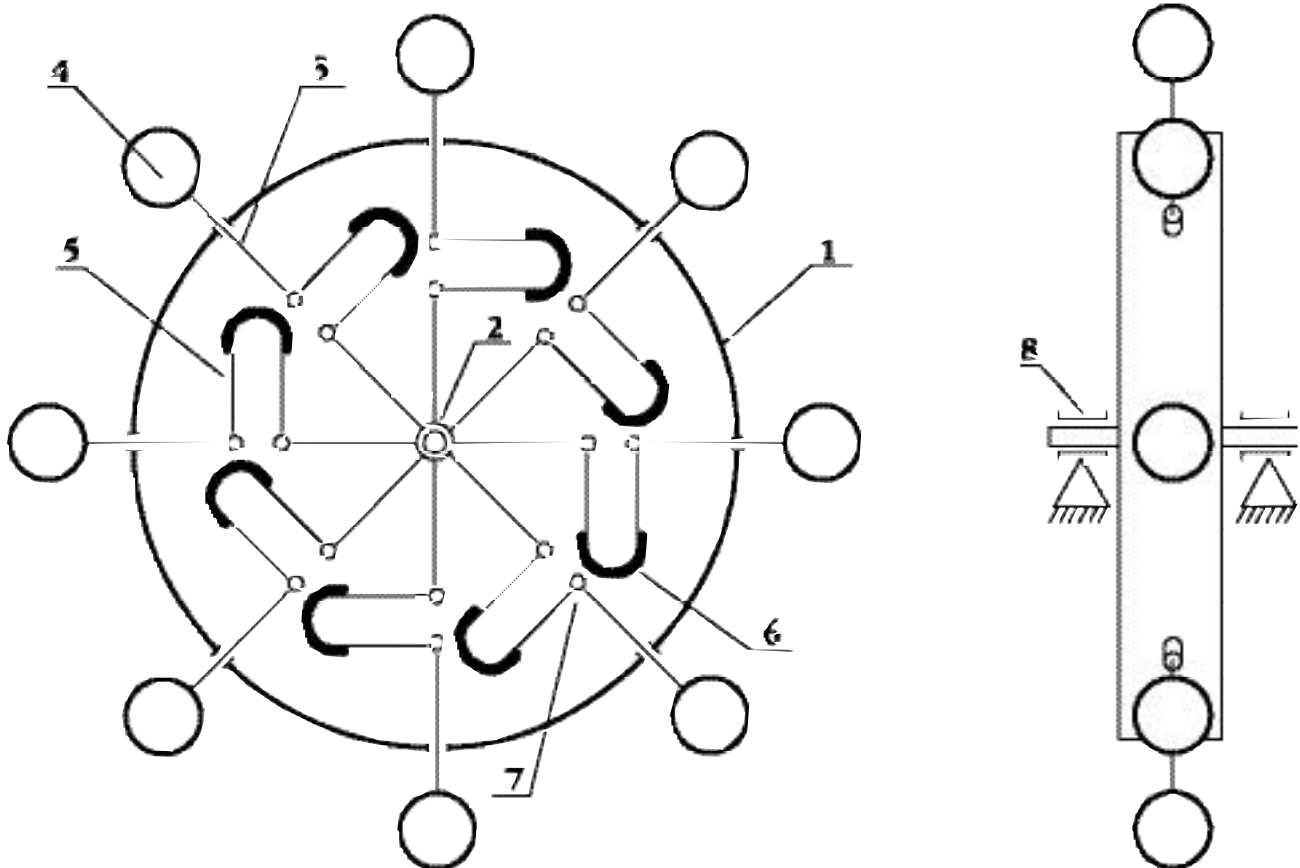


Fig.1
Motor

The structure peculiarity is preconditioned by a loop-shaped part placed on each spoke (5), which has a form of a metal strip or core. An arched bimetal component is built in the center of each loop-shaped part (6). Joints can be fixed at the joining point of loop-shaped parts and spokes to simplify the motor movement (7).

In the motor structure described arched bimetal components become straight when heated. The motor axis ends are placed in bearings (8).

To initiate the motor movement the loop-shaped parts need to be in mediums (zones) with different temperature. For instance, the lower part of the wheel may be placed into hot water (9) and the upper part will stay in the air (10).

Motor operation

When the motor is in a medium with identical temperature, for example, in the air, the temperature of all bimetal components will also be the same; therefore, they have identical form. In this case all spokes will similarly project over the wheel rim and all weights have similar distance from the wheel axis.

This state makes the whole system balanced and immovable. But if the motor wheel is partly placed into water with the temperature exceeding that of the ambient air **the bimetal components in water will become straight and shift the axis weights from the wheel axis.** This phenomenon initiates motor operation.

Let us consider this process in more detail.

On touching water, the bimetal component in the loop-shaped part becomes straight and shifts a weight from the wheel axis. The wheel becomes unbalanced, obtains torque and turns clockwise. This rotation makes the following bimetal component on the next loop-shaped part of the following spoke touch water. This bimetal component also becomes straight and shifts a weight from the wheel axis, generating an increased torque that turns the wheel clockwise.

At the same time a bimetal component comes from hot water on the left side of the wheel in zone "A". The component cools and restores its initial form, i.e. it curves more and pulls the weight on the spoke to the rotation axis. This leads to a decrease of its counterclockwise torque that affects the wheel.

The loop-shaped parts on the left side (A) and the right side (B) of the motor wheel will cause asymmetry in the number of weights projected by the spokes. On the motor left side (A) the weights will be projected from the wheel axis when the spokes are located in corner "C". On the right side

(B) the weights on the spoke axes will be shifted from the axis when the spokes are located in corner "D". Fig.2 shows that corner "D" is far larger than corner "C". This means that more weights will be shifted on the right side of the wheel in zone "B" than on the left side in zone "A".

Fig.2 shows that the wheel weights generating a clockwise torque are projected on the right side. On the left side in zone "A" only one weight is projected and it generates a counterclockwise torque. More weights shifted from the wheel axis on the right side will generate a greater clockwise torque than the weights shifted from the wheel axis on the left side. This is the cause of the wheel clockwise rotation.

This interesting effect is achieved due to the loop-shaped parts on the wheel spokes with bimetal components placed on them. When the next wheel spoke reaches corner "D", the bimetal component connected with it touches hot water, becomes straight and shifts the corresponding weight further from the wheel rotation axis. The motor wheel continues rotation, making the next bimetal component touch water. It is also heated, becomes straight and shifts the corresponding weight from the wheel rotation axis. The wheel continues rotation. Bimetal components are touching water in succession. On the left side, in zone "A", the bimetal components successively come out of hot water, cool in comparatively colder air, return to the initial sharply curved form and pull the weights on spokes to the wheel rotation axis. This is the reason for the wheel torque to decrease.

Mass movement from the axis in a rotating object commonly causes reduction of rotation speed. And, on the contrary, the rotation speed increases when the mass comes close to the axis. In motor zone "A" the weights come close to the rotation axis after the corresponding bimetal components come out of hot water, and the same number of weights move from the center in zone "B", i.e. these effects on the rotation wheel compensate each other.

In essence this is a heat machine. The heat transfer from a warmer medium – water – to the cold medium – air – is achieved owing to the heat capacity of the band-form bimetal component. This is the reason for fast heating and cooling processes. Due to the fact that bimetal components are not large, not so much heat is needed for their heating.

The motor will operate when the air temperature exceeds that of water but in this case it rotates counterclockwise.

There is another model of this motor when nitanol components are used instead of bimetal ones. Nitanol is a memory metal alloy that changes shape when reaching certain temperature. In this instance, the nitanol component is normally curved but becomes straight when heated (for example, up to 50°C), and the weight on the spoke end moves from the wheel rotation axis initiating rotation of the wheel. That means similar operation of a nitanol-based and bimetal-based motor.

The motor structure is very simple and its operation does not require power or fuel supply: it is enough to place its wheel into the water the temperature of which is different from that of the air.

The motor structure may be further developed: for example, a focused sun ray can be used for the heating purposes; the bimetal component can be heated with a common electric lamp on one side of the wheel, the required heat may come from a heating radiator, stove or burning gas-jet. Such motor may be heated when installed on a mantelpiece, etc.

This article describes the motor model that can be used as a toy. Being supplied with looking-glass units it may be applied to get various luminous effects or may be installed in the shop showcases, or else at exhibitions. This motor is also able to operate in a gravity force environment, even on the Moon. There direct sun rays may heat bimetal components to 200°C , and the temperature of the components located in the shadow almost reaches absolute zero, i.e. the temperature difference in this instance is over 400°C , which enables constant efficient motor operation.

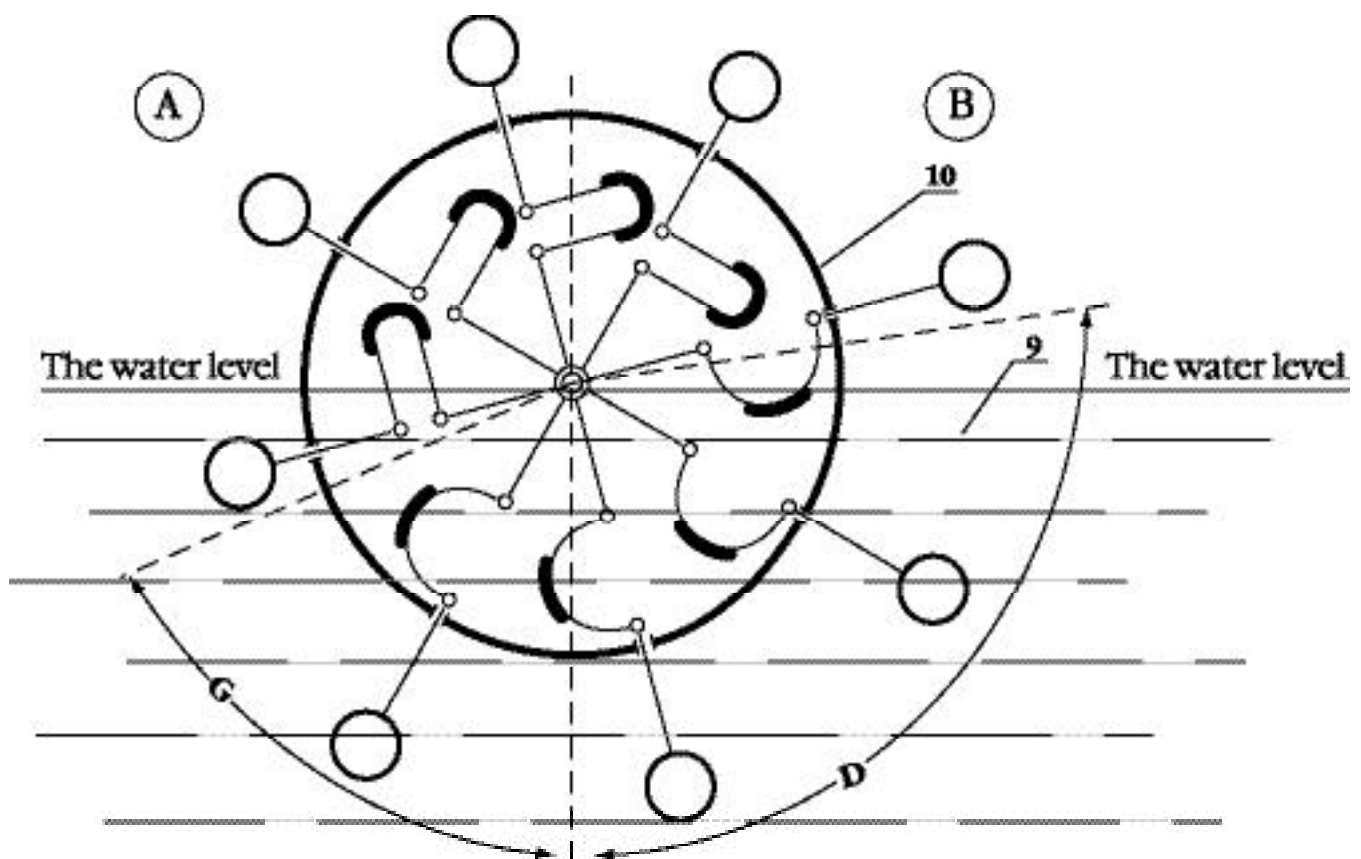


Fig.2
The motor in operation

Self-Interaction in Electromagnetic Rotation

S.A. Gerasimov, V.V. Stashenko, Russia

Physics Department, Rostov State University, Rostov-on-Don, 344090

Email:GSIM1953@mail.ru

Introduction

The electromagnetic rotation is the motion of a magnetized body in a direction perpendicular to both the vector of magnetization J_m and the direction of the electric current j in a liquid inside which the magnet is located (Fig. 1).

Editor: Readers can compare this vector composition and the device scheme of Godin and Roschin with the Searl experiments. The similarity is evident.

A. V. Frolov

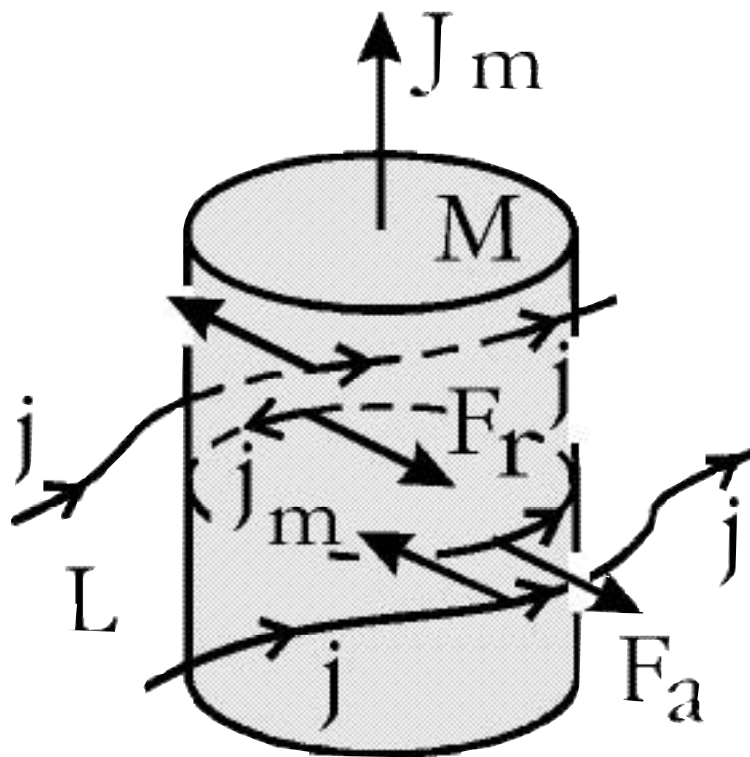


Fig.1

Electromagnetic rotation. A magnet M of magnetization J_m that is partly or entirely submerged in a conductive liquid L with a direct current of density j is moving in the direction of the force $F_a + F_r$.

The force producing such a motion is sufficiently weak and, normally, the phenomenon is observed at rotation. Although, this is quite a well-explored phenomenon [1-6], nobody knows what makes the magnet rotate [4]. There is an opinion [2,3] that the motion of the magnet in the conductive liquid is caused by the forces of attraction F_a and repulsion F_r between currents of density j flowing in the liquid and surface magnetization currents j_m of the magnet, often called the Ampere currents as shown in Fig. 1.

The external magnetic field of a long cylindrical magnet originating far from either pole is zero. Therefore, no force is exerted on charges moving in the liquid far from the ends of the magnet. Nevertheless, the magnet still moves in the liquid with the direct current even if it is only a thin magnetized needle [5]. Thus, the deeper the magnet is immersed in the conductive liquid, the more liquid gathers around it. The deeper the immersion is, the higher the total force must be. That should be so.

In reality, it is quite different. During intermediate immersions when the magnet is partly submerged in the liquid, the torque N does not depend on the depth of immersion, in the other words, currents flowing round the cylindrical magnet do not influence the exerting force acting [6]. Moreover, during shallow immersions, the magnet moves together with the liquid. **This is none other than the self-interaction** [7]. The conductive liquid under the magnet experiences the magnetic action. The direction of this force coincides with the direction

of the magnet motion. **Thus, the part of the conductive liquid moving in this direction under the action of the magnetic field B , affected by the frictional forces in the liquid causes the motion of the magnet in the same direction.** The only way to find out the role of the self-interaction in this phenomenon is experimental investigation. It would be appropriate to exclude the currents flowing under the magnet. In this case the magnet must rotate in the opposite direction.

Experimental system

A commercially available cylindrical magnet M of magnetization $J_m = 1,95 \cdot 10^5$ A/m and a balanced load P connected by a rocker R are suspended by a thread T as shown in Fig. 2.

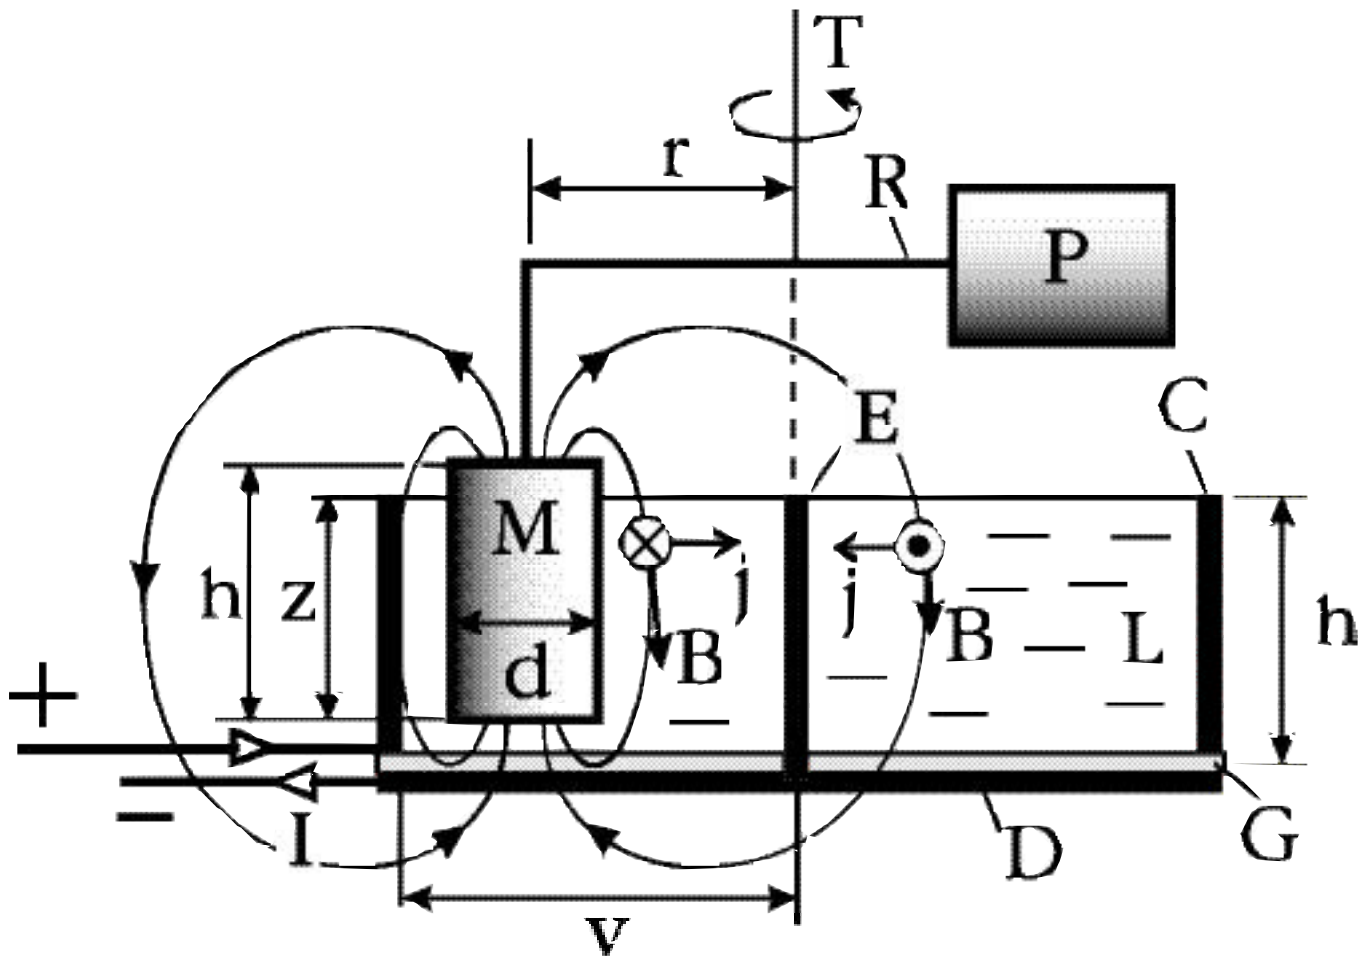


Fig.2

The experimental set and its parameters: $h=50$ mm, $r=35$ mm, $d=25$ mm, $v=70$ mm, the diameter of the central electrode E is 5 mm, the thickness of the bottom G is 2 mm. ($\otimes$) and ($\odot$) are directions of the force acting on current elements of current density j in the magnetic field of inductance B

The magnet is immersed in the 5% copper sulfate solution (CuSO_4) so that the depth z of immersion can vary. A vessel containing the conductive liquid L is large enough for the magnet to be almost entirely immersed. The cylindrical surface C of the vessel and the central electrode E of the system are made of non-magnetic materials. The bottom of the vessel G is, of course, insulator. The magnet is coated with an insulating moisture-proof varnish. The length of the electrode E equals the height h of the vessel. A direct current of strength I passing through the cylindrical electrode C , the conductive liquid L , the central electrode E and the disk electrode D generate a torque of electromagnetic origin which results to the rotation of the magnet. The disk electrode D is intended to provide the system with the symmetrical supply of the current.

Experimental results

The size of this experimental device differs from that described previously [6]. **As a result we have obtained the torque N , which is about ten times more intensive than the former one.** But the main result is that the torque does not change its sign when the magnet is being immersed in the conductive liquid (Fig. 3).

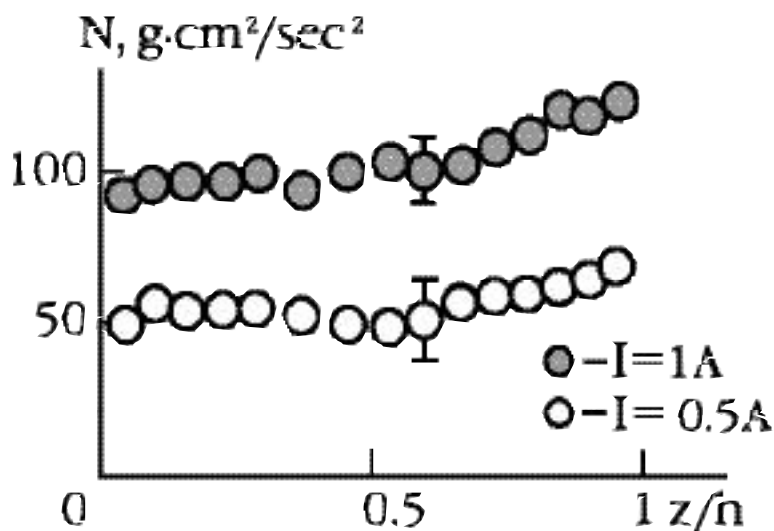


Fig.3

A typical experimental dependencies of the torque N acting on the magnet depending on the depth of immersion z

When the magnet is almost entirely submerged in the liquid the depth of which equals the height of the magnet, no currents are flowing under and above it. In this case the rotation of the magnet is expected to be the result of drag action of the rotating liquid located in the intermediate field relative to the magnet. This part of the conductive liquid is rotating in the direction opposite to that of the motion of the magnetized body. It seems to be the right way. The magnet pushes the liquid away and, therefore, is moving in the opposite direction. No, this is wrong. If it was correct, this effect would also occur during the shallow immersion. At small z the magnet and the liquid rotate together. So far we still do not know what makes the magnet rotate.

References



S.A. Gerasimov

1. Faraday M. Experimental Researches on Electricity. // London: Ed. by R. and J.E. Taylor. 1839.
2. Ampere A.M. Theorie Mathematique des Phenomenes Electrodynamiques. // Paris: Blanchard. 1958.
3. Sigalov R.G., Shapovalova T.I., Karimov H.H., Samsonov N.I. // Magnetic Fields and Their New Applications. // Moscow: Nauka. 1976.
4. Gerasimov S.A., Ershov A.V. What Makes a Magnet Rotate? // Physics Education (Moscow). 2002. V. 22. P. 70-75.
5. Grabovsky M.A., Mlodseevsky A.B., Telesnin R.V., Shaskolskaya M.P., Yakovlev I.A. Lecture Demonstrations on Physics. // Moscow: Nauka. 1965.
6. Gerasimov S.A., Ershov A.V. Mechanism of Electromagnetic Rotation. // Problems of Applied Physics. 2001. V. 7. P. 34-35.
7. Gerasimov S.A. Self-Interaction and Vector Potential in Magnetostatics. // Physica Scripta. 1997. V. 56. N 3-4. P. 462-464.

Capillary Motor

Iosiph I. Elshansky, Russia

Koshtoyantsa St., 1a - 75, 119454 Moscow

Email: ewrik@bisinter.ru

For several decades the author has been organizing a contest for young inventors on the radio, television, in mass media and the Internet. There have been accumulated thousands of engineering solutions that belong to schoolchildren and youth. There are many original ones, including perpetual mobile. Though unfeasible in principle, they have interesting structure and competent engineering solutions.

For example, a child's dream to create an oblique roof over a city or field and direct the rain flow to a turbine to obtain mechanical work is of little use. But it's quite another matter if this child takes a pencil, a sheet of paper and tries to make a sketch or a drawing of such construction. Even if the construction is primitive and unfeasible, the child will get his first engineering experience and self-reliance.

I can still remember one peculiar case. Once the editors were instructed (it was in the times of the USSR) to assist an honored inventor of new machines. It was a Stalin Prize laureate, creator of a special type of lime that was widely applied in construction (I will not disclose his name). The inventor was given (that was not common practice) a large room in a shared apartment situated in a prestigious block of apartments in Moscow. It turned out that all room space, except for narrow passages at the walls, was occupied by a huge table. On the table up to the ceiling there were some pipelines, glass and metal vessels, retorts and other laboratory ware. The most impressive thing was retorts heated by gas coming through a hose from the shared kitchen. All that stuff was bubbling, hissing and steaming. The inventor was creating a perpetual mobile!

I will give one more example of a situation common for the editors of the "Inventor and Rationalizer". Once we had a respectable-looking visitor who made an odd request to get the President of the French Academy of Sciences to respond to his letters about a perpetual mobile

plan. The essence of Alexander Rodionov's (Maloyaroslavets, Russia) invention was that "in accordance with Newton's and Guerin's laws fluid flows up through capillaries and turns a wheel when flowing down (see Fig.1).

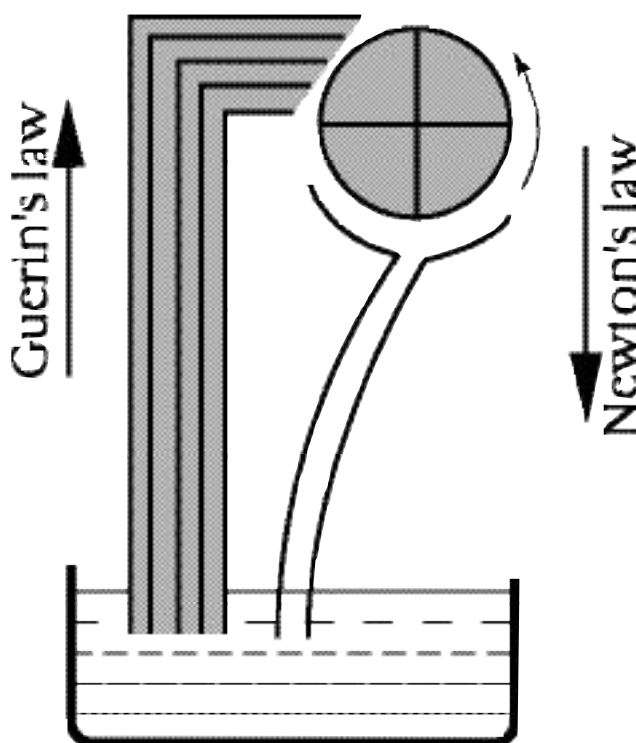


Fig. 1
Perpetuum-mobile

There are many similar projects in the history of engineering. Hence, this case may be considered as typical. We all know that the molecular adhesion forces (moistening) that push the fluid upwards will stick to it and the capillary motor will never work. But is the idea totally unfeasible? Since false modesty is inappropriate when it comes to perpetual mobile, I will present my ideas on this not so honorable subject for the reader's judgment.

It seems that all perpetual mobile inventors start not with a pencil and a sheet of paper but with experimenting on magnets, oblique plane, wicks, wheels, springs and other materials at hand. My first heat (perpetual) motor was also the result of an experiment.

The "Capillary" idea of Alexander Rodionov haunted me. I recalled that the great Lomonosov devoted lots of time to studying molecular adhesion and capillarity. They are present in everyday life, let alone the nature, especially in plants that would not be able to exist without them. How else would moisture flow up the trunks and stems? But, on the other hand, according to Mikhail V. Lomonosov's data, water flows up only for the maximum of several dozens of millimeters even through the thinnest capillary. But trees may have the height of several dozens of meters! If, as it is customarily considered, moisture flows from one capillary to another of its own accord, why not suppose that a capillary perpetual mobile is feasible? Explanations that moisture in plants flows up due to root pressure do not sound plausible. So where is the truth?

Years have passed since that visit of A. Rodionov. Now, just like I used to sympathize with, as it then seemed, a rather odd inventor, now my relatives sympathize with me. One can not blame them: for weeks and months there have been flowerpots all

around the apartment - on the tables, window-sills and bookstands. With bottles, tubes and self-made water manometers to follow.

Once, when I was assembling a device, I could not find two similar glass tubes and had to put in the tube of thin polyethylene. But no matter how hard I worked the water in the communicating vessels was at different levels. In the glass tube the water level was always higher. It could not be otherwise, if you come to think of it, but isn't it the right time the words "made of equally wettable material" were inserted into the communicating vessels law?

Here is a primitive experiment: make a hole in the bottom of a plastic flowerpot containing soil and a plant, and insert there one end of an elastic tube. The other end is inserted into the bottom of a plastic bottle containing water (see Fig. 3). In accordance with the communicating vessels law, the water will flow from the bottle into the flowerpot. When we see that the soil has been made wet, the experiment shall get more complicated: elevate the flowerpot so that its bottom is higher than the liquid level in the bottle. In some days we shall notice that the soil has not dried up and the water level in the bottle has lowered. One should not be a Solomon to guess that the soil or the roots of the plant transfer the water from the lower to the higher level. Here is a typical natural perpetual mobile!

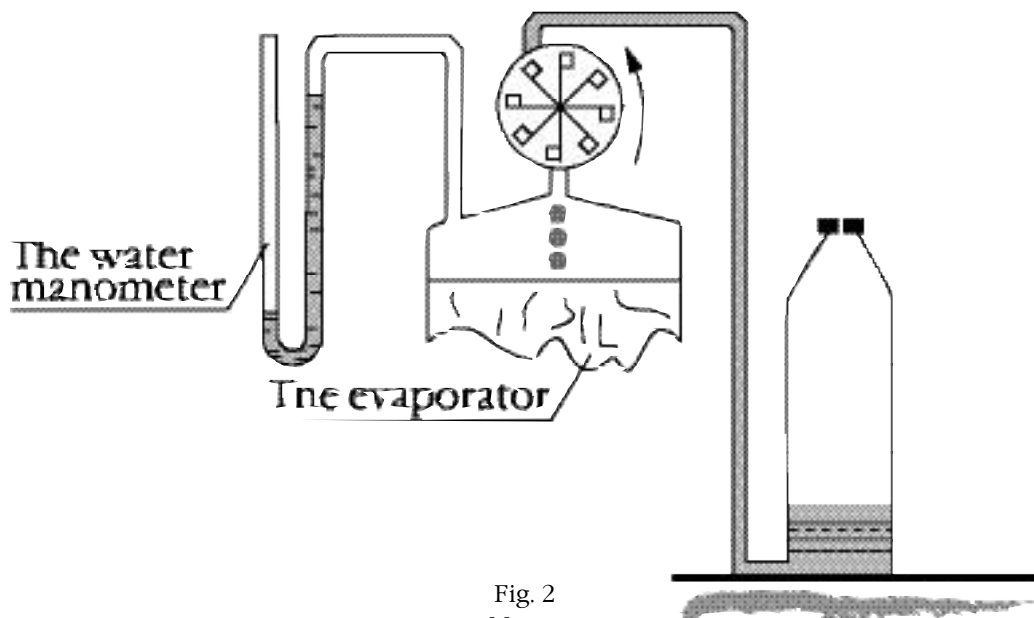


Fig. 2
Motor

It is no use referring to the molecular adhesion forces since they can not be applied at such height differences. What is it then? A molecular collision as in a boiling kettle? But a leaf has neither high temperature nor much space. Nevertheless, water evaporates both from the soil and leaf surfaces. At the same time there is rarefaction under the evaporating surface. Can it be the rarefaction that pulls up new portions of water?

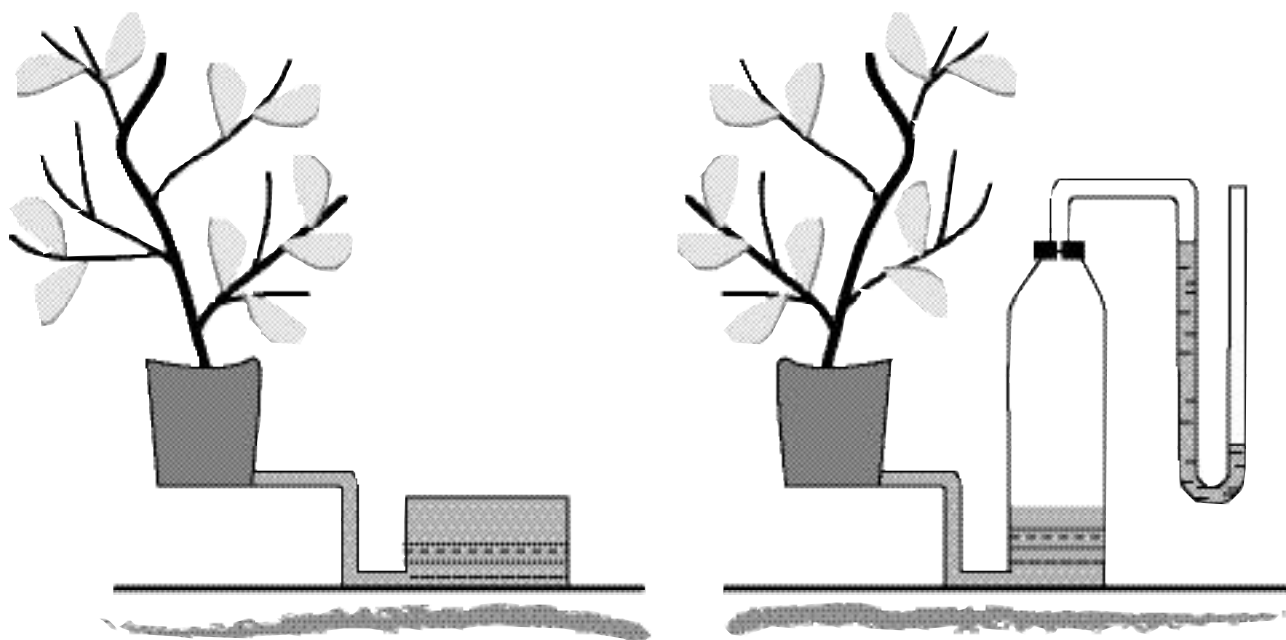


Fig. 3
Rarefaction

Let us make the experiment still more complicated. Put the leg pipe of a liquid manometer into the bottle cork. (Fig. 3) Almost immediately the water level in the closest leg to the bottle will start rising. It means that there is rarefaction in the bottle. Can it be the rarefaction that "rules" the plants?

Most likely, the essence of the mistake made by Rodionov and other authors of capillary motors consisted in attempts to get the water outflow from the capillary. **If it is not flowing out but evaporating, as it is common for the soil or plants, then, probably, vacuum will manifest itself and the capillary perpetual mobile will start working.**

I made my first capillary perpetual mobile many years ago (see Fig. 4). And it worked: though slowly, the wheel was steadily turning. No doubt, it was due to the heat inflow from the air. Therefore, such motor will work if there is a temperature difference and relative humidity of surrounding air is below 100%.

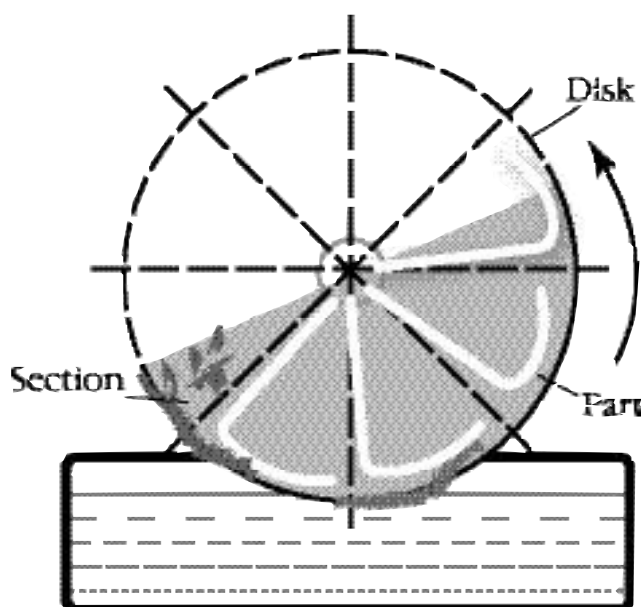


Fig. 4
Capillary Motor

The heat motor operating principle is clear from this figure. The disk (many disks on the common axis) is divided into isolated sections. Their surface is covered with a moisture-proof piece of material (filtered paper, cloth, etc.). The part of each section somewhat gets under the base of the next one. Hence, a small part of the base of one section and a part of the part following the section can get into water simultaneously. Due to the capillary moistening the section and the part will start to absorb water. Since the section is shifted about the center of gravity, the turning moment is bound to appear. The section that is out of water starts to dry up, the moment will increase and the wheel will start turning.

Having determined that, though slowly, the motor is turning, the author applied to a patent authority for a patent on the invention of the "Perpetual mobile", meaning it as a joke. I hoped that the experts (I knew some of them personally) will understand this joke. But, unexpectedly, the device was considered an invention, though under the

name of the "Heat motor" (certificate of authorship USSR # 1455040).

Basically, the motor is similar to the project of A. Rodionov. I would not be surprised if he protested. The same capillaries and the spontaneous rise of liquid on the moisture-proof material. The only difference is that the liquid does not flow out but evaporates from the capillaries.

Almost without any reason - one can not predict his eccentricities - I have recently made one more capillary motor (see Fig. 3). Perhaps, it resulted from my experiments with plants. This motor directly and spontaneously lifts water to a higher level, which is more convincing. Moreover, water flows in the form of drops (or a stream) and turns the propeller! The motor is quite operable and has even been shown on TV. But do not try to verify it on your own - such work is useless without certain know-how. The author would not like to disclose the "secret" yet. I could still make a patent application.



The Continuous Rotation Device

The essence of this invention is that in a closed circle the rotation of the object occurs without any outer influence or any power sources (electric energy, oil, diesel oil, etc.), which results in the rotation of the rotating part of the device. The torque can be easily enhanced by means of transmitting it to the reduction system. At that rate, the necessary rotation speed and rotation power can be acquired.

The device is small, easy to transport, mobile (both, in operation and switch-off), simple and inexpensive to make and assemble. It is economical, ecological and weather independent.

The device can be used in any industrial or household appliance field where the continuous rotation is required. It is especially

important to note that this device can be used to generate energy on a large industrial scale as well as in small laboratories, in mountains and remote districts, in tunnels, at sea, etc. for it does not require any power lines.

Patent Claim Priority:
#20030059, April 19th 2003

For more information
contact
the author of the invention:

Eldar Sariyev,
Azerbaydzhan, Baku,
Tbilisskiy Prospekt, 75-26;
Tel: + (994 12) 92-47-73, 98-95-02;
Email: eldar_sariyev@yahoo.com

Gravity-heat Power System



Vladimir N. Sukhanov, Russia
Kosmonavtov Str., 35-39, 420061 Kazan
Email: Wladimir.Sukhanov@soros.ksu.ru

Natural hydrologic cycle is a widely recognized phenomenon. Water evaporates from the ground and water reservoir surfaces, generally, due to the Sun heat, then moves to the superstructure atmospheric layers where it is condensed, and precipitates onto the ground surface, but on higher levels compared with evaporation surfaces. In this process water is also purified and desalted. From the higher levels water flows to its main evaporation points, forming streams like brooks and rivers where water power plants could be established. Flowing to the lower surface layers with lower potential energy, water in the Earth's gravitational field performs work that can be utilized.

Natural hydrologic cycle principle is used in the gravity-heat power system (USA patent No. 3953971, International class. F03G7/04 of May 4, 1976).

In this system the temperature difference between ground surface layers (the mountain foot and its top) is used to produce electric power and obtain fresh water. The temperature difference does not change much with change of height, and the system effectiveness is quite moderate, which can be named as its drawback.

The system utilizes free environmental energy. Its efficiency (converted to the process maintaining energy) tends to infinity.

The author proposes a new gravity-heat power system that can substitute modern heat power plants. It contains all installation components as per USA patent No. 3953971 except for the heat exchanger on the ground surface whose functions are performed by a conventional steam boiler.

Gravity energy component **G** in the proposed system:

$$G = X_m \cdot T g H,$$

where

- ♦ X_m – fluid flow,
- ♦ T – time of operation,
- ♦ g – acceleration of gravity,
- ♦ H – tower height between the steam boiler and the freezer (condenser).

This formula does not allow for vapor density of operating fluid.

The vapor density is insignificant as compared with the operating fluid density.

Energy **P**, required to maintain operation:

$$P = X_m \cdot T q,$$

where q – specific fluid vaporization energy

Efficiency **K** – of the system should not be lower than 80%

To obtain efficiency that equals 120% the following is required:

$$H = 2,2q/g$$

Or **H** = 25,4 kilometers.

Construction of such towers is too complicated for modern technology. Therefore, a stratospheric balloon that is linked to the ground surface by a flexible twin-core hose rope may be used. One core is designed to send down fluid and the other to send up vapor. Flowing down to the ground surface through the hose, the fluid will generate fluid column pressure. The fluid will cross water-turbine generator cascades, after each of which the fluid pressure will decrease and the fluid will continue its way down.

There is an alternative. To make the tower several times lower the evaporation (at the tower foot) and condensation (at the tower/mountain top) should be phased (in the form of cascade) at various pressure values and with utilization of the same heat energy. For this purpose a heat carrier is used that will transfer heat from the tower (mountain) top to its foot. This operation will enable the tower height segmentation into H/n sections where n is the number of grades in a cascade.

Cascade structure is shown in Fig. 1

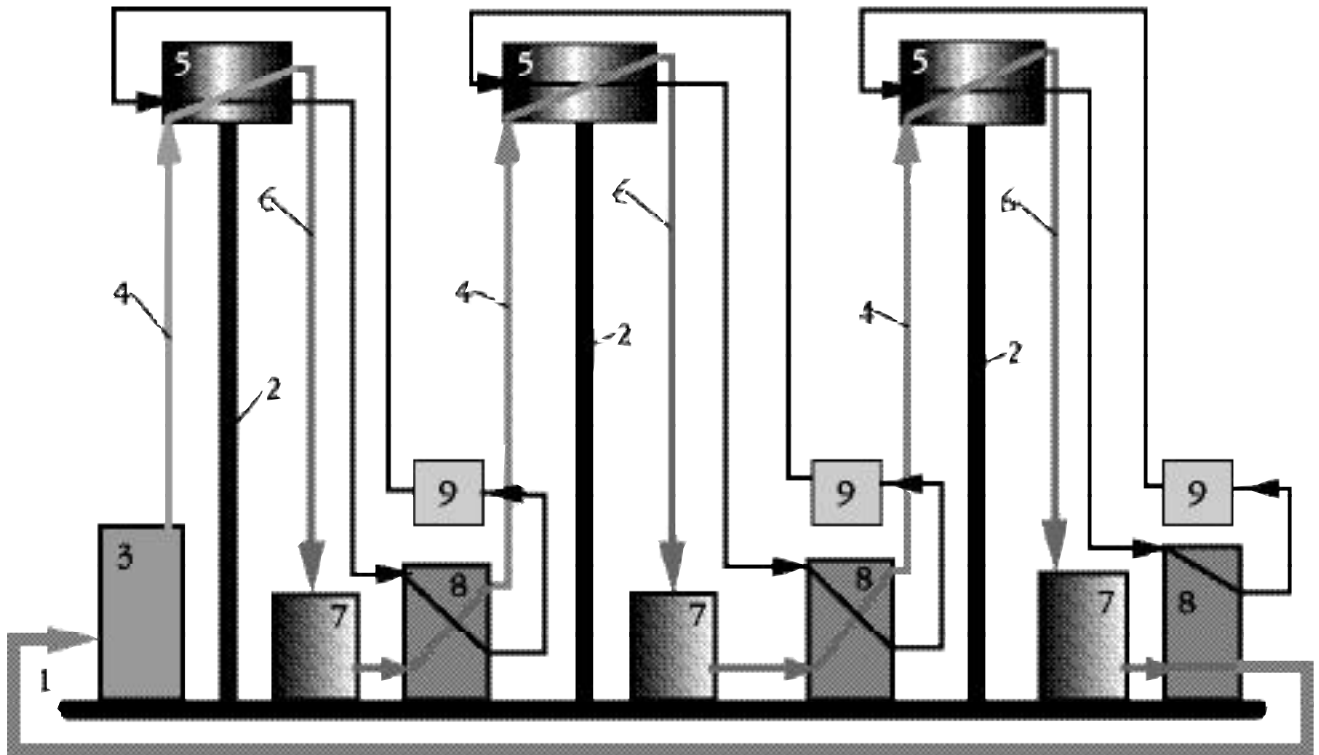


Fig. 1
Cascade

where

- 1 – ground surface,
- 2 – tower component or the smoke-stack of the steam boiler,
- 3 – steam boiler,
- 4 – steam pipe,
- 5 – heat exchanger and condenser,
- 6 – pressure pipeline,
- 7 – water-turbine generator,
- 8 – heat exchanger and evaporator,
- 9 – circulation pump,
- 10 – pipeline of the heat carrier circulation.

Cascade (operating fluid, water) with 500 meters

of height can contain several dozens of grades (50 and more). **In this case the cascade efficiency may approach 120%.**

Decreasing the tower height to 500 meters (for water) will allow for utilization of conventional water-turbine generators and standard equipment.

In the proposed cascade the heat energy is required to maintain the cascade working capacity when Earth's gravitational field energy is utilized. In the author's opinion there are still other ways to use gravitation.

The system scale is its main drawback. Therefore, partial utilization of the proposed principle may

seem more attractive. The proposed engineering solution was simple.

In a thermal power station the condenser is installed on the top of the tower (mountain). After the condenser the water lift in the water tower finished at the steam boiler pressure pipe (omitting the pump that was no longer necessary). Energy required for pressure pipe operation was saved. In other words, the water tower was utilizing the Earth's gravitation at the conventional juncture of vapor condensation in the steam plant.

Such proposal was made on June 17, 1982 in the patent application USSR N3453603/06, (101161) expert code 060701KH. However, the utilization of free and environmentally friendly gravity energy did not arouse interest even on the part of patent experts.

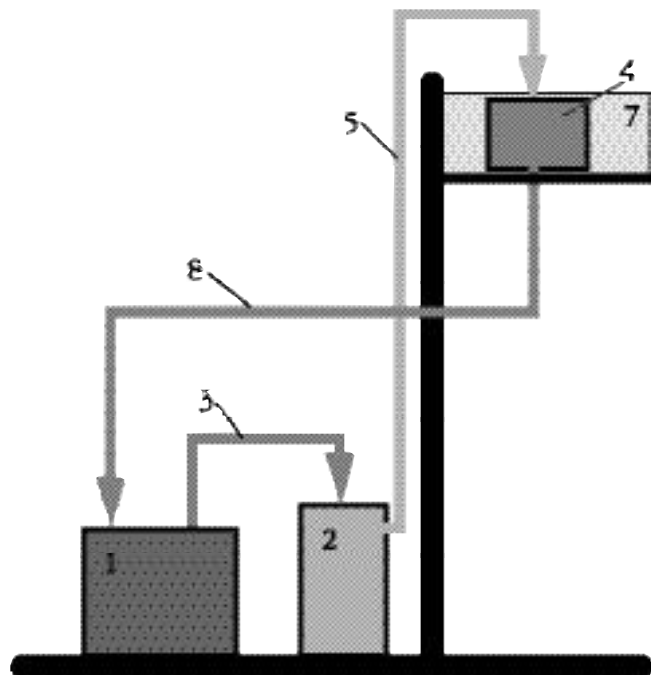


Fig. 2
System

The author is looking for serious partners.

The Alternative Energy Potential in Russia

According to the International Energy Agency (IEA) calculations, total investments into the energy industry constitute approximately 330 billion dollars annually. Almost half of this sum (150 billion annually) is allotted to the development of the electric power industry. This information only partially reflects the potential of the alternative energy development and does not include the market growth factor upon the introduction of autonomous power system technologies. Vast territories of the planet have not been sufficiently developed yet due to the absence of local energy resources and power lines. From this point of view, Russia is the country with an enormous consumer demand potential provided that the mass production of autonomous fuel-less energy systems guarantees low production prices.

Alexander V. Frolov
Editor-in-Chief

Faraday Lab Ltd

Fuel-less energy R&D
R&D in alternative astronautics

Read our
New Energy Technologies
magazine

Lev Tolstoy Str. 7-601
St. Petersburg
197376, Russia
Tel: 7-812-3803844
www.faraday.ru

Modern Perpetual Mobile

Review prepared by correspondent Alla Pashova, Russia.
Based on the Internet pages and other information sources

It is common knowledge that any experimental information, which is against a conventional scientific paradigm, is considered to be false, extracted from the society and finally is turned into something **classified and elite**.


Politics-oriented science as a whole and natural science in particular often result in misrepresentation and falsehood of **popular knowledge** that turns it into the fighting weapon of socio-political organizations, states and their groups.

World-outlook and political contradictions of any society often determine science development strategies. In 1885 Nicola Tesla presented his transformer in action by means of which he lit carbon lamps in a 25 miles circle without any cords, conductors or switches using the 5000-HP turbine of the Niagara hydroelectric power station. Afterward, he obtained financial support for one of his energy projects.

On a special testing ground Nicola Tesla built vacuum-energy systems. However, in 1885 the systems, as well as the testing ground, were destroyed as it became evident that if they went on the mankind would never need organic fuel again. But the destruction of the systems and testing ground does not at all mean the destruction of papers and documents...Ever since that moment people have been trying to find "free energy".

The experiment of distant lighting of carbon lamps without using any cords was repeated only once by the physicist Filippov. He managed to light the lamps in Tsarskoe Selo employing the electric generating systems in St. Petersburg. Filippov died in 1914 under mysterious circumstances.

In 1917 the Portuguese American Andres invented non-convetional fuel for an internal

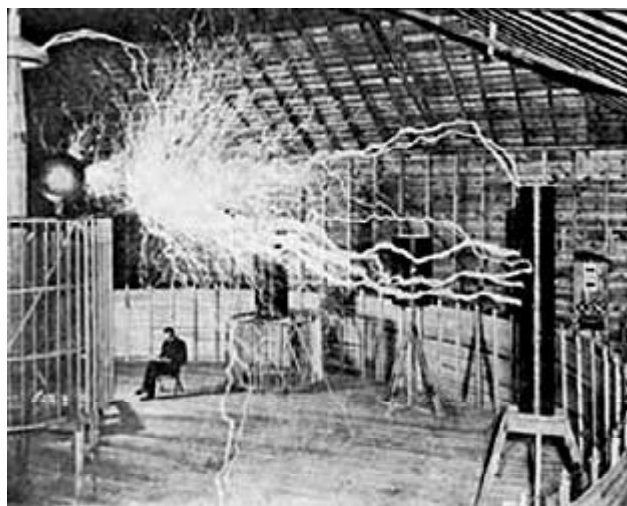

combustion engine. The essence of his invention was in some inexpensive chemicals, which he dissolved in water (some drops of chemicals per pail of water). A special state committee tested the new fuel during the New York - Washington - New York automobile races. After the races one of the largest oil monopolies in the U.S. offered Andres 2 million dollars in cash for the documents and all rights for his invention and later locked all the information in their safes. Two days later after getting the money Andres disappeared. (The information was disclosed by V. Vasilevsky, the former chief of the scientific and technical intelligence department of the KGB of the USSR, who had been in charge of the department since 1930).

The above-mentioned examples show that there were a lot of attempts to develop revolutionary energy technologies. But what then are the grounds for the 'energy crisis' complaints? The answer is simple: the desire of a group of financial and energy multinational corporations for an economic, political and, finally, for a total control of the world. That is why there is no room for "free-energy" hunters in our science, not even as laboratory assistants, not to mention some higher positions.

Practice often negates scientific dogmas, especially when it comes to the efficiency of different devices. In general, the traditional understanding of efficiency is quite limited and should be forgotten. Instead of the traditional notion "efficiency" we should consider the notion "energy-conversion efficiency" (ECE), which has no limits. In 1974 in the USA a six-stroke internal combustion engine was designed which had a double ECE. The fifth stroke of the engine operation included water injection; the sixth was characterized by the water vapor introduction. Firstly, the engine had a higher ECE than that of the Carnot cycle. Secondly, taking the 55 % ECE of the contemporary internal combustion engine, the ECE of a six-stroke engine exceeds 1.

Practice often negates scientific dogmas, especially when it comes to the efficiency of different devices. In general, the traditional understanding of efficiency is quite limited and should be forgotten. Instead of the traditional notion "efficiency" we should consider the notion "energy-conversion efficiency"...

Before the war there appeared "studebekkers" with the fuel consumption of 5.5 l per 100 km. But the fuel-economy record was set by the Japanese. In 1986 they built up an automobile, which used only 0.055 l of fuel per 100 km (about 44 g). Unfortunately, now we do not have plants, which could manufacture automobiles of the kind.

In 1832 Tomson came up with the idea of a **heat-pump unit**. Stating the unity and interconvertibility of substance movements, he proved that the mechanical energy consumption can restore stray heat. At that time cross-Atlantic ships had low-temperature steam engines, which employed exhaust steam and ether vapors. The efficiency of those engines was already higher than the Carnot cycle efficiency.

Now with the help of the facts acquired during the last century we will prove the scientific inconsistency of the orthodox model of the second stage of thermodynamics. In 1941 the English physicists O. Hougen and K. Watson published their work featuring the experimental fact that the ammonia-saturated vapor pressure in liquids was higher than the general pressure. For example, with the general pressure of 50 atm and the temperature of 0° C, such pressure was 17 % higher. This means that having placed a semitransparent partition and a turbine between two containers it could have been possible to build up a natural-heat vapor-converter. This method was used by **von Platen, the Nobel prizewinner from Sweden, who constructed a self-rotating centrifugal machine, which provided a 1000 atm pressure when ammonia interacted with water. The heat emitted was enough to compensate friction losses**. It is also known that the Carnot principle cannot be applied to closed cycles. W. Vielstich, 'Combustion Cells', 1968: "**If an entropy change of a reaction is negative, it can exceed 1**". It means that a certain amount of energy can be obtained from the natural heat. Such an effect is possible in electrochemical generators, which employ a direct oxidation process before oxidation and dioxidation".

A demonstrative example of scientific experiments withdrawn from science is discovery # 13 "The knock power-transfer regularity" made on December, 18th, 1962, which makes it possible to create a mechanical "perpetual mobile". The experiment shows that the conventional "knock theory" does not work in practice: **the bouncing energy of a body after it has been knocked can be higher than its energy before it has been knocked**.

Trying to get some recognition, **E. Aleksandrov, Doctor of Engineering Science, made his demonstrative experiment in front of many different commissions: a chilled-steel ball when falling from a 10 m height onto a firmly-fixed chilled-steel plate made a 14-15 m-high bounce**. That was the notorious 'perpetual mobile' as it is. It went on like this until somebody decided to explain the result of the experiment by a metal lattice internal

energy. At once, everything was clear. Since that moment the above-mentioned principle has been successfully employed in percussion-action machines. This principle can also be used in simple electric-power systems.

Now we can see that electro-technicians had already constructed demonstrative 'perpetual mobile' machines 10 years before politicians and economists started to speak about the 'energy crisis'.

In 1921 the mass media wrote about A. Hubbard who invented an electromagnetic generator without any external energy supply. The Hubbard generator was used as a boat motor.

...now we can see that electrotechnicians had already constructed demonstrative 'perpetual mobile' machines 10 years before politicians and economists started to speak about the 'energy crisis'...

In 1928 L. Nidershot invented a 300 W electric generator, which did not require any external energy supply. The device consisted of a radio-technical oscillation generator (500 kHz) and a coil. After 68 years there appeared publications about A. Melnichenko who repeated the experiment.




In 1927 T. Brown (England) obtained a patent on the ways of originating a moving power and energy using an electric field. Later, in 1955 while working in France, he presented a system with the speed-capability of several miles per hour using a 2000 eV field. After that he had to stop his experiments and was sent to the USA.

In 1943 N. Tesla presented an electric-motor automobile. The energy was generated by a previously-unknown generator.

In 1960 Stovbunenko (whose research work results were subject to a special verdict of the Military-Industrial Complex) presented his motor, which made it possible to move in his old automobile 'Moskvich' around the city for

the whole day utilizing the power of a standard automobile battery.

In 1980 there was a qualitative break through in electro-technical "perpetual mobiles". Baumann's electrostatic machines of the total capacity of 750 kW started functioning in the religious community of Liden (Switzerland), serving all daily needs of the village. (See the photos below)

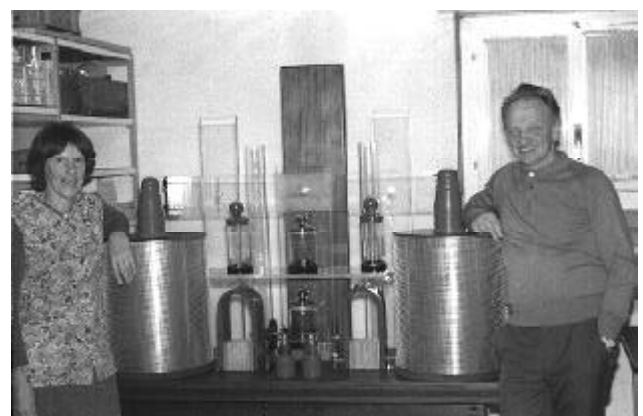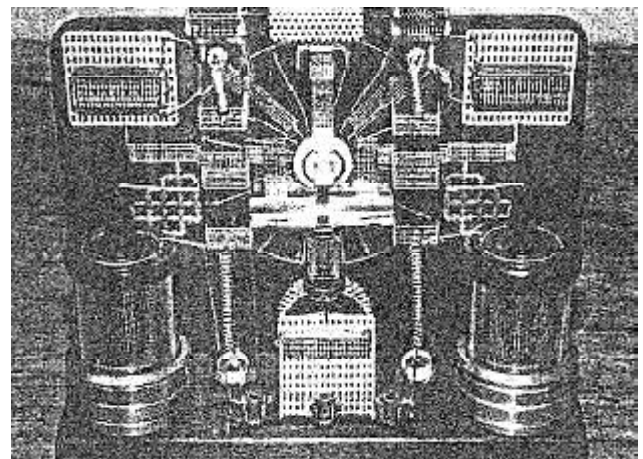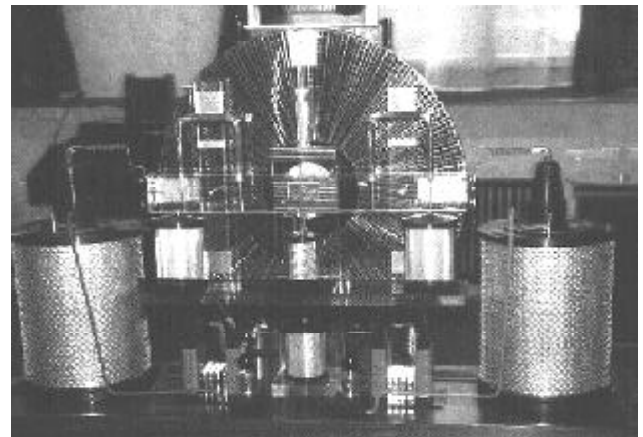

**The photos are taken from
www.free-energy.cc**

Thus, in 1980 there appeared a community with no energy problems, no need for organic fuel and no fear for the 'energy crisis'.

In 1881 N. Sluginov discovered an energy imbalance that occurred in the water electrolysis process. In his experiments he got that the output energy was 30 % higher than the input energy. In 1980 American scientists recreated this energy imbalance and proved that while employing the steam turbine rejected heat, the water electrolysis efficiency reaches 120%.

This information introduces a story about an energy system invented in 1957 under the guidance of I. Filimonenko. The system did not simply generate energy in the form of a high-pressure vapor and output hydrogen and oxygen but also absorbed radiation. In 1960 the USSR Central Committee and Cabinet Council gave a special secret ruling, known as "The Three 'K's'" (Keldysh, Kurchatov, Korolyov) to go on with the research in this system. However, after Kurchatov's death the project was "oppressed" and later on after the death of Korolyov the project was completely cancelled. The special committee of the USSR Academy of Sciences stated that the system was functioning against "the Law of Nature". I. Filimonenko was dismissed and expelled from the party. Later, in 1980-1991 the experiments were partially renewed. Several testing systems were constructed in the Chelyabinsk region but the construction was never finished and the use of a mobile system for eliminating the damage caused by the Chernobyl accident was refused. This story is a demonstrative example of the traditional rejection of promising projects by science, which could be very beneficial for Russia.

Theoretical Background of 'Perpetual Mobile'

Originally, the term 'entropy' was used only in connection with the reasoning about limited or eternal nature of the Universe. Later it came to be used to describe the functioning principles of thermal machines. Now there exist more than 600 contradictory definitions for 'entropy', which are actually the results of a long and unfinished

discussion between the supporters of Dekart and Leibnitz, who defined 'motion' in different ways. It is these permanent contradictions in the theoretical fundamentals of physics that make it impossible to explain the existence of a 'perpetual mobile'. However, standard physics has never denied the possibility of creating energy technologies allowing the ECE higher than 1.

We should remember that the basis of the so-called variational calculation is the mathematical apparatus technique of the conventional mechanics. It seems that if system behavior equations directly depend on time, this system cannot fall under any conservation laws. **This is the proof of a complete failure of the conventional energy conservation law!**

It is these permanent contradictions in the theoretical fundamentals of physics that make it impossible to explain the existence of a 'perpetual mobile'

In time-independent thermodynamics the existence of 'perpetual mobile' can be explained by the system internal energy usage. There exist two kinds of thermodynamic systems. Some of them when being heated or affected in some other way start increasing their internal energy while other systems show the internal energy decrease. The latter are called negative absorption systems. The standard version of the first law of thermodynamics does not cover all the processes occurring in such systems. The output of a negative absorption system can be higher than its energy. The additional output is acquired by the gradual internal energy loss.


To cap it all, there are more than a hundred experimental facts that show the limited nature of the Maxwell theory. They were obtained by scientists from different research institutes and construction bureaus, were tested and registered. Thus, for example, in 1973 in the USSR the acoustic magnetoelectricity effect was discovered. The author of the discovery proved the

interaction of electrons with ultrasonic waves with a 1000-times energy increase. This is against the Maxwell theory, which absolutely denies effects of the kind. But the limited nature of the theory was never accepted.

However, the examples of the machines in action prove that since 1834 when the first refrigerator was invented, when the cross-Atlantic ships were equipped with low-

temperature ether-vapor steam-engines, the contemporary science had no right to introduce 'the second holy principle', especially in the orthodox form of 'the Carnot cycle efficiency'. The modern theoretical physics cannot provide grounds for the negation of creating over-unity devices. That is why we should rely on the physicists-experimentalists who develop the science in a practical rather than theoretical way.

Alekseenko's Fuel-less Motor

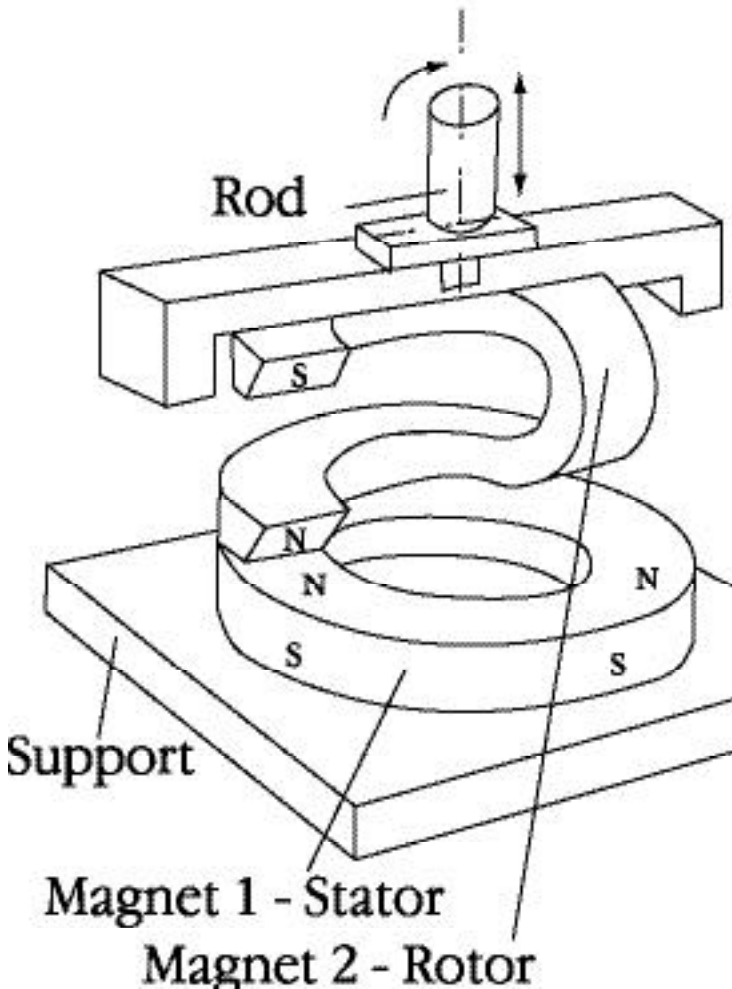

РОССИЙСКАЯ ФЕДЕРАЦИЯ

ПРЕЗИДИУМ АКАДЕМИИ НАУК
РОССИЙСКОЙ ФЕДЕРАЦИИ

ПАТЕНТ

НА ИЗОБРЕТЕНИЕ

№ 2131636

На изобретение: Патентное ведомство Российской Федерации, изобретение в области техники, 1992 г. (1992), Российская Федерация по технике и изобретениям, изобретение в области техники, изобретение в области техники

БЕССТОИМЫЙ ДВИГАТЕЛЬ

Изобретатель: *Алексеенко Василий Ефимович*

патент № 2131636, дата регистрации 21.03.97

Подано в 07.10.96

Автор(ы) изобретения: *Алексеенко Василий Ефимович*

Патент издан в 1997 г. на территории Российской Федерации в течение 20 лет с 7 октября 1997 г. при условии уплаты пошлины за поддержание патента в силе

Государственный реестр изобретений Российской Федерации

г. Москва, 10 июня 1998 г.



В.А. Косов

Patent # 2131636
Vasily E. Alekseenko

Aerospace Defense Research Finds Free Energy and Antigravity Possible

Dr. Ines Espinoza, USA
email: dr.ines@vasantcorporation.com

Editor: it is worth mentioning that the first gravitational-wave physical mechanism and the mechanism of spin-effect "grazer" (gravitational lasers) designing were described by S. M. Polyakov and O.S. Polyakov in the book "An Introduction to the Experimental Gravitational Studies", Moscow, 1991.

After a 7-year research study, a senior staff aerospace defense engineer, George J. Bugh, concludes economically free energy and even antigravity are possible.

A 7-year study of "free energy" devices, sometimes called "over unity" devices, was done to determine if any of these devices generated power by transferring energy from unknown sources and if so to determine where the energy was coming from. Included in the study is research of related devices with claimed antigravity effects. The study attempted to determine validity of claims, commonalities of device characteristics and to determine how these devices could work. **The results conclude that some devices can generate economically free energy. This study also concludes there is a possible link between gravity and electromagnetism that can be exploited to generate antigravity or electrogravity effects.**

The majority of the study was to come up with a theory to explain how the devices could work. In his research, Mr. Bugh used mostly classical electrodynamics rather than quantum electrodynamics. In Quantum theory, the wave-like characteristics of matter are described using abstract probability waves. However, Bugh proposes that the wave characteristics of matter may

also be described as coming from a very real sea of unseen electromagnetic standing waves among all matter. There is a slide show presentation at the website that explains the differences between the Quantum and Classical way of explaining particle interactions.

According to classical electrodynamics, all electrically charged particles, like quarks of protons and neutrons as well as orbital electrons for example, **should radiate away energy from precessional and precessional plus orbital motion.**

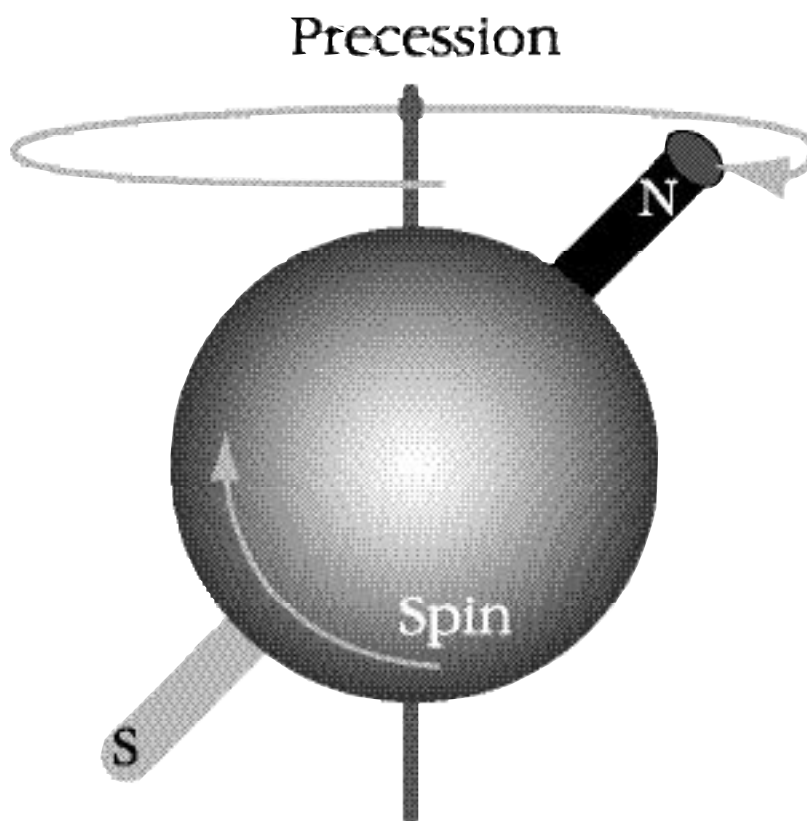


Fig.1
Electron motion

If in fact this really happens then all electrically charged particles can be radiating away energy all the time. However, all particles can also absorb just as much energy from all other radiating particles. The absorbed energy applies electromagnetic forces that naturally move all similar type particles into harmonious precessional motions with all other particles. This results in a vast sea of electromagnetic standing

waves among all matter. Even free particles would move into precessional motions that are in sync with the established sea of standing waves.

Symbolic Electron Process in an Opposing External Magnetic Field

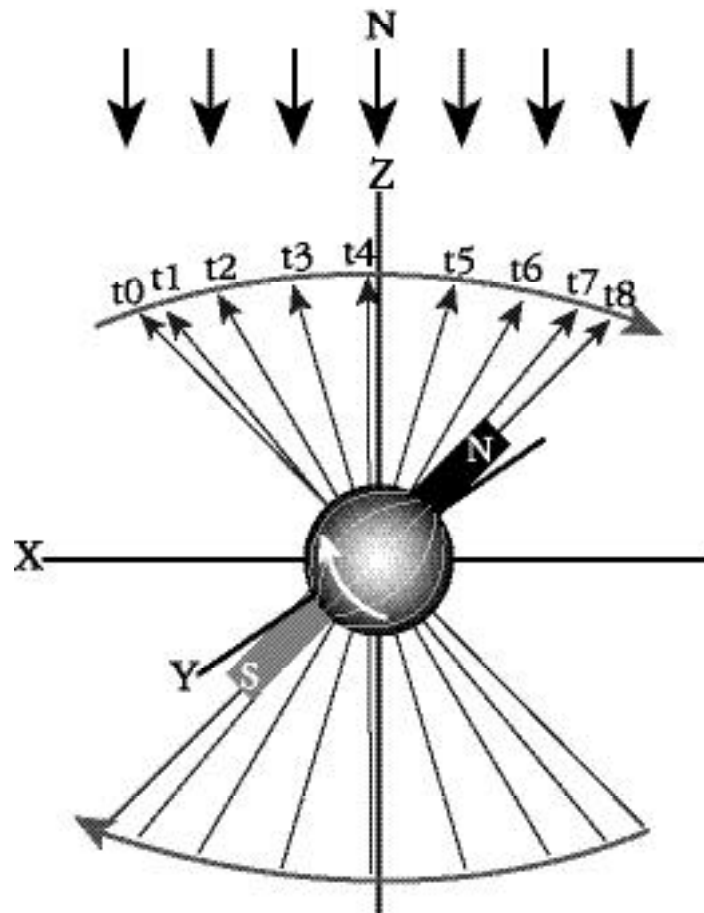


Fig. 2
Electron precession

There can be a hidden yet strong tendency towards harmony among all matter in the universe due to these unseen standing waves and spin interactions among all matter. This tendency can overcome to a great extent the tendency towards chaos and heat death of the universe. This tendency can also be exploited to perform work.

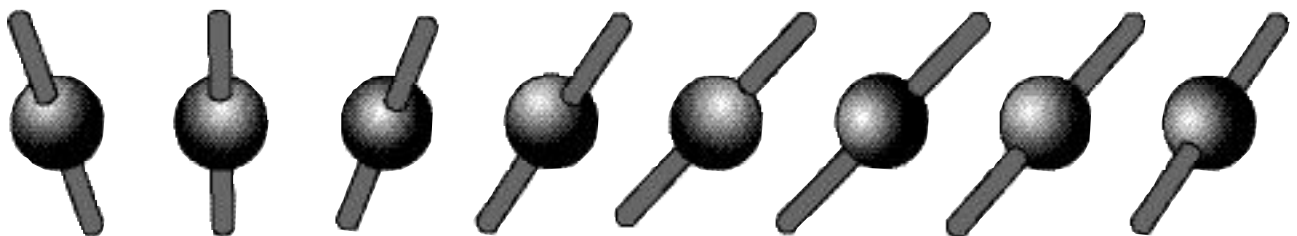


Fig. 3
Spin wave

This is an interaction among all matter that Ernst Mach alluded to as necessary to cause matter's characteristic of inertia. Einstein later called this Mach's Principle. Einstein studied Mach's ideas while developing his theory of General Relativity.

Bugh describes inertial resistance to acceleration as caused by electromagnetic forces. Changes in position of a mass will cause phase differences to develop between the precessional motions of the particles of that mass relative to the sea of standing waves. This in turn causes electromagnetic force that resists a mass from changing its position.

The research papers are published in a book and a CD titled "Spin Wave Technology Initial Release".

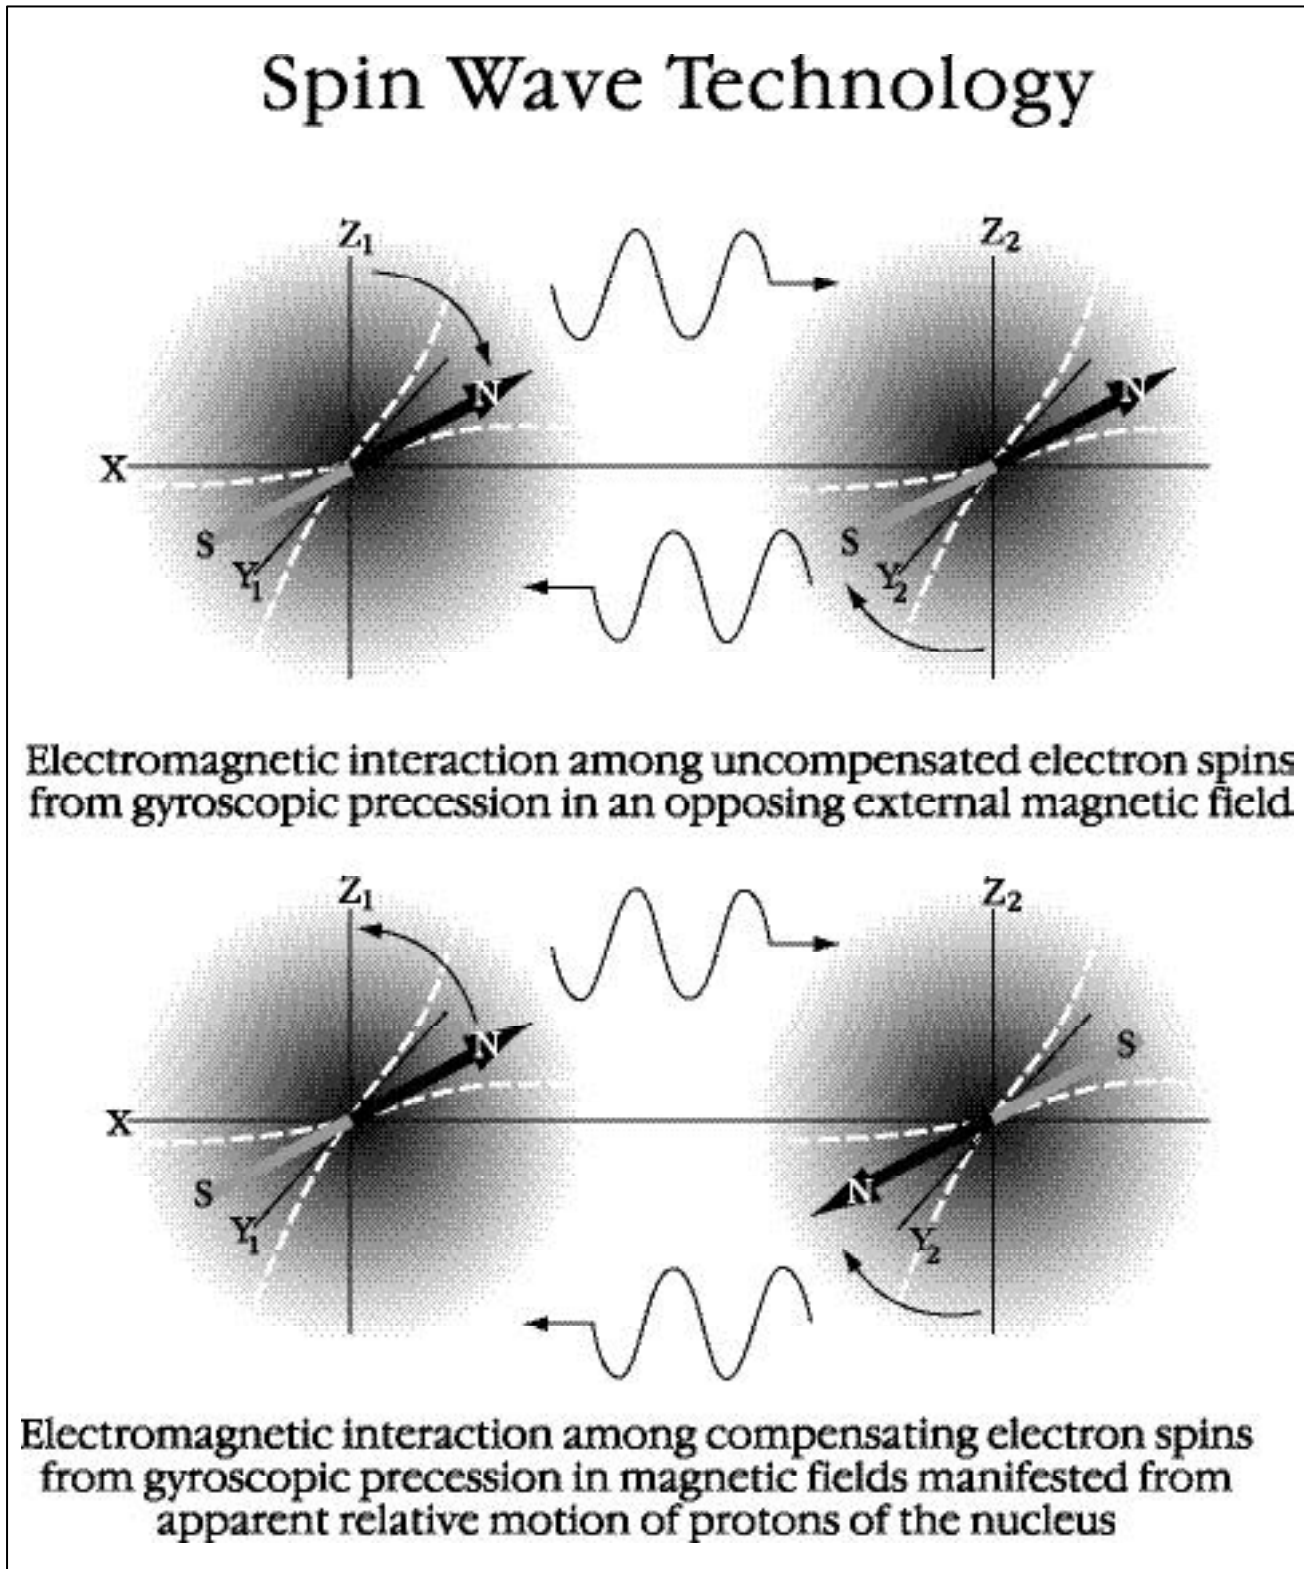


Fig. 4.
Spin wave technology

At the end of the book it suggests that it should be possible to create computer simulations of particle interactions using classical electrodynamics to demonstrate both inertial resistance and gravitational attraction and it should be possible to simulate devices that manipulate these particle interactions to demonstrate antigravity effects.

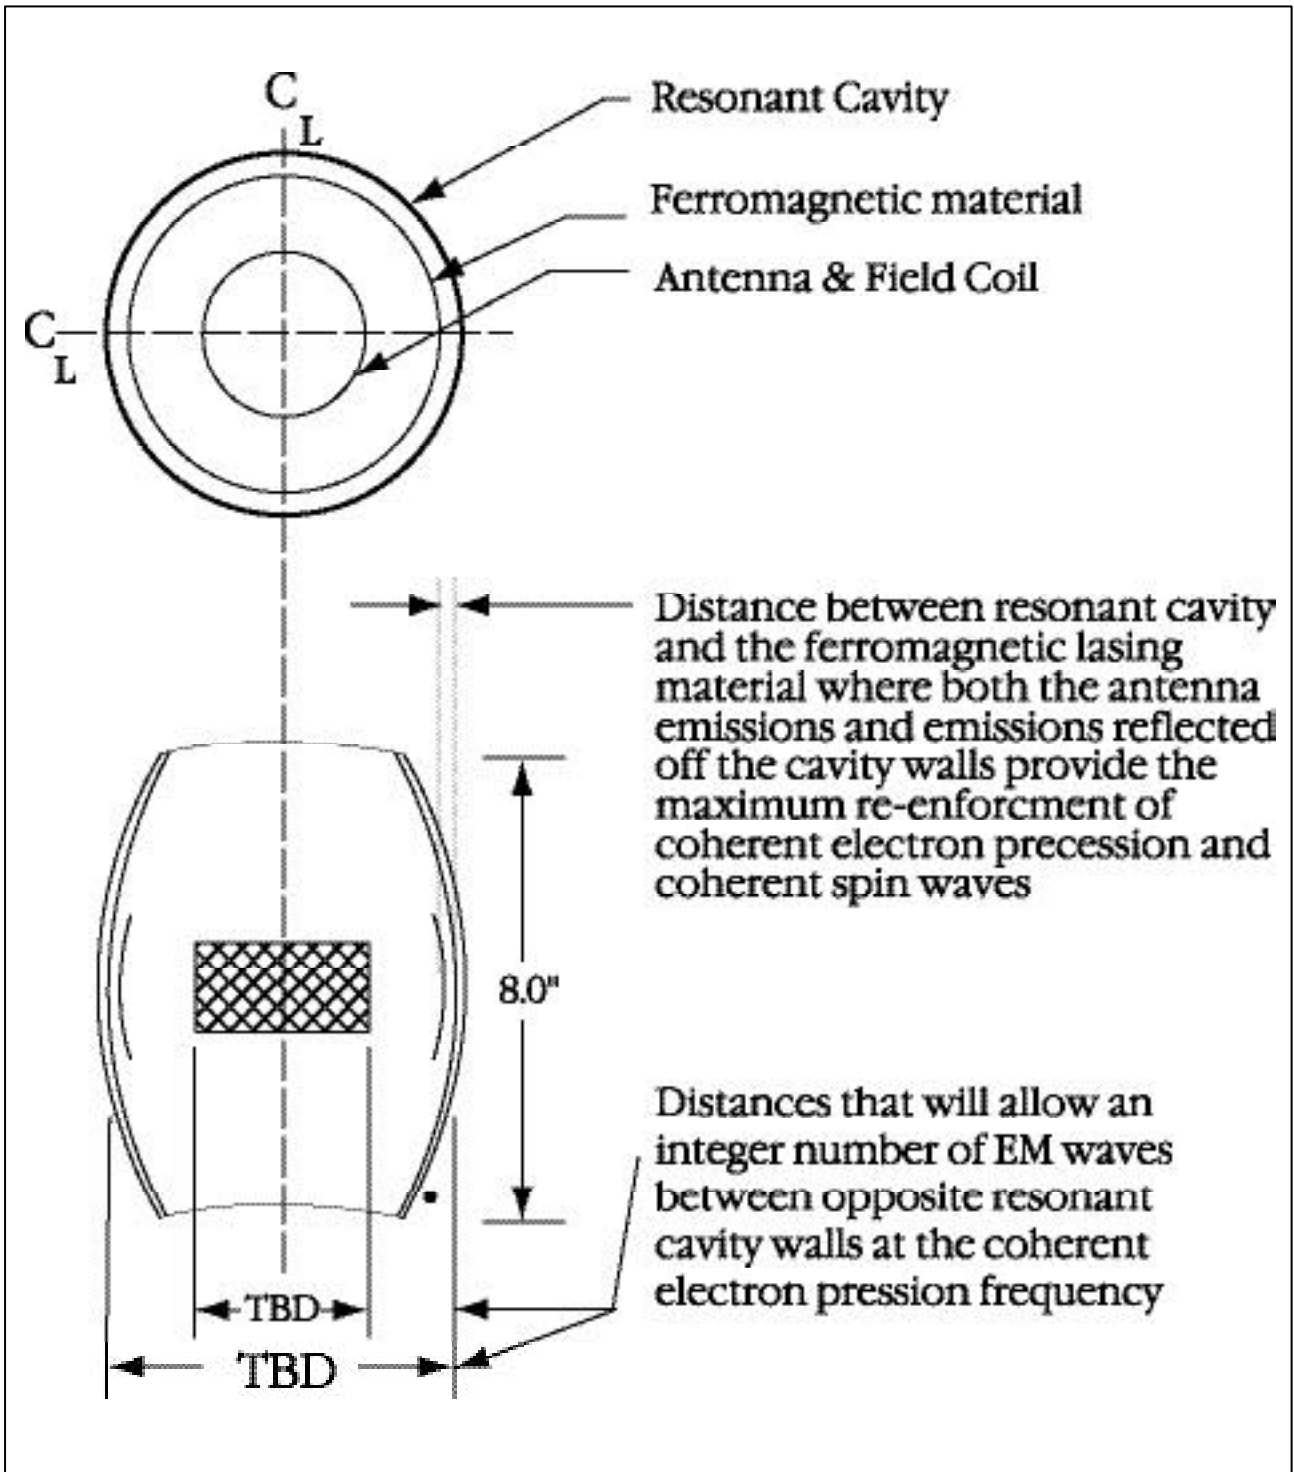


Fig. 5
Spin wave laser

More information is available about the research results at the website: www.vasantcorporation.com.

On Physics of Electromagnetism Mechanical Analogue or Pure Mechanics?

Yury V. Ivanko, Ukraine

E-mail: ux0lw@hotmail.com

After publication of the article "Study of possibility of a high-energy hyper-low-frequency electric field" in the "New Energy Technologies" magazine, Issue #2, 2003 I am often asked why I have mentioned the Big Bang in my hypothesis.

I would like to reassure atheists since I do not back the Big Bang hypothesis. But I had to base myself on something. At present the origin of the Universe as a result of the Big Bang has priority and is recognized by the academic science.

Both theorists and experts have long noticed a deep analogue between vortex motion of air currents and electromagnetism. My vision of the physics of electricity and electromagnetism is fully based on existence of a vortex capable physical environment. What is considered to be and is measured **as electric voltage, electric current, magnetic or gravitational interactions is nothing but similar-originating phenomena - the result of vortex flow environment affecting our detectors - dissimilar formations for these vortex flows.**

For instance, let us consider three vectors for the flow along the skin-layer of the line conductor - aerial emitter, together with alternating voltage attached to it (Fig.1):

- 1) longitudinal - showing as electric voltage, the gradient of potentials between the emitter feeding point and the emitter cold end, U ;
- 2) tangential - showing as amperage - electric current, I ;
- 3) radial - showing as the interacting force of two flows - magnetic field (attraction/repulsion), H (not to be mixed with the commonly used term of magnetic intensity).

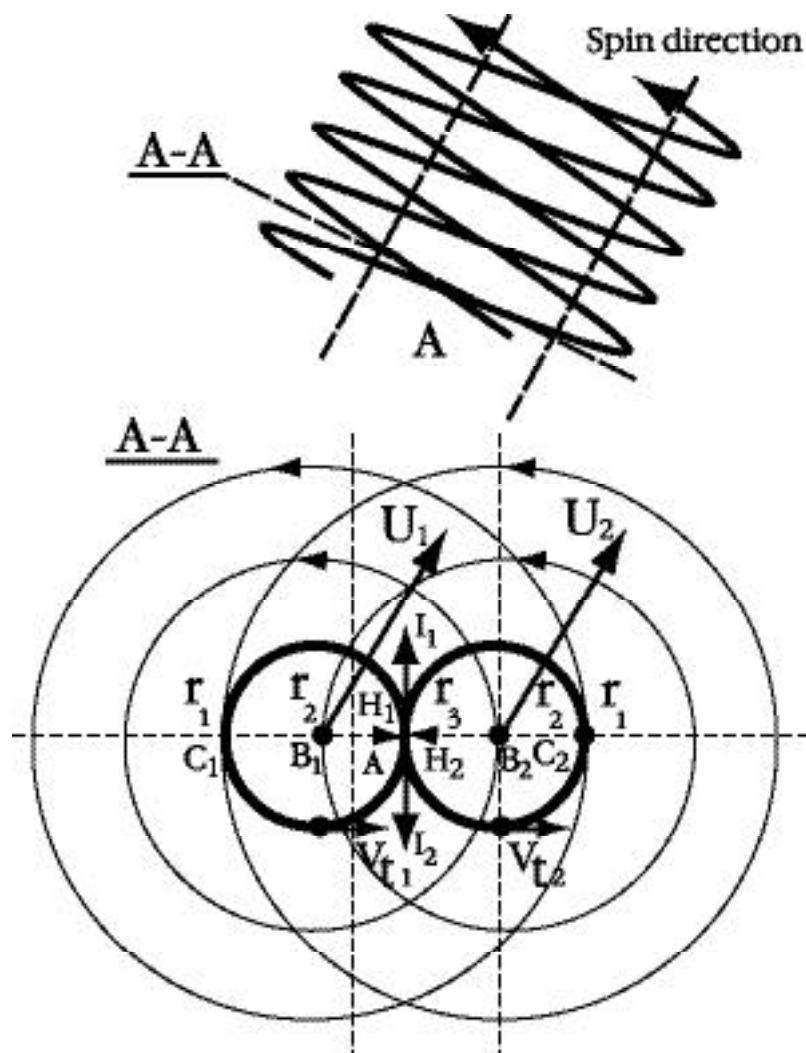


Fig.1

Interaction of two left-handed homogeneous parallel flows.

Let us consider it step by step:

Consider line conductor AB with length L in free space (Fig. 2).




Fig.2
Line conductor in free space.

Let us assume that he is not affected by and fields. Then the gradient of potentials between A and B equals zero. Let us apply sinusoidal voltage from the generator output to point A (Fig. 3).



Fig.3
Sinusoidal voltage at the generator output.

Let us consider the initial time point t_0 . The generator output voltage is $U=0$. At time point t_1 the generator output voltage has changed and took on value U_1 .

It is necessary to note that (See Fig. 2) the propagation speed is finite: $c=300000$ km/sec. Point B will "learn" about the voltage alteration only in time $t_b = t_1 + L/c$. Therefore, at time point t_1 between points A and B appears gradient of potentials $\Delta\varphi = U_1$. So what is the direction of vector U_1 ? Right, along conductor AB.

What practice says

One should not be a physicist or radio mechanic to notice small electro-shock of ungrounded metal objects close to aerials of powerful transmitters. Specialists term them as "electromagnetic inducers". Has an expert ever measured the actual characteristic of the field intensity distribution along a line conductor? Why should he? Everyone knows from school lessons how alternating voltage is distributed along the conductor, the length of which is comparable with the wave length (Fig. 4).

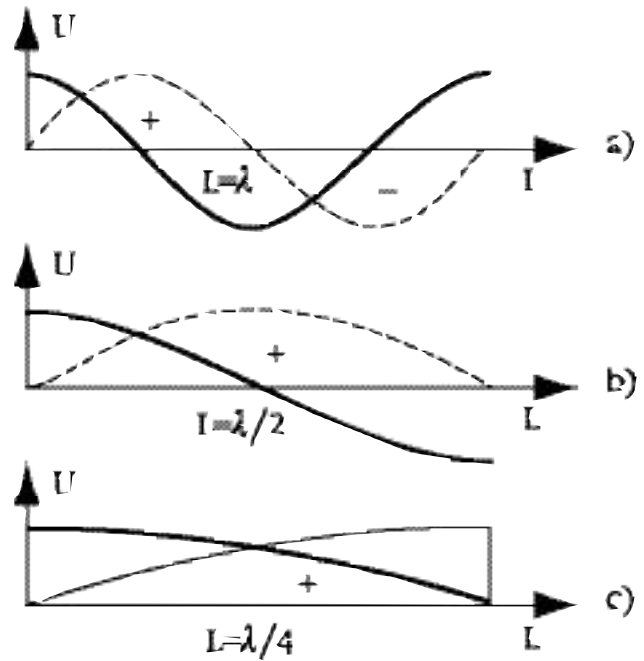


Fig.4
Classical representation of voltage distribution along a linear vibrator a) for λ , b) for $\lambda/2$, c) for $\lambda/4$.

Now let us consider what experimental measurements suggest.

An experiment of measuring the field intensity distribution along the line conductor is shown below. A classic field indicator (FI), assembled as per scheme in Fig.5, was used as an intensity measuring instrument.

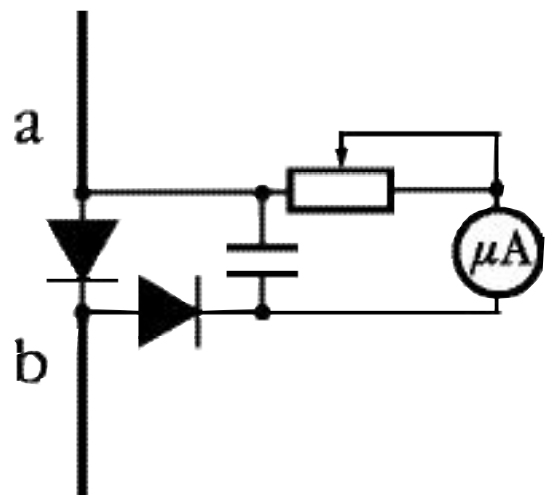


Fig.5
Field indicator principle diagram.

FI was located in immediate proximity to the vibrator but had no galvanic contact with it. Experimental frequencies were selected in

accordance with the standing wave coefficient minimum (SWC) for λ , $\lambda/2$, $\lambda/4$. Sinusoidal signal generator was connected to one end of the vibrator (Fig. 6a).

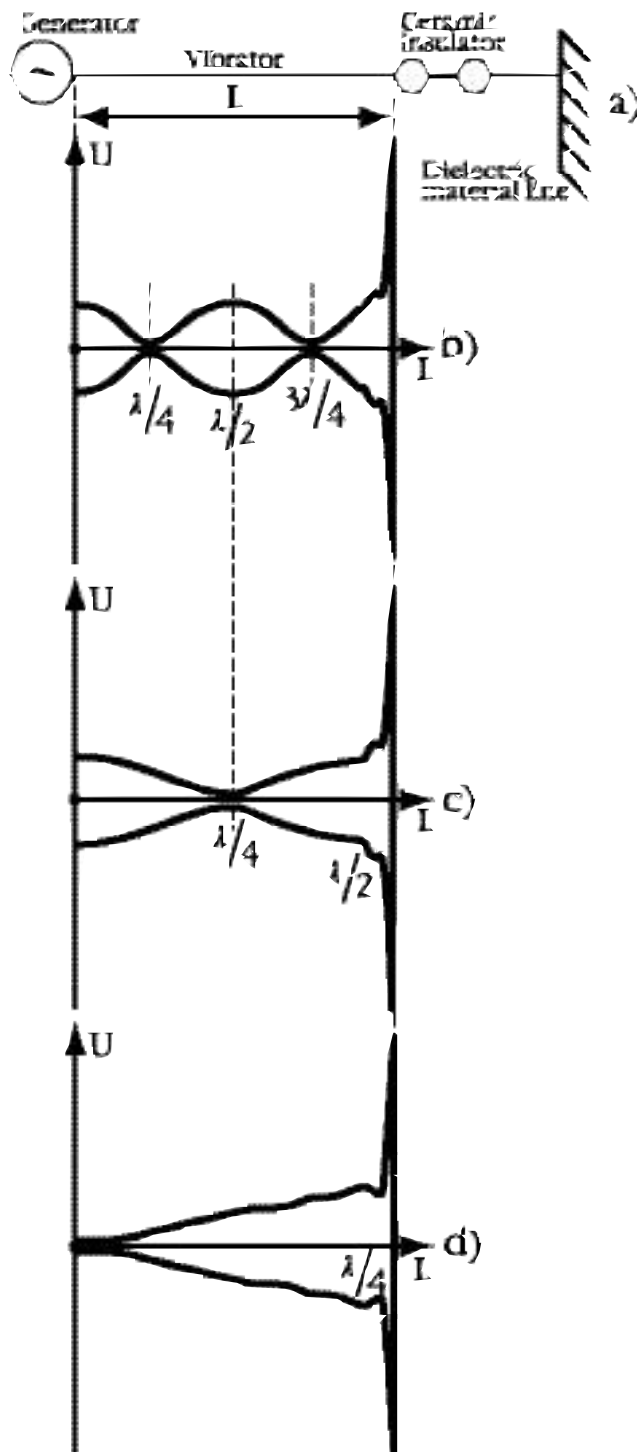


Fig.6
Measured field intensity
along a linear vibrator.

To better understand diagrams in Fig. 6 curves are drawn at the upper and lower ends of each axis L that corresponds to the vibrator location. The curves were run with FI horizontally located on both sides of the vibrator.

From Fig. 6d it is clear that the diagram is axisymmetric and looks like a conic funnel.

Meanwhile, the vibrator directional diagram measured by the monitor receiver far more distant than λ , shows the characteristic that coincides with the simulated one through the Matlab-6 system (See Fig.7). As you can see from this figure, the spatial characteristic of the directional diagram is in the form of a toroid.

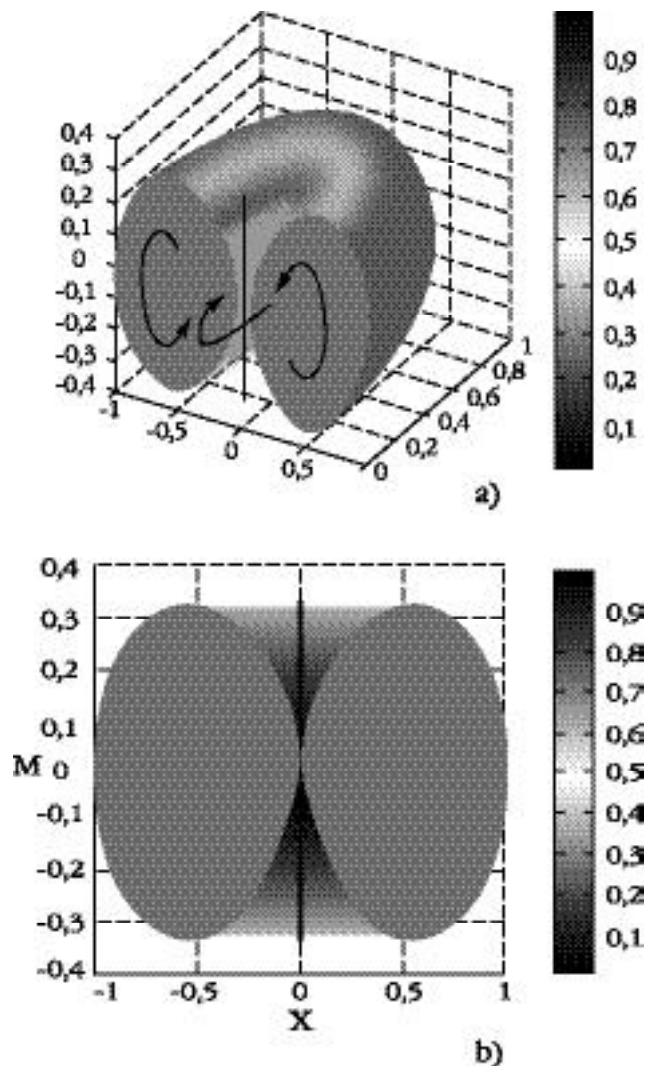


Fig.7
Matlab-6-simulated directional diagram of the semi-wave vibrator

A series of alterations was made to explore vortex ether dynamic processes with variable wave length and frequency in line conductors, solenoidal and flat coils, etc.

For certain purposes the solenoidal coil may be considered as a shortcut linear vibrator. On respective frequencies the field intensity distribution along the solenoid corresponds to the linear vibrator. This data may prove useful to many modern engineers of the Tesla transformers and generators. To increase voltage on the cold end a toroid capacitor is set in the Tesla transformers. Nuclear physicists use the hemisphere capacity for the particle accelerators. Thus, a voltage of millions of volts may be achieved.

Flat coils are best explored in terms of field intensity distribution (See Fig. 8)

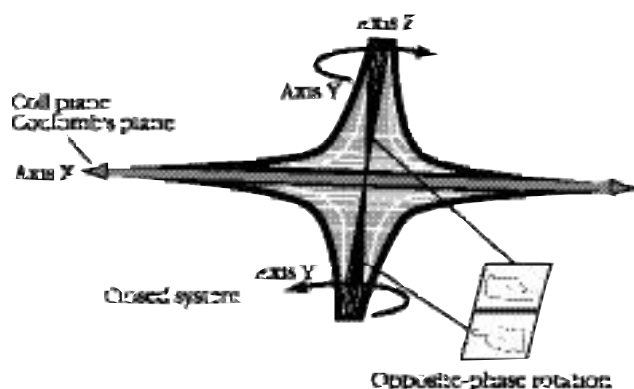


Fig.8

Field intensity distribution for a flat coil in a closed resonance circuit.

Field intensity distribution on a resonance frequency is correct.

The practical experiment for the case in fig. 6d has shown that the neon lamp that is connected with the vibrator end will be off. And this is with a 100 W generator! It is a paradox, one would say. The measurement diagram shows a "splash" of the field intensity at the vibrator end but we feel nothing. Indeed, when the FI is located as shown in Fig.9 for $\lambda/4$, the "electrodynamic vacuum" will generate. The device showed "0" intensity, which conforms neither with the diagram in Fig.6 nor with the diagram in Fig.7.



Fig.9

Field indicator shows "0" - "electrodynamic vacuum".

The same "vacuum" in the center of tornado was observed by people in the epicenter.

Remember what is measured with the field indicator (an ampere meter) along the linear vibrator. The Ampere force!

So, both people and their environment are in rotation process. The Earth rotates around its axis and around the Sun. The Sun rotates around the Galaxy center. The Galaxy rotates around the center of the Universe. The Universe rotates...

Every space point has an inceptive rotation impulse (torque). Let us remember the analogy. Water flowing out of the tub rotates counterclockwise in the northern hemisphere and clockwise in the southern hemisphere. If you set a right-handed torque in the northern hemisphere, the water will continue to flow counterclockwise.

The electromagnetism is the same. It has a natural left-handed rotation. Nevertheless, practical radiotechnology is familiar with right-handed fields artificially generated by transmitters.

The commonly used term of magnetic interactions is easier to understand if we consider the electromagnetic field as a vortex flow. Two left-handed homogeneous parallel flows are shown in Fig.1. At the point of interaction A of vector projection, the speeds of flow propagation on section plane **A-A** have opposite direction and compensate each other. The actual flow density is $\rho_1 < \rho_2 < \rho_3$. Reduced pressure occurs at point A. The flows are attracted. The resulting attraction vector for the whole flow is radially directed. The counter parallel flows will have composition, i.e. overpressure, and will repel.

One should note that graphic presentation in Fig.1 for vectors H and I for the etherdynamic systems is possible only in special cases. In dynamic vortex flows the current intensity vector is actually directed towards the flow movement and coincides with the vector direction of its propagation speed (V). The resulting vector H remains a radius-vector only for the considered point of interaction of two flows. The flow energy parameters are defined by its propagation speed V (Fig.1).

I am convinced of existence of ether vortex flows in the Universe. Modern astronomic and cosmological surveys confirm my hypotheses of aether Hyper-fields existence on a Universal scale.

The commonly used term of magnetic interactions is easier to understand if we consider the electromagnetic field as a vortex flow.

Even an amateur in aerodynamics and dynamic of gas vortex may make cosmological conclusions:

- ♦ vortex initiation implies the initial gradient flow of at least two counter flows;
- ♦ energy parameters of the emerging vortex flow can not exceed those of the parent flows
- ♦ there exist ether flows with energy exceeding that of our Universe
- ♦ our Universe has not originated from a point and is not finite. It is the spiral (vortex) structure of our Universe that testifies against the Big Bang hypothesis.

Conclusions:

Practical radiotechnology is familiar with the key difference between the field intensity distribution diagrams of aerial emitters in near and far zones. After combining diagrams 6d and 7b (Fig.10) it is possible to draw certain conclusions.


When transverse waves (radio waves) are formed around the aerial vibrator, the double transformation of the initial flow geometry starts:

♦ **the first flow is a homogeneous spiral flow on the conductor skin-layer;**

.. **the second flow is a non-homogeneous vortex flow of the near zone;**

.. **the third flow is a toroidal flow of the far zone.**

The toroid volume alteration in the far zone (as per the transmitter vibration frequency) forms volumetric planar transverse vibrations (spherical waves) that are called electromagnetic or radio waves. The gradient of potentials alterations (as per the transmitter vibration frequency) provoke changes of the Coulomb plane, which form longitudinal vibrations with a narrow directional diagram.

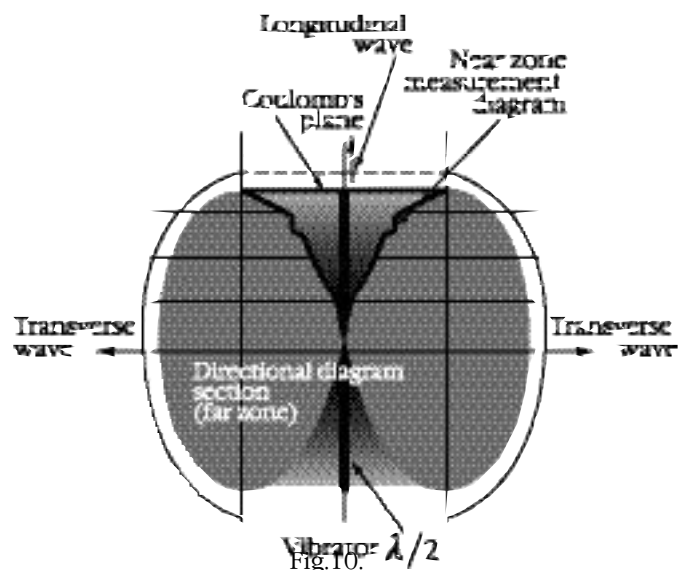

The longitudinal flow is assumed to be formed as a chain of toroids (like smoke rings)

Ether-dynamic approach provides grounds for more substantial conclusions and assumptions. A new approach to energy and communication systems is made real. Further results of the experiments with transmitters and aerials, assembled on ether-dynamic principles, enabled to draw the following conclusions:

- all reasons, preventing transformation of the transmitter power into the power of transverse radio waves, are evident;

- all reasons for the transverse wave phase lagging with the increase of distance from the emitter, are also evident;

- besides the toroid that forms the transverse wave, the second flow generates a crucially new radiation that has a very narrow directional diagram along its longitudinal axis;

- the aerial ignores wave geometry for the second flow and its longitudinal derivative;

- the radiation along the second flow axis has a very high penetrating power;

- the radiation along the second flow axis has no signs of polarization.

The list of references is not shown in this article due to its size. It can be looked up at **www.efir.com.ua**.



In October 2003 the second stage of the research on the “time control” was completed. In the photo below you can see Chernobrov V. A. and Frolov A. V. in the laboratory, October 31st 2003.

The second stage conclusions are quite interesting, however the usage of timers (chronometers) as detectors is proven to be inappropriate for they are subject to magnetization and their indication variations cannot be reliable in this case.

The next stage will feature the following method of detection of the time rate changes (the rate of the matter existence) that is the radiation wave-length measurement. If it is possible to achieve significant results then we will be able to detect the change of the laser ray colour in the area of the effect and its linear path deviations. The experiments will be held to register the weight changes of the detector at the expected influence of the produced effect on the ether density.

Our company looks for cooperation with corporations, which are interested in the application aspects of these technologies.


*Frolov A. V.
General Director, Faraday Lab Ltd
7-812-3803844
<http://www.faraday.ru>*



CELL OF THE THIN PLASMAELECTRIC HEAT GENERATOR

Ph. M. Kanarev, A.I. Tlishev, Russia

E-mail: kanphil@mail.kuban.ru

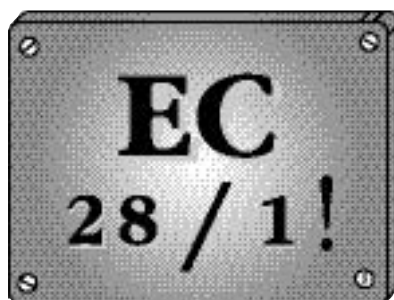

The main task of the experiment was to check the hypothesis: "Electrodynamic influence on the water molecules gives the possibility to significantly reduce energy expenses on destruction of their chemical bonds; further fu-sion of these molecules considerably increases the output of additional energy in the form of heat".

In order to solve this task, special experiments were carried out as regards the electrodynamic destruction of chemical bonds of water molecules by electric pulses of various frequencies.



Photo of the Thin Plasmaelectric Heat Generator

CHECK TEST RECORD FOR PLASMAELECTRIC HEAT GENERATOR

Table 1

	Indices	1	2	3	Avg.
1	mass of the solution, which has passed through the reactor m , kg.	0.470	0.432	0.448	0.450
2	temperature of solution at the input of the reactor t_1 , degrees	22	22	22	22
3	temperature of the solution at the output of the reactor t_2 , degrees	66	66	65	65.67
4	temperature difference of the solution $\Delta t = t_2 - t_1$, degrees 44	44	43	43.67	
5	durability of the experiment $\Delta \tau$, s	300	300	300	300
6	reading of voltmeter V , V	4.50	4.50	4.50	4.50
6'	Reading of oscillograph , U, V	4.47	4.47	4.47	4.47
7	reading of ammeter I , A	2.1	2.1	2.1	2.1
7'	Reading of oscillograph , I, A	2.2	2.2	2.2	2.2
8	electric power consumption according to indices of voltmeter and ammeters, $E_2 = I \cdot V \cdot \Delta \tau$, kJ	2.84	2.84	2.84	2.84
9	power the heated solution, $E_3 = 4.19 \cdot m \cdot \Delta \tau$, kJ	79.64	80.01	80.72	80.46
10	reactor efficiency index $K = E_3 / E_2$	28.04	28.17	28.42	28.21

Supply voltage and current were measured with the help of a voltmeter, an ammeter and an oscillograph (Fig. 1-4)

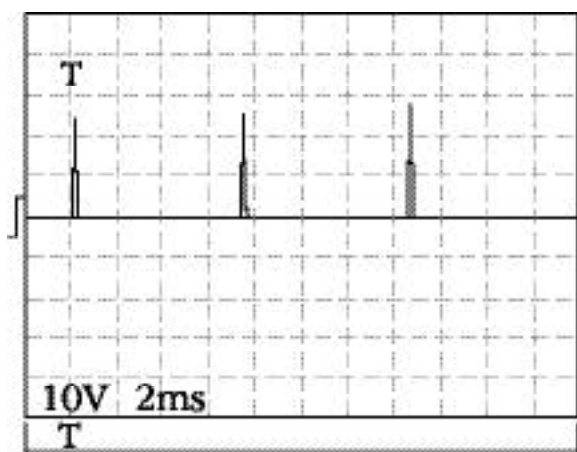


Fig. 1
Voltage

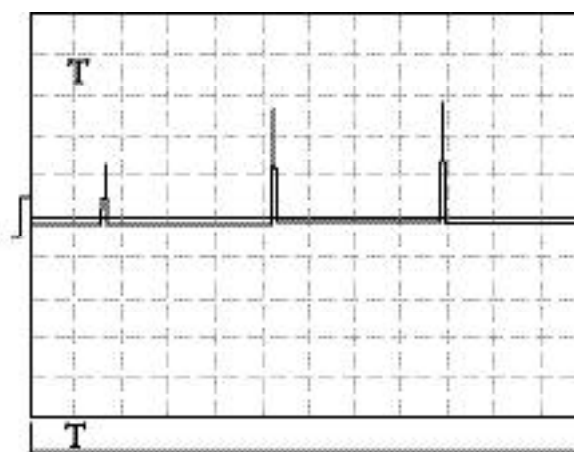


Fig. 2
Voltage

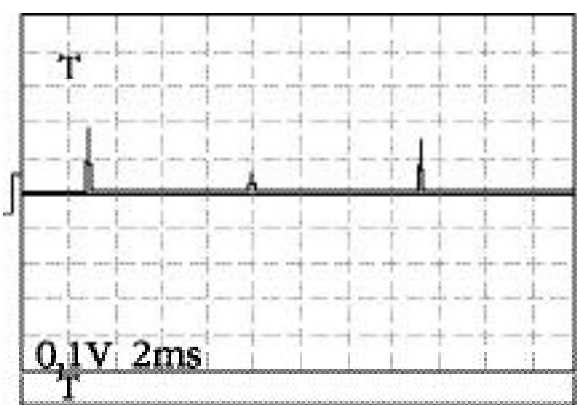


Fig. 3
Current

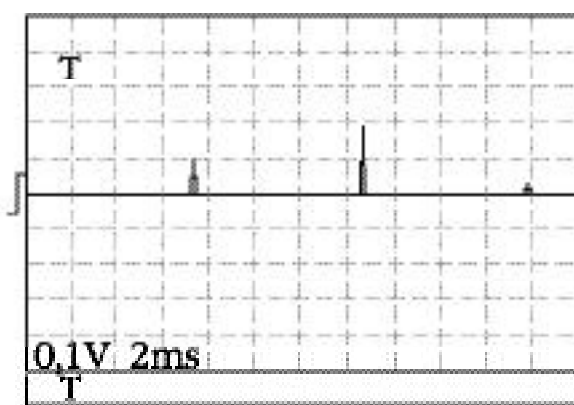


Fig. 4
Current

Process parameter calculation according to the oscillograms (Fig. 1-4) to the check test record (Table 1) gave the following results:

- ◆ Pulse scale 10.
- ◆ Average voltage amplitude according to Fig.1 and Fig. 2: $U_{av} = (23+25+28+10+26+29) \times 10/6 = 235$ V.
- ◆ Average current amplitude according to Fig. 3 and Fig. 4: $I_{av} = (20+6+17+7+10+19+3) \times 10/7 = 117$ A.
- ◆ Pulse repetition period $T = 7.4$ ms. Pulse duration $t_p = 0.28$ ms.
- ◆ Pulse frequency $f = 1000/7.4 = 135.1$ Hz. Relative pulse duration $S = 7.4/0.28 = 26.32$.
- ◆ Space factor $Z = 0.5/26.32 = 0.019$.
- ◆ Average pulse voltage $U_{av} = 0.019 \times 235 = 4.47$ V.

- ◆ Average current in pulses $I_{av} = 0.019 \times 117 = 2.22$ A.

Thus, it is possible to consider that the experimental test of energy efficiency of the water electric heat generator with the help of two methods gives practically identical results and confirms the above-mentioned hypothesis concerning the possibility to generate additional energy in the processes under consideration. It should be noted that as during measurements the pointer instruments of high class of accuracy of 0.2 have been used (relative conventional gauging error does not exceed 0.2%), and oscillographic measurement accuracy is much lower (usually, about 5%), the readings of the voltmeter and the ammeter should be considered more accurate.

Commercial efficiency of the water electric heat generator will depend on pulse generator economy. Since efficiency of powerful pulse

generators can be near one unit, energy efficiency in industrial plants that use the considered heat generators should not differ greatly from the data obtained during laboratory research.

Simplicity and one hundred per cent reproducibility of the described experiments open a prospect for quick commercialization of the water electric heat generator.

REFERENCES

1. Kanarev Ph.M. The Foundation of Physchemistry of Microworld (the second edition). (In Russian)
<http://www.ikar.udm.ru/sb28-2.htm>
2. Kanarev Ph.M. The Foundation of Physchemistry of Microworld. The second edition. (In English).
<http://book.physchemistry.innoplaza.net>
3. Kanarev Ph.M. Water Electric Generator of Heat.
<http://Kanarev.innoplaza.net>

Professor Kanarev looks for co-projects with prospective investors.

• Fantastic Projects •



Smith's Generator

Review

TransWorld Energy,
8110 Bent Oak Lane Spring, Texas 77379, USA
Email: donsm1@earthlink.net
<http://altenergy-pro.com>

Don Smith is a University degreed professional in science & engineering. Served in three wars; WWII, Korea and Vietnam. He has enjoyed a long and successful profession as an executive in the petroleum industry. His life long outside interests include electronics and engineering. A popular walk on substitute for University Professors in physics, chemistry, biology and computer assisted drafting. Teaching style similar to Richard Feynman. He enjoys celebrity status in Japan and Saudi Arabia.

About 20 years ago, the book "Inventions, Researches and Writings of Nicola Tesla", resulted in his reconstructing, as a way of understanding the many theories and devices shown in the book. From this encounter, a very strong bonding resulted. The object then became putting his thinking inside that of Tesla, such that expanding upon and extrapolating areas not yet reached by Tesla.

Technological advances in materials provide sourcing for devices not possible at earlier periods. For example, magnetic permeability which is the counter part of negative resistance is an open field for experimentation today.

Don does not sell his inventions, but trades licenses for shares in companies which then incorporate the new technology into their marketing systems. As such, he is on the Board of directors of several well established ventures located in Japan, Brazil, Mexico and Saudi Arabia.

Successful reproductions of Don's technology are present in Finland, Saint Petersburg - Russia, Yugoslavia, Romania, Japan, Hong Kong, and numerous other Countries. His book "Resonance Energy Methods" has a circulation of 40,000 copies in worldwide in many languages.

generators can be near one unit, energy efficiency in industrial plants that use the considered heat generators should not differ greatly from the data obtained during laboratory research.

Simplicity and one hundred per cent reproducibility of the described experiments open a prospect for quick commercialization of the water electric heat generator.

REFERENCES

1. Kanarev Ph.M. The Foundation of Physchemistry of Microworld (the second edition). (In Russian)
<http://www.ikar.udm.ru/sb28-2.htm>
2. Kanarev Ph.M. The Foundation of Physchemistry of Microworld. The second edition. (In English).
<http://book.physchemistry.innoplaza.net>
3. Kanarev Ph.M. Water Electric Generator of Heat.
<http://Kanarev.innoplaza.net>

Professor Kanarev looks for co-projects with prospective investors.

• Fantastic Projects •



Smith's Generator

Review

TransWorld Energy,
8110 Bent Oak Lane Spring, Texas 77379, USA
Email: donsm1@earthlink.net
<http://altenergy-pro.com>

Don Smith is a University degreed professional in science & engineering. Served in three wars; WWII, Korea and Vietnam. He has enjoyed a long and successful profession as an executive in the petroleum industry. His life long outside interests include electronics and engineering. A popular walk on substitute for University Professors in physics, chemistry, biology and computer assisted drafting. Teaching style similar to Richard Feynman. He enjoys celebrity status in Japan and Saudi Arabia.

About 20 years ago, the book "Inventions, Researches and Writings of Nicola Tesla", resulted in his reconstructing, as a way of understanding the many theories and devices shown in the book. From this encounter, a very strong bonding resulted. The object then became putting his thinking inside that of Tesla, such that expanding upon and extrapolating areas not yet reached by Tesla.

Technological advances in materials provide sourcing for devices not possible at earlier periods. For example, magnetic permeability which is the counter part of negative resistance is an open field for experimentation today.

Don does not sell his inventions, but trades licenses for shares in companies which then incorporate the new technology into their marketing systems. As such, he is on the Board of directors of several well established ventures located in Japan, Brazil, Mexico and Saudi Arabia.

Successful reproductions of Don's technology are present in Finland, Saint Petersburg - Russia, Yugoslavia, Romania, Japan, Hong Kong, and numerous other Countries. His book "Resonance Energy Methods" has a circulation of 40,000 copies in worldwide in many languages.

Abstract

Mr. Don Smith has discovered that Ohm's Law of Resistance does not apply to Magnetic Resonance that travels unrestricted for great distances. Therefore, multitudes of electrons are disturbed. The Magnetic moments are translated into usable electric energy. The Magnetic Dipole provides an unlimited source of electrical current. Mr. Smith's "Dipole Transformer" has been pending since last September.

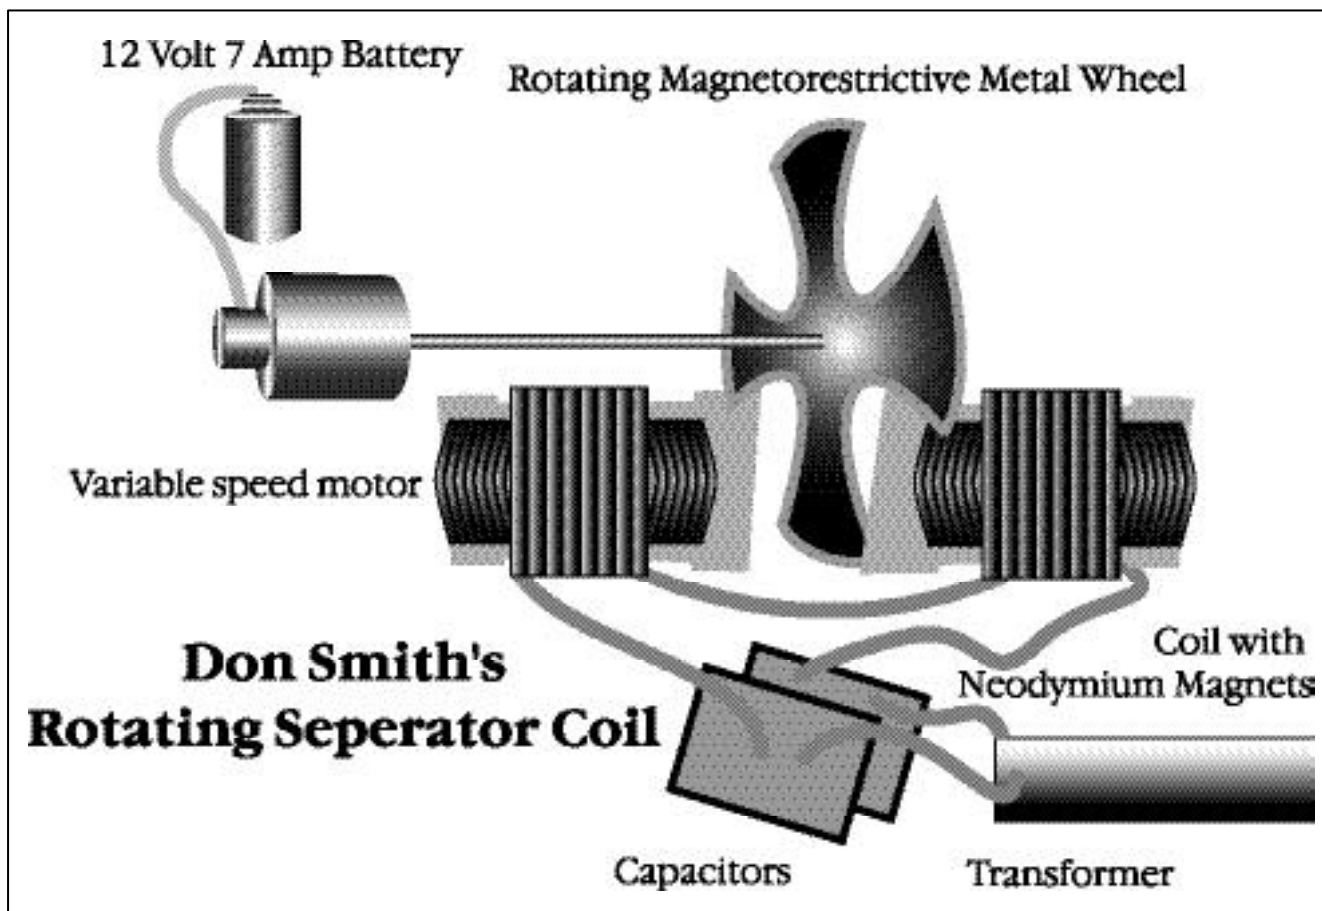


Fig.1
Smith's Energy Receiver

Useful energy occurs as the result of imbalances of ambient background energy and it is a transient phenomenon. In conventional circuits, the electrical field is in a closed system that is damped out with heat loss, which severely limits its utility. **The flip side of the electron generates magnetic waves, which is an open system, not subjected to heat loss. These being unrestricted are the universal source of energy. Universally present electrons are flipped to their electrical position, resulting in useful energy.** When properly constructed an electrical circuit can become self sustainable once started. An obvious corollary would be that the number of radio or television receivers in operation does not deplete the magnetic wave source providing

the service. The key source of unlimited energy is Magnetic Resonance. To understand this requires putting a stake through outdated physics. An obvious example is the piano where the key impacts the one note giving one sound, which resonates with its two side keys providing a much higher level. Magnetic Resonant Energy clearly amplifies demonstrating more energy out than in. **Excess energy consequent to a reaction is called Free Energy and can be very large as is in the case of Magnetic Resonance.** The intentionally ignorant physicist makes a habit of ignoring this fact.

Useful electricity is obtained from disturbed electrons, which radiate magnetic fields and waves. The generator disturbs and collects this

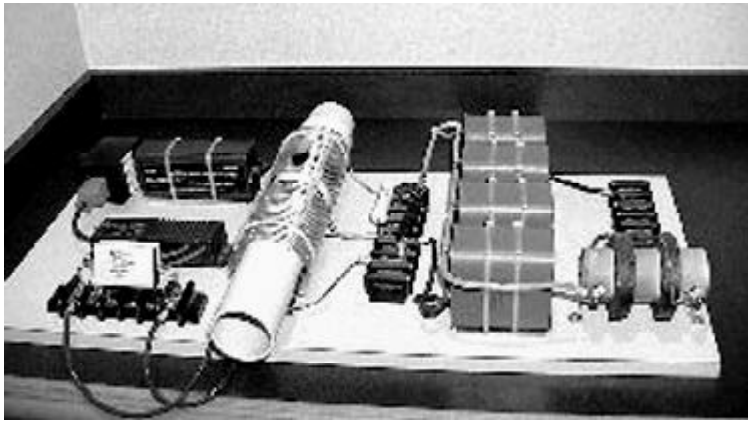


Fig.2
D. Smith's Energy Receiver


emitted electron energy. These electrons remain fully intact and undiminished until the end of time. This Energy is free and the cost of accessing it depends on the ignorance of the collector. With an appropriate collector system an unending source of environmentally benign, inexpensive, available energy everywhere, is provided.

Editor: in September 2003 Donald Smith took part in the annual "Inventor's Week-end" Conference where he presented the report on his invention. In this issue you can find more details on the conference.


*It is worth of a note that we have received **a number of negative comments on this inventor's work.** However, we thought his articles to be quite interesting and decided to publish them. We would be glad to get readers' comments, who are familiar with the work and inventions of Donald Smith.*



News from Farady Lab

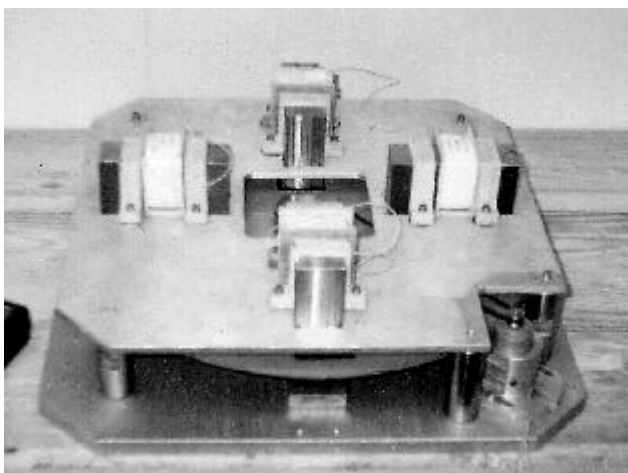

Disk permanent-magnet generator
Faraday Lab Ltd

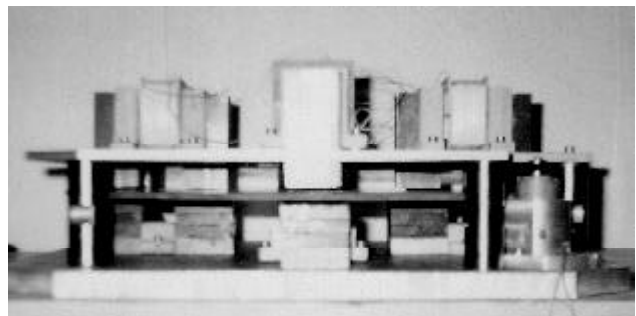

In our lab we are still working at the optimization of the alternator design (electromagnetic generator with the permanent magnets). We have introduced the drum rotor instead of the disk rotor into the new design of the alternator. The operation mechanism is the same, namely, the alternation of the magnetic flux near the generator coils occurs as a result of the rotating elements operation of the rotor, which "shunt" the magnetic flux.

Frolov A.V.

Strategies for Launching a New Over-Unity Device

Ryan S. Wood, USA

14004 Quali Ridge Drive, Broomfield, CO 80020

Problem description: With any singly successful over-unity energy device comes a host of business, technical and financial problems and opportunities. A public announcement permanently will lead to a "Pons & Fleishman" effect that at best delays public success and at worst derails the entire technological effort. Careful attention needs to be applied to the marketing launch, replication, patents, legal defense and finances.

Potential Solution: With a few working devices that generate 100-500 horsepower it is relatively easy to hook these units to the electrical grid and generate monthly checks from the utilities. The law states that major utilities must purchase electricity from any supplier at "cost avoidance" rate now typically, between 6 and 10 cents per kilowatt-hour. This law, California Public Utilities Commission - Rule 21, for example, is designed

to help small hydro-electric producers and solar or wind farms. There is a safety requirement of grid transfer switches, but they are not terribly complicated or expensive. The entire equipment set-up must be approved by the utility, however, if you start with a diesel electric generator or small hydro plant it can be approved, operating and stable before the clandestine switch or hybrid operation with an over-unity machine. The law is strongly supportive of the energy producer and disconnection for non-safety or maintenance reasons is exceedingly rare.

A key benefit of this approach is that you have established repeatability by having multiple working sites, you have established that it can generate money and the technology does real work and you have created several independent locations where press and scientists can visit to validate the over-unity effectiveness in-situ.

Typical revenues would be as follows:

Generator Horse Power	100	200	300	400	500
Annual \$, 90% uptime @ 6 c/kWh	\$ 35,100	\$ 70,199	\$ 105,299	\$ 140,398	\$ 175,498
Monthly payment @ 6 c/kWh	\$ 2,92	\$ 5,850	\$ 8,775	\$ 11,700	\$ 14,625
Annual \$, 90% uptime @ 10 c/kWh	\$ 58,499	\$ 116,999	\$ 175,498	\$ 233,997	\$ 292,496
Monthly payment @ 10 c/kWh	\$ 4,875	\$ 9,750	\$ 14,625	\$ 19,500	\$ 24,375

It will take money without the strings of investors to champion and defend a new breakthrough technology into the energy marketplace and this strategy offers a quiet way to prepare for the ultimate launch and resulting scientific and media frenzy that will ensue. It

will take years for the business to form, products to be built and marketing and acceptance and industry confidence to be established. All during those years this strategy can generate cash to support engineering and operations.

**Please call if there are questions at 303-941-9663 (cell),
Home: 720-887-8071
Ryan S. Wood**

• Fantastic Projects •

The Hutchison Effect – An Explanation

Mark A. Solis, USA

<http://www.geocities.com/ResearchTriangle/>

Email: your_neighbor_2000@yahoo.com

People often ask, "What exactly is the Hutchison Effect?" This brief essay is an attempt to answer that question to the satisfaction of the majority. First of all, the Hutchison Effect is a collection of phenomena which were discovered accidentally by John Hutchison during attempts to study the longitudinal waves of Tesla back in 1979. In other words, the Hutchison Effect is not simply a singular effect. It is many.

The Hutchison Effect occurs as the result of radio wave interferences in a zone of spatial volume encompassed by high voltage sources, usually a Van de Graff generator, and two or more Tesla coils.

Editor: We can call this effect "The H. Wells Effect" because he was first to describe it in his book "The Invisible man". The main character of the book used two sources of electromagnetic vibrations and Wells said that they were not Hertz waves but something else. "But the essential phase was to place the transparent object whose refractive index was to be lowered between two radiating centers of a sort of ethereal vibration..." ("The Invisible Man", chapter 20).

A. V. Frolov



The effects produced include levitation of heavy objects, fusion of dissimilar materials such as metal and wood, the anomalous heating of metals without burning adjacent material, spontaneous fracturing of metals (which separate by sliding in a sideways fashion), and both temporary and permanent changes in the crystalline structure and physical properties of metals.

Fig.1 represents the proof of Hutchison Effect based on metal blocks. Deformation occurred at room temperature as a result of complex interaction of electromagnetic fields.

The levitation of heavy objects by the Hutchison Effect is not - repeat not - the result of simple electrostatic or electromagnetic levitation. Claims that these forces alone can explain the phenomenon are patently ridiculous, and easily disproved by merely trying to use such methods to duplicate what

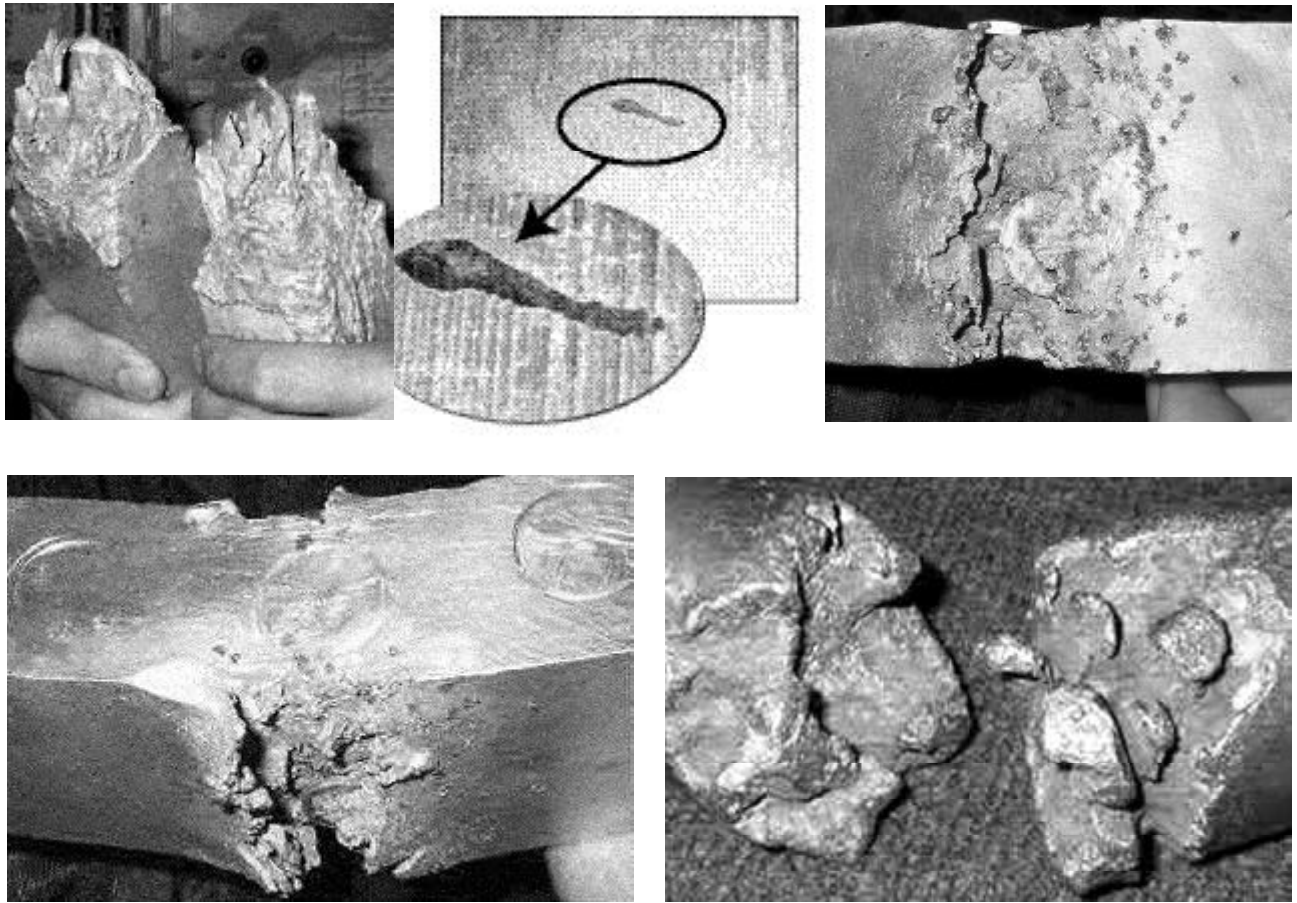


Fig.1

Cold melting of metals

The upper left: steel, The lower left: aluminium with coin prints and with a coin inserted in a partially open split;
The lower right: fully torn aluminium bar; The middle upper and right: a section part of the aluminium block,
into which a wood block is fused (brown matter)

<http://www.rumormillnews.com/JOHN-HUTSHISON2.htm>

the Hutchison Effect has achieved, which has been well documented both on film and videotape, and has been witnessed many times by numerous credentialed scientists and engineers. Challengers should note that their apparatus must be limited to the use of 75 Watts of power from a 120 Volt AC outlet, as that is all that is used by Hutchison's apparatus to levitate a 60-pound cannon ball.

The fusion of dissimilar materials, which is exceedingly remarkable, indicates clearly that the Hutchison Effect has a powerful influence on Van der Waals forces. In a striking and baffling contradiction, dissimilar substances can simply "come together," yet the individual substances do not dissociate. A block of wood can simply "sink into" a

metal bar, yet neither the metal bar nor the block of wood come apart. Also, there is no evidence of displacement, such as would occur if, for example, one were to sink a stone into a bowl of water.

The anomalous heating of metal without any evidence of burning or scorching of the adjacent materials (usually wood) is a clear indication that possibly the nature of heat may not be completely understood. This has far-reaching implications for thermodynamics, which hinges entirely on the presumption of such knowledge. It should be noted that the entirety of thermodynamics is represented by the infrared portion of the electromagnetic spectrum, which is insignificant in a

context of 0 Hz to infinite Hz. The anomalous heating exhibited by the Hutchison Effect shows plainly that we have much to learn, especially where thermodynamics and electromagnetism meet.

The spontaneous fracturing of metals, as occurs with the Hutchison Effect, is unique for two reasons: (1) there is no evidence of an "external force" causing the fracturing, and (2) the method by which the metal separates involves a sliding motion in a sideways direction, horizontally. The metal simply comes apart.



Doctor John Hutchison

Some temporary changes in the crystalline structure and physical properties of metals are somewhat reminiscent of the "spoon bending" of Uri Geller, except that there is no one near the metal samples when the changes take place. One video shows a spoon flapping up and down like a limp rag in a stiff breeze. In the case of permanent changes, a metal bar will be hard at one end, like steel, and soft at the other end, like powdered lead. Again, this is evidence of strong influence on Van der Waals forces.

The radio wave interferences involved in producing these effects are produced from as many as four and five different radio sources, all operating at low power. However, the zone in which the interferences take place is stressed by hundreds of kilovolts.

It is surmised by some researchers that what Hutchison has done is tap into the Zero Point

Energy. This energy gets its name from the fact that it is evidenced by oscillations at zero degrees Kelvin, where supposedly all activity in an atom ceases. The energy is associated with the spontaneous emission and annihilation of electrons and positrons coming from what is called "the quantum vacuum." The density of the energy contained in the quantum vacuum is estimated by some at ten to the thirteenth Joules per cubic centimeter, which is reportedly sufficient to boil off the Earth's oceans in a matter of moments.

Given access to such energies, it is small wonder that the Hutchison Effect produces such bizarre phenomena. At the present time, the phenomena are difficult to reproduce with any regularity. The focus for the future, then, is first to increase the frequency of occurrence of the effects, then to achieve some degree of precision in their control.

The spontaneous fracturing of metals, as occurs with the Hutchison Effect, is unique for two reasons: there is no evidence of an "external force" causing the fracturing, and the method by which the metal separates involves a sliding motion in a sideways direction, horizontally. The metal simply comes apart.

Editor: On November 17th 2003 we got to know that the inventor John Hutchison can eventually lose his home laboratory. The property can be confiscated upon court order due to neighbours' complaints. Apparently, it is dangerous to conduct experiments of the kind at home and even within a town. We wish him success!

A. V. Frolov

A SIMPLE DEVICE FOR HEAT TO ELECTRICAL ENERGY CONVERSION BY MEANS OF FERROELECTRICS

A. Ries, A. Z. Simoes, M. A. Zaghete, J. A. Varela,

Institute of Chemistry, Universidade Estadual Paulista, Rua Prof. Francisco Degni s/n,
14801-970 Araraquara-SP, Brazil
Email: ries@posgrad.iq.unesp.br

E. Longo,

Department of Chemistry, Universidade Federal de São Carlos, Rodovia Washington Luís - km 235, 13565-905
São Carlos-SP, Brazil

Introduction

A few years ago, ZaeV [1, 2] demonstrated experimentally the possibility of heat to electrical energy conversion by means of ferroelectrics. A capacitor filled with a ferroelectric material was charged and discharged periodically at a temperature just a little lower than the Curie point. According to ZaeV, the capacitor must have a nonlinear capacitance $dC/dV > 0$, which means the capacitance increases with rising voltage. Besides these experimental results, it was proven by a theoretical calculation that the electrical energy obtained during discharging can reach up to 1.35 of the energy introduced to charge the capacitor. The present paper presents an inexpensive and simple electric

circuit which can be used to prove heat to electricity conversion experimentally. Moreover, the physical mechanism of heat to electricity conversion is explained in the form of a thermodynamic cycle.

Thermodynamic cycle for energy conversion

The following thermodynamic cycle is composed of four reversible steps. It works only at a temperature just a little lower than the Curie point, where the dielectric constant is highly temperature dependent. Fig. 1 shows the relative dielectric constant of a representative ferroelectric ceramic as a function of temperature.

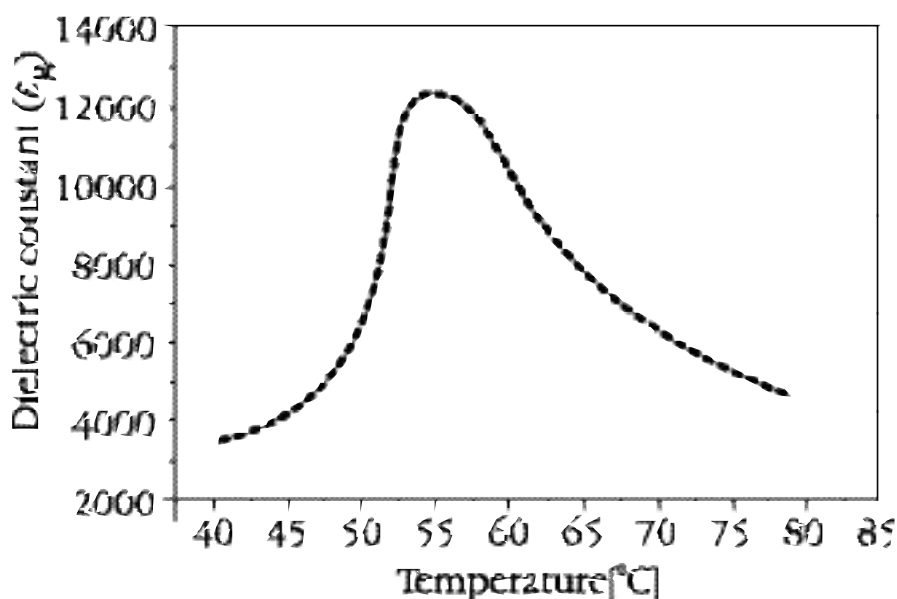


Fig. 1

Relative dielectric constant versus temperature for a barium strontium titanate ceramic (80% Ba, 20% Sr) prepared by the author. Curie point = 55°C.

As it can be seen, just below the Curie point in the range from 50 to 55°C, small changes of the temperature cause high changes of the dielectric constant.

Furthermore, to understand the conversion mechanism, it is necessary to understand the electrocaloric effect. When an electric field is applied to a dielectric medium, the latter is polarized. For ferroelectric materials, the parallel domain alignment is the most important part of the total polarization. During the successive alignment of the domains, some material parameters in particular entropy, heat capacity and temperature change. Since the material possesses less degrees of freedom in the polarized state, its entropy and heat capacity are reduced. As a consequence, provided that no heat exchange with the environment is possible (adiabatic conditions), the temperature increases. It is very important to understand that the energy for warming of the dielectric is not taken from the polarizing electric field. The increase in temperature is a result of the decreased heat capacity only.

From this, it can be derived easily what means "nonlinear capacitance".

When a capacitor is charged adiabatically which means its voltage increases faster than any heat exchange with the environment is possible, due to the electrocaloric effect, the temperature of the dielectric must also increase. As it can be seen from Fig.1, below the Curie point, an increasing temperature leads to a higher dielectric constant. Assuming that both temperatures, the one before charging and the other after charging are still below the Curie point, one can say that the dielectric constant increases with an increase in voltage.

Since the capacitance is proportional to the dielectric constant, the capacitor has a nonlinear characteristic $dC/dV > 0$. In the same way it can be concluded that adiabatic charging just a little above the Curie point reveals a nonlinear capacitor characteristic with $dC/dV < 0$.

Quantitative experimental measurements on the electrocaloric effect in some

representative ferroelectric and antiferroelectric materials were published by Thacher [3].

STEP 1: Adiabatic charging of the capacitor

We consider a capacitor filled with a ferroelectric medium at an environmental temperature a little lower than the Curie point.

An adiabatic charging of a capacitor (no heat exchange) effects an increase in temperature and capacitance due to the electrocaloric effect. We assume that this increase in temperature is so small that the temperature remains below the Curie point. Finally, the capacitor is completely charged while the dielectric medium has a higher dielectric constant and therefore a higher capacitance than it possesses at the environmental temperature.

To go further to step 2, the capacitor is held under conditions where no discharge is possible, e.g. it is disconnected from the power supply.

STEP 2: Thermal equilibration

After a short time, the charged capacitor has cooled down to the environmental temperature. While cooling down, the dielectric constant and capacitance decrease. But the charges of the capacitor plates remain constant. As a consequence, the voltage and the electrical energy increase. This can be readily recognized from the general capacitor equation $q = CV$ (q = charge, C = capacitance, V = voltage):

$$q = \text{constant} = C_1 V_1 = C_2 V_2$$

STEP 3: Adiabatic discharging of the capacitor

While discharging the capacitor the temperature and capacitance decrease (again heat capacity changes) due to the electrocaloric effect, leading to a further increase in the available electrical energy. The ferroelectric medium possesses now a final temperature below the temperature of the environment.

STEP 4: Thermal equilibration

In order to proceed with step 1, it is necessary to reach the environmental temperature. An inflow of heat from the environment to the dielectric material is required.

Electric circuit to observe energy conversion

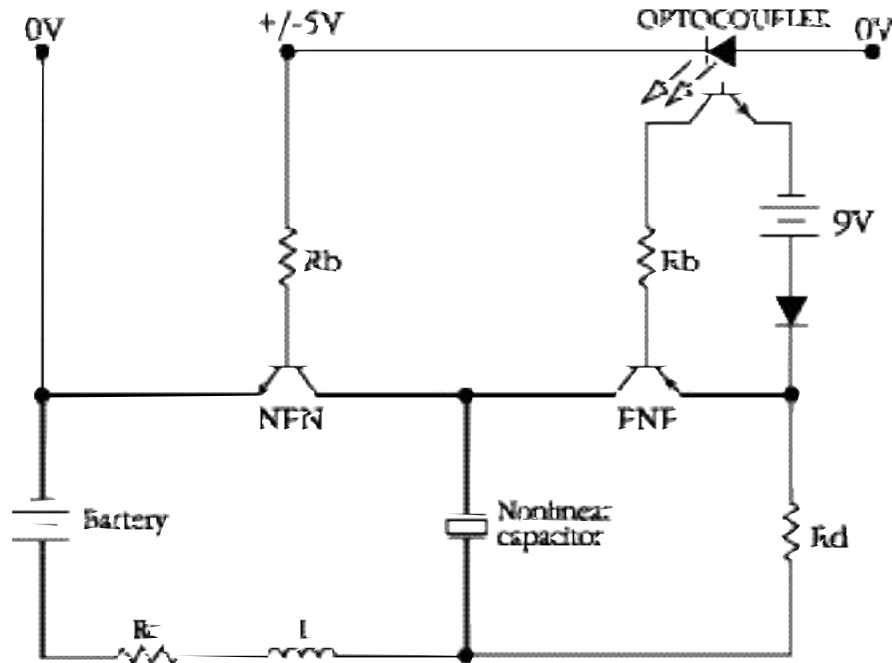


Fig. 2

Electric circuit for testing the energy conversion effect. The connections to the square wave generator are labeled with 0V and +/- 5V, the resistors Rb are to adjust the maximum base current of the transistors.

Assuming the experimenter has a nonlinear capacitor, the set-up shown schematically in Fig. 2 is proposed as a possible conversion device. The circuit contains two different types of transistors (NPN and PNP) which fulfill here the function of a switch.

The NPN junction transistor consists of two n-type semiconductors (called the emitter and collector) separated by a thin layer of p-type semiconductor (called the base). On the other hand the PNP junction transistor consists of a thin layer of n-type semiconductor lying between two p-type semiconductors. The base is the ON/OFF switch for the transistors. If a current flows to the base, there is a path from the collector to the emitter, where a current can flow (switch is ON). If there is no current flowing to the base, then no current can flow from the collector to the emitter (switch is OFF).

The charging-discharging process is controlled by a square wave generator which produces an output signal switching from +5V to -5V. The switching frequency is adjustable from 0.1 Hz up to at least 10 kHz. This output signal is applied to the bases of both transistors.

During the time the square wave generator output signal is +5V, a base current flows through the base-emitter junction of the NPN transistor which creates a low resistance path between the collector and the emitter. As a consequence, the capacitor is charged by the battery. The collector-emitter junction of the PNP transistor has a very high resistance, because here no base current flows. Therefore the capacitor is not discharged at the same time. When the output signal switches to -5V, a current flows to the base of the PNP transistor and not to the base of the

NPN transistor. Now the capacitor is discharged.

In order to understand the function of the inductance in Fig. 2, we analyze the thermodynamics of the charging process.

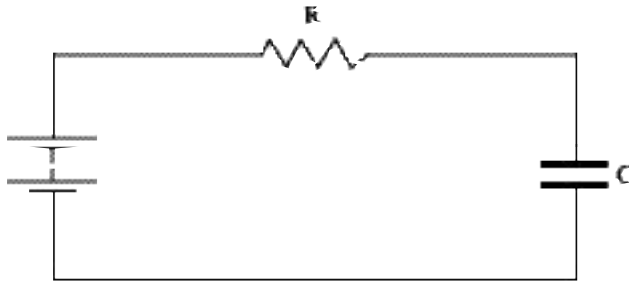


Fig. 3
Simple circuit for charging a capacitor

If a linear capacitor of capacitance C is charged to a voltage V through the load R according to Fig. 3, the energy $W = 0.5 C V^2$ is stored in the capacitor. During the charging process, a time-dependent current $I(t)$ flows:

$$I(t) = V/R \exp(-t/RC)$$

This current develops the heat Q in the load:

$$2Q = R \int I^2(t) dt = 0.5 C V^2$$

Here the integration limits are from zero to infinity. This calculation shows, that the energy taken from the battery is the energy stored in the capacitor after charging plus the heat produced in the load, also $2 \cdot C V^2$. One can see that the heat Q is not dependent on the resistance value R .

The above used equations are only valid in case of a one-step charging process.

If the capacitor is charged stepwise to the final voltage V , e.g. using a ramp generator, and each voltage step effects a voltage increase, the total heat produced in the load is (N = number of voltage steps):

$$Q = N \cdot 0.5 C (V/N)^2 = 0.5 C/N V^2$$

Now the energy taken from the source is:

$$W = 0.5 \cdot (1 + 1/N) C V^2$$

If the number of steps N tends to infinity, the heat Q tends to zero.

This energy loss in the load dramatically influences the efficiency of any conversion device and must be taken into account, otherwise all experimental attempts to observe energy conversion would fail.

A more detailed discussion on charging a capacitor and the unavoidable energy losses was given by Heinrich [4] and Gupta et al. [5].

The inductance in the circuit (Fig. 2) effects a slower rising of the current during the charging process (due to self induction) and can reduce the heat generated in the load dramatically.

Acknowledgments

Financial support of this work was provided by the Brazilian agency FAPESP (www.fapesp.br) and the German Academic Exchange Service (DAAD), (www.daad.de).

References

1. N.E. Zhev, Yu.S. Spiridonov, Capacitance as a converter of heat to electrical energy, Russian Electrical Engineering, Vol. 69, (2000) pp. 69-72
2. N.E. Zhev, Research on the Capacitance Converter of Environmental Heat to Electric Power, New Energy Technologies, issue 2, (2001)
3. P.D. Thacher, Electrocaloric effects in some ferroelectric and antiferroelectric $Pb(Zr, Ti)O_3$ compounds, Journal of Applied Physics, Vol. 39, (1963), pp. 1996-2002
4. F. Heinrich, Entropy change when charging a capacitor: A demonstration experiment, American Journal of Physics, Vol. 54, (1986), pp. 742-744
5. V.K. Gupta, G. Shanker, N.K. Sharma, Reversibility and step processes: An experiment for the undergraduate laboratory, American Journal of Physics, Vol. 52, (1984), pp. 945-947

• Fantastic Projects •

The Gates Motor



A. Akau, USA

Email: adrianakau@aol.com

The Gates motor company has produced a motor that does not run on fossil fuel or on electricity. It comes in a 28 HP and a 5,000 HP version. When linked to an electric generator, the larger motor will produce 2,200 kW.

My name is Adrian Akau. I am a recently retired school teacher, having taught science and math in the public school system, state of Hawaii for the past 36 years. One of the classes I taught was on energy.

Our world should be reaching the half-way mark in easily accessible oil by about the year 2016. Since the rate of oil usage is becoming higher each year, it is unlikely that the oil supply will last as long as the 140 years since the first well was drilled in Pennsylvania. We will become more dependent upon OPEC with all the political pressures and problems that accompany this type of dependency. As the easy oil is consumed, we must look for

ways to extract less accessible oil such as from shale. The added expense will be passed on to the consumer.

The burning of coal is not the answer either because coal cannot supply convenient energy as does oil. An oil-based economy cannot transfer over readily to natural gas; there is not enough natural gas available and it is again, not a convenient and concentrated source as is oil. We also have serious pollution problems with the burning of fossil fuels (natural gas being the exception) but the burning of all fossil fuels have contributed to the serious problem of global warming.

It may take all of 50-80 years to transfer to a non-fossil fuel economy. The transfer must be made slowly so as not to disturb the infrastructure of our economy which is presently based upon fossil fuels. We must gradually create a new infrastructure that is non-fossil fuel dependent.

The motor incorporates a unique spring configuration to provide rotation

The production model of the motor is 24 inches high by 48 inches in length. Connected to a generator it will provide sufficient power for about eight hundred US homes. It is designed to be tough and to last a long time. It uses a high grade airplane synthetic engine oil

to prevent friction and the build up of heat. Only the oil filter needs to be changed. The motor has special needle bearings and portions of the motor are made of high quality steel.

The Gates motor is designed to run 24 hours/day, 365 days/year without incurring any fuel costs. The larger size motor would come in pairs; the spare motor being used as a back-up unit should the regular motor be turned off for maintenance such as to change the oil or in case there should be any problems with the first motor. The company is willing to enter into a contract for maintaining the motor after installation.

The Gates motor represents a major breakthrough in motor design technology and provides practical solutions to environmental and fuel conservation concerns. **Finally, a completely mechanical motor has been developed.** It can deliver the power needed in a wide variety of service applications without any waste products or emissions to adversely affect the environment. This revolutionary new motor utilizes spring power technology. Unlike conventional motors which must reach a maximum rpm level before the desired horsepower, the Gates motor provides maximum horsepower instantly by virtue of the torque stored in the springs.

The basic operating principle of the Gates motor involves a series of springs configured to provide the required motor rotation and power delivery. Consider, if you will, the operating principle of a grandfather clock. Once the clock is wound, it continues to operate until it runs down and stops. The springs must then be rewound so it will operate again. Suppose the clock is continually being rewound

as it operates. Then the clock would run continuously. This condition is what forms the basis for the operating principle of the Gates motor. The motor incorporates a unique spring configuration to provide rotation. The springs inside the motor are wound and preset at the factory at the time the motor is assembled. The amount of torque wound into the springs at the factory determines the horsepower of the motor. Inside the motor are a multiple of springs positioned horizontally in a circular arrangement. As the motor operates, the springs are unwound a set number of degrees. A double ratchet system at one end of the motor rewinds the degrees used back into the springs. As the springs are unwinding, **the power generated from all the springs reset each spring (one at a time) during each revolution of the motor.** It is this reset action that produces and delivers power from the springs to the flywheel located at the opposite end of the motor. The flywheel serves to ensure the smooth operation of the motor and to convert the springs into useable horsepower. The smaller motor has 50 foot pounds of torque at a shaft speed of 3000 RPM and will produce 28 HP. The HP can be altered by factory adjustment. The speed of the engine is controlled by a hydraulic pump which provides pressure upon the power shaft.

**Contacts: Gates Motor Corporation,
P.O. Box 715, Hauula, HI, USA 96717
Email: gagates@earthlink.net**

Editor: We tried to get the video of this device operation from Gates Motor Co., but after a long consideration it was not provided since the authors are competitor-conscious.

Alexander V. Frolov

Longitudinal Waves

Cold Electricity

Adrian Akau, USA

Email: adrianakau@aol.com

Dr. Peter Lindemann in his book "The Free Energy Secrets of Cold Electricity" presents the story of this type of electricity which really is not electricity as electricity is normally meant to be understood. Cold electricity behaves differently than normal electricity. Regular electricity may be used in the process to generate this cold form but this transformation is not the type of change in voltage and current that occurs in a transformer. Rather, it is the extraction of a form of current from "normal" electricity by a process that uses high voltage.

In discussing the Edwin Gray motor, Dr. Lindemann relates a demonstration by Gray. Gray used a 6 volt car battery with lead wires running to a system he had devised using a voltage booster and a series of capacitors which raised the voltage to 3,000 volts. He then closed a switch that ran the high voltage into two electromagnets which caused a loud popping sound and cause the top electromagnet weighing a pound and a quarter to be propelled over two feet into the air. Gray claimed that only 1% of the system's energy was used with 99% going back to the battery. He said that he had 'split the positive' with his system.

Other evidence of using this fractionated electricity was Gray's use of a small motorcycle battery (15 amps which would normally produce $W = V \times A = 6 \text{ V} \times 15 \text{ A} = 90$ watts) to run concurrently six 15-watt electrical light bulbs, a portable 110 volt T.V. set and two radios. A glowing 40 watt light bulb running off the system was dropped into water without the glass breaking; the bulb gave off light but not the heat that accompanied a bulb run by regular electricity.

This would mean that tungsten in the filament of the light bulb was not resisting the flow of this fractionated electricity and that this "cold electricity" was causing the luminous glow by some other means.

According to Gray's Patent #4,595,975, low voltage was chopped into pulsating DC by passing it through a multi-vibrator (buzzer like a door bell). Then the pulsed DC was sent through the low voltage winding (primary) of a transformer which changed it to pulsating high voltage DC current at the secondary side. The pulsating high voltage DC was rectified by a full wave bridge and changed into high voltage DC.

The high voltage DC was used to repeatedly charge a capacitor as the current was sent to briefly discharge across a spark gap (rated at 3000 volts). The discharge of the spark across the gap had to be in one direction only and its duration was controlled by the size of the capacitor and by the strength of a magnetic field encompassing the gap. This magnetic field had a quenching effect because it caused a back EMF each time the discharge occurred. The current from the discharge across the gap was then sent through a resistor and then to a vacuum tube (the conversion switching element tube).

Another of Edward Gray's patents "Efficient Electrical Conversion Switching Tube Suitable for Inductive Loads" (April 1987, patent 4,661,747) described the switching tube. It utilizes a low voltage anode (positive plate), a low voltage anode (positive plate) and one or more electro-static or charge receiving grids (located between the positive

plates and the cathode or negative plate supplying the electrons). This tube's function was to 'split the positive'. A normal vacuum tube usually uses only a single anode at a particular voltage to control the voltage flow within the tube. The function of the charge-receiving grids was to collect the "cold electricity".

The most unusual part of this Power Supply circuit consisted of devices specifically designed to remove excess energy when the Switching Tube was functioning. A spark-gap protection device, served to "protect the inductive load and the rectifier elements from unduly large discharge currents". As stated, the rectifier elements are the two anodes and the grids in the Switching Tube. In a normal vacuum tube, no protection would be necessary because the maximum power of the tube would be based upon the electricity provided to heat the tube filament and to charge the anode (voltage x amps). Therefore, the excess energy comes from the process occurring as the spark gap affected electrical pulses pass through the Switching Tube. The process of extracting the "cold electricity" places danger of overload upon the system. (Please take note that the "electricity" from the Switching Tube is no longer the normal type of electricity we have from our batteries or from an electrical outlet but rather a completely new form with entirely different characteristics.)

The description continues, "Should the potentials (voltages) within the circuit exceed the predetermined values fixed by the mechanical size and spacing of the elements within the switching tube, the energy is dissipated (bypassed) by the protective device to the circuit common (electrical ground)" by two strategically placed diodes (devices that permit the passage of electricity in one direction only). The question now arises "What is the cause of this large amount of excess energy which must be dumped to ground through device acting like a lightning rod in order to prevent the circuit from burning out?"

To examine the cause of the excess energy source, we must go back over a hundred years to 1889. Heinrich Hertz had just announced

in 1887 that he had discovered electromagnetic waves and Nicola Tesla was attempting to duplicate Hertz's experiments. Tesla used abrupt and powerful electric discharges produced with banks of capacitors charged to very high potentials and was able to explode thin wire (copper bus bars). He came to the conclusion that Hertz had mistakenly associated electrostatic inductions (electrified shockwaves in air) for true electromagnetic waves.

The explosion of the copper bars by means of the "disruptive discharges" from the capacitor bank produced sharp shockwaves which struck Tesla with great force across the entire front of his body. Tesla said they felt more like powerful gunshots rather than electrical sparks. They produced effects similar to lightning or to those produced by high voltage DC generators previously discussed; the simple closing of a high voltage DC generator caused a stinging shock. AC generators were not in use in this pre-AC era and it was shown, later on, that AC generators did not produce these effects.

This shock was first assumed to be the result of residual static charging. It stood straight out of highly electrified conductors, seeking ground paths which included workmen and switchboard operators. In long cables, Tesla estimated that this electrostatic concentration was several orders in magnitude greater than any voltage the DC generator could actually produce. It caused a hedge or crown of bluish needles or spicules to point at right angles to the cable or straight from the electrical cable line into the surrounding space. The bluish needles appeared the very instant the switch was closed and disappeared a few milliseconds later, after which the system functioned normally. However, anyone through whom the blue needles passed, especially in large regional power systems which used high exceptionally high voltages, usually did not survive. Generators rated at a few thousand volts produced hundreds of thousands or even millions of electrostatic volts during the start-up pulse. Highly insulated, heavily grounded relay switches had to be installed to protect workers from certain death.

Engineers at this time assumed **the effect to be caused by a "bunching" action which occurred when a powerful force was not able to move charge sufficiently quickly through a system.** (A similar "choking effect" also happened with large steam engines; if steam was introduced too rapidly, the steam engine could explode.) The metal of which the wire was composed somehow offered resistance to the charge carriers before they were able to move away from the generator terminals. It seemed that the wire acted as a blocking force to the electrons or to some unknown part of the electrons for the first few milliseconds, rather than as a conductor. The powerful, deadly bluish spikes sprang from the line until the current charges actually "caught up" with the applied electrical field. It was as if the spicules were a form of relieving pressure on the system by converting the voltage impulse into some other form.

Tesla began wondering why the electrostatic field moved faster than the actual charges. He believed that this effect could help him find electric waves better than his capacitors because the line resistance caused the electrostatic charges to bunch together into a density much greater than obtainable with his capacitors.

Tesla understood that ordinary capacitor discharges were oscillating currents or spark currents which "bounced" between each capacitor plate until their stored energy was dissipated. The high surge voltage of the DC generator exerted such a high one way pressure on the dense line charges, due to the millisecond resistance of the metal, that possible voltage "bounces" were also oscillations of current as was true with the capacitors. Tesla used every means possible to block the "back-rush" (bouncing) of the oscillating current in order to prevent the supercharge to prematurely decline; he wanted to maintain this powerful "bunching" effect as long as possible in order to study it and to make use of it.

His face and hands experienced a penetrating shockwave; a sharp pressure and an electrical irritation were brought on at the sudden closing of the switch. His face and hands were

especially sensitive to these shockwaves which caused a "stinging" effect at close range. Tesla believed that he was being struck by material particles approaching the vapor state as they were thrust from bluish crowned wire.

Later on, he was to discover they were not gas particles. **He placed himself behind a glass shield but to his amazement, he still felt the shockwaves and stinging effects; the glass shield did not protect him.** These stinging rays could be felt at great distances from their sources and, to his amazement, would penetrate shields of both glass and copper. Tesla knew that normal electrostatic charges spread over the surface of a metal (copper, for example) shield so that the stinging effect could not have an electrostatic origin and therefore was not electrostatic in nature but was from some other yet unknown source.

Joseph Henry in 1842 had noticed the magnetization of steel needles by the discharge of a Leyden Jar (type of primitive condenser made with a glass bottle). The Leyden Jar was at the top floor of a building while the needles were in the basement. Dr. Henry, noting the passage of these magnetizing rays through brick walls, oak doors, stone and iron flooring and tin ceilings believed that the spark given off by the discharge released "light-like rays" that passed through the material obstacles with ease before magnetizing the needles.

Elihu Thomson, a physics instructor in 1872 had been attempting to make sparks from a Ruhmkorff Spark Coil more clearly visible for his physics students. He attached one pole of the coil to a cold water pipe and noted that the previously blue spark changed to white. He then attached the other pole to a large metal table top and produced a silver-white spark that would be clearly visible to all attending his lecture. He went to the door of the room to notify his colleague but received a strong shock from the door knob. Turning off the Ruhmkorff coil prevented the brass knob on the oak door to stop shocking. He returned with his friend, again turned on the coil and discovered that all metal objects in the entire building, no matter how distant

from the coil or insulated from the floor, produced long and continuous white sparks upon the touch of a penknife or screwdriver.

The device Tesla perfected was far superior to the Ruhmkorff Spark Coil. The effect of his disrupter device was so strong that a single wire placed in an oil bath produced what he had originally but mistakenly thought to be gaseous streams so powerful that they visibly depressed the oil into a depth of about two inches. Tesla concluded that "besides the air, another medium is present".

...he placed himself behind a glass shield but to his amazement, he still felt the shockwaves and stinging effects; the glass shield did not protect him. These stinging rays could be felt at great distances from their sources and, to his amazement, would penetrate shields of both glass and copper...

Tesla had been able to perfect his device by placing a capacitor between the switch and the D.C. generator thus increasing the power and protecting the generator windings in much the same manner as the diodes Edwin Gray's Switching Tube protected Gray's circuit. Tesla also raised the voltage and quickened the "make-break" rate of the switch to increase the power level by placing a powerful permanent magnet crosswise to the discharge path of the high voltage output of the DC generator wires. The magnetic field caused the discharge arc to automatically "blow out"; the charge passing through the wires in the presence of the magnetic field built up reverse emf (electromotive force or voltage).

Tesla believed he had discovered a new type of electricity with special characteristics. This form of electricity did not consist of alternating waves. **They were longitudinal waves** composed of successive shocking

waves with effects that could be seen and felt at a distance. **Vector components of these shock waves were unidirectional. They were able to force charges in the direction of their propagation.** In his patent #787,412, "Art Of Transmitting Electrical Energy Through The Natural Mediums" (April 18, 1905), Tesla calculated the mean velocity of the waves propagated by his device to be 471,240 Km/sec. Knowing that the velocity of light is 300,000 Km/sec would indicate that the type of transmission to which Tesla is referring is different than standard electromagnetic radiation; these special longitudinal "Radiant Energy" waves moved faster than the speed of light.

After conducting hundreds of experiments, Tesla found that "Radiant Energy" longitudinal waves **could penetrate all materials and cause "electronic responses" in metals such as copper and silver.** Impulses exceeding 0.1 millisecond duration produced effects such as pain, mechanical pressures, explosion of thin wires and vibration of objects. Impulses of 1.0 microseconds caused the sensation of physiological heat; at still shorter lengths white light would fill the room. Impulses less than 100 microseconds were safe to work with and Tesla planned to use them for his power broadcast system since they could pass through all matter.

In 1890, Tesla discovered that placing a long single turn copper helix near his magnetic disrupter became covered with an envelope of white sparks. Effects were strongest when the helical coil was placed within the disrupter wire circle. In this "shockzone", the coil was surrounded by a blast of long, fluid like silvery streamers which clung to the surface of the coil, flowing over the coil at right angles to the windings. Tesla hypothesized the electrostatic-like effect was due to radiant transformation rules requiring measurements of discharge lengths and attributes of the helix used (number of turns, diameter, etc.). (Editor: resonance)

The new induction law he discovered showed that radiant shockwaves became much stronger when encountering segmented objects. The radiant shockwaves

"flashed over" the outer skin of the helix from end to end without passing through the windings of the coil; shockwaves of 10,000 volts introduced to a 24 inch coil rise to 240,000 volts. The greater the resistance in the helix turns, the higher the maximum voltage. This was completely different from magneto-induction. Remember that he was not working with electricity but with radiant shockwaves.

Aether particles were incompressible and could easily pass through space and matter with a speed much greater than the speed of light. This was pure radiant matter but, at the same time, pure Radiant Energy. Cold electricity is one of the forms of this Radiant Energy

This transformer he invented used radiant shockwaves to produce pure voltage without current. Each transformer had to be "tuned" by adjusting the disrupter to a specific impulse duration. At that point, voltage impulses could flow smoothly, flowing over the copper surface much like a stream of water in a pipe. No amperage could be detected but if the stream was aimed at a distant metal plates, "current" was produced which reached several hundred or even thousands of amperes. Tesla then began to wonder what made up this white, currentless stream.

Tesla determined that normal charge carriers (electrons) could not travel as quickly as the radiant pulse; no current moved the coil because the electrons were choked in the metal lattice of the coil. **The radiant pulse moving over the surface of the coil was not electronic in nature.** He placed the legs of a heavy U-shaped copper bus bar directly to the disrupter primary and then connected the short-circuited system to several incandescent lamps. These lamps glowed with a brilliant cold white light as

with Gray's light bulb, proving that the power for the light was not electrical in nature. Tesla believed that the electrons were blocked from flowing through the wire while the radiant pulse was released over the coil surface as a "gaseous" pulse (splitting the positive, according to Gray).

Tesla came to believe that voltage could be viewed as streams of aether under various states of pressure and that his transformers affected the aether as to produce the luminous effects he observed. In his patents, he describes his "light-like rays" as tightly constricted aether streams propelled from his transformers along infinitesimal ray lines along which an incompressible movement occurs instantly through space on all points along its path. Aether streams were being drawn in through his transformer at higher natural pressure and then accelerated in the electrical discharge. The voltage in his transformer could control the brilliance of light in a room but this type of light was almost impossible to register on film. He could heat up a room or cause cool breezes by controlling the voltage in impulse duration in his transformer.

Tesla saw electrical current was really a complex combination of aether and electrons. Through the application of a disrupter, the electrons were removed from the gap by the magnetic field while the aether streams continued to flow through the circuit. He considered aether particles highly mobile with infinitesimally small mass and cross-section as compared to electrons. They were incompressible and could easily pass through space and matter with a speed much greater than the speed of light. This was pure radiant matter but, at the same time, pure Radiant Energy. Cold electricity is one of the forms of this Radiant Energy.


Edwin Gray, Dr. Nicola Tesla and Dr. Thomas Henry Moray all used radiant energy technologies. It is important to understand that the Laws of Thermodynamics and Maxwell's equations do not pertain to "Radiant Energy" technologies.

• Fantastic Projects •

Gravity Conversion Rotary Device

Review is prepared by editor Tatiana Ezhova

Here another fuelless perpetuum mobile is presented.

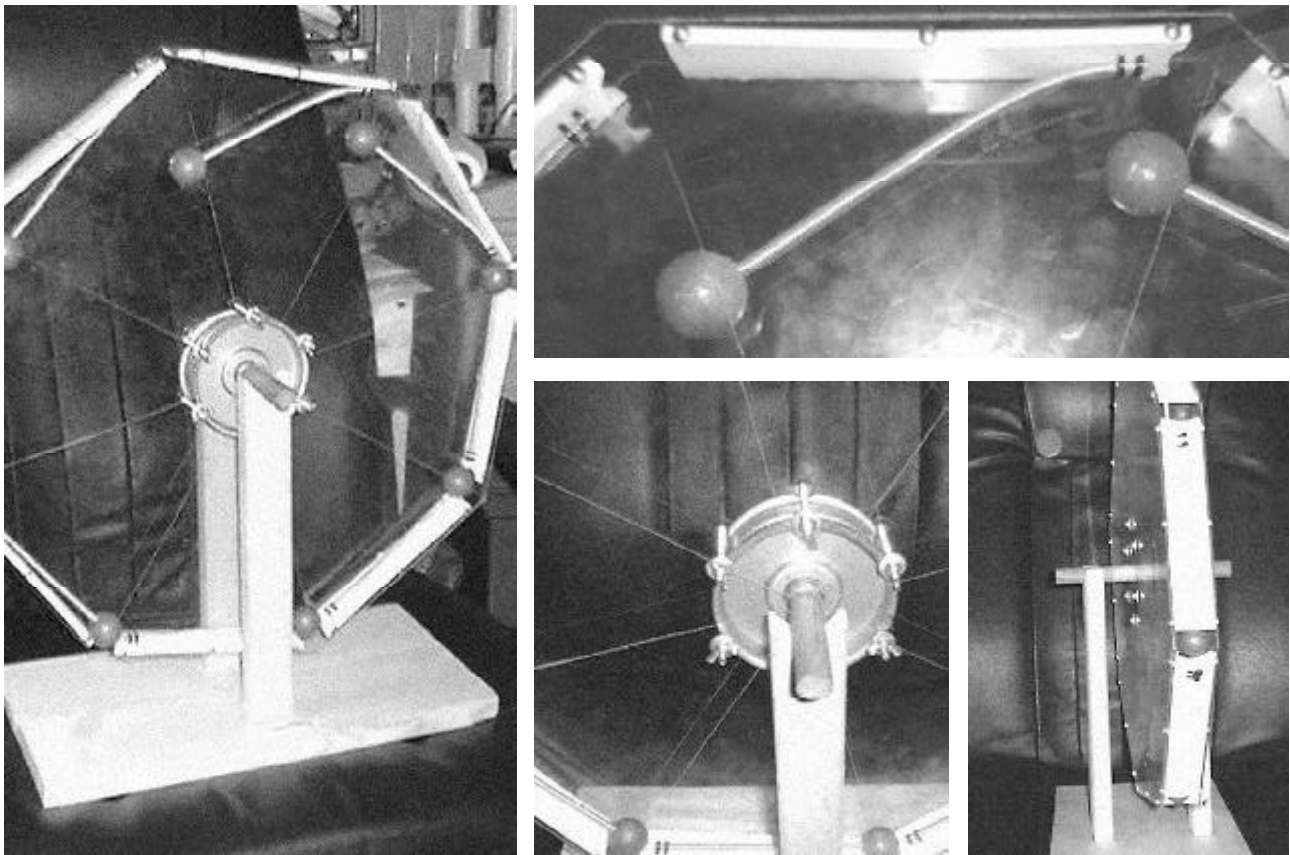

The system design

The design includes a wheel with spring spokes. Pegs may be fixed inside the wheel to balance movement of weights on springs. All parts should be homogenized as to dimension and weight. The author used 4 oz. lead balls and the 3/16" springs. The wheel measures 9" in radius as measured from hub center to center of each lead ball at outer periphery. This device is actuated and stopped by the hand. Its speed is self governing, it ramps up to speed quickly and simply stays there.

Note: you can find more detailed information about the device at <http://www.greaterthings.com/News/FreeEnergy/Directory/GravityMotors/photos/>. Also read in this issue article "Novozhilov's motor" that describes another wheel motor that does not require any fuel for its operation.

Torsion Technologies

Xing-liu Jiang, Xiong-wei Wen, China

Science School,

Beijing University of Aeronautics and Astronautics, Beijing 100083

and

Li-jun Han, China

Department of Materials Science and Engineering,

Beijing University of Aeronautics and Astronautics, Beijing 100083

ABSTRACT

Highly localized nuclear activation in electrochemical systems and other electrical discharge processes have been observed by many laboratories in the world. This report is an attempt to explain such anomalous phenomena by using torsion field theory and axion model. Anisotropic behaviours of radiation products, burst character, "heat after death" of excess energy release in electrical discharge systems are considered to be interpreted by the torsion coherence of vortex dynamics with the zero-point energy induced by localized intense field emission of micro-protrusion of the cathode, and the dynamic Casimir effect of transient evolution of triple region of gas, liquid solution, and electrode protrusion. Axion model and Primakoff's effect are proposed for explanation of nuclear transmutation without noticeable gamma radiation.

Nuclear products with high concentration, unidentified tracks with highly collimated lines of low energy nuclear reactions in the electrochemical systems were recorded by CR-39 solid detectors and photo-films, and localized spots with chemical alterations were observed at our laboratory. It is suggested to carry out intensive study of vortex dynamic for explaining the anomalous phenomena in wide area of nature and laboratories. Analysis of vortex dynamics with wide range from pitting corrosion of electrochemical system, laboratory plasma, tornado, to quasar spiral model with extremely high energy cosmic rays in the center region, leads to a conclusion for that vortex dynamics creates torsion fields responding to the anomalous effects.

I. INTRODUCTION

Many laboratories in the world have observed nuclear reactions and **excess heat** in electrochemical systems. The mechanism of such anomalous phenomena is not being well understood according to normally accepted physics.

Nuclear products with high concentration and tracks with highly collimated lines of low energy nuclear reactions in the electrochemical systems were recorded by CR-39 solid detectors and films at our laboratory [1,2]. These facts suggest that quasar model with spiral structure and extremely high energy cosmic rays in the center could be used to explain the mechanism. It is supposed to use the concept of torsion field to interpret the observed phenomena, typically, the properties of axion acceleration, memory effect, and the polarized nuclear reactions with torsion effect [3].

II. PHENOMENA IN NATURE AND AT LABORATORIES

The vortex and spiral structures are the archetype that appears at all levels of nature and laboratories, for example, atom structure, vortex lattice in superconductors, dense plasma focus, lightning, quasar etc.

Recent report of dark matter annihilation at the galactic center describes that the cold dark matter near the galactic center is accreted by the central black hole into a

dense spike [4]. Particle dark matter annihilation makes the spike to be a compact source of photons, electrons, positrons, protons, antiprotons and neutrinos. It reminds us for that there is a similarity among pitting corrosion with electrochemical noise, laboratory plasma pinching (dense plasma focus, for example), fast laser induced ion beams [5] and quasar spiral model with high-energy cosmic rays in spiral center in spite of large dimension difference. Comparing the experimental results of electrochemical cells with excess heat and nuclear transmutation to astrophysics phenomena, it is supposed that the investigation of vortex dynamics of torsion coherence with the zero-point energy is essential for tapping the zero-point energy.

As it is predicted by quantum mechanics that the vacuum is seething with active energy, even at temperature of zero point Kelvin. This zero-point energy (ZPE) can be thought as an infinite number of virtual photons that are popping out of the vacuum and going back in, but should be a measurable effect en masse. To exam the origin of ZPE background, the interaction of matter with the ZPE can be treated on the basis of charged point particles interaction with a background of electromagnetic zero-point radiation with spectral-energy density.

Based on observation in the experiments, the following features are considered in order to understand the experimental results with electrical discharge systems.

A. ELECTROCHEMICAL DOUBLE LAYER

In an electrolytic cell, the electrolysis with high conductivity and the electrochemical double layer with large layer-capacitance lead to a typical structure of the cathode potential distribution similar to the cathode drop of glow discharge in low gas pressure. For a compact layer the thickness of the double layer is equal to one ionic layer, across which there is a linear fall of potential. Thus, high electric field exists in some regions on the surface of the cathode.

The local enhancement of the electric field on the cathode surface with the double layer is related to the protrusions and cracks similar to the tip discharge in air or in a vacuum. The current distribution depends strongly on the surface roughness and the work function of the electron emission. A high transient current density ($> 10^8 \text{A/cm}^2$) could be expected due to enhanced field.

B. ENERGY CONCENTRATION

On the cathode surface, the high persistent electrical fields ($> 10^7 \text{V/cm}$) and large equivalent capacitance ($> 25 \mu\text{F/cm}^2$) lead to a high energy concentration in the double layer [6]. The concentrated field on the tips of the protrusions or cracks after a long-loading period with deuterium on the palladium cathode surface creates a high transient electron flux because of the large distributed capacitance and the negligible inductance in a localized discharge mini-network. The experimental data show that the reactions take place only in some restricted areas that have specific properties. The idea of micro fusion due to the results of energy concentration and the high deuteron flux could be used to explain the nuclear transmutation.

C. TORSION FIELD AND THEIR EXPERIMENTAL MANIFESTATIONS

Elementary particles have the moment of quantity of motion, i.e. spin. If in any substance the spins of particle have a preferable direction, then it is interpreted as spin polarization of the substance. Every substance creates a torsion-field (or called spin-field or axial field) in the space surrounding it when polarized by spins [7]. The superposition of torsion field, generated by the atomic and nuclear spins of each molecule, determines the intensity of torsion field in the space surrounding each molecule. Torsion field has strong penetration ability and does not interact with the crystal lattice of substances. The torsion field created by rotation of some sort of matter is concentrated in two opposite beams propagating along the rotation axis. The intensity of torsion-field with some

lower constant value can be retained for several weeks after the rotation is stopped. Such property of vortex matter has been recently observed in type II superconductors with magnetic flux line lattice [8]. The studies of vortex matter of type II superconductors have shown a number of puzzling phenomena associated with vortex motion, including: low-frequency noise and slow voltage oscillations; a history-dependent dynamic response, and memory of the direction, amplitude duration and frequency of the previously applied current.

Some behaviors of the torsion-field effect have been observed in the experiments of electrolysis regarding the so-called cold fusion, such as when the gas bubble chains come out from the protrusions of the cathode surface a long time after switching off the electrolysis potential. The more surprising thing is the heat after death, which has been recorded by many labs. This phenomenon could be explained by the persistence effect of the torsion-field produced by vortex dynamics of tip effect.

D. EXPERIMENTAL RESULTS IN THE ELECTROCHEMICAL CELL

CR-39 plastic films possessing with a high degree of optical clarity and isotope in track response, and are sensitive to neutron, proton, tritium, alpha, and other charged particles, were used to detect the products of nuclear reactions. The films of CR-39 were immersed in the NaOH electrolyte of heavy water and placed adjacent to the tips of the cathode [9]. After 110 hours, electrolysis experiment with the applied voltage 1 V and current 2 ma, the solid detector was etched by 6.25 N NaOH solution in 70°C for 11 hours. The photomicrograph shows the cluster of tracks with a cycle crater of 100 μm in diameter and 25 μm in depth. According to the etching condition, the energies of the most of the particles, P, T, α are estimated roughly to be in the range of 1-4 MeV. On the backside of same region of the CR-39 film detector, one can clearly see a few of tracks in the circle area or

nearby. Such tracks are believed to be created by recoil-protons of forward incident neutrons. High concentration of the cluster of nuclear tracks could be explained by the quasar spiral model and by the crystal channeling effect [Fig.1]. The experimental results of the generation of tritium with single crystal metal of Pd show that none of the generation of tritium has been revealed by using non-single crystal electrodes [10]. The importance of the crystal channeling effect for nuclear reactions in the electrochemical systems can be inferred.

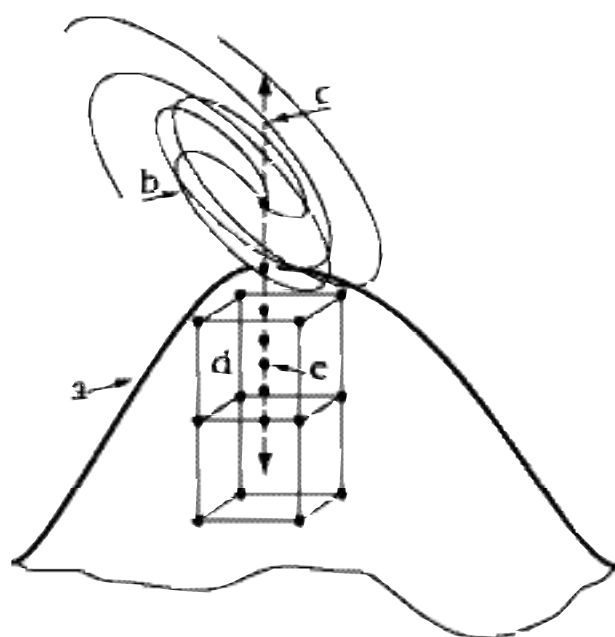


Fig.1

Schematic presentation of a micropinch spiral by tip effect in the electrolysis cell:

- a) tip of the electrode; b) spiral structure of micropinch; c) electron beam; d) crystal channel; e) ion beam

To determine the spatial distribution of radiation active sites (RAS), Black-white 135 films of 27 DIN have been used to image the position of the RAS. After a 1,5 year of deposition in glass tube of finishing electrolysis experiments with light water electrolyte for more than 200 hours running, the patterns of RSA were clearly formed on the films after exposure of 100 hours [2]. The bright spots corresponding to the tips of palladium cathode edges can be seen due to

the tip effect. The effect of magnetic field on the traces of the charged particles has been observed while the Pd samples exposing to the films, which were folding and wrapping up the sample, were inserted between couple magnets. The tracks stretching along the film surfaces confirm that the tracks were created by charged particles, electrons for example, with low energy about some keVs. Highly oriented tracks can be observed by autoradiography by using normal films locally [Fig.2].

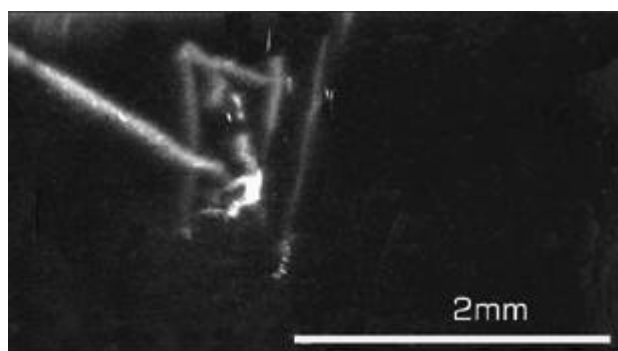


Fig.2

Autoradiography of charged particle tracks of beta delay isotopes on the surface palladium cathode. Some tracks of beta particles are paralleling the cathode surface.

E. SONOLUMINESCENCE AND “BUBBLE NUCLEAR FUSION”

Some scientists of Oak Ridge National Laboratory in America reported their articles of bubbles experiments in Science. Experimental results show that the radiation lights of sonoluminescence possess three characters: short duration with picoseconds; wide continual spectrum; highly oriented thin beams.

Based on those characters, vortex dynamics with axial acceleration of bubble collapse could be inferred.

Nuclear reaction with abnormal gamma radiation was observed [11]. Dr. Claudia Eberlein describes her conclusion on sonoluminescence that only the ZPE spectrum matches the light emission spectrum, which must be a ZPE phenomena [12]. The effect of torsion field on nuclear reactions along the axis of vortex should be taken into consideration

for the low ratio of the nuclear products of n/T due to spin polarization of reaction particles.

Axion model and the Primakoff effect are proposed for explanation of nuclear transmutation without noticeable gamma radiation. Many laboratories in the world have been engaged in several experiments to search for axions, light neutral pseudoscalar particles yet to be discovered. The axion would be produced in the solar core through the Primakoff effect if its mass is a few electronvolts and could be detected in the laboratory.

III. CONCLUSION

Researchers of new energy study of "cold fusion" type should pay great attention to the general processes of electrolysis to find the key points, which could play a major role in the transit from the electrochemical processes to processes of torsion and the nuclear processes. From the authors' point of view, the evolution of double layers is of importance to understand the anomalous effect, typically on the protrusions of cathode. The change of space-time near the tips due to torsion field generated is expected to delivery the zero-point energy, and dynamic Casimir effect for the evolution of gas bubbles on the tips are expected to generate photons and excess heat [1]. The yields of transmutation products are related to the current distribution on the cathode surface. The cathodes of thin wire were benefit to the generation of nuclear reactions and excess heat for electrochemical systems. Careful examination of the evolution of electrochemical double layer will lead to a good understanding of pitting corrosion with electrochemical noise, and further to recognize the anomalous excess heat and nuclear reactions.

Heat after death was observed at many laboratories. It is believed that the persistence behaviors of torsion field can be used to explain such anomalous phenomena.

The contact between beads coated with a thin metallic layer or multilayered film and

palladium black particles could be regarded as point-contact similar to the tip-effect [13].

We may say that it is expected to reveal the puzzles of the mechanisms of high-Tc superconductivity with pinning vortices by the torsion field theory [14,15].

REFERENCES

- [1] Xing-liu Jiang, Jin-zhi Lei, Li-jun Han, Dynamic Casimir Effect in an Electrochemical System, J. New Energy, Vol.3, No. 4, 47(1999).
- [2] Xing-liu Jiang, Chang-ye Chen, Li-jun Han, Tip Effect and Nuclear Active Sites, Proc. of the 7th Intern. Conf. on Cold Fusion, Vancouver, April, 1998, pp.175.
- [3] Don Read, Excitation and Extraction of Vacuum Energy Via EM-Torsion Field Coupling Theoretical Model, J. New Energy, Vol. 3, No. 2/3, p.130(1998).
- [4] P.Gondolo, J.Silk, Dark matter annihilation at galactic center, Phys. Rev. Lett. 83, 1719(1999).
- [5] BPS, Laser light in, stream of protons out, Physics Today, Jan.2000,p.9.
- [6] G.Korluem and J.O.M. Bookris, Textbook of Electrochemistry Vol. II. Elsevier Publishing company Amstorsan, 1951. P.364
- [7] A.E.Akimov, G.I.Shipov, Torsion fields and their Experimental Manifestations, Journal of New Energy, 2(2), 67(1999).
- [8] Y.Paltiel, E.Zeldov Y.N.Myasoedov et al. Dynamic instabilities and memory effects in vortex matter, Nature 403, 398 (2000).
- [9] X.L.Jiang, L.J.Han and W.Kang. Concentrated energy and Micro Nuclear Fusion, ICCF6, Oct 1996, Japan p.580.
- [10] R.L.Matlock, F.E.Collins, G.R.Bancher, Anomalous tritium found in the recombined off gasses during electrolysis using crystal cathodes. Elem. Energy(cold fusion), 26, 28(1998).
- [11] Taleyarkhan R P, West C D, Cho J S, Lahey Jr R T, Nigmatulin R I, Block R C. Evidence for Nuclear Emissions During Acoustic Cavitation. Science, 2002 295: 1850~1862.
- [12] Claudia Eberlein. Theory of quantum radiation observed as onoluminescence, Phy.Rev.Lett.53,2772(1996)
- [13] G.H. Miley, G.Narne, M.J.Williams, J.A.Patterson, J.Nix, D.Cravens, and H. Hora, Quantitative Observation of Transmutation Products Occurring in Thin-Film Coated Microspheres During Electrolysis, Proceedings of ICCF-6, OCT. 1996, Japan, p. 629.
- [14] T. Matsuda, K. Harada, H. Kasai, O. Kamimura and A. Tomomura, Observation of Dynamic Interaction of Vortices with Pinning by Lorentz Microscopy, Science, 271, 1393(1996).
- [15] G.W. Crabtree and D.R. Nelson, Vortex Physics in High Temperature Superconductors, Physics Today, April 1997, p.32.

New Energy Technologies

PRINTED EDITION ADVERTIZING RATES

Full Page Ad

B/W - \$400
Colour - \$800

Half Page Ad

B/W - \$200
Colour - \$400

Quarter Page Ad

B/W - \$100
Colour - \$200

New Energy Technologies is distributed in the leading Scientific Laboratories in Russia and has subscribers in more than 20 countries all over the world

To advertise contact us:
Farady Labs Ltd, Phone/fax: 7-812-380-3844
<http://www.faraday.ru>, office@faraday.ru


• Fantastic Projects •

The Invention of Roman Solomyanny

Our previous issue featured an article about Roman Solomyanny who came to our office and told us amazing things. He said that during his army years (according to his words, he was in the military intelligence) he made a radio technology invention and later on built a free energy generator. The inventor claimed that his device had been working for a certain period of time without any fuel and had been producing power enough for heating and lighting his countryside house. We could not ignore such an intriguing piece of information. Moreover, Roman promised to build and present his device in 2003. We paid him for this interesting story to be published in the issue and prepared for the continuation...

Alas, to no avail... His mobile phone was silent and we started to worry about the inventor's health. Fortunately, we managed to contact his parents on his home telephone (Roman lives in St. Petersburg) and they told us that the chap was OK. It seems he's lost his interest in us. But we still hope that Roman did invent something really exciting and not only polished up his talent for writing science fiction articles. Those people, who want to know the details about this invention or discuss it with the inventor himself, can get in touch with us for his contact information. Anyway, we will be very pleased to see him again full of new exciting stories. We have already introduced the 'Humour' section into the magazine and are planning to start the 'It Just Can't Be So' section.

Editor

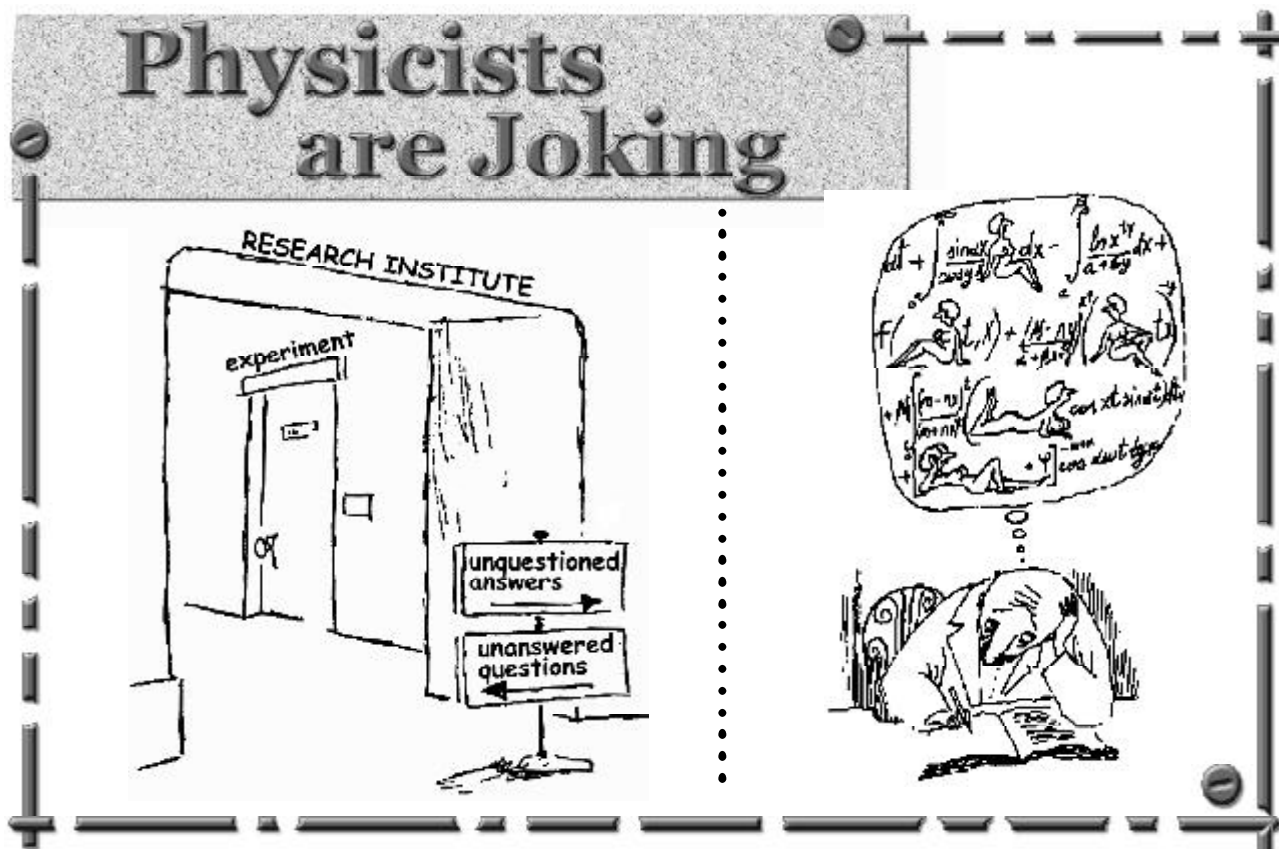

Anti-Gravity: The Holy Grail of the 21st Century

Bruce A. Smith, USA

PO Box 1676, Yelm, Washington 98597

Email: brucesmith@rainierconnect.com

A Primer on the Role of Electromagnetic, Electrostatic, and Torsion Fields in Anti-Gravity and Field-Effect Propulsion

Before visiting a University of Washington physics professor to talk about electrostatic propulsion, and hopefully anti-gravity, I realized: *Birds defy gravity. So do 747's for that matter. They apply the laws of physics and lift off the ground. That's anti-gravity, isn't it?* Yes, that's true, I suppose, in a metaphorical sense. But seagulls, jumbo jets and space crafts manifest anti-gravitation effects strictly speaking. What I want to address here is not the overcoming of gravity but the neutralizing of it.

Dr. Eugene Podkletnov, one of the foremost researchers in anti-gravity, and whose work is sought by NASA, Boeing and British Aerospace (now known as BAE Systems) describes the hunt for anti-gravity the greatest scientific quest of this century. He calls for an international effort, akin to the Manhattan Project that developed the atomic bomb, to conquer the secrets of anti-gravity, and usher in a new era of scientific understanding whose technological development will be at a scale so vast that the potential outcomes are merely hinted at by our previous achievements.

Just getting such a project off the ground will require unprecedented international cooperation, and public disclosure as well; the potentials are that vast, that scary, and that dangerous. Dr. Dan Marckus, noted British avionics expert, states in *The Hunt for Zero Point*, the seminal work-to-date on anti-gravity written by Jane's Defence Weekly aviation editor Nick Cook, that the secrets of anti-gravity in the wrong hands will make thermonuclear weapons look like firecrackers.

The secrecy surrounding anti-gravity research is phenomenal. Boeing refuses to publicly acknowledge any activity in anti-gravity development despite the fact that its competitor and sometime sub-contractor, British Aerospace (BAE Systems) is, the latter providing funds for four university research efforts as part of its Project Greenglow, one of which was a Podkletnov replication experiment headed by Dr. Clive Woods at the University of Sheffield,. Further, Nick Cook publicly, and privately to me in an email, states quite directly that George Muellner, former director of Boeing's ultra secret Phantom Works, claims Boeing sought the services of Dr. Podkletnov to unlock the secrets of his gravity-shielding research. Cook says that Muellner states Boeing was denied Podkletnov's services due to the objections of Russian officialdom, which the Russian-born Podkletnov must pay attention to, apparently, despite the fact that he works in Tampere, Finland. Dr. Podkletnov, wisely perhaps, chooses not to clarify these particulars despite our several emails.

Perhaps Boeing can deny any activity on anti-gravity because NASA is doing its own research, and as a prime contractor to NASA, such as by running the Space Shuttle Program, Boeing probably knows what NASA knows. NASA spent \$600,000 recently in its Breakthrough Propulsion Physics program (BPP) to purchase Podkletnov replication equipment. Inexplicably, that equipment sits in boxes in NASA's Marshall Research Center in Huntsville, AL, awaiting more funding; according to an email I received from NASA propulsion researcher, Ron Koczor.

But enough with this business; what do we know about anti-gravity?

The search for that answer has taken me to some exciting and obscure places in this world, like the Aeronautics and Astrophysics lab at the Seattle campus of the University of Washington. I called those folks because Nick Cook in *The Hunt for Zero Point*, mentions that UW received a NASA contract to study theories of inertia as part of its BPP program. *That's a good place to start*, I thought, but it took backtracking to BPP Project Director Marc Millis at NASA's Glenn Research Center in Cleveland to find Dr. John Cramer at the UW Physics Department. His mission was to confirm with Dr. James Woodward the latter's 1996 preliminary research into the loss of gravitational mass in a targeted piece of metal from oscillating capacitors. Although Woodward's initial data appeared encouraging, NASA's Millis told me that their funding dried up before completing their research. Furthermore, the entire BPP became unfunded in 2002 and now in 2003 has become a hazy, privatized version of its former NASA subset self.

However, UW is continuing related research, such as magnetically confined fusion energy generators and that, for me, by using electromagnetism to contain an inner field makes it a close cousin of anti-gravity and field-effect propulsion. I spoke with Professor Uri Shumlak who told me that he and other UW staff from the Department of Aeronautics and Astronautics, along with a bevy of their grad students, are building a prototype of a fusion generator called HIT, which stands for Helicity Injected Torus.

This donut ring-shaped torus encloses a roundish chamber. Within that chamber a vacuum is first created, and then a volume of hydrogen gas is introduced and heated to a few million degrees Celsius, which separates the electrons and protons from their atoms turning the whole stew into a quasi-neutral foam of plasma. Then the torus envelopes the plasma with a magnetic field to keep it away from the sides of the chamber enabling the plasma mass to stay hot, and

keep the rest of Seattle cool. (While I was standing next to his little eight foot long gizmo, Prof. Shumlak assured me there was no danger of a couple million degrees of heat escaping. The heat density of the plasma was "too low" for me to, well, break a sweat over. His quote was, "There's no more heat mass inside that chamber than what's contained in a cup of coffee." I sure hope you're right, Doc.)

Then, once the plasma field is contained, the magnetic field squeezes the plasma, fusing the nuclei of one hydrogen atom into another. As the hydrogen couples combine, a helium atom is created and a neutron is released, along with lots of energy in the form of heat. One day, such a generator will give us unlimited amounts of electricity, as the heat can produce electric voltage.

Lots of electrical power on the cheap the UW predicts; and the Department of Energy agrees, once the details of building reliable magnetic field generators are solved. What does magnetic fusion have to do with anti-gravity? Two things: first, magnets. Electromagnetism seems to be one of the major players in anti-gravity, particularly the use of electromagnetic fields to contain other fields, such as plasma fields in the HIT, or torsion fields, but more about that later. Secondly, the HIT works, or is about to. It's real and mainstream science embraces it, while anti-gravity is, well, a little more out there and reliable data is harder to obtain. So the technology of HIT lays a base that other research can build upon, such as not only containing other fields, but also building field effect propulsion systems, the most elementary of which is electrostatic propulsion, and aspects of that are already being applied by NASA.

Electrostatic propulsion uses electrical fields differently than electromagnetism does. In EM a current flows and creates a field, while in electrostatic systems the current is static and a charge builds up a field, such as in a capacitor.

These theories are utilized on NASA's Deep Space I, a probe bound for the outer reaches of our solar system. On Deep Space I, the

propellant, a tankful of xenon gas, is excited electrostatically into positive ions. The engine has a negative charge at the exit end, so the charged xenon rushes out the tail pipe with a greater thrust than if it was just using conventional chemical propellants. In fact, the electrostatic propulsion system on Deep Space I allows it to fly at 60,000 mph, or 10,000 mph faster than it would with a conventional rocket. In addition, only 82 kg of xenon is needed for its entire mission, so with its smaller mass and weight Deep Space I will fly along side its intended target, a comet, and drag race on equal footing while filming and conducting studies. Again, not anti-gravity per se, but electrically charging Deep Space I's fuel-field sets the stage for a closer look at electrostatic propulsion.

Taking that closer look is Tim Ventura and his fellow researchers at American Antigravity, an organization based in Kirkland, WA. Ventura and his crew use electrostatic asymmetrical capacitors to create a field that levitates objects, such as their small, kite-like "lifters." These lifters are very light, weighing only a few ounces, and have balsa wood struts that support the capacitors. When two capacitors of different size receive their share of a 30,000 volt charge, the lifter lifts- no motors or wings.

How, no one really knows in my judgment; and the phenomenon is replete with controversy and mystery. But as one who has seen a lifter fly, let me tell you what one looks like and what I saw when Tim Ventura's took off.

Tim has been building lifters since he was a kid and has perfected a four-foot, by-four-foot, by four foot triangular lifter which has flown so many missions in his garage that the silver aluminum foil has turned white. The thin, chopstick-like balsa wood ribs that hold the aluminum foil in place are joined every few inches by a vertical strut (much like a telephone pole on a HO model railroad set) which sticks up and secures the copper or stainless steel wire of the upper capacitor. The ribs are intersected every ten inches or so by the strut of an interior triangle, since the whole lifter is composed of interconnected isosceles triangles which give the necessary strength to the balsa wood frame. All told

there is about 30 linear feet of aluminum foil and a similar run of wire.

The lower and larger capacitor is a strip of aluminum foil stretched between the horizontal balsa wood struts. The second capacitor is a thin strip of 50 gauge wire mounted about one inch above the aluminum foil. As capacitors they store electrical charge but don't pass it on in a current.



Fig.1
Lifter

The negative lead goes to the lower aluminum foil and the positive lead is attached to the upper wire. The three corners of the lifter are tethered to the work table so that the electrical leads from the power source are not broken off in flight.

The power source kicks out 15,000 volts at 250 watts. Tim uses a voltage generator made by Information Unlimited, Inc, but before the current reaches the capacitors, the voltage is stepped up to 30,000 volts by Tim's homemade voltage multiplier stack. At full throttle the lifter is straining at the tethers, bending the balsa wood frame near the point of fracture.

Throw the switch and at around 17,500 volts the lifter begins to quiver in take-off. At the full power of 30,000 volts the lifter is roaring and a noticeable downward breeze is observed. Many physicists call it "ion wind," and say that it is how the lifters fly. But what exactly is ion wind, and can it be the cause of flight?

"Ion wind is the movement of ionized air particles," according to Ventura, "which flow downward according to electrical charge." Here's his theory:

The positively charged wire on the top part of the lifter steals elections from the surrounding air, leaving the effected air molecules positively charged. These positively charged air molecules, or ions, then head downward toward the large source of negatively charged electrons generated by the aluminum foil. These air molecule ions are bigger and heavier than the electrons seeking them, so there is a net thrust downward pushing the whole lifter up. That's the theory, and frankly all I can do to verify the theory is to tell you what others tell me. Before I do that, though, let me tell you what I experienced standing next to a levitating lifter.

In flight the lifter emits a high whining, hissing buzz, and I could feel a good breeze coming up at me from the work table underneath the lifter. Also, standing next to the lifter but not touching it, the hair on the back of my head started to rise up in electrostatic-like fashion.



Fig.2
Lifter

To analyze the air currents Tim blew baby powder at the top of the lifter. The majority of the particulate cloud was drawn into the middle area of the lifter and then sucked downward. A kind of vortex was created at

times, for intermittently I could see a cloud forming into an organized column beneath the lifter and then spreading out in 360 degrees once it hit the work table surface.

Electrostatic propulsion uses electrical fields differently than electromagnetism does. In EM a current flows and creates a field, while in electrostatic systems the current is static and a charge builds up a field, such as in a capacitor

Is that ion wind? Well, there certainly was a breeze, and it sure felt like air, but how would I know if it was ionized? Something definitely sucked the baby powder down, but was it more than just regular air blowing past me? Again, I don't know.

Is the movement of wind why lifters fly, regardless of whether it is ionic or not, or is the wind just a by-product and not the propulsion? Could the capacitors be creating a field that neutralizes gravity, allowing the craft to levitate? Or are they creating some kind of new field that is localized and the surrounding ambient field pushes this "field-bubble" up, much like a helium balloon is pushed up by the surrounding heavier air trying to fill the emptier "field" of the lighter helium?

Ventura thinks at least two phenomena are at work. Ion wind is definitely one he feels, for the breeze is self-evident. However, he thinks a second effect is at work, too, and many agree with him. Most speculation concerns what is called the Biefeld-Brown effect, the "Brown" being T. Townsend Brown, whose name is well known in early quantum research and whose work is prominently discussed in Nick Cook's *The Hunt for Zero Point*.

The Biefeld-Brown effect, according to Ventura, is the theory that high voltage, air-gapped capacitors with different or asymmetrical capacities generate a net

directional force upwards from the larger element to the smaller element, which on the lifter is from the aluminum foil to the wire. This force then pushes against the ambient energy field of the surrounding area, perhaps pushing against a more rigid energy field of the zero point energy field.

Brown apparently made his case for these electromagnetic effects, receiving patents in the 1960's for his research. NASA's Dr. Jonathan Campbell at Marshall Research Center in Huntsville confirmed to me that he also, has received a patent recently for his research into the thrust effects of asymmetrical capacitors.

Editor: By the way, this patent is meaningless from the point of view of a prime claim. Before that there had been many publications on the subject.

A.V. Frolov.

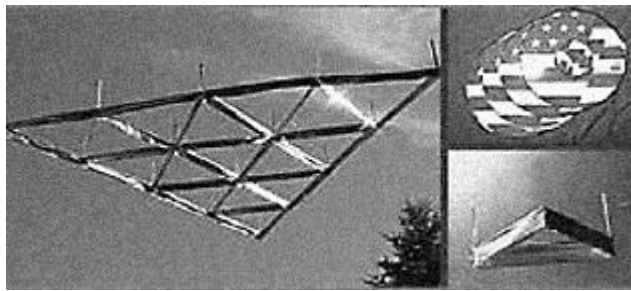


Fig.3
Lifter

However, prominent physicist Hal Puthoff, whose research is a broad swath across the fields of the 'new physics', featured in both *The Field* and *The Hunt for Zero Point*, and who was also the military's "Top Psychic" as the twelve-year director of the CIA's remote viewing squadron, has a different perspective: "I'm quite certain at this point that the so-called 'lifter' phenomena is just an electrostatic ion wind phenomena, not 'antigravity'."

But Dr. John J. Rusek, Adjunct Professor of Aeronautics and Astronautics at both Purdue University and the United States Air Force Academy, says that "Initial findings of 'classroom' experiments with lifters show ionic wind to be way too small a factor, by three orders of magnitude." Dr. Rusek has formed a technological company, Swift

Enterprises, to continue this research and bring it to the level that is "presentable to the mainstream physics community."

Along these lines, Jean-Louis Naudin shows on his extensive web site, not only how to build a lifter, but also several photos of research into the ion wind issue. Naudin's team has wrapped test lifters in plastic yet they still produce anti-gravitational effects.

Others may have a clue to the second or even a third force at work. Researcher Fran De Aquino, professor of physics at Maranhao State University in Sao Luis, Brazil, is described in the literature as showing that "bubbles of localized space-time" can exist in variance to the surrounding fields. Anecdotal experience suggests that the lifters may be undergoing such space-time anomalies.

Editor: At this point we need to interrupt the author as he has already completely confused the reader. I would recommend referring to Thomas T. Brown's patent: USA patent #3,187,206, 1965.

Alexander V. Frolov

The Hunt for Zero Point states that NASA sought the services of Dr. Eugene Podkletnov, and although their replication research languishes, *The Hunt* claims that researcher Ning Li, of Huntsville, AL is pursuing this line of research as a private contractor to NASA.

Another Huntsville operation, Transdimensional Technologies, is exploring these multi-faceted phenomena as well, and its extensive web site shows it to be a frequent contractor to NASA, including research into "asymmetrical capacitive propulsion," and capacitor-based devices to test "ion wind" forces. Jeff Cameron, of Transdimensional, is said by Ventura to be "the father of the lifter," having developed them while exploring anomalous torsional effects of high energy lasers. The lasers twisted and at the time it was considered a nuisance. But the unknown forces at work later led Cameron to found Transdimensional, develop lifter technology to a commercial level, and subsequently patent many pieces of related technology. Unfortunately, I have been unable to reach Jeff

Cameron or anyone at Transdimensional for any kind of confirmation.

Nevertheless, how would gravitons be blocked, or gravity shielded?

Dr. Hal Puthoff says there are two ways of looking at it. First, one can look at the issue from a quantum point of view, that there is a particle exchange between the gravitons and something else, and the net effect is anti-gravity. The how's and why's of that are speculative, so Puthoff turns to a classical approach for answers. He prefers looking at "engineering the vacuum." To do that one must first look at the vacuum.

As I understand it we are all in the vacuum, everything is. The "vacuum" is the matrix that contains all matter and all energy. It is the engineering perspective of the zero point energy field, or the "*Field*" as popularized by Lynn McTaggart in her masterpiece *The Field*. Puthoff shared with me statements from fellow researcher Dr. T. D. Lee that state: "The vacuum is the seat of energetic particle and field fluctuations, and ... is the seat of space-time structure ... that encodes the distribution of matter and energy.... The vacuum is energetic in its own right."

Thus energy can be drawn from the field; and spacecraft can have "vacuum propulsion systems, or propellant-less propulsion," in other words, field effect propulsion.

At any rate, more and more physicists are thinking that the vacuum can give them a whole lotta oomph, enough to propel spacecraft; and when they learn how to corral it, a whole bevy of new phenomena may be encountered, including anti-gravity. This new potpourri of research is being called by many the "new physics." And although his approach is classical, Dr. Hal Puthoff seems to be sensing what's out there waiting to be discovered.

Puthoff's current research has been to explore "the perturbation of atomic or molecular ground states, hypothesized to be equilibrium states involving dynamic radiation/absorption exchange with the vacuum fluctuations. In this model atoms or molecules ... are expected to undergo energy shifts that

would alter the spectroscopic signatures of excitations involving the ground state." Puthoff says he's had no success so far with this approach, but his words remind me of De Aquino's speculation that objects lose mass as they absorb energy. Pull energy from the field around you and you lose weight. Bingo, lift-off. **But how does one pull energy from the field?**

Editor: Some solve this problem by means of the ether density changes, which are performed with the help of vortex longitudinal-wave technologies.

A.V. Frolov

Torsion fields might play a role here according to many, and the literature on anti-gravity is filled with the phrase, "torsional effects." But what exactly is a torsion field? "It has something to do with spin," Nick Cook told me on the phone. "You have a torsion field when you spin something. Add a little electromagnetism and you might have anti-gravity." That's the short-hand version of it and here's a deeper look.

Mike Wright, resident physics expert at BeyondTheOrdinary.Net web stream radio, told me this: "When forces create curvature (such as rotation) in more than two planes, a torsion field results. Not only does the object go around, but it goes around and 'down' or 'up', and the up/down movement is an additional acceleration in that dimension. EM and gravitational fields differ by having a magnitude of force and only one direction of movement.

"A tornado is a structure of air in air. A whirlpool is a structure of water in water. So, because more than two planes are involved, objects can be created from 'nothing'; that is to say that objects can be created from the medium of the environment, such as a tornado from two air masses of differing temperature."

So spin plus movement is the key. Again, Tim Ventura is on the hunt. He demonstrated to me **that spinning magnets will cancel out their magnetic fields sufficiently so that two magnets facing each other with like poles will not push each other away if one of the magnets is rotating**

perpendicular to the force of opposition. It's not anti-gravity, but it gets us closer to the heart of the matter.

Further, Russian physicists have been researching the torsional effects of both sub-atomic particle spin, and the loss of gravitational mass in planets from the angular momentum of their orbits. Spinning makes something happen, but what? Tornadoes and Mother Nature might have a few clues.

Tornadoes spin, in a sense, although no one is Oklahoma who has spent a night in a storm shelter during an F5 event would describe the tornadoes in the night sky as *spinning*. Nevertheless, tornadoes have anomalous effects that are legendary: blades of grass stuck into mirrors, a piece of straw embedded flawlessly into a tree trunk. How? It seems as if the laws of mass, gravity and inertia are melted as winds swirl at speeds up to 300 mph in an organized vortex pattern. Is this a clue to melting the pull of gravity?

Getting information to this question has not been easy. Many scientists claim not to have even heard of torsion fields, including particle physicists at major US universities. So, again I turn to Nick Cook and The Hunt for Zero Point

Dr. Dan Marckus says that if "you generate a torsion field of sufficient magnitude the theory says you can bend the four dimensions of space around the generator. The more torsion you generate the more space you perturb. When you bend space you also bend time."

Marckus continues, "If you dipped ...one of these whirlpools ... into the zero point energy field, the seething mass of latent energy that existed on an almost undetectable level all around us [in the field would] ... react in an almost magical way by directing that energy."

The torsion field, in effect, is "a pump, a 'coupling' device that could dip into, and then direct, energy out of the zero point energy field." "But," Marckus continues, "the vortex wasn't a three-dimensional phenomena or

even a four-dimensional one. It couldn't be. For a torsion field to be able to interact with gravity and electromagnetism it had to be endowed with attributes that went beyond the three dimensions of left, right, up and down, and the fourth-dimensional time field they inhabited; something that the theorists for convenience sake labeled a fifth dimension-hyperspace."

Cook concluded that the torsion fields "bind with gravity ... to produce a levitation effect - an antigravity effect," but "it wasn't doing so in the four dimensions of this world, but somewhere else." That somewhere else is hyperspace. **So how do we activate torsion fields and enter hyperspace?**

Dr. Eugene Podkletnov may have a clue.

Podkletnov, the Russian researcher working in Finland, has studied the gravity shielding effects of superconductors. Again, Nick Cook in The Hunt, relays vital information. Cook says Podkletnov claims, "If the superconductors are rotated considerably faster than 5,000 rpm ... the disc experiences so much weight loss that it actually takes off." Thus, torsion field creates levitation. I emailed Dr. Podkletnov to find out more about this issue. He replied: "[A] fast rotating object can, under certain conditions, cause the polarization of the volume that it occupies in space and around it. This polarization causes the gravitational effect as it modifies [the] local gravity field. The vortex of the polarized particles will create a vertical thrust with a certain force and spatial momentum. Some scientists call these polarized particles gravitons. The term graviton is an artificial one and at present we are not sure if it is a wave or a particle and what type of particle. Maybe it is a usual tachyon or a superluminal neutrino (a faster-than-light-particle). Polarization of the media means that the spins of electrons, protons, neutrons and of small subatomic particles that constitute the fabric of space or vacuum would be parallel. Then a kind of gravity well is formed and the objects tend to fall into this well. We observe this picture as an object rising to the sky. Polarization of the media (of space) causes some glow around the object as it acquires additional

energy and because of it, the glow around some objects is observed."

What I understand from Dr. Podkletnov is that gravity is the effect of spin -- the spin of all subjected particles, from the sub-atomic level and up being parallel; thus they are all aligned to fall into the gravity well of earth. And spinning objects, such as his superconducting discs, when influenced additionally by an electromagnetic field, will experience a shift in the spin of the sub-atomic and atomic elements. They will be turned and not be aligned in parallel. Thus, they are able to levitate.

But how to polarize the media and get things spinning? Enter Dr. Marcus Hollingshed, an enigmatic figure allegedly from Cambridge University. Dr. Hollingshed claims to have built a six-ringed toroidal coil antigravity device, which achieved great effect using rotating magnetic fields. In January 2003 he announced on the Internet that he has developed a 160kg vehicle able to lift in excess of 2000kg and that it has both horizontal and vertical drive features. His

device cannot only go up and down and sideways, but it can push things away and pull objects to it.

In addition, the field that the device purportedly generates is capable of being broadened and weakened, or narrowed and amplified in a lensing effect, with the field producing an absolute vacuum of 2.2m spherical diameter. Best of all, when it's cranked up the core of it goes invisible, although the term Dr. Hollingshed uses is that there is a "loss of reflected light." There are no reports of independent confirmation, and Nick Cook says he hasn't been invited to see it, so, he's skeptical.

Where does this leave us? Perhaps Dr. Podkletnov's words sum up our current situation. "Modern theoretical physics cannot give you the direct answer to your questions (levitation, torsion fields, etc.,) and a scientist who would agree to give you the answer cannot be regarded seriously, softly speaking. If you had asked Dr. Einstein if he were an expert on gravity, the answer would be NO. I can repeat his words: No, I am not a magician, yet; I am still learning."



Wayne Macleod, USA

Email: dynamars2100@yahoo.ca, cwleod@shaw.ca

Gravity is the incremental slowing of time as we move closer to its source. If we imagine panes of glass stacked on top each other, one pane slightly denser than the one immediately above, a ray of light coming from above will constantly refract in a curved beam downward as it enters the stack. The same is true of a ray of light entering a gravity field. The analogy is not too far fetched because refraction is caused by a slowing of light in the denser medium. Of course, gravity affects material objects as well as light, but this is explained by every object traveling on a 'world line' in

spacetime. We can use light as in the glass example because light is its own world line.

Why the world lines of objects take the paths they do can best be understood by compressing our normal 3 dimensional space into 2 dimensions, length and height only. When we throw a stone into the air it rises and falls in a parabolic arc in these two space dimensions. That path in space is a complete mystery until we consider another dimension, time, a dimension we can imagine measured at a right angle to the plane of the 2 space

energy and because of it, the glow around some objects is observed."

What I understand from Dr. Podkletnov is that gravity is the effect of spin -- the spin of all subjected particles, from the sub-atomic level and up being parallel; thus they are all aligned to fall into the gravity well of earth. And spinning objects, such as his superconducting discs, when influenced additionally by an electromagnetic field, will experience a shift in the spin of the sub-atomic and atomic elements. They will be turned and not be aligned in parallel. Thus, they are able to levitate.

But how to polarize the media and get things spinning? Enter Dr. Marcus Hollingshed, an enigmatic figure allegedly from Cambridge University. Dr. Hollingshed claims to have built a six-ringed toroidal coil antigravity device, which achieved great effect using rotating magnetic fields. In January 2003 he announced on the Internet that he has developed a 160kg vehicle able to lift in excess of 2000kg and that it has both horizontal and vertical drive features. His

device cannot only go up and down and sideways, but it can push things away and pull objects to it.

In addition, the field that the device purportedly generates is capable of being broadened and weakened, or narrowed and amplified in a lensing effect, with the field producing an absolute vacuum of 2.2m spherical diameter. Best of all, when it's cranked up the core of it goes invisible, although the term Dr. Hollingshed uses is that there is a "loss of reflected light." There are no reports of independent confirmation, and Nick Cook says he hasn't been invited to see it, so, he's skeptical.

Where does this leave us? Perhaps Dr. Podkletnov's words sum up our current situation. "Modern theoretical physics cannot give you the direct answer to your questions (levitation, torsion fields, etc.,) and a scientist who would agree to give you the answer cannot be regarded seriously, softly speaking. If you had asked Dr. Einstein if he were an expert on gravity, the answer would be NO. I can repeat his words: No, I am not a magician, yet; I am still learning."



Wayne Macleod, USA

Email: dynamars2100@yahoo.ca, cwleod@shaw.ca

Gravity is the incremental slowing of time as we move closer to its source. If we imagine panes of glass stacked on top each other, one pane slightly denser than the one immediately above, a ray of light coming from above will constantly refract in a curved beam downward as it enters the stack. The same is true of a ray of light entering a gravity field. The analogy is not too far fetched because refraction is caused by a slowing of light in the denser medium. Of course, gravity affects material objects as well as light, but this is explained by every object traveling on a 'world line' in

spacetime. We can use light as in the glass example because light is its own world line.

Why the world lines of objects take the paths they do can best be understood by compressing our normal 3 dimensional space into 2 dimensions, length and height only. When we throw a stone into the air it rises and falls in a parabolic arc in these two space dimensions. That path in space is a complete mystery until we consider another dimension, time, a dimension we can imagine measured at a right angle to the plane of the 2 space

dimensions. By multiplying the time of the object in flight by the speed of light, we have a three-dimensional coordinate system, not of space but of spacetime. We can then graph the world line of the object. So why does the object fall? It is because spacetime near massive bodies is curved. A remarkable fact is that the curved world lines of all objects in the same gravity field, whether of a thrown ball or fired bullet, have the same radius of curvature. Hence all objects fall with the same acceleration.

To neutralize gravity we must somehow 'straighten' the world lines of objects traveling in curved spacetime. It would be as if we had in our stack of glass panes a bubble, around which the density of glass became less on approach to the bubble. Then the ray of light, when close to the bubble, would refract opposite to the path it would normally take when traveling through the rest of the glass. Similarly, if we could manufacture a 'time bubble' in a gravity field opposite to the time slowing known as gravity, we would have any object embedded in the time bubble isolated from that gravity field.

The Electrical Levitation theory can best be understood by first considering an analogy. Let us imagine a wheel spinning on an arm like a child's propeller toy. The arm also rotates, in a direction opposite to the spinning wheel. We consider the rate of spinning of the wheel from the point-of-view of two observers, one observer stationary on the ground, the other observer rotating with the arm. Obviously the two observers will not see the same rate of spinning on the wheel. Because the arm is rotating opposite the spin of the wheel, its rotation must be subtracted from the rate of wheel spin as seen by the stationary ground observer. This is not true of the observer rotating with the arm, who will see the spin of the wheel as if there were no arm rotation.

The concept is easier to envision with linear motion, such as of a man throwing a ball on a moving train. The velocity of the ball seen by the pitcher on the train will not be the same as its velocity seen by a stationary observer on the ground. As the stationary observer sees it, that velocity will have the train's velocity

subtracted from it if thrown against the train's velocity. It is the same with rotary motion: the velocity of the wheel for the stationary observer is slower because the arm's rotation is subtracted from it.

But suppose the wheel rotation is *the same* for the two observers! Something must be different between them, and that is time. As explained by Special Relativity for linear motion, time is not a universal constant; it differs between observers depending on their relative motion. The property of nature that is constant, that produces this relative time difference, is the speed of light. So we must look for a similar constant in nature for a relative time difference between observers in our rotary example. We have one in electron angular momentum, known as electron "spin," $\hbar/4\pi = 5.28 \times 10^{-35} \text{ kg-m}^2/\text{sec}$, where $\hbar$ is Planck's constant. Like the speed of light, this quantity is constant for all observers, whether the observer is on a rotating system or stationary on the ground. Here is the tool for producing our time 'bubble'.

Let us now imagine a series of concentric rings, all rotating in the same plane and in the same direction. Electric current is pushed through these rings in the same direction as the ring rotation. (Current here is considered the flow of electrons, not conventional positive current.) The rotating rings are sandwiched between two magnetic plates, the function of which is to maintain the angular momentum of the current electrons oriented properly with ring rotation.

Analogous to the above example, each electron takes the place of the spinning wheel and the rotating arm is replaced by the rings. Thus, because electron angular momentum is a universal constant, an observer of the electrons in this rotating system will not have the same time as a stationary observer outside it. If each current electron has its "spin" oriented opposite the rotation of the rings, time on the rotating system would run faster than for a stationary ground observer, the same as in empty space relative to the Earth. The rotating system would therefore have the world line of empty space, not that of the

gravity field. Its spacetime would not be curved. Since gravity is a time phenomenon, such a system in a gravity field could not have the behavior of a normal object. This conclusion may seem erroneous considering that ring rotation could never reach relativistically significant velocities, but we have an analogy with magnetism that is caused by a Lorentz contraction of the distance between moving electrons. If we considered the diminutive drift velocity of electrons alone we would never conclude that magnetism was possible, but the effect is *accumulative* over trillions of electrons. The hypothesis here is that the same is possible with the trillions of free electrons oriented with a spinning ring, to produce an accumulative time effect.

We now come to the controversial part of this theory because the above treats electron angular momentum the same as angular momentum of a normal physical object, whereas the electron is a quantum particle and quantum particles have their own realities with bizarre consequences when analogized with our macro universe. For instance, the electron has quantum spin number $1/2$, and such a particle would have 720 degrees in one rotation, not 360. Nevertheless, the electron *does possess* dipole magnetism. It *does behave* as a spinning ball with negative charge. Electrical Levitation is therefore an empirical theory. The property of the electron that gives electron di-pole magnetism cannot be an actual physical rotation, but whatever that quantum property, if it produces di-pole magnetism there is reason to expect it to produce other macro physical phenomena as if it were.

The theoretical finding of General Relativity that time runs slower in a gravitational field was confirmed by the Pound-Rebka experiment in 1959. **It is not that gravity causes time slowing, gravity is time slowing.** Since time and energy are reciprocal, more time on our rotating ring system would mean less energy seen by an observer in that frame of reference than seen by a stationary observer on the ground, the opposite of the red shift of a gravity field. This

energy difference must equal the energy of the mass in a gravity field that is to be levitated, its energy of weight, and lost. Experimenters should therefore be aware that their device might radiate. But this is not a free energy machine. The energy of levitation comes from its magnetic field, and the electron magnetic moment energy turns out to be $V_e = mc^2$ divided by the electrical current, m is the mass to be levitated and c is the speed of light. This is an enormous amount, but becomes practical if enough electrical current can be sent through the rings. That means the electrical resistance of the ring material must be very low. For copper it is not. No material currently exists with sufficiently low electrical resistance at room temperatures, but **superconducting materials** exist that at cryogenic temperatures experience a dramatic loss of electrical resistance.

An experimental device can therefore be envisioned using a superconducting disc substituting for the electric rings. The disc would serve as a conductor for an electric current and would therefore need to be sliced along one radius with an insulator placed in the notch. Both edges of the notch would be connected to a power source by brushes rotating with the disc. With a counterclockwise disc rotation as seen from the top, to have clockwise electron "spin" the magnetic field between the plates would have to be up. Only the moving free electrons of the current will be available for any time alteration effect. These will also **produce a magnetic field, which it is reasonable to assume would be of the same time alteration effect as the electrons, thus producing the required alternate time "bubble"**.

The resources required for an experiment using superconducting material at cryogenic temperatures are beyond this writer's means and an experiment has not been attempted, but an experiment at the Tampere University, Finland, 1992, using a superconducting disc suggests that gravity shielding is possible. Owing to the immense advantages gravitational shielding would give to the present interest in space exploration, effort toward its development would be logical. This essay may offer clues on how to begin.

Editor: I find the article by Wane McLeod quite interesting as his approach is very similar to the idea I first presented in my report at the "Space, Time and Gravitation" Conference which took place in St. Petersburg in 1998. The report was included into The Proceedings of the Conference, Part I, 1999. Before that the brief version of the article was published in English in the 'ELECTRIC SPACECRAFT' magazine, Leicester, North Carolina 28748 USA, Issue 27, 1997 p.30-31.

I managed to demonstrate that the ideas of Thomas T. Brown, especially his USA patent # 3,187,206 of 1965, are something more than just the force asymmetry in the electric capacitor. According to the concept presented in my report, by creating a matter property gradient (in particular, the dielectric permittivity gradient) we actually change the curvature of the electric force line in space. Normally, the natural space curvature accounts for the electric field potential decrease with the distance increase from the surface of the charged object. By creating the dielectric permittivity gradient (described by T.T. Brown in his patent of 1965) we change the natural distance potential gradient law. We can both increase and decrease this change and even reverse it. With the dielectric permittivity change square function, the natural space curvature is completely compensated and with more extent it is reversed and can be turned to negative. At that rate, the potential is not decreased but increased with the increase of the distance from the surface of the charged object. This is the essence of my concept that has never been considered before by any author. By creating the gradient described by the quartic function we get the same distance potential gradient law as in the natural conditions only with a different sign!

T.T. Brown, who discovered a force in capacitors with a special dielectric, offered the practical application of this concept.

However, he did not find the source of this force, which, according to my concept, is conditioned by two factors: the corresponding dielectric property gradient function and the elastic properties of the dielectric material, which is of no less significance. Normally, dielectric particles are attracted to the charged surface but when the reversion of the curvature of electric field force lines occurs, they are repulsed from it and we can use this propulsion force. Elastic deformations (including those occurring during the pulsating operation of the field) account for the reaction forces equivalent to the generated propulsion force. Thus, the momentum conservation law is in action, however, the device is still moving.

T.T. Brown also considered other ways of generating a force, such as the material magnetic property gradient. Logically, by analogy with the electric field we can consider the gravity field, which can be "designed" and "reversed" by means of creating a matter with the density gradient. At that rate, the gravity potential must change in accordance with a certain law when the distance from the gravity field source being increased.

We should also note that the local space volume levitation effect with the accelerated or decelerated time rate was first described in my articles "Physical Principles of the Time Machine", NET #3 (6), May-June 2002 and "Practical Application of the Time Rate Control (TRC) Theory", NET #3, November-December 2001.

Our company conducts experimental researches on creating new materials that possess the properties described. We are interested in serious business contacts with companies in the aerospace industry to further discuss eventual cooperation projects in this field, including *co-patenting*.

Alexander V. Frolov

Perpetuum Mobile Not in the Past but at the Present

Vladimir I. Likhachev, Russia

Krasnodarskaya str., 38/20-34, Moscow, 109386

In several issues of the "Nature and man. Light" magazine in 1995-97 my colleague E. Oparin and I wrote on the unscientific character of absolutizing the law of degradation of energy, on the important issue of creating the perpetuum mobile of the second kind utilizing infinitely available *environmental heat energy*. We even send a letter to Yuri S. Osipov, the Russian Science academy President, but received no reply. Notwithstanding many official discussions, there are no well-reasoned objections to our arguments or proof on the part of "high" official science, because, in fact, we are right.

I have recently received one more confirmation: bright and feasible data on the negentropy cycle (the cycle with spontaneous reduction of entropy) with a chemically active working substance that will be described later.

After the publication of Victor M. Brodyansky's book "Perpetuum Mobile in the Past and at Present. From Utopia to Science and from Science to Utopia", Second Edition, one can not but return to these issues. More so because the foreword of V.A. Fabricant, member of the USSR Academy of Pedagogical Sciences, claims the law of degradation of energy to be the "law of nature" and supports shamefully the deformation of the monothermists, especially P.K. Oschepkov, by academicians P. Kapitsa, L. Artsimovich and I. Tamm ("Pravda" of November 22, 1959), followed by E. Velikhov, A. Prokhorov and V. Sagdeyev ("Pravda" of June 22, 1987).

After the publication of Brodyansky's book I met the author several times (notably at a special seminar in The Moscow Energy Institute) and expressed my opinion about his book: the book avoids serious discussion

of the monothermists, stresses their failures which are quite normal in the initial development of perpetuum mobiles of the second kind.

For example, Brodyansky knew about Tsiolkovsky's discovery. Guay's book "On the Little-Known Hypothesis of Tsiolkovsky" is listed among the First Edition references. But Vladimir Brodyansky avoided analyzing this discovery both "in the past" and "at present". The Second Edition references even list the "Physical Thought in Russia" magazine, issue #1 of 1991, that contained for the first and only time the modern edition of the "Law of Degrading of Energy" by Tsiolkovsky. "At present" V. Brodyansky knows my analysis of Boltzman's mistakes but he paid no scientific attention to my analysis either.

In Brodyansky's book the description level of chemical reaction cycles is even lower than that of Schpilrine. Schpilrine at least tried to present his arguments but here we see unsupported statements "justified" by the phrase "the detailed discussion would take too much space". Vladimir Brodyansky's analysis of anti-Stokes luminescence (pp.216-219) is also superficial. Dissipative and entropy processes prevail in it. But if there is evidence supporting higher frequency quanta than the frequency of radiating flux, **it is the evidence of negative entropy**. Vladimir Brodyansky not only is familiar with it and also shows it by the example of investigating the Sun and the Earth (p.247).

Vladimir Brodyansky's analysis of Rank's tube (pp.235-237) displays the same tendency. In the Rank's tube the dissipative processes also prevail. Its effectiveness as a refrigerator is lower than in the traditional schemes.

But one can not deny the existence of negentropy processes in it. It is these processes that "originate" the cold gas flow. And Brodyansky's "origination" on p.236 "The vortex tube in fact divides the coming gas into two fluxes: heated and refrigerated" - is totally false. That can be performed only by "Maxwell's demon" that does not exist in substance.

The refrigerated flux in the Rank's tube is formed by the "Tsiolkovsky's flux" by way of heat transfer "from cold to hot", from the tube center to its circumference by **centrifugal accelerations**. On its basis (to be more exact, on the basis of Finko's tube) the perpetuum mobile of the second kind can be created. And we have this engineering solution. E. Oparin and I made the corresponding patent application for an invention but the Federal Institute of Industrial Property again refused to consider such applications. Here one can see similarity with the causes of re-edition of Vladimir Brodyansky's book. And one need not be a big politician to admit the reality and understand the sources.

Environmental and, especially, anti-nuclear movement is invincibly expanding. Danger to human life and threat of ecological catastrophe are quite real. The Second Edition of Brodyansky's book protects

behind scientific arguments those who use Russia as a source of easy money and then flee.

But we like our country - vast and austere. This austerity and space form REAL PEOPLE and support humanity and materialistic humanism of the energetic and talented, not just the rich.

In modern Russia the powerfully spread alcoholism, debauchery and drugs are the instruments of slavery. But the monothermy and development of alternative power engineering will become basis for Russia's revival and unprecedented prosperity.

Russians learn slowly, sometimes, very slowly, even disgracefully slowly. But we will learn. And then no one will stop us. The following tips are meant for those who are ready to risk their efforts and facilities in order to build alternative energy knowledge base: dissipative and negentropy processes are inseparable and very often their mechanism is the same. In our environment the dissipative processes are more effective and hide the negentropy ones. No dissipative process combination can generate the negentropy cycle. Look for examples in Brodyansky's book. To create the negentropy cycle and use the environmental energy at least one negentropy process is required that has effectiveness and negentropy exceeding entropy growth at all levels of the cycle.

News from "IntAlek" Company

William Alek [alekws@intalek.com] has updated the latest and greatest ZPOD system drawings:

http://www.intalek.com/Index/Projects/SmartPAK/Projects/ZPOD/ZPOD_System05.pdf

This is release 5.0

Here is the latest electrical schematic: http://www.intalek.com/ZPOD/ZPOD_System05.gif

Based upon his "preliminary" tests thus far, he estimates the COP is around 2.0. This estimate is interpreted from the following scope traces:

<http://www.intalek.com/ZPOD/in.GIF>

Alan Francoeur's Generator Canada

Alan L Francoeur, Canada

Email: alf@shaw.ca

This is my writing and development about the Interference disc generator, and the permanent magnet dynamo machine, and other related inventions. I have always been intrigued with electricity and magnetism and aetheric energies starting at a young age. Back in 1980 I wanted to do something to help get my large vehicles better fuel economy. With this goal in mind, I experimented and designed my first heat

exchanger vaporizer system to do my part to clean up our cars and trucks, fig. 1, 2, and 3 are two earlier vaporizer units under construction. For more information about this fuel system, please refer to my vaporizer fuel system report. The main body of this writing is referring the permanent magnet dynamo system that has been in the making since 1987, starting after the development of the interference disc generator.



Fig. 1



Fig. 2



Fig. 3

I invented the Interference Disc generator concept while I was employed at Giant Yellowknife Mines NWT from 1983 to early 1986. The idea of using metal blocking plates to shield magnetic fields stirred in my mind while working around heavy electrical mining equipment, and 1000hp and other electric motors with exposed coils that have heavy metal around the outer casing. I did a search at the time and found John Ecklin's work very interesting with his application of the shielding effect. During my off time in Yellowknife, I was experimenting with the interesting effect of producing induction with a stationary coil mounted beside a stationary magnet with a small air gap maintained between the magnet and the coil. During the construction of my first disc machine, I called it the Interference Shielding effect because of

the interference the blocking disc does to cause induction, thus the Interference Disc Generator fits the description. The first transformer coils I used to test the interference shielding effect were used from old radios, and the magnets were alnico types. Back in 1986 in Calgary Alberta, a friend Bud Johnson and I constructed the first test disc generator model using alnico magnets, fig. 4, and later ceramic magnets were installed. Months later I designed and began construction of another larger Interference Disc machine with horseshoe shape neodymium 35 grade magnets mounted on the outside, and with the N and S magnetic poles facing toward the coils in the center portion of the machine. The coils and magnets in this larger machine are mounted in reverse of the first Interference Disc generator, fig. 5, 6.



Fig. 4

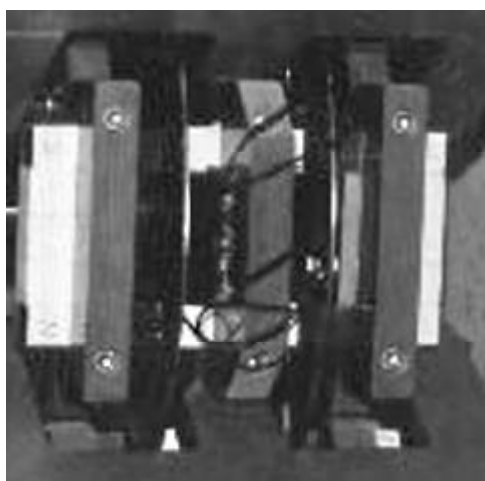


Fig. 5

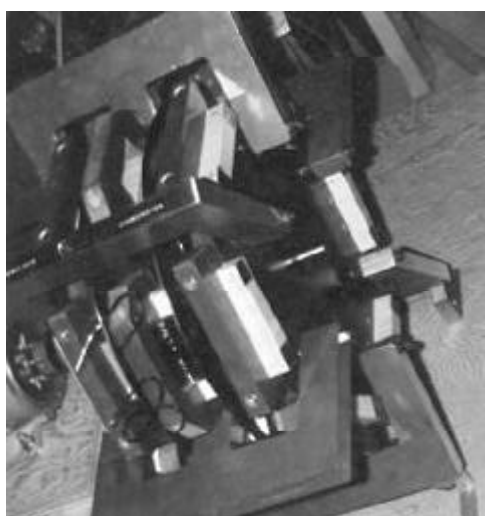


Fig. 6

General description of the interference disc generator

The Interference Disc electrical generator is made of a stator (114) consisting of an array of even number parallel mounted bar magnets (112) arranged and supported (114) in a circular fashion equidistant from each other, where the polarity of the magnets (112) are alternating when viewed at either end. Fig. 7

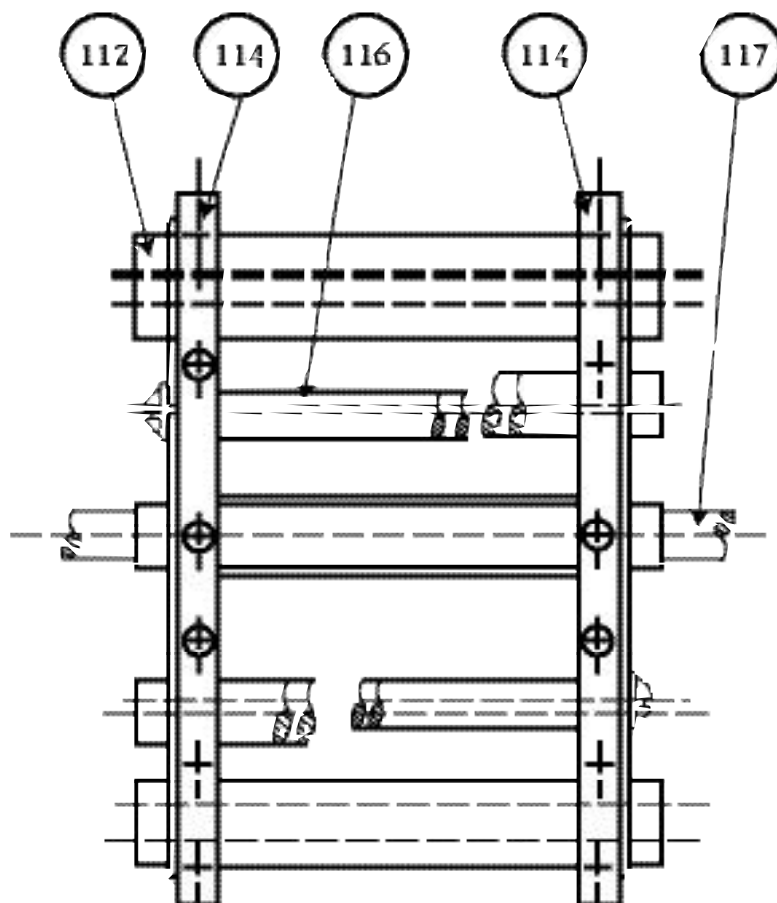


Fig. 7
Magnetic bars assembly (rotor)

Also in the stator fig. 8, (102) there are twice the number of coils (111) as bar magnets (112) wound in pairs on U-shaped cores (110). One half of the coil pairs mounted at one end of the bar magnets (112) in the same circular fashion, each corresponding to and aligned opposite to a pair of bar magnets (112) and separated from it by an air gap. On the other end of this pair of bar magnets (112) there are another set of coils (111) aligned likewise.

The rotor is made of two magnetically susceptible circular plates (109A or 109B) (such as iron or steel) Fig. 9, centrally mounted on an axle (107) fig. 7, which is in respect to the array of magnets and coils Fig. 9a.

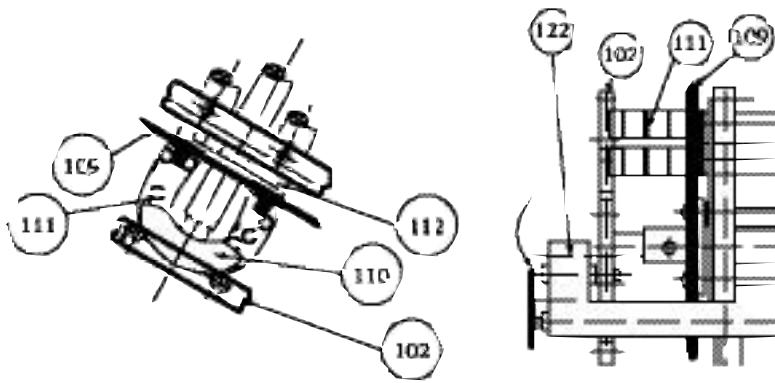


Fig. 8

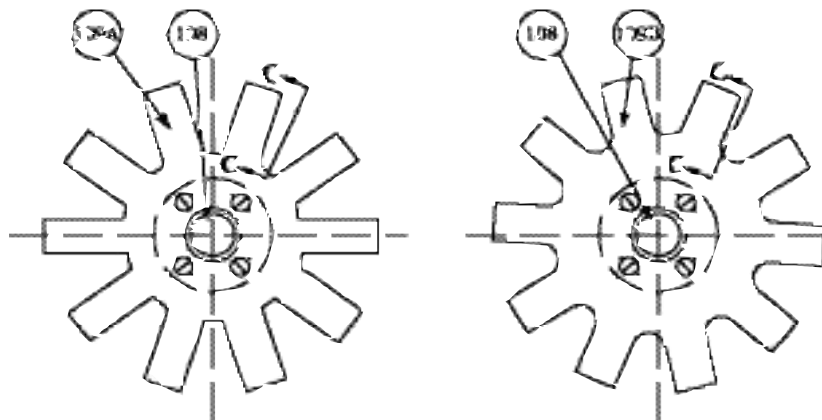


Fig. 9

The interference discs (109A or 109B) are separated from each other so that they can rotate in the airgaps between the magnets (112) and the coils (111). The interference discs (109A or 109B) have a number of **equidistant opening, either more or less in number than the number of the bar magnets (112).**

The arrangement and size of the openings are such that when the discs (109A or 109B) are rotated by an outside motive force, they open the magnetic field between adjacent bar magnets (112), and the opposing coils (111) at both ends of the stator (114) simultaneously. Hence inducing an alternating electric current in the stationary coils (111) fig. 10.

By opening and closing the magnetic influx to the core (110) of the coils (111), an alternating current will be generated in the coils

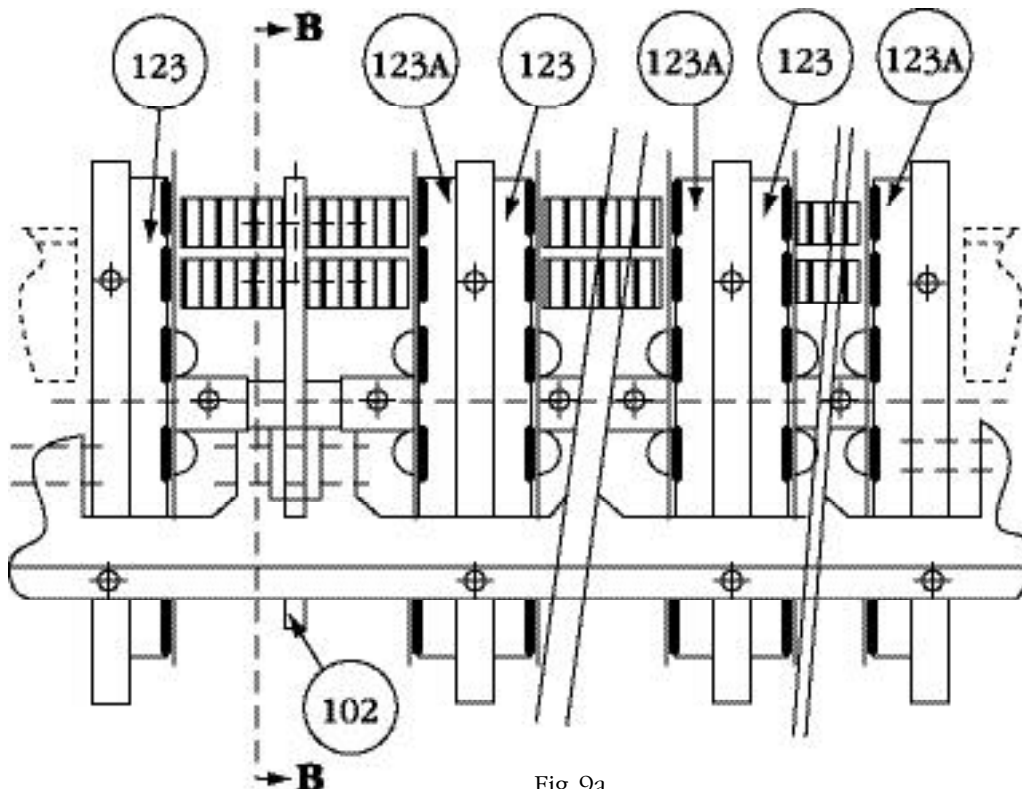


Fig. 9a

Magnetic bars assembly (stator)
Option II: multable magnetic coil-disk assembly

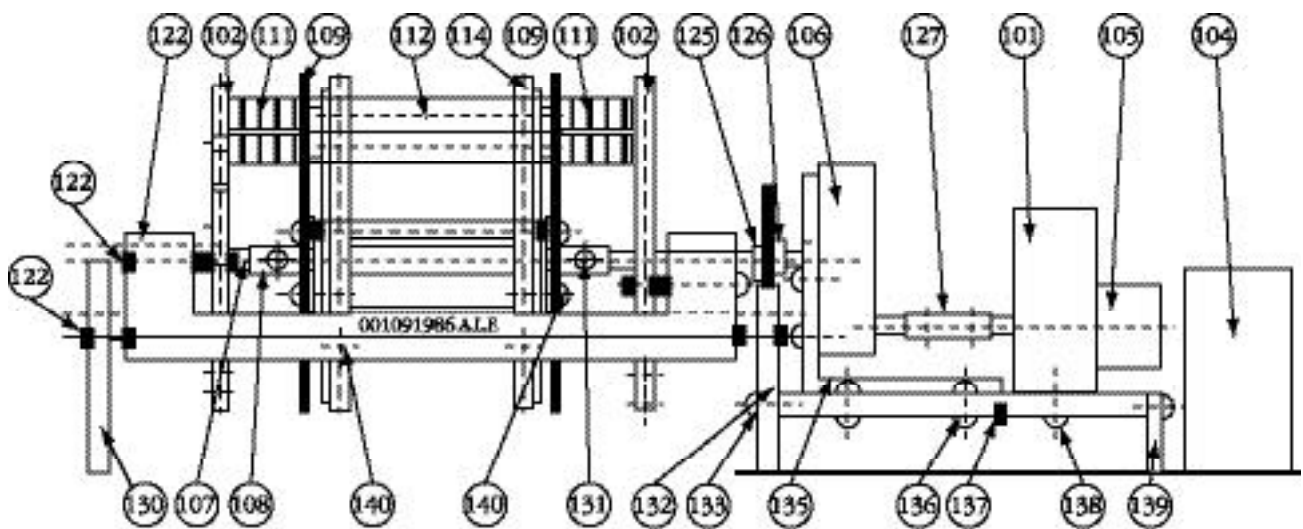


Fig. 10

(111) in a retro-order to the rotational direction of the interference discs (109A or 109B). Depending on the number of magnet-coil assemblies three phase AC current can be obtained. The regulation and attenuation of these currents can be achieved by known electric engineering methods (Fig. 10).

The efficiency of the unit would vary greatly depending on the speed of rotation, the width of the air gap, the strength of the magnets, and the materials used to construct the coils. I used nickel base amorphous metglass in the coils in both the smaller and larger machines, which as a result, shows greater efficiency as compared to conventional core laminates. Less energy is needed to spin the balanced disc rotor while causing a larger moving magnetic field to cause induction in the stationary coils. With this effect, it is easy to visualize the advantages this design has over conventional generators and motors. New testing of the coils will be conducted after the machine goes through all the upgrades to eliminate the problems with the warping interference discs.

The Interference Discs Generator described in this document **has the potential to produce more than unity effects** by easy turning of a magnetically balanced (non-warping) interference disc. Optimizing the device with closer tolerances and correctly selected materials and incorporating internal magnetic balancing, will add to the success

and improved performance of this unique generator design.

Improvements can be made with this design while the operating principal remains the same. Looking at the photographs included you will see the 1st proof of concept generator frame is constructed mainly from aluminum, this metal was used only because it was inexpensive material and easy to work with fig. 11. Non magnetic and non-conductive materials should be used to construct the generator frame supports to eliminate the eddy current losses. All of the nuts and bolts used to hold the disc generators together worked well for making the test machines capable to have adjustable air gaps, however, they can all be eliminated with design changes that preset the gaps and tolerances to optimize the conditions of the interference disc effect.

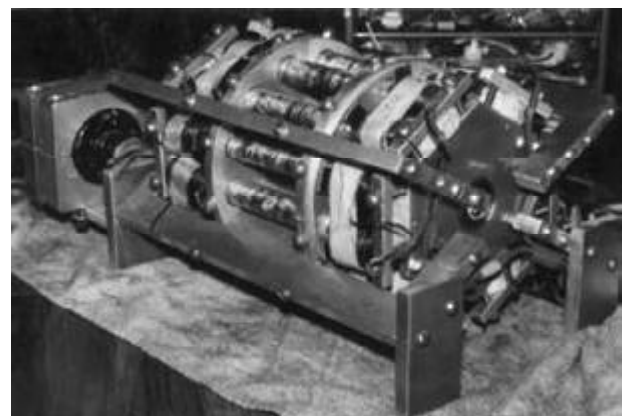


Fig. 11

Many improvements were adopted in the next larger #2 version of the Interference Disc generator fig. 12. Phanolic materials (non conductive and non magnetic) were used in the frame supporting the magnets and the coils, thus eliminating eddy current losses within the frame support. Large aluminum E bars were used to support the magnet frame support and the coil frame support with no noticeable eddy current losses. The aluminum used is positioned further away from the coils and magnets in the larger generator so as not to be affected by the magnets. Larger more powerful neodymium magnets and I shaped transformer coils were installed and tested in the larger machine which showed an increase in output power over the 1st machine fig. 13. Using more powerful neodymium magnets in this larger disc machine created some problems with the interference discs. Not only did they warp the discs they caused them to vibrate and chatter causing the fins to hit the magnets and the coils. I increased the air gap to over half an inch and moved the disc further away from the magnets to prevent damage. The effect was a reduction of magnetic flux reaching the coils that reduced the power output. The discs must be constructed much stronger and rigid if using neodymium magnet grade 35 or greater, then the air gap can be closed so more magnetic flux will reach the coils allowing for a greater electrical output.

The wiring of the coils circuit can be constructed by known engineering methods to achieve AC or DC power, and like any conventional transformer, wind the coils with heavy wire for more amps and more turns for more volts. The coils are stationary in this machine which makes it easy to harness AC power directly from the coils without brushes. All coils that are in phase can be wired in series or

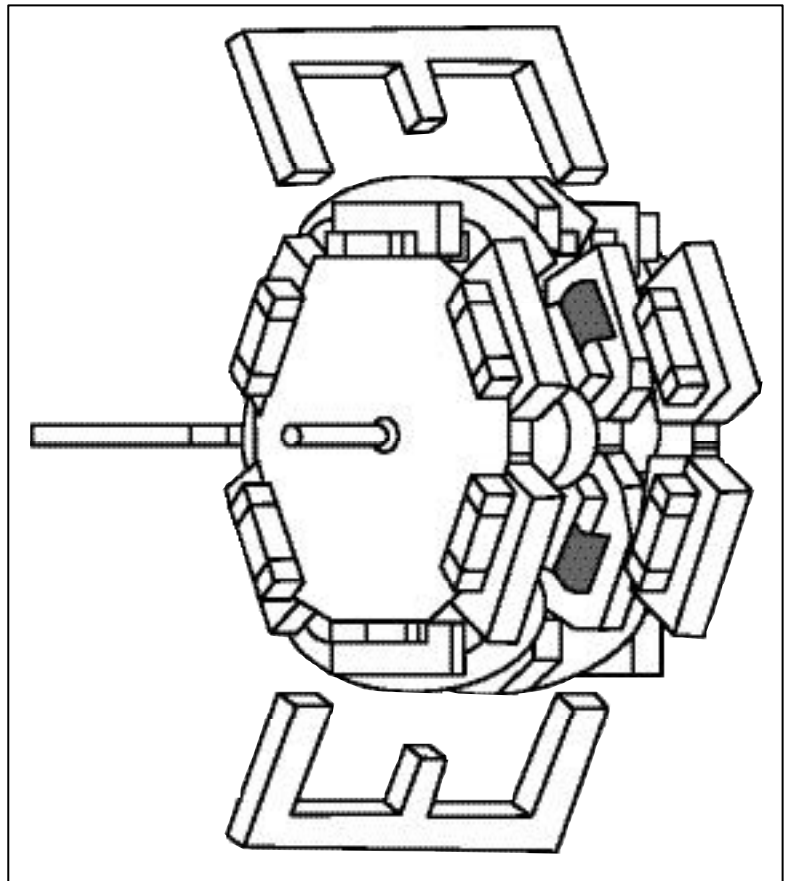


Fig. 12

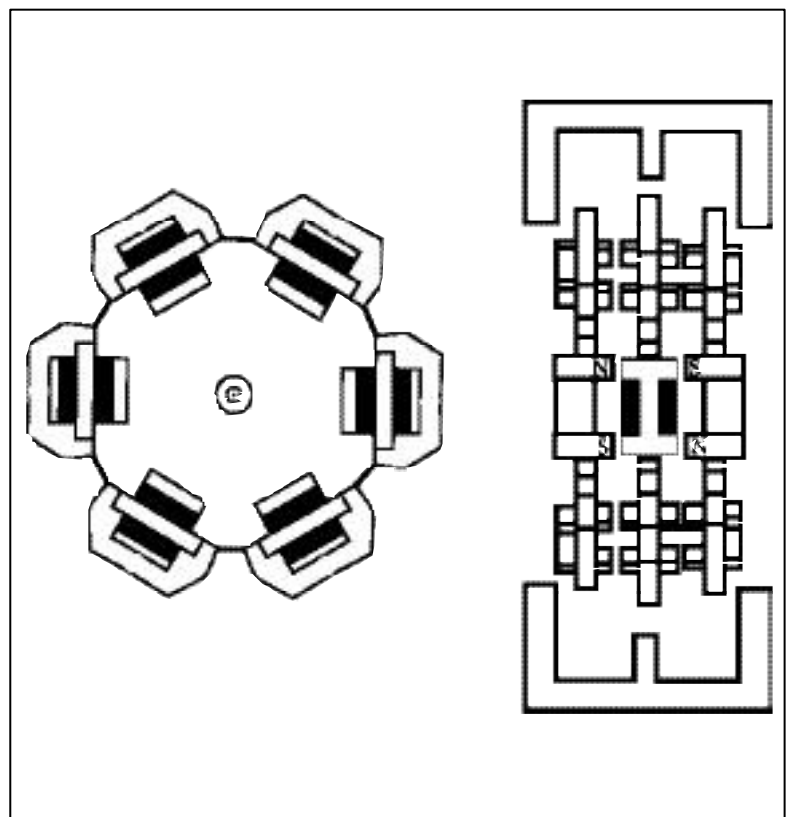


Fig. 13

parallel, the number of the blocking plates on the interference disc determines the phasing of the coils.

The diagram in fig. 14, 14a shows the path of the magnetic flux movement in relation to the position of the blocking plates of the interference disc. The magnetic field in the core/coil is switching polarity as the interference disc fins alternately moves in and out of the air gaps on each side of the coil. As you can see, depending on the position of the disc, positive and negative induction takes place for AC output of the coils. John Ecklin has achieved this effect using rotating blocking plates. I have achieved the same effect using balanced rotating interference discs with multiple stacks of isolated coils and poles mounted in a circle equal distance from each other.

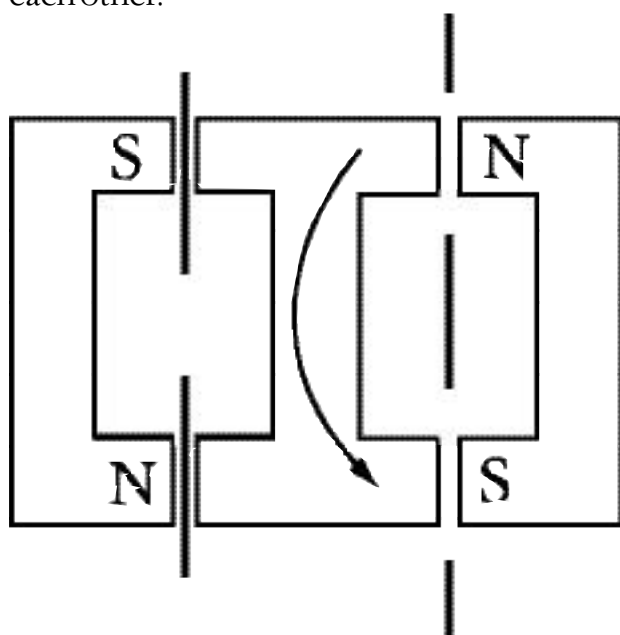


Fig. 14

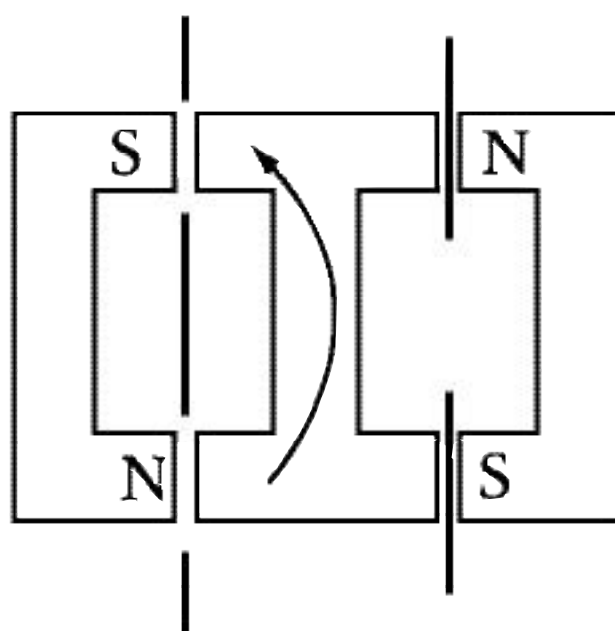


Fig.14a

The effect I reproduced with Gary Wesley's permanent magnet motor is related to the Interference Disc generator in the fact that blocking plates are used to shield the magnetic field, only we differ on methods to balance the blocking shields. Gary Wesley used springs to carefully balance the blocking plate, and I used a different number of interference fins working with the magnets to balance the blocking plates. The magnets in my Interference Disc machine become the springs.

More photos of both Interference Disc machines are shown in fig.15, 15a and 15b below.

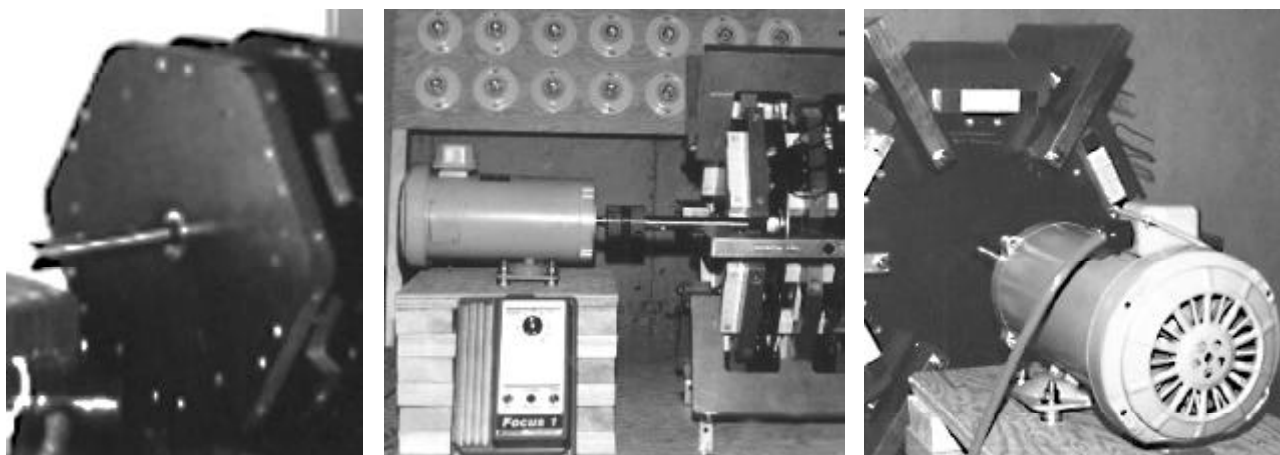


Fig. 15

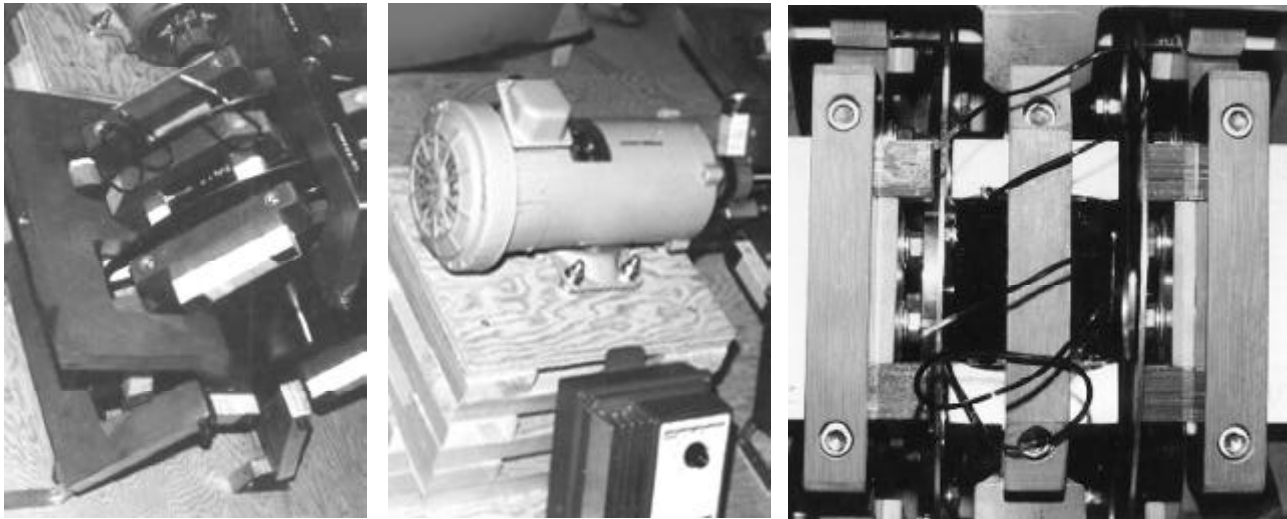


Fig. 15a

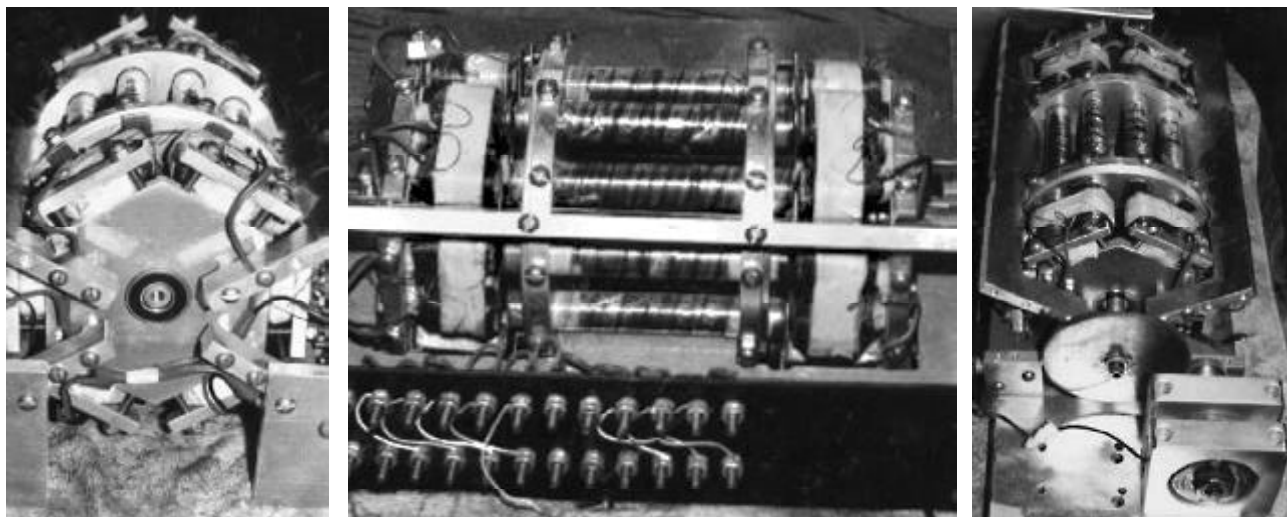


Fig. 15b

Closing comments on the disc generator

In closing this discussion of the Interference disc generator, I would like to go over and point out some of the concepts that I incorporated into the design of my permanent magnet dynamo.

As I made further progress and completed the later stages of the Interference disc generator, it became clear to me to use certain concepts of the machine and incorporate them into the design of my multiphase permanent magnet dynamo. Some of these concepts are explained here.

I have constructed several interference discs that have a different number of blocking

shields, some with 10 blocking fins and some with 11 blocking fins and others with 12 blocking fins. They are all interchangeable on the machine to change the phase relations between all the isolated coils. The 12 finned disc will produce a single-phase dynamo with all the coils in phase, and the 10 finned disc on the machine will produce a three phase dynamo. One phase represents four groups of isolated coils, and the second phase represent the other four coils, and the four coils left are the third phase, for a total of twelve coils. All just by changing the number of fins on the interference disc and or adding more layers. Using 12 magnet poles and the 10 or 11 interference fins on the disc, the rotor discs becomes magnetically balanced and easy to rotate in spite of the load on the coils. The 12 finned disc has a larger holding force because

of the same number of fins as magnetic poles. However, it can be reduced to almost nil by adding more layers of interference disc and balance them against each other. Many in phase coils can then be added in series or in parallel to build your power levels to any desired potential.

Both machines have stationary coils, and the disc generator has 12 magnetic poles (6N and 6S), and the permanent magnet dynamo also has 12 magnetic poles (6N and 6S). The disc generator uses 10 or more fins on the interference shielding plate per rotor, and the permanent magnet dynamo has 10 or more coils around each rotor. There is the same number of interference blocking plates as there are induction coils on each of the two difference machines and the number of blocking fins and or coils are interchangeable. The back emf effects are different on both machines, the Interference disc generator demonstrates easy turning of the discs while the stationary coils are loaded, and when producing alternating current the permanent magnet dynamo rotor slows down when a load is placed on the stationary coils. Both machines produce AC power out of the coils and the Interference Disc generator has a closed magnetic circuit through the coils, and the permanent magnet dynamo has open magnetic circuit through the coils.

The Permanent Magnet Dynamo

I would like to begin this topic at this point by describing my permanent magnet dynamo machine.

I designed this machine to be completely interchangeable into

many different motor generator combinations. These combinations involve different number of magnetic poles and different number of interchangeable coil poles in the same machine, two versions are possible, one with isolated coils and another with the coils that share a common core fig. 16.

We can change the magnetically balancing effect (*holding force*) by changing the number of coil poles or (*interference disc fins*) in relation to the magnetic poles. This turns the machine into a multipurpose, multiphase, variable output, and variable frequency ac dc permanent magnet motor generator system. I first designed this unique multi purpose dynamo in 1987 after I built my third Interference Disc generator.

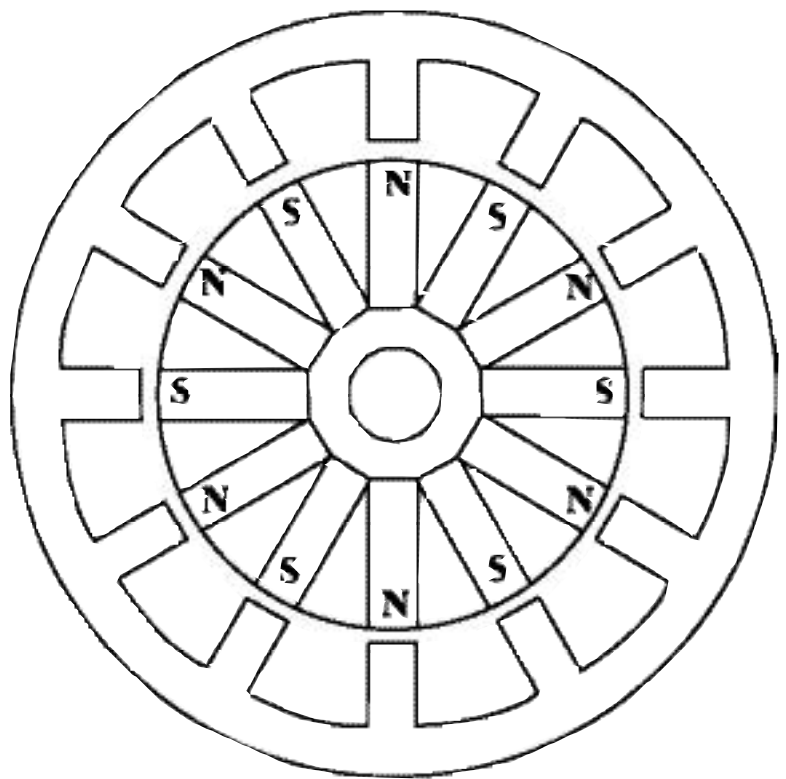


Fig. 16

Dynamo description:

Rotor:

It is well known that a bar magnet has its magnetic field concentrated at the N and S pole ends, and the half way line between the poles of a magnet is the neutral zone, this is the region where the magnetic field is canceled or neutralized. The *ferrous* keeper ring I designed for this rotor is mounted near the axle and it has machined flat decks so the magnets attach flush to the deck of the

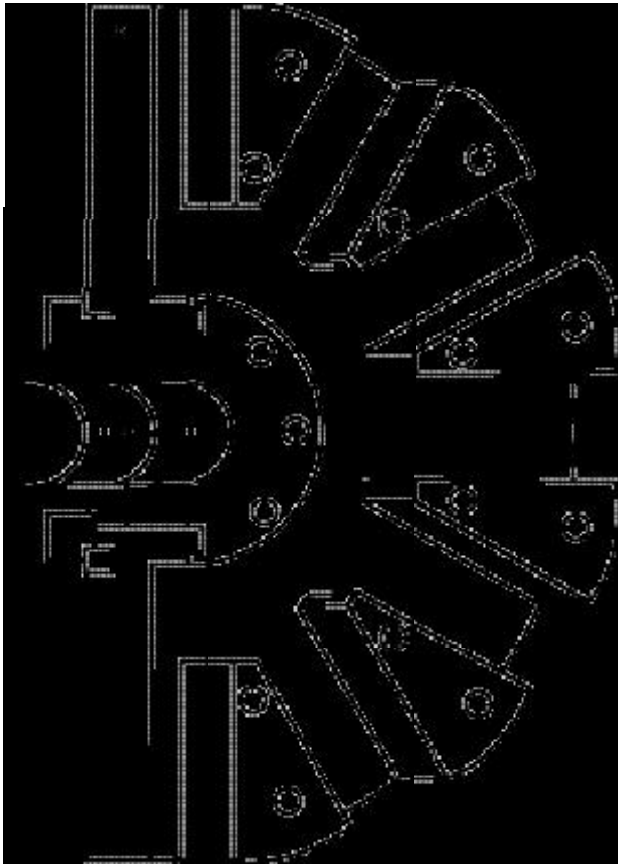


Fig. 17

keeper ring. Because of this feature, flux leakage is reduced at the keeper ring and the magnetic field concentrates at the rotor poles. With the poles of the magnet positioned near the axle and attached to the keeper ring in the rotor, the magnetic field that was there is now forced to add magnetic field density to the outer magnetic poles on the rotor rim. The density of the magnetic field at the poles is now greatly increased which makes a very powerful small size rotor. The *ferrous* inner keeper ring (*active iron*) that is installed inside this rotor design, is also the *neutral zone* of the magnetic field when viewing all the combined permanent magnets in the rotor. Shown is a cut away view diagram of the rotor, fig. 17.

I utilize rare earth rectangular shape neodymium grade 35 bar magnets with the dimensions of 3" long and 1"x1" on the end poles. There are 12 bar magnets mounted 30 degrees apart in NSNS configuration, and the bar magnets are attached to a precision

machined inner keeper ring which makes the active iron the region of the middle of the magnetic field (the neutral zone). Another way to view this is to imagine two 3" long bar magnets attached together, you now have a 6" long magnet. Bend this magnet in half and install iron at the U and it now becomes a horseshoe magnet with two 3" long pole ends. It's a powerful rotor design in the fact that each of the 3" long bar magnetic poles has the field strength of a 6" long bar magnet. More poles on the rotor will allow for higher frequency ac generation at lower rpms, twelve magnetic poles on each rotor is shown in fig. 18, 19.



Fig. 18

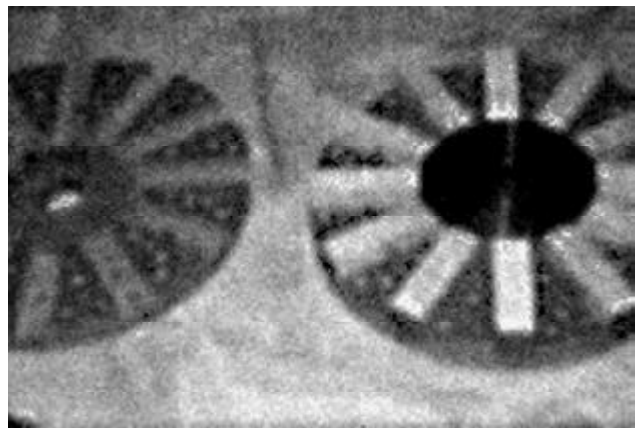


Fig. 19

The drawing in fig. 20 and picture in fig. 21, shows twelve magnet poles in each rotor in relation to the position of the coils. Ten *amorphous* cores are shown mounted around each of three rotors before they were wound with magnet wire fig. 21. The machine I have constructed houses a total of three rotors side

by side that are mounted 10 degrees apart in relation to their *magnetic poles*, each rotor has twelve magnets installed for a total of 36 magnetic poles shown infig. 20. This dynamo concept can be constructed to any size with unlimited numbers of rotors and coil combinations to fit any power requirements.

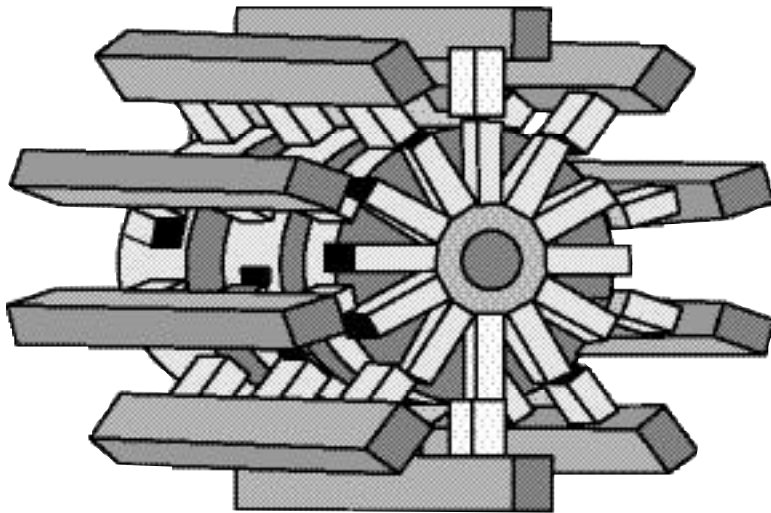


Fig. 20



Fig. 21

It is well known that a magnet exerts a force of attraction to iron bringing them closer together, after they have come together, they are in their **static position**. A force must be exerted to either the magnet or the iron in order to pull the magnet and the iron apart, removing them from their static position. The term **static position** is used to describe the point

when the magnet and the iron bar are at their nearest point.

As in the Interference Disc Generator, this Permanent Magnet Dynamo I am describing also uses an internal magnetic balancing effect which reduces startup torque on the rotor.

In this system, one set of magnets is in their static position in relation to the coils, such as the impulse coils. Another set of magnets on one side of the rotor is not in the static position, and there is another set of magnets that is not in its static position on the opposite side. One side is half in to the coils, and the other side is half out the coils, allowing the rotor to have minimal start up torque in turning the rotor. The magnets function in two jobs, the first with its velocity is to cause induction into the transformer coils producing ac power.

The second function, is the opposite pair magnetic fields on the rotor balancing each magnet out of their static position in relation to the coil positions at any given time, they cancel their holding force which puts the rotor at equilibrium. This reduces the amount of start up energy required to rotate the rotor resulting in higher efficiency. It allows the rotor and or multiple rotors to turn easily and efficiently despite the inherent powerful holding force of the rare earth neodymium magnets. With the three rotor machine configuration, I have connected 6 impulse coils in three phase to function as the motor impulse circuits with a hall effect brushless motor controller fig. 22.

Star wound three phase motor impulse coils.



Fig. 22
Star wound
three phase motor impulse coils

Two more pictures of the one rotor dynamo option are shown with a 1hp dc motor turning the rotor with an 800 watt load on the coils, six 100 watt AC light bulbs, and two 100 watt 12 volt DC light bulbs, Fig. 25, 25a.

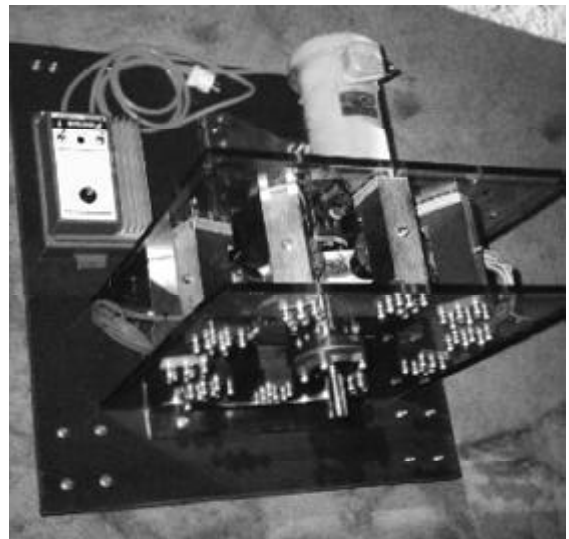


Fig. 23

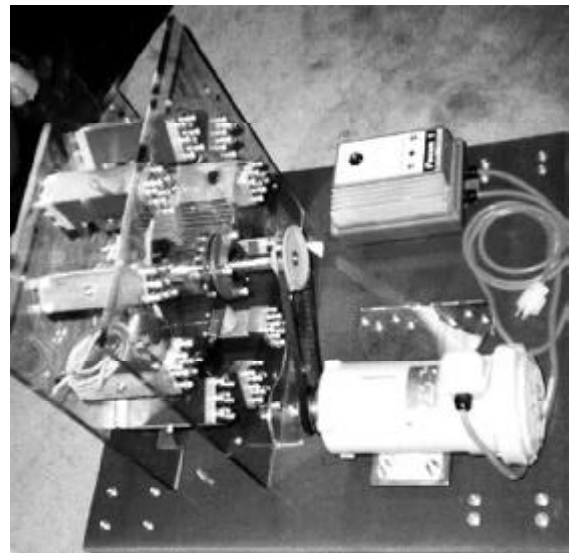


Fig. 24



Fig. 25

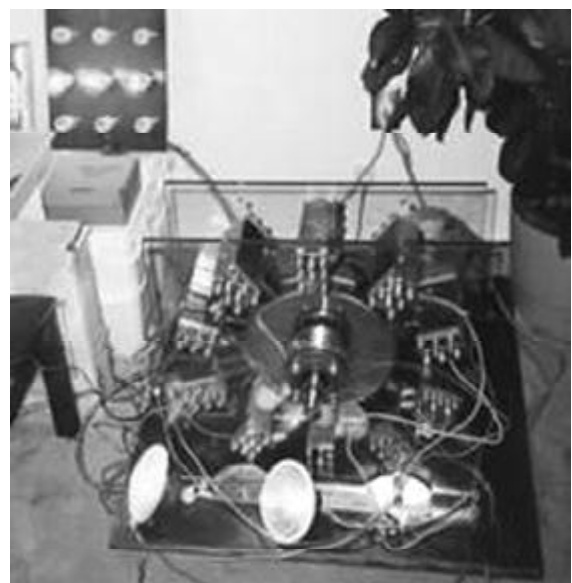


Fig. 25a

The efficiencies of this dynamo are so far inconclusive with regards to producing an endless self running machine. Our research is continuing to improve the efficiency by eliminating all conventional type ac and dc motors from this dynamo, and incorporating high voltage dc impulses of very short time duration's as Ed Gray did with his technology years ago. However, a description of my early self running attempts is included near the end of this dynamo report. These tests have manifested an abundance of heat in the 24 volt dc drive motor.

Another picture of the three-rotor dynamo configuration is shown with 12 regenerating ac to dc coils, and with the motor impulse coils removed fig. 26.



Fig. 26



Fig. 26a

Another close up of the regenerating coils and three phase motor impulse coils is shown on the dynamo fig. 27.



Fig. 27

Tests to produce an abundance of heat

I have testing the machine so as the output coils are connected to regenerate a 12 volt battery as the motor is turning the rotors. I used a brand new conventional permanent magnet 1/4 hp 24 volt dc motor that is running on 12 volts to turn the 110 pound 3 balanced rotors, and or the 35 pound 1 balanced rotor version.

The regenerating output coils produce AC to DC power with no noticeable ripple on the scope. The generated direct current from the coils is connected to go back into the battery, in which the motor uses to produce the torque needed to rotate the rotor. As this happens, the regenerated dc power from the coils is again going back into the battery first, and then to the motor. The result is that the battery supplies less power to the motor when the regenerating DC current is going into the battery. The motor takes on a load from two sources, one is from free wheeling the rotor with out loading or drawing current from the coils, and the other is the load induced on the motor when the coils are loaded to produce current.

The dc permanent magnet motor has shown that during one of many switch mode tests, it consumes 15 amps at 12 volts from the battery while a chosen number of regenerating coils supply the amount of current going back to the battery. The battery supplies 50% of the amps and the regenerating coils supply the other 50% amps. This effect can be changed depending on how many open isolated regenerating banks of coils are activated and loaded.

This test shows a 15 amp draw the motor while it is turning the rotors under load while regenerating current from the coils. It may be they balance each other and both battery and coils supply 7.5 amps each that make the total 15 amps draw on the motor. This accounts for the 15 amps total load that is shown on the dc drive motor. It produces an excessively large amount of heat in the dc motor that is useable output energy. On a larger scale the heat generated in a given motor can be enormous. More accurate measurements are needed to determine the true energy in verses energy out.

However, this electric heat pump effect can be altered to produce more or less heat depending on the size and type of the drive motor, and the amount of regenerating coils that are placed under load. Cooling tubes wound around the motor with water flowing through them is a way to pull the heat out for useful applications. Hot water from the drive motor and electric power from the coils at the same time.

After running the machine, the amorphous regenerating coils remain cool to the touch whereas the conventional dc motor gets very hot with higher amps going through it. The machine also has a longer running time when the coils are regenerating the battery, as compared to running an outside equal load with the same amp draw, in that case the battery drains much faster.

This sheds light with the observation of high heat build up in the motor side (less efficient side) of the circuit while being cooler on the generator side (amorphous side) of the circuit. After hours of run time the battery

begins to drain, when this happens, the battery begins to show tangible temperature changes from one side of the battery to the other. The whole negative side of the battery remains cool to the touch (temperature drop), while the whole positive side of the battery gets warmer to the touch (temperature rise). The effect is repeatable and only happens when the regenerating coils are connected to charge the battery as it is running. It may be approximately 20 degrees difference in temperature, depending on how many regenerating coils are activated sending its current to the battery. There must be exothermic reactions and endothermic reactions going on inside the battery motor generator combination that is causing this temperature difference. The load and heat generated can be changed the on the motor from the flick of a switch that activates and loads the output coils, which in turn dumps its energy back into the battery pack or outside load. The efficiency ratio of the machine changes depending on how many and which banks of regenerating coils are activated, which again also effects the temperature difference manifesting on each side of the battery, motor, and amorphous coils.

Other tests

An Automotion dc brushless 3 phase motor controller with hall sensors was used to test the machine in fig. 26a. Tests have shown the 1hp dc motor and the three phase brushless dc motor controller will not be the answer to closing the loop on this motor generator machine. The brushless controller has a 50% duty cycle which will not manifest the electro radiant effect, and it also has a constant draw on the battery as a regular dc motor does. It is much less efficient than using very fast and short unidirectional dc impulses in the motor impulse coils to kick the rotor around. This brings the subject of Nikola Tesla's magnifying transmitter and Ed Gray's radiant energy impulse motors to light, and a possibly answer to closing the loop for a real auto-rotating machine.

Before I go further with this, I want to point out the many phase possibilities this dynamo has. If you look at the coil arrangements in the 10 coil machine, you can clearly see the coils that are in phase with each other. When a second and third rotor is installed with all the coils attached, one pair of coils on the first rotor is in phase with another pair of coils on the second rotor, and another pair of coils is in phase on the third rotor. With the ten coil to twelve magnet pole rotor assembly, the machine has five phases of isolated banks of coils. If twelve coil mounting bars are attached around the three rotors, and the three rotors are spiraled off set by 10 degrees, you will have a powerful three phase dynamo. If the rotors are not off set by 10 degrees and are lined up in phase with each other, all the coils on the machine will be in phase for a powerful single phase dynamo. The volts and or amperage can be tailored for an application by the winding of the transformer coils, and the machine produces 60hz at 600 rpm. This dynamo machine concept is also interchangeable into many other motor generator combinations, and sizes, and any volts or amps requirements, it all depends on the needs of the end user.

Cooling tubes wound around the motor with water flowing through them is a way to pull the heat out for useful applications. Hot water from the drive motor and electric power from the coils at the same time.

It is possible to have super efficiencies with this system using unidirectional hv dc impulses of very short duration's at the make brake contact at the closure of the switch.

I have acquired two of Ed Gray's radiant energy impulse motors #4 and #5 to revive an almost lost technology. I am proposing to combine a special permanent magnet dynamo with less back EMF that is tailored to produce 5kv dc under 2000rpm. This dynamo

will energize a 5kv dc capacitor bank and replace Gray's 12 volt to 5kv dc converter. The energized capacitor bank will discharge through the conversion tubes in the very same manner as in Gray's original circuit, only the capacitors will get energized from the high voltage dc dynamo instead of from a battery through an inverter. This version of a high voltage dc dynamo will be connected to and turned by Ed Gray's EMA motor, a starter motor will disengage after it begins running.

There are three banks of high voltage coils that are connected 120 degrees out of phase from each other, each bank represents 12 - 100 watt coils for a total of 1200 watts per phase. All isolated coils in each phase are wired in series to produce the high voltage dc potential to energize the capacitor bank. The isolated capacitor bank will discharge their potential through its conversion tubes in 120 degree increments each time the impulse coils are at their closes point toward each other. One isolated capacitor bank will discharge through the conversion tube with it disconnected from the dc dynamo circuit. The second isolated capacitor is at this point beginning to receive its charge from the dc dynamo, while the third capacitor phase is fully energized just before the switching circuit disconnects it from the dc dynamo for it discharge phase. This fully aligns all the isolated 3 coil phases in this permanent magnet dynamo system to the 120 degree three phase radiant energy impulse system of Ed Gray's EMA motor #5.

The plan is to eliminate all the batteries and converter and use a rotating high voltage dc dynamo in its place. Nikola Tesla used high voltage dc dynamos with capacitors as part of his magnifying transmitter to produce radiant electricity. So it seems logical to do the same thing, merging Ed Gray's radiant energy motor and our version of a high voltage dc permanent magnet dynamo. Could it regenerate a car, or power a home, and or a factory?

Shown below are pictures of Ed Gray's motors in fig 28, 29.

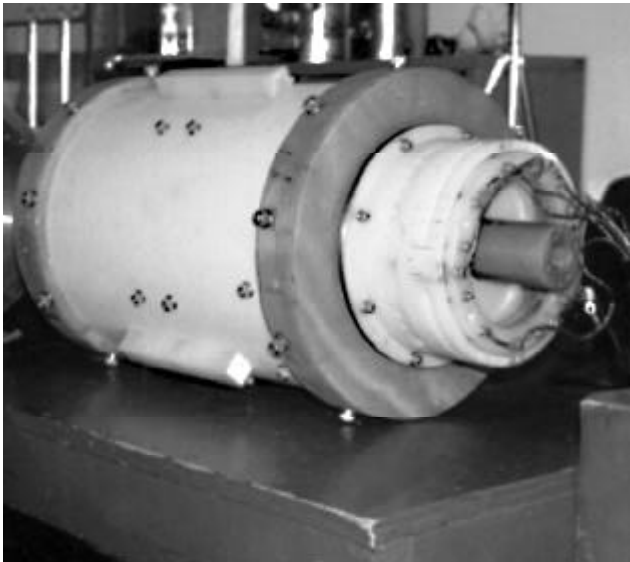


Fig. 28



Fig. 29

I would like to acknowledge two friends of mine who have helped make the Interference Disc machine possible, Bud Johnson 1986 shown in fig. 30 and the late Dr. Carl Reich shown 1987 in fig. 31. I would also like to acknowledge Wilbert Griffith and Brian & Rose Langan for their contribution in helping us make these projects possible, and there are others who wish to remain anonymous. Bud Johnson also an inventor, was one of the first people who I met after relocating to Alberta from the NWT, he made arrangements for us to construct the first disc machine in a machineshop.



Fig. 30
Bud Johnson



Fig.31
Dr. Carl Reich

Dr. Carl Reich was a pioneer in the alternate medical field and he published a book along with Robert R. Barefoot called "The Calcium Factor", copyright 1992. Through Carl's dedication and hard work with alternate health and energy, Dr. Carl Reich contributions have also helped made the Interference Disc machine and our Permanent Magnet Dynamo possible.

I also would like to thank my wife Jan Francoeur for being part of making this research possible, she has spent countless hours to prepare this report and assist in the reconstruction of these machines.


The test results and hypothesis I have written are not complete, and the research and development of the described magnetic energy machines is on going, and as such, the potential and performance and true efficiencies of these machines are still yet to be determined. This author knows that the aether is real and free energy systems are possible, and I will continue to work until I have completed the integration of Ed Gray's

radiant energy motors with our larger version dc dynamo machine. When this happens, a new round of testing will begin with our attempts to run the two machines together in closed loop regenerating mode.

I hope I explained these energy machines in a way that you all can understand, and more information will be released as progress is made. ***You may find this information useful with your quest to be energy independent. However, if you profit from any of my ideas I have described in this writing, then in all fairness, please remember to reward the inventor so research and development can continue.***

This is my gift to humanity.

Interesting Information

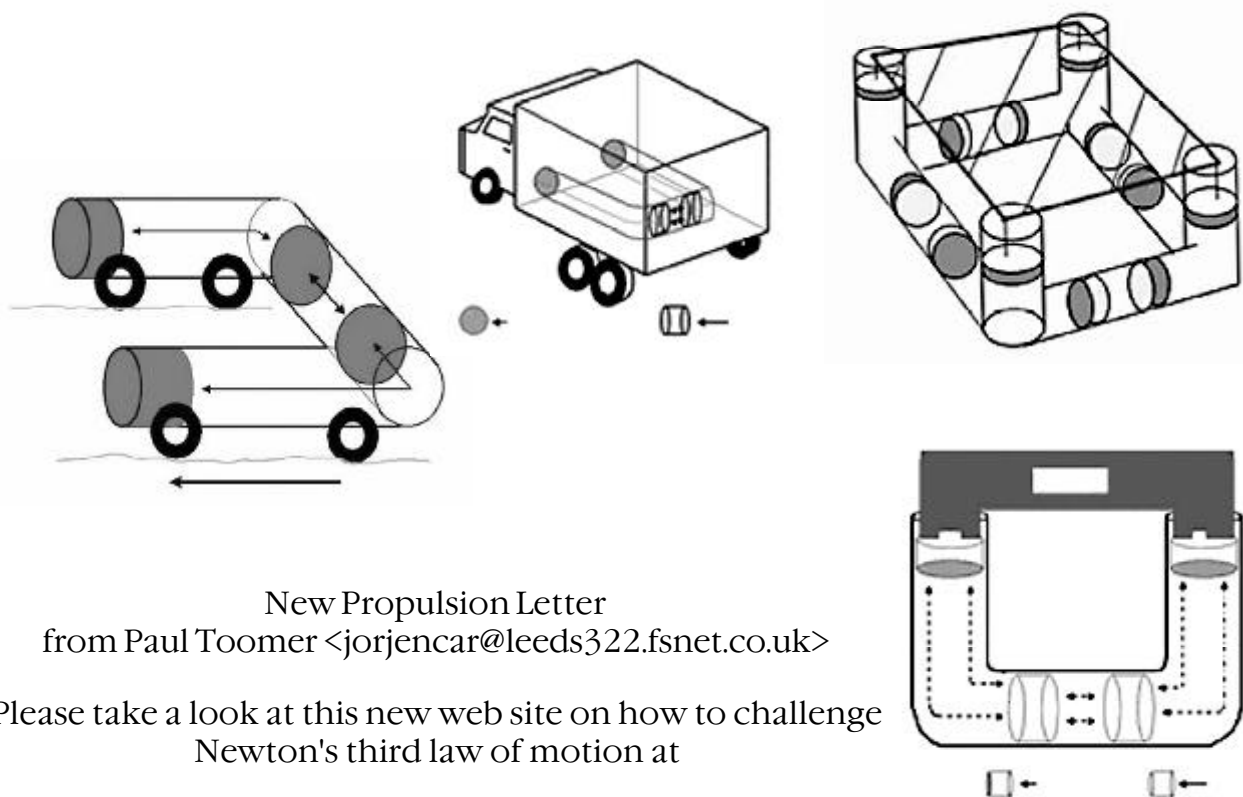

A NEW PARADIGM FOR TIME

EVIDENCE FROM EMPIRICAL AND ESOTERIC SOURCES

Donald Reed, USA
1032 Borden Road, Depew, NY 14043
Email: torsionpower@yahoo.com

The author of this article presents an experimental approach to the teleportation problem and time pace control and space regularity questions.

Part I of II

ABSTRACT

The following essay seeks to establish awareness, through a far-ranging careful examination of various empirically documented anomalous research results in the field of new energy, the long-suspected evidence provided by associated key legendary secret government project work in the USA and former USSR, maverick new theoretical models in foundational physics for elementary particles/fundamental electromagnetic wave-field structures, as well as remarkably corroborative related information from esoteric (psychically channeled) sources, of the necessity for the development of a new paradigm for mass, energy and especially time. After having been guided through this process, the reader will hopefully be motivated to acknowledge the importance of this imperative for a new understanding of the workings of nature, as well as gain hints for the associated future development of new viable sustainable energy sources and related technologies.

Introduction

When we come to examine the annals of physics over the past century, we find them replete with several competing core theories

of the physical world, each attempting to demonstrate a unified conception of space, time, energy and matter. Notable among these, the most successful and formally canonized in academia, are special and general relativity, and quantum theory, the latter of which includes quantum electrodynamics and quantum chromodynamics as recent offshoots.

However, even these fundamental theories have fallen short in achieving this coveted goal, due to many reasons, not the least of which is their failure to account for the anomalous but substantial documented evidence continually presented over the years by new energy research and other related empirical evidence considered outside mainstream science. In this author's opinion, these weaknesses in current physics and its relative ignorance and/or selective omission of the findings of non-orthodox scientific research, stem primarily from an ill-conceived institutionalized conception of **time**, as an immutable linear flow against which everything involving **change** can be measured. This "relational" concept of time treats it as a specific passive property of physical systems and changes happening to them. It is a one-dimensional continuous and homogeneous entity geometrically describing the property of duration. This antiquated relational view of time is abstracted from our unique prejudiced viewpoint as sentient beings whose particular point of waking conscious focus is this camouflage physical reality, which is apprehended through the limitations circumscribed by the physical senses.

Accordingly, modern physics is built on the basis of this relational conception of time. However, the use of this conception has not

so far resulted in resolving all the problems associated with time. Moreover, so far even an essential definition of time has not been formulated in physics, there are only operational definitions indicating different methods of measuring time intervals.

In contrast, the "substantial" conception of time, advanced in this paper, implies that time is an independent phenomenon of nature existing side by side with matter and physical fields, whose active essence can and does affect objects and processes occurring in the universe. Moreover, the following dissertation argues, by positing that active substantial **change** is the basic concept and relational **time** is its derivative, that those objects and processes can also have a reverse action on time.

Accordingly, we will attempt to show, through a wide-ranging examination of new energy research and other information, the necessity for the establishment of a fluidic, elastic, field nature for true active time which is malleable; one in which even the local pace of time, and mass and energy content can be influenced artificially by intelligent technological control, or naturally by conscious intent, or by a combination of these two methods. To help motivate the reader's awareness for this imperative, we will also examine several esoterically-based sources from key selected psychically channeled transcripts. These will be taken from the following sources: unpublished comments by Jane Roberts on an altered state of consciousness[1] (indicated in this manuscript by J.R.), or published transcripts from **The Seth Material** and **The "Unknown" Reality** (indicated in the manuscript by UR)[2], published chronicles from the entity Kryon, channeled by Lee Carroll [3], and concepts from Wilbert Smith's legendary discourse: **The New Science** (NS) [4]. For easier reference, all psychically channeled transcripts will appear in italics, with my additional explanatory comments in regular type within parentheses.

Granted, our unique investigative foray, ranging as it does from the concrete arena of knowledge represented by the cutting edge

of visionary science to the intangible arcane realms bordering on the spiritual, will of necessity lack the exacting logic of scientific rigor.

Nevertheless, we hope to provide, through just such a unique eclectic format, the beginnings of a possible fresh understanding of the workings of nature and perhaps ultimately furnish a conceptual basis for extending the structure of current physical theory to compatibly encompass the elements of a unified framework of physics and metaphysics.

As "unscientific" as this proposed venture may appear, especially to the contemporary physicist or theoretician, we unabashedly press on, secure in the belief that the currently perceived "mutually exclusive" bodies of knowledge defined through psychic means and that of orthodox physics are more closely linked than is currently suspected. Indeed, it will be demonstrated that that some of the psychically defined data bears a striking resemblance to the tenets of present empirical knowledge.

New Research

Theories Indicate Necessity for Novel Time Concept

A body of work which postulates a fluid-field substantial nature for time, is the esoterically-based book written by Wilbert Smith in the early sixties, **The New Science**. Here, Smith outlined a unified theory of all physical interaction by positing that an active mass-free field energy he termed the *tempic field* exists, and is the parent field structure out of which our passive relational linear clock time emerges. To be sure, this book and its specific format of exposition has its weaknesses, not the least of which is a writing style which taxes one's comprehension to the limit. All researchers who have attempted to connect Smith's knowledge with the frontiers of current scientific knowledge, new energy research, etc., have been frustrated by his introduction of terms which may or not have the same meaning as the corresponding terms in mathematical science. This practice

causes many passages to appear so vague as to cause total bewilderment on the part of the reader.

...the establishment of a fluidic, elastic, field nature for true active time which is malleable; one in which even the local pace of time, and mass and energy content can be influenced artificially by intelligent technological control, or naturally by conscious intent...

In coming to investigate the source of Smith's theory 25 years ago, I came into contact with Kenneth Killick of Canada. Killick was the individual who served as the original mentor and for a time a colleague of Smith in the mid-1950's. Smith, whose background was in electrical engineering, found it very difficult to accept or understand the philosophical overtones of Killick's thought. Consequently, he resorted to the use of psychic mediums to try to verify the information provided to him by Killick. This is the origin of Smith's association with discarnate entities known to those familiar with his work as "the boys topside". Thus Smith's subsequent writings promote such confusion perhaps because he only obtained a partial understanding of these cosmic ideas, and he opted to writing in a kind of code basically to try to hide his own confusion. Through my own association with Ken, I discovered that The New Science is able to be put into reference with known facts once the spiritual-philosophical elements of Killick's teachings are duly integrated. When this is done, "Wib" Smith's book can teach much and can become a cornerstone to new energy science. Otherwise, it remains at best, a fragmentary enigma.

The work by Smith and Killick is pertinent to the theme of the present paper, since they both showed through experimentation with a special caduceus-wound coil, that so-

called relativistic parameters of mass and gravity, energy, and time-flow, can be altered through intelligent artificial control. Adequate delving into some of the elements of these theories will enable us to glean new insight for transforming the current paradigm of time. Further details on Ken's so-called tachion energy theory can be found in this author's earlier expositions on this subject in issues of **Energy Unlimited** (1978-1982)[5].

Smith's main error is in postulating a fundamental "spin" dynamics based upon conventional continuous rotation. As Killick points out, such a concept of spin on the microscopic level, precludes any possibility of true evolutionary change, in the cosmic sense.

Also, as we shall see presently, the continuous spin concept obviates expression by anything in the universe, of its personal moral responsibility. However, with tachion energy theory intact and untrammelled, the impersonal dualistic concept of interaction between two polar entities, such as is expressed not only in ordinary classical Newtonian physics, but its 20th century successors, relativity and quantum theory, is supplanted with the omnipresent workings of a **trinity** at all levels and manifestations of reality.

Indeed, the fundamental tachion field (mass-free) energy has **three** components: two polar opposite entities (a positive "charge" and a negative "charge"), and the ability for these two to be in what is called "static-dynamic balance". The static-dynamic balance completes the trinity.

A simple physical macroscopic manifestation of static-dynamic balance can be seen in two people arm wrestling. As the energy of one participant is brought to bear against that of the other, we will see a vibration or oscillation once a balance of their energies is obtained. As more effort is expended, the vibrations will increase in frequency and decrease in amplitude. At this point we will see a static state relative to the two arms; neither causes loss of arm position of the other. But simultaneously we also have a dynamic situation in the rapid oscillation which

maintains, and is in turn sustained by the muscular energy which produces the static state of the arms. Both states mutually support each other's existence. The two component entities (the arms) resonate together, but without losing their own identity.

The implications of this last statement, missing in current physical theory, is unique to the system of tachion energy. We will see in the following that the dynamic functioning of these sub-atomic tachions is such that by their inherent ability to manipulate space and the time-frame of matter through static-dynamic balance, they do not harm anything else in their environment, nor are they affected (forced to lose their own identity) by the ambient environment. Accordingly, inertial mass is not an inherent component of tachion energy, but is a derivative of certain tachion field modes.

We spoke earlier of tachion "charge". We keep the word in quotes to underscore that this is not to be equated to electrical charge, but merely signifies two polar energy states of the primordial ground-form, out of which all known physical forces come to be manifest. These tachion energy states can be defined in terms of "rotational" motion. Again "rotation" must also be placed in quotes as it

does not signify the common idea of continuous spinning. Such a concept was suggested above in connection with evolutionary progress in its cosmic interpretation.

The tachion-pair could be described as executing a "back-and-forth" ratcheting movement. The tachion-pairs are analogous to the ends of a drum majorette's baton. But unlike the twirling motion of the baton, the tachion-pairs do not demonstrate the classic macroscopic continuous spin motion, but oscillate in a 3-component "clocking" action.

In Fig. 1 we have drawn a circle and have divided it into three 120 degree arcs. The first motion in the tachion cycle is an arc from the 0° - 360° location, to the 240° degree position. This movement is stated philosophically as the question, "Can I go?" In the second phase it swings back from the 240° degree position to the 120° degree point, and then returns to the 240° degree position. This graphically represents an analysis of the first question, and can be phrased as the "Let me think" component. Finally, then it proceeds forward another 240 degrees taking it past the 360° degree point to 120° degrees. This last stage is the action motivated from the analysis in stage two, and is entitled, "Yes I Can". In this activity it will be observed that all path lengths are 240 degrees.

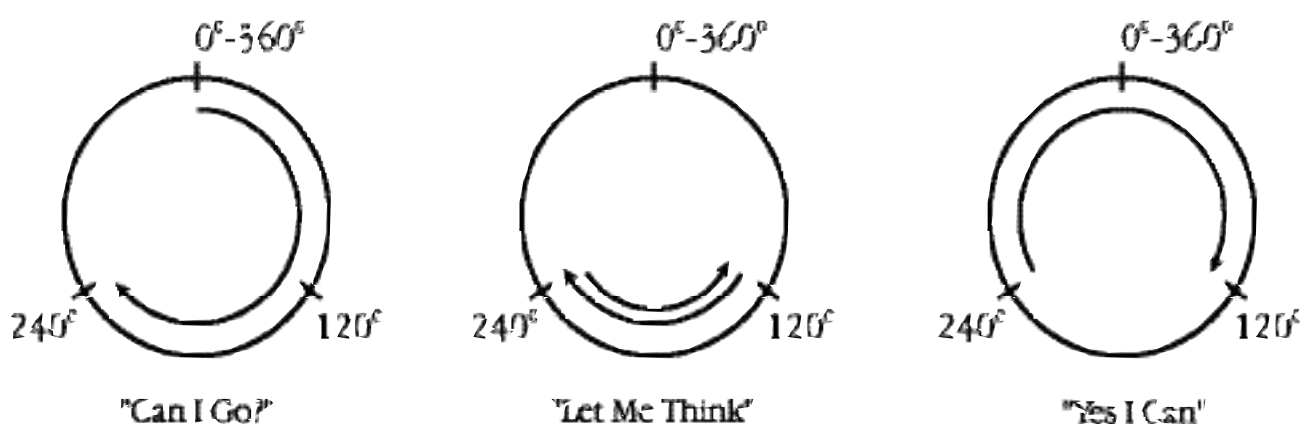


Fig. 1
The 3-Component Tachion Movement

However, as representative of true evolutionary progress, the tachion-pair does not remain confined to the plane in its 3-phase cycle. After each "Let me think" stage, the entire pair unit could be considered to advance "upward", perpendicular to its plane of "rotation". The

combined motions can be viewed as an elevation up an inclined ramp, screw-fashion (Fig. 2).

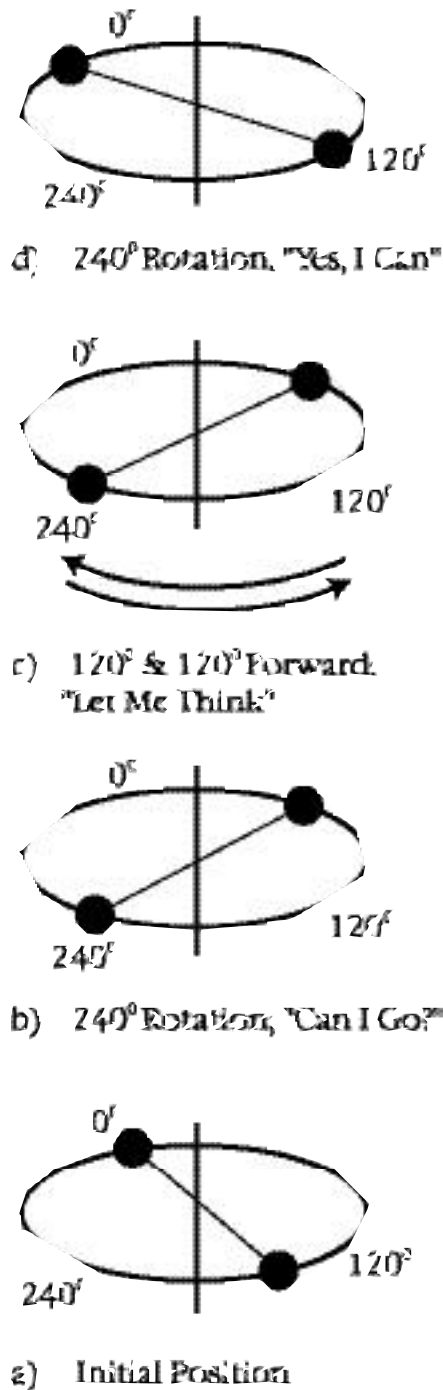


Fig.2
Tachion "Ratcheting"

Thus, while they clock themselves backwards in the plane, they never go back to where they were originally but only seem to do so from the point of view of an observer in the plane. This entire activity can be visualized as a

diametrically opposed pair "rotating" in a plane, but there must still be considered an upward ratcheting movement. They execute the clocking motion simply because they adhere to the three principles of observation, analysis and motivation. A meaningful application of this idea to the structure of physics would eliminate the necessity for a totally impersonal type of interaction governed solely by force. Unlike all current theories of elementary particles, the tachion-pair, by its unique activity, thus expresses a personal moral responsibility. So this elemental energy of the universe never goes where it is not wanted, but only where it will not disturb its immediate environment.

The topological structure of each tachion in the pair is also significant in regards to this "ethical" modus operandi. First, tachions in their primordial state are massless, toroidal shaped fields which always occur in pairs. Like toroids, tachions will singly exhibit three motional degrees of freedom, to wit;

1. rotation around its major axis.
2. inner (P), or outer (N) rotation about its cross-sectional (poloidal) axis.
3. expansion and contraction of the field (each toroid pulsates radially about its cross-sectional axis).

As a pair-unit, the combined motions will give rise to the following possible orientations: two identical (N) rotations; (N) rotation - (P) rotation; two identical (P) rotations (Fig. 3).

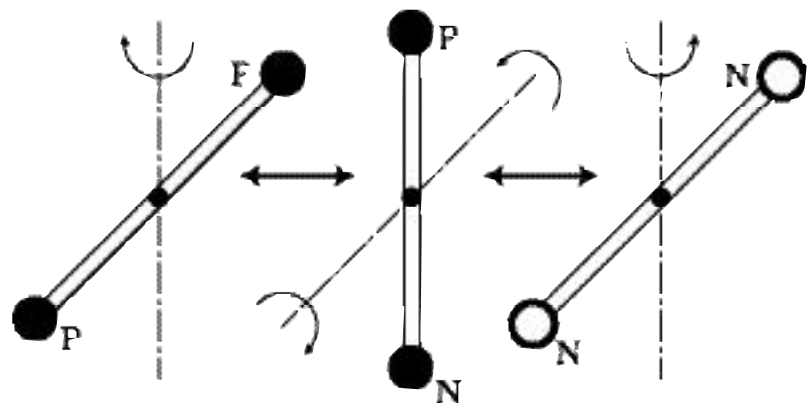


Fig.3
The Three Tachion Modes

The dual (P) or (N) rotations will always lie in the same plane, whereas in the "mixed" rotation mode, the orientations of the tachions will be mutually perpendicular. In the pair unit, the energy will shuttle

back and forth between the tachions by virtue of their harmonious expansion and contraction. The contraction of one pair partner is immediately compensated for by an equal amount of expansion in the other. When one is fully expanded and the other completely contracted, they will reverse roles executing the second portion of the cycle. There will be two points in the clocking cycle where the tachions will share an equal amount of energy ("field equity") stage. In each cycle of a tachion-pair the field equity stage is passed twice, a fact which is significant when topology of the field dynamics is considered (see [5]). Now, looking at the field geometry for the tachion-pair unit at the two field equity stages of the cycle, we observe that the two geometries are not identical but are *mirror images* of one another via a non-orientable field structure. See Fig. 5, which shows the isomorphism between the dynamics on a Moebius band (a non-orientable topological structure) and the tachion pair clocking cycle.


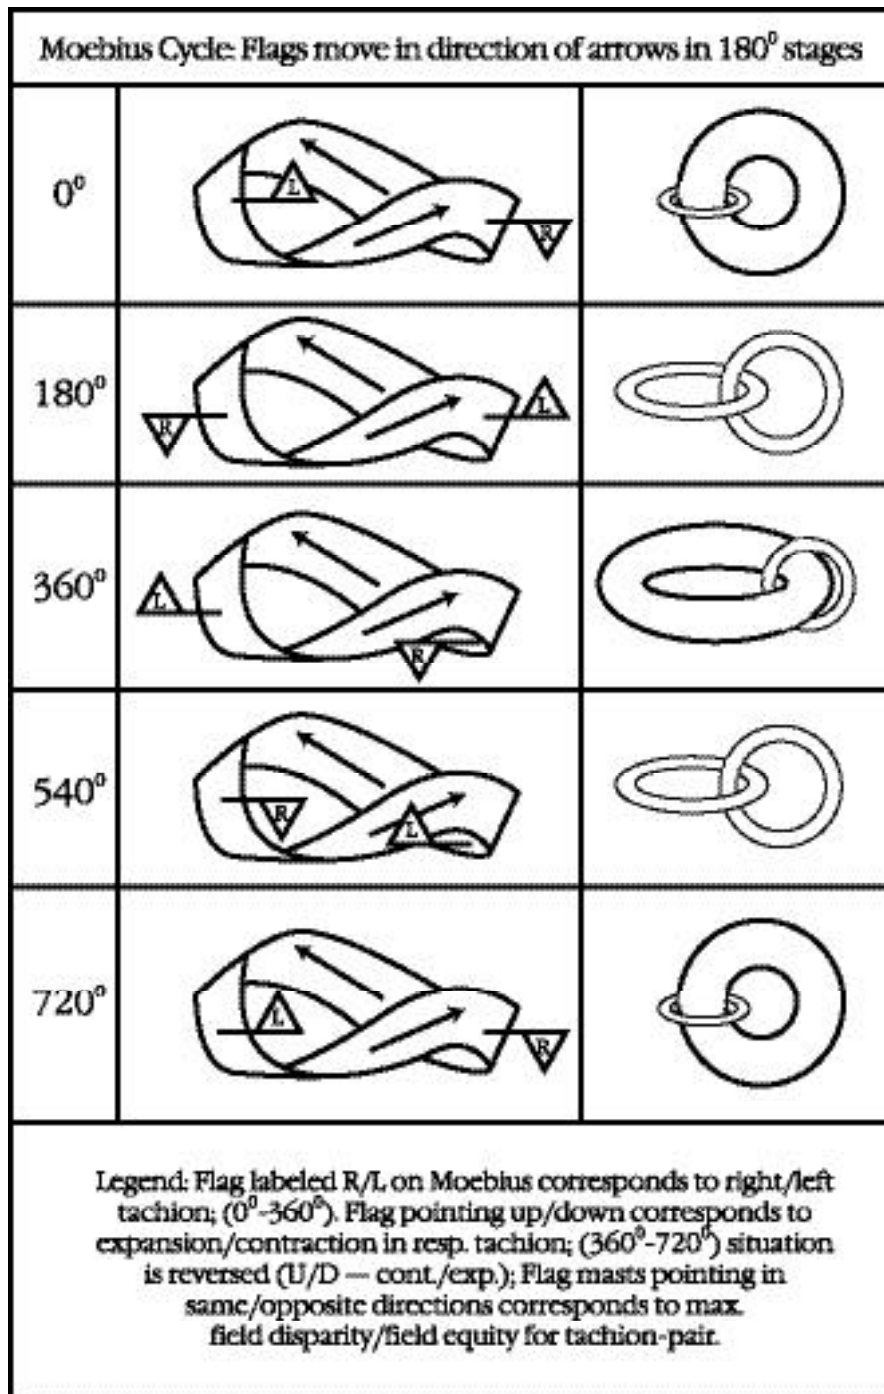


Fig.5

This suggests the remarkable idea that the space time points that the pairs generate are not, as commonly assumed, identical, static, and bereft of intrinsic character, but exhibit *enantiomorphic* topologies, which by virtue of their mirrored relationship exert upon one another a potential for dynamic interaction. For now we present a second diagram to illustrate the three pair energy modes: N-N, N-P, P-P, as well as one sequence of oscillation of the N-P pair (Fig. 4).

a) Three types of pairs:

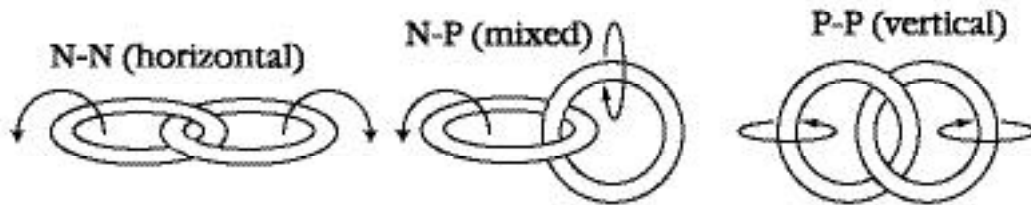

b) Stages in clocking cycle of N - P pair (I thry V)

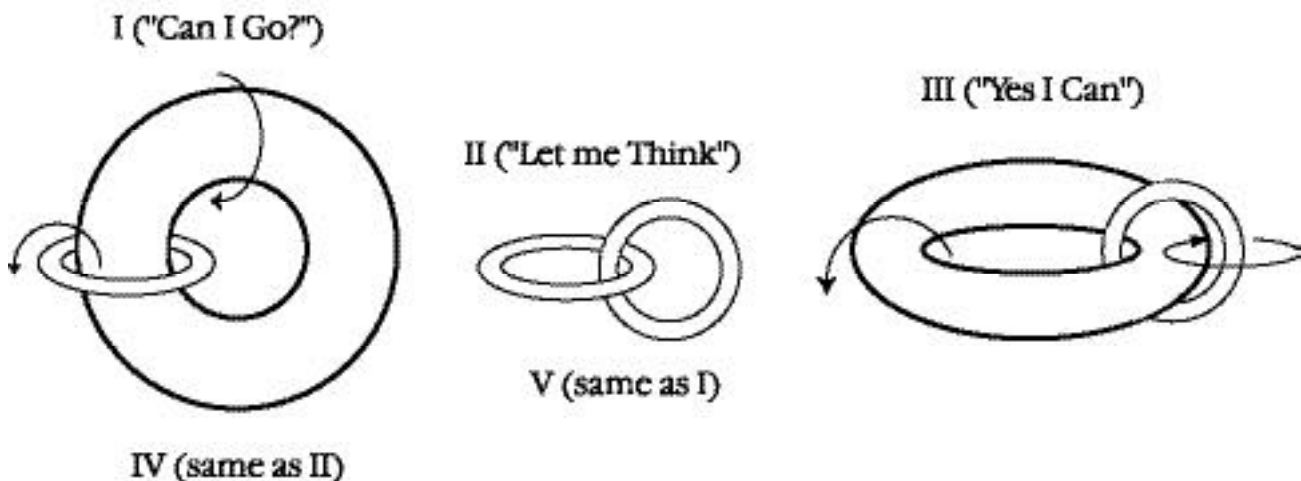


Fig.4

In this figure we note a unique trinity of field operation: two stages of maximum field disparity (I and III) connected by the intermediate condition of field equity (II). Upon postulating the additional requirement that the pair will create a new space-time location every time the field equity state is reached, we see that with each cycle the unit will not return to its original state with respect to the environment, but will advance to new evolutionary states with each pulsation. In accordance with the above comments, the tachion-pair unit "ascends" the evolutionary spiral via this unique action we have termed "clocking" motion. In accordance with the description in Fig. 4A, in Fig. 4B, stage I represents "Can I go?", stage

II represents "Let me think", and stage III represents "Yes I can".

Now, in this regard, the previous analogy of the tachion-pair as likened to the ends of a baton, where the baton rises and falls as it rotates, is quite apt. However, unlike the ends of the baton tachions are not rigidly connected but possess much freedom of movement outlined above. On the other hand, much like the baton ends, they are mutually supportive of each other's activity and requirements, never seeking to overpower, or to be eclipsed by the identity of their partner. In this manner they exhibit personal moral responsibility, as we have previously stated. By their mutual

harmonious action tachion-pairs will progress in a true evolutionary fashion, while never harming anything else in the universe by their action.

...the dynamic functioning of these sub-atomic tachions is such that by their inherent ability to manipulate space and the time-frame of matter through static-dynamic balance, they do not harm anything else in their environment...

Now, the above is an inherent characteristic of tachion-pairs as long as they go about their business individually- that is, in their pre-physical state. Now, when the three fundamental tachion-pair energy modes described above exhibit a slow clocking frequency, there is opportunity for them to join together whereupon we begin to see matter being formed. The element of mass, or inertia is provided by the binding activity of the (N-P) mode, which is a function of the slow oscillation of the pair unit. Besides the clocking frequency, the factor of inertial mass or density of physical substance is also dependent upon the amount of separation between the two pair components in each individual sub-atomic tachion-pair unit. In general, the denser or more massive an object is, the slower its microscopic tachions will clock, and the farther apart will be the individual toroid components. This is a classic push-pull situation, i.e., there is a key inverse static-dynamic balance relationship between tachion-pair pulsation frequency and their area of operation (density of field). The rest mass that any physical substance displays to macroscopic observation, is thus a direct function of the amount of energy supplied by the master field to sustain the oscillation of the pair-unit. Thus, a primary feature of tachion dynamics is the following: if we change the energy, we must expect to observe a corresponding change in the manifestation of the mass, and vice versa.

Consequently, in tachion dynamics there is a built-in interchangeability of energy and mass, an idea which concurs with similar conclusions in Einsteinian relativity (notably, $E = mc^2$).

But here is where tachion theory and relativity part company. We have seen that our postulated "clocking" pulsation of the pair is the factor, which determines both space and time. Both **space** (area of pair operation), and **time** (frequency of pulsation) are mutually dependent on what **we shall call the master field of thought and intention, which determines the clocking frequency.** From the dynamic influence of the master field arises subsidiary conditions of time and space which are truly "fluid" qualities of tachion operation. This is indeed consonant with the assumptions of a proper unified field theory in which all the factors of our objective world as apprehended by the physical senses, are subsumed under the relative state of a guiding master field. Moreover, under the geometrical constructs of such a theory neither space nor time should be subservient to the other but should retain their unique qualities in a mutually supportive relationship. This is guaranteed in tachion theory under the fluid give-and-take of the pair operation. Relativity, on the other hand, despite its logical consistency, does not meet the above requirements. To his great credit Einstein recognized the need to integrate time with space in a synthesis that would retain the distinctive qualities of both. The result was a theory, which extended the classical Euclidean concept of 3-dimensional space as a kind of "cosmic container" of matter, to embrace a structure of space, which arises from the laws interrelating its material content. Thus, for instance, in his General Relativity theory gravitation became interpreted as a distortion of the spatial fabric by sources of mass-energy in a non-Euclidean framework. Unfortunately, as a foundation of his theory, Einstein mistakenly assumed a subservient role of time to space. He tried to "freeze" time down into spatial-like dimensions utilizing metric equations, which were variants of a basic form. Before a true understanding of

gravitation is developed, the rationale for applying such metrics to this end should be seriously re-appraised. In short, instead of freezing time down into a spatial dimension in order to make it fit a world ruled by nothing but gravity, we must develop a conception of space sufficiently fluid to let true time have its proper place therein.

These and other similar ideas are articulated by Andrea and Paulo Correa in their recent insightful essay on the various serious shortcomings of relativity theory. They write: "Time is not treated by relativity as distinct in nature or in quality from the set of topological locations or lengths between points. Whether in the SR (Special Relativity) form of a flat Minkowski spacetime or in the GR (General Relativity) form of a curved Riemannian spacetime, the essence in relativity lies in its treatment of time as the fourth length of a 4-dimensional space. As the actual metric of a length of time is not fixed, only the intervals being invariant, one can no longer speak of the reality of timelines or of synchronicity" [6].

In their second installment, the Correas even imply the existence of a mass-free energy, which is an integral element of the Killick tachion energy theory: "From a strict physical viewpoint, only an energeticist position can make sense. While space and time may be considered to exist outside the function of matter, independently from it, *they cannot be conceived outside the function of energy*...the field remains conceptualizable (in Einsteinian relativity) only by the pseudo-Riemannian manifold, which, on its own, fails to analytically treat the difference in dimensionality between Space and Time, fails to differentiate between them as distinct manifolds, and fails to account for them as the intrinsic properties of energy in flux".

The tachion theory is such a model that delineates the functions of time and space in terms of a basic mass-free energy substratum. Now as we have seen, since tachion dynamics pre-supposes a static-dynamic balance feature connecting frequency of the pairs (fundamental time elements) with their area

of operation ("fluid" space configurations), it represents such a foundation upon which to construct such a theory which will harmoniously treat time and space on an equal footing without neutralizing the unique structural features of each. Since the decrease/increase in the clocking frequency of the tachion-pairs will result in a corresponding increase/decrease of area of operation, the local *pace of time* will also decrease/increase at that space-time location. This is due to the push-pull relationship between energy and time. The intrinsic energy of a tachion-pair will be defined to be its energy of "motion" (energy in the "convergent", pre-physical state). Thus we see that an increase/decrease in the clocking frequency also implies that the intrinsic energy of the pair will also follow suit. Consequently, the intrinsic energy available for a manifestation will increase/decrease as time pace allotted for this purpose decreases/increases. Moreover, the product of intrinsic energy and time interval will always be constant due to the perfect trade-off between both factors in the tachion clocking action. This relationship is remarkably similar to the quantitative statement of the Uncertainty Principle in quantum mechanics in the form: $E \cdot t = h$. This formula states that the product of the energy exchange of a quantum mechanical particle and the time interval required for that exchange to take place, is equal to the so-called "quantum of action", or Planck's constant.

Thus, as a concomitant of tachion dynamics, which is argued could also be the basis of electron spin geometry among other things (see [5]), *time* is made malleable; no longer continuous, or rigidly uniform as in Newtonian conceptions, or subservient to space as in Einsteinian relativity, time "flow" can go to zero, and can even reverse under the application of certain electrodynamic field configurations such as provided by the caduceus coil and other devices [5]. With tachion dynamics even the laws of causality will no longer hold. This is due to the fact that tachions have a much broader field of operation than the purely physical realm. Thus, many unusual demonstrated features relative to quantum theory, such as the principle of Indeterminacy, quantum non-

locality (EPR experiment), "entangled particles" as well as hypothesized qualities of an *aether* of space, can find their source in this microscopic non-linear electrodynamic clocking oscillation attributed to the tachions. In fact, the ultimate expression of time as well as space to our sensory perception, could be a direct function of these substratum pulsations. From this consideration there emerges a new dynamic model for **fundamental time** as a "fluid-elastic" field effect arising from the unique ratcheting oscillatory motion of tachion-pair entities. Ultimately, it will be seen that tachions may even form the structural essence of consciousness itself, thus providing the long sought-for unifying link between physics and metaphysics.

N. Kozyrev

Other Recent Russian Research Implying New Dimensions for Time

Another key researcher who postulated an active substantial role for time was the Russian astrophysicist Nikolai Kozyrev [7]. He argued that the gap between the exact (physical) sciences and the natural sciences will not vanish until the principle of causality differentiating cause and effect is placed at the basis of the exact sciences. This implies the objective directionality of time or its flow. We encounter numerous manifestations of this principle in our life and in natural science. Yet this principle is new in both mechanics and physics as a whole. The natural scientist's time is not Minkowski's geometrical time, nor is it the time of mechanics, theoretical physics, etc.

Nikolai Kozyrev argued that the gap between the exact (physical) sciences and the natural sciences will not vanish until the principle of causality differentiating cause and effect is placed at the basis of the exact sciences

As Kozyrev argued, mechanics has been using only the "geometrical" property of time, its duration size, i.e., the intervals between the events under study. Timed, these intervals acquire the same passive properties as the interval measured between two points in space. It is only this property of time that the objective sciences assumed to be existing objectively, postulating that all other time properties are subjective. However, if we want to differentiate causes and effects, in reality the *flow of time* must be a physical quantity, duly expressed mathematically and entering the equations of mechanics. The physical meaning and mathematical expression of the flow of time can be obtained from the space-time properties of causality. Thus, processes in the world occur not only in time, but also *with the aid* of time. Time flow is an active property owing to which time may act on a material system. Consequently, it is in the properties of time that the source maintaining the vital processes of the world must be sought.

From these arguments, we can also derive a fundamental property of time. Let us assume that we have changed by a certain technique the flow of time in a material system. In this process we have perhaps changed the stresses within the system and hence its energy.

However, it is impossible to change the total amount of motion of the system, i.e., to obtain a momentum equivalent to an external action. In other words, time may carry energy but no momentum. Time is a non-momentum material reality. From the above property of the flow of time, Kozyrev concluded that it follows directly that the rotation of a body may be used as a device for changing the flow of time in a system. Time flows into the system in the cause-effect direction, the rotation increases the flow, and hence the system obtains additional energy.

In attempt to verify his theories, in the 1950s, Kozyrev thus performed experiments with spinning gyroscopes and discovered, in agreement with his predictions, that the weight of the spinning system changes slightly depending upon the magnitude of the angular velocity and the direction of

rotation. Although the effect detected was not large, the nature of the arising forces could not be explained by existing theories. By applying a vibrating framework to the gyroscope, Kozyrev also found that not only does time deliver an energy, but that near the cause-effect system *time density* changes. Time is rarefied near the generator and becomes denser near the receiver. In other words, time becomes stretched by cause and compressed by effect. In addition, the variation in time intensity is in inverse ratio to the first degree of the distance. This can be seen by the following consideration: Time is expressed by rotation and hence involves planes passing through a pole of the rotating system with any orientation in space. **In the case of lines of force issuing from a pole, their density decreases in inverse ratio to the square of the distance, while the density of planes can readily be shown to decrease with the first degree of the distance.**

Kozyrev discovered another property of time when investigating irreversible processes such as crystallization of a substance, condensation, or evaporation. This influence can be effected by any irreversible process and is registered by a measuring system without any preliminary excitation, i.e., when the cause and effect positions are not separated. In other words, apart from flow and density, time seems to have another property, causal orientation, resembling in a way the polarization of light [8]. This property proves to be so variable that even the sign of the observed influences may change and hence the reciprocal cause and effect positions become reversed.

Continuing his studies on the properties of time, Kozyrev (with V.V. Nasonov) conducted astronomical observations using a receiving system of a new type. When the telescope was directed at a certain star, the special detector positioned within the telescope registered the incoming signal even if the main mirror was shielded by metal screens. This fact implied that electromagnetic waves (light) had some component that could not be shielded by metal screens. When the telescope was directed, not at the visible but at the true position of the star, the detector

registered a signal that was much stronger. The registration of the true position of different stars could only be interpreted as the detection of star radiation that had velocities billions of times the velocity of light. It was concluded that the radiation from stellar bodies hence had a component, which was non-electromagnetic. Kozyrev also found that the detector measured an incoming signal when the telescope was directed at a position symmetrical to the visible portion of the star relative to its true position. This fact was interpreted as a detection of the future positions of stars [9].

From the 1960's onward, additional Russian research groups continued and expanded upon the work began by Kozyrev on the unique non-electromagnetic radiation that was apparently a concomitant of all rotating bodies, whether accompanying macroscopic spinning objects of great mass (cosmological or terrestrial), or at the quantum level exhibited by elementary particles possessing recorded anomalous spin features which were not accountable by standard theories. This emanation which was exhibited by rotating bodies was termed torsion radiation [10]. Subsequently it was learned that this unique radiation was a part of all living or inert substances. This so-called "torsion field" research was carried on mainly in secret in the former Soviet Union, and only became known to the Western nations after the fall of the Iron Curtain. Many effects attributable to alterations in time and gravity have been reported through this research. For more information on this topic the reader is directed to this author's review in reference 10 and references therein.

Part II of II

Summary of Part I

It is the intention of this multi-part dissertation to motivate an imperative for considering the eventual establishment of a more expansive paradigm for the phenomenon of time, one which views time from the "substantial" as opposed to the orthodox "relational" standpoint. The

substantial concept of time implies the existence of an **active** essence which can and does affect objects and processes occurring in the universe. Furthermore, approaching time from such a fundamental basis implies that by positing active substantial change as the ground form **prime mover** and relational time (**passive** "clock-time", or entropy changes) as its derivative, that those objects and processes can also have a **reverse** action on time.

Towards this end in Part I (hereinafter referred to as I), we considered the key research of the late astrophysicist N.A. Kozyrev who, in carefully controlled experiments which were subsequently successfully replicated, recorded phenomena which have hitherto been unexplainable by standard contemporary received knowledge-whether from the standpoints of Newtonian, Relativistic or Quantum physics. Kozyrev pointed out that only by considering time as an active essence, could these cited "anomalous" phenomena, which are virtual conundrums from the viewpoints of a relational (passive) concept of time, be duly formulated on a logical basis. Accordingly Kozyrev's associated "causal mechanics" incorporates an objective directionality of time flow, implying differentiation between "cause" and "effect". **Consequently, by applying a thermodynamically irreversible process to a physical system (example: vibration to a spinning gyroscope), the rotor in this instance would be observed to lose (or gain) a small but detectable percentage of its weight, depending upon the direction of rotation.** Moreover, in this process **linear momentum** (linear speed of rotation) is not changed, but energy is nevertheless delivered to the system by additional forces directed along the axis causing a change in **angular momentum**, and that near the cause-effect system of the irreversible process, **time density** is altered - rarefied near the generator and concentrated in proximity to the receiver. Kozyrev concluded that time is a non-momentum material reality.

Other experiments of an astrophysical nature showed that registration of the true

position or future position (as opposed to visual-present-position) of different stars via the non-electromagnetic component of star radiation, demonstrated the existence of an energy essence, which was apparently instantaneous, or had a propagation velocity of at least a billion times the velocity of light. In this regard, Kozyrev opposed the conventional astrophysical paradigm, which posits energy generated/emitted by stars is a physical consequence of thermonuclear conversion. Instead he maintained that via rotation, stars converted time essence into non-physical (or pre-physical) energy. The latter was nevertheless detectable on Earth by transduction through reflecting telescopes shielded by metal screens, of stellar radiation by a Wheatstone bridge. Hence the "impact" of time was detected by resistor electric conductivity changes (see I and references therein).

Leaving no stone unturned in our investigation, we also took up a discussion of the related Killick-Smith tachion energy model for fundamental (pre-physical) reality. Here we coined a new term- a **trinitivity** of action, which was underscored as a key feature of the operation of tachion-pair entities. Accordingly, we posit the existence of two polar topologically orthogonal toroidal fields, with the unique ability, by the mutual shuttling back-and-forth of their energies, to exist in a third auto-generated state called "static-dynamic balance". Now, since tachions are hypothesized to transfer energy instantaneously, inertial/gravitational mass is not a primordial component of tachion operation (see I). Here we see a striking similarity to the Kozyrev conception of the operation of time in interaction with a physical system - where energy changes are manifested without linear momentum alterations delivered. Likewise, the Smith book, **The New Science** (see I) treats **the hypothetical tempic field as a scalar quantity, which only has direction in relation to its distribution (or "density" change). Only through establishing what Smith termed a tempic field gradient does the tempic field possess vectorial nature.** Similarly,

Kozyrev viewed time like space as possessing both geometrical and physical properties. The geometric property of time is duration (its scalar component), while physically the course of time is similar to vectorial field propagation and the density of time to field intensity. Although Smith and Kozyrev apparently never were aware of each other's research, the following quote from Kozyrev reveals that they both made key profound discoveries about nature which indeed bear more than a superficial similarity: "Time density is a scalar quantity, just the one observed in the above experiments. Time density decreases with increasing separation from the process creating it. Therefore, a vector property corresponding to density gradient and tractable as time obtaining, should also be observed"[7]. However, in I we also enjoined the reader to observe caution and selectivity when attempting to separate the wheat from the chaff in Smith's book.

Accordingly, the previous ideas are substantially correct, whereas his concept of "continuous spin" of tempic field energy is basically flawed. Killick replaces this outmoded counter-productive notion with a key ratcheting motion, like the escapement of a watch, which is performed by the tachion entities composing a pair-unit. Through this unique "clocking-motion", a cycle of tachion-pair operation exhibits what could only be described as an **ethical modus operandi**, passing through the three stages of observation - reflection - action. By virtue of this 3-stage process, tachion-pairs demonstrate in their individual activity and in interaction with their environment - *personal moral responsibility*.

This is indeed an unprecedented notion which implies that a type of conscious thought process can be ascribed to tachion operation. This can be related to current notions from quantum physics, relative to quantum coherence of states - such as wave-function collapse, Indeterminacy, quantum non-locality (EPR experiment), "entangled" particles, etc. This may be an indication that in such cases, whenever the Principle of

Causality is breached or at least compromised, we may be witnessing the unique effects of the inherent conscious microscopic non-linear clocking oscillation of the tachions.

Along these lines, although Kozyrev did not report observing any effects of time energy, which could be considered as "value-motivated", he did report on an equally mysterious "after-effect" in many experiments, which could only be construed as signifying a **memory** process. For instance, it turned out that in experiments with a vibrating torsion balance (or pendulum), at points of support the emerging additional forces did not disappear when the vibration was stopped, but remained in the system for an appreciable time. Interestingly, **their relaxation times were found to be independent of the mass of a body but were dependent on its density**. The largest effects with maximum preservation times were observed on porous materials like brick or volcano tuff. In enumerating on this unusual preservation action Kozyrev observed: "...a body placed for a certain time near an (irreversible) process and then brought to a torsion balance, produced the same effect on it as the process itself...aluminum showed no memory. The largest memorizing effect for processes of both signs has been shown by sugar"[7]. Also, his colleague Danchakov later observed in conjunction with biological experiments that water with decreased viscosity due to having been subject to the action of a process, exerted a distant action on water that had not been under such an action, causing its viscosity to decrease as well.

In this second part of the current dissertation, we will examine other important related information gleaned principally from esoteric sources, referenced in I. These have been obtained from books by Jane Roberts: **The Seth Material, The "Unknown" Reality** (UR) [2], unpublished transcripts (J.R.) [1], and transcripts from the entity Kryon channeled by Lee Carroll [3]. This information is remarkably corroborative with that from Kozyrev research and the tachion energy theory. Finally, we will cap off

our exposition with a brief examination of a bold new maverick physical theory of sub-atomic electron structure, featuring variable time/mass attributes, which could be the catalyst for bringing the cited elements from esoteric knowledge and empirical physics research (Kozyrev, etc.) out from their hitherto relative obscurity, to the forefront in our ongoing mainstream investigations in probing the cutting edge frontiers of not only physics, but those of the natural sciences as well.

Other evidence

When one compares the transcripts from various esoteric sources it's remarkable how similar is their description of nature's fundamental operations at the pre-physical level. For instance, a careful reading of the Jane Roberts' channeled transcripts from the entity Seth, reveals a remarkable close connection with the particles termed EE (electromagnetic energy) units and the above Killick teachings on tachion pair dynamics. But first a word of caution to the reader. We should resist the tendency to put into the frame of reference of our sentient physical experience, structures whose essence is fundamentally non-physical. The customary physical characteristics of duality and dichotomy of fields, and the related yardsticks of mass, length and time, for the most part, may not apply in this situation.

It would be impossible, however, to formulate a comprehensive model for the EE unit dynamics were none of the factors for gauging physical reality to be able to be applied to higher dimensional realms. Fortunately, one characteristic does survive the transition to the non-physical framework- the element of **pulsation**. Seth reports in [2] how EE units, much like tachion-pairs are built up and dynamically pulsate in response to thought patterns. First, depending upon the relative intensity of the emotional energy, they will instantly be drawn together in clumps or may just as quickly disperse. Furthermore, being of a pulsating nature, these units can expand and contract. Theoretically, there is no limit to

their size or frequency of pulsation. Seth describes their operation in the following manner: **Now, there are electromagnetic structures, so to speak, that are presently beyond your instruments, units that are the basic carriers of perception. Their size varies. Several units may combine, for example. To put this as simply as possible, it is not so much that they move through space, as that they use space to move through. There is a difference.**

On this point, if our conceptions remain "earthbound" we will not perceive any difference between these actions, but once we cast our mental gaze beyond physical experience, an important distinction becomes apparent. To understand this, we need only reflect on the similar non-classical logic that is the basis for the non-orientable Moebius topology that we have seen governs the dynamics of the tachion-pair unit [5]. Tachions, whose translational movement is governed by the relative pulsation frequency, apparently enter and leave our level of reality at two times (field equity stages) during each pulsation cycle. Before leaving our plane, the tachion-pair constitute what we call a space-time point.

Upon returning to our level, due to the Moebius topology of the clocking cycle, their essence creates a new space-time point with enantiomorphic (mirror image) characteristics to the first. The resulting progress of the units in physical reality is thus manifested by a "jerkily discontinuous" movement. Summing up, since the units **are** the point they create, it can now be understood that the units **use** space (or the nature of the space-time points) to move through, rather than the case of macroscopic matter which moves continuously (or appears to) through space.

Seth continues his description of the EE unit dynamics: *Laws of attraction and repulsion are used and, in a manner of speaking, thermal qualities are involved, and this is the only hint that your scientists have received of them so far. The units charge the air through which they pass, and*

*draw to them other units. The units are not stationary in the way that, say, a cell is stationary. These units have no "home". They are built up in response to emotional intensity. They are one form that emotional energy takes. They follow their own rules of attraction and repulsion. As a magnet will attract with its filaments, so these units attract their own kind and form patterns which appear to you as perception. They are electromagnetic, in your terms, following their own patterns of positive and negative charge. In this instance, like definitely attracts like. The units are just beneath the range of matter. None are identical. However, there is a structure to them. The structure is beyond the range of electromagnetic qualities as your scientists think of them. Consciousness actually produces these emanations, and they are the basis for any kind of perception, both sensory and extrasensory. These emanations can also appear as sounds and you will be able to translate them into sounds long before your scientists discover their basic meaning. One of the reasons they have not been discovered is precisely because they are so cleverly camouflaged within **all** structures.*

*Being just beyond the range of matter, having a structure, but a non-physical one, and being of a pulsating nature, they can expand and contract. They combine qualities of a unit and a field, in other words. Since they are beyond the range of matter, upon which matter is formed, they will not follow the laws of matter, although at times they may **mimic** the laws of matter. It is almost impossible to detect an individual unit, for in its dance of activity it constantly becomes a part of other such units, expanding and contracting, pulsating and changing in intensity, in force, and changing **polarity**. It would be as if the positions of your north and south poles changed constantly while maintaining the same relative distance from one another, and by their change in polarity upsetting the stability of the planet- except that because of the greater comparative strength at the poles of the units, a newer stability is almost immediately achieved after each shifting. Even the altruistic motives of the tachion-*

pair as cited by Killick parallels similar behavior of these EE units.

Again from J.R.: The behavior of these units changes in the following manner. When a unit is in the act of combining with another, it aligns its components in a characteristic way. When it is separating itself from other units, it will align its components in a different way. The polarities change in each case, within the units. The unit will alter its polarities within itself, adapting the polarity-design of the unit to which it is being attracted; and it will change its polarity away from that design on breaking contact.

Ken Killick has described the mutual action of several tachion-pairs bonding, as the origin of standard sub-atomic particles possessing features known to modern science such as mass, charge, spin angular momentum, magnetic moment, etc. Thus, according to tachion energy theory, the electron attains its validity, and maintains its structural integrity, by virtue of relations between the component pair dynamics [see [5]]. Since for the bulk of their independent existence, tachion pairs are in the pre-physical state, we can speculate that they may actually be superluminal entities. Remarkably, J.R. echoes this view with similar notions: *...the electron achieves its validity because of these (possibly superluminal) orbital units (tachions?). What we see as an electron is not made of the same things as the orbital units, however; it is an **effect**... when you change the structure of the electron, you are changing the relationships between the orbital units. This change will require an application of energy. It may be possible to construct a chamber that would give the electron more freedom.*

*Whatever we do now in the handling of electrons is not giving them enough freedom and we are structuring the way in which they can appear. The next observation made by Seth could prove to be essential in clarifying the true nature of time: ... If electrons were given more freedom they would affect **our notion of time in perceiving them. The way the measurements (on electrons) are made forces the electron to appear***

in a particular way, but actually it's flitting around, seemingly in many places in rapid succession (pulsing in and out of physical reality). Turning to the structure of elementary particles in [2], Seth offers a similar observation in which he describes the electron as commonly perceived by scientific measurement apparatus, as merely a shadow or facade of the actual electron entity which constitutes a multi-dimensional structure.

In terms of a structural model for the electron, Seth says it would be more appropriate to view these units as composed of *interrelated fields* rather than as the current conception of a particle or a wave. Correspondingly, both of these criteria are key elements of the tachion theory, which posits the electron as composed of two-pair tachion fields. The electron achieves its stability-integrity from the interaction of these free-wheeling units.

Electron Spin and Structure of Fundamental Time

The electron "spin" feature is also claimed to be integral to the exhibit of "time's arrow" in UR [2]: *The electron spin determines time "sequences" from your viewpoint. In those terms, then, a reversed spin is a reversed time motion...electrons, however, spin in many directions at once, an effect impossible for you to perceive. You can only theorize about it. There are "electromagnetic momentums" thus achieved and maintained- certain stabilities that operate and maintain their own integrity, though these may not be "equal" at all portions of the spin. There are equalities set up "between" the inequalities...time, in your terms, then, is spinning newly backward as surely as it is spinning newly into the future. And it is spinning outward and inward (pulsing inward and outward of physical reality) into all probabilities simultaneously.*

It is vital that you understand this inward and outward "thrust" of time, however, and realize that from this flows the consecutive appearance of the moment. The thrusting gives dimension to time that so far you have not even begun to realize... This inward and

*outward thrusting allows for several important conditions that are necessary for the establishment of "relatively" separate, stable universe systems. Such a system may seem like a closed one from any viewpoint within itself. Yet this inward and outward thrusting condition effectively sets up the boundaries and uniqueness of each universal system, while allowing for a constant give-and-take of energy among them. By their unique operation, the EE-units, which form the elementary particles such as the electron, serve as the conduit for this energy flow once it is transduced by elements of thought that Seth terms "consciousness units" (CUs). Continuing in UR on this subject Seth **describes how time can be alternately created or "broken down"**: *The consciousness units serve as source points or "holes" (Black holes or White holes?) through which energy falls into your system or is attracted to it- and in so doing, forms it. The experience of forward time and the appearance of physical matter in space and time and all the phenomenal world, results. As CUs leave your system, time is broken down. Its effects are no longer experienced as consecutive, and matter becomes more and more plastic until its mental elements become apparent. These observations are corroborated by Kryon in his dissertations to follow.**

Specifically, in the Kryon channelings, further insight on this electron "freedom" is given in the context of change of frequency: *...There is something we call the electron haze which is around the nucleus of the atom. The space between the energy haze and the nucleus (which is great), varies more than you think in matter. As the space varies, the speed (frequency) of the haze must change. It is in the physics where the speed of the haze is strong and fast that you have a different time-frame than your own...you have not yet accepted that an object can seem to be stationary- yet traveling (vibrating) very fast. Not in a linear time from point A to point B, but in the electron haze of its vibrating parts.*

J.R. corroborates these comments in this dissertation: *Einstein considered relationships of this sort that hold in the far universe as one increases velocity towards the speed of light,*

but there are also "inner" situations (altered **stationary** states) that relate these quantities, and that are much easier to get into. In regards to atomic structure to allow for frequency changes, Kryon adds: *What is it that makes the distance between the parts change? This is the puzzle for the scientists. For the area between the nucleus and the energy haze although vast, is not void. It is a patterned soup of energy (the so-called "vacuum"), and it is within the pattern of this null that changes the distance, and therefore the speed (frequency) of the haze.*

Mass, gravity and time are intimately related to this frequency change in the atom. Witness the comments from J.R.: ***Time exists as an invisible dragon matter and this is interpreted as gravity. Time exerts a definite force like gravity, and this is connected with the behavior of the electron.** However, since we always look at electrons in a certain way and gravity in a certain way, we miss the connection. And this related comment as well: *There is another equation to be discovered that expresses the relation between time, mass and gravity.* Kryon reiterates this sentiment, along with relatively detailed scientific information: *Gravity is an absolute product of the characteristics of mass and time... one of which you may change.**

*What has been missing so far in your thoughts is how gravity is related to time, and that the entire issue of gravity, mass and time is non-linear. You have yet to develop the formula of physics. It is not here yet, and we are going to give you three attributes of the formula, but without the formula. These attributes are understood but the way they relate are misunderstood. Your science is just now beginning to see the shadows of them, however. The first attribute of the formula is the ability to understand the **density** of mass. Why is the electron haze so far from the nucleus? We have told you that you can change this distance, and in doing so, the density will change in the mass that is defined by the atoms being shifted. The electron haze will have to vibrate faster (this is possibly the "freedom" referred to earlier by J.R.), the closer it is to the nucleus; when the electron*

*haze vibrates faster, its **time-frame** will shift. Therefore, the second attribute of the formula is a time-shift, and they go together. Also, be aware that you make an erroneous assumption that the actual speed (frequency?) of the electron haze must always be the same no matter what the distance. This is not understood yet either. There is a difference between speed (velocity/ translatory rate) and vibratory rate, and it has to do with the actual physical definition of the **electron haze**.*

Mass discrimination is the ability to control the density of mass. With a density shift will come a time-shift, and with a time-shift will come a third attribute... we will call the **reality of location**, or where the matter is... in which dimensional reality it goes to when shifted. Here is an axiom: **shifts in dimensionality when matter is changed in this fashion create a reality where the matter has to be to exist in its new form**. It might be inches from where you changed it or miles. That depends on how much it got changed. The difficult thing to explain to you is a concept that has not been recognized... that matter has a **reality index**, and that its core attributes are linked to where it exists in time and space. Therefore, the three attributes that must work together are **density, time-frame and location**.

Electromagnetic Field Manipulation of Cosmic Lattice and Time-Space-Matter

In regards to tapping this (mass-free) energy-haze-soup, between the atomic nucleus and electron shells, Kryon speaks thusly: *There's something we are going to call APD (atomic phasic displacement). This is a term that is going to refer to the ability to tap the (Cosmic) Lattice for unlimited energy. The Cosmic Lattice is balanced, but it is not quiet. The Lattice has astounding power. It has a flow of energy that I cannot explain to you, for there is no paradigm model for it yet in your thinking. Therefore, you would not easily understand. The Lattice has vents that we can best describe as necessary for the flow of energy. It balances the slight inequity of the*

polarity. The vents also have to do with time...you will always find two vents together. One will be prominent, the other will be secondary. You might graphically and clearly see one, but you will have to look carefully to see its partner. There are always two. This is an axiom or physical rule of the Lattice energy, and of the universe: This information remarkably parallels Killick's teachings on tachion energy pairs.

Witness this Kryon pronouncement: Hiding within common atomic structure is a marvelous peek at something that will totally and completely mystify you, for it will seem to break all the laws of time and space. The "twins" are a pair of atomic parts that always relate to each other, and are always found in pairs. You will discover that when stimulated correctly, they will always move together as a pair. When you start separating them by distance to experiment, they will continue to move exactly together. If one's energy is converted, then the other will do the same. This will cause you to totally reexamine your ideas of time and space, for this condition will not follow the "ultimate speed" of transmission that you thought was correct...that of the speed of light. You will have discovered something that travels faster than you can ever measure. Compare this statement with the torsion energy claimed by the Russians to travel at a billion times light speed [10].

In returning to the discussion on how to tap the Cosmic Lattice for energy, Kryon continues: The vents are very necessary for the balance of your universal energy. The vents are also energy portals, (drains, to you), and are where the front of each Lattice cell touches the back...Like so many other physical processes, however, its going to take a tremendous amount of energy in order to unbalance even one cell's null attribute...Once you understand how to "prod" the null to unbalance itself, you will be rewarded with a steady flow of energy, far beyond what you put into it. This is accomplished since you create your own tiny "vent". An unbalanced cell creates a situation where the other cells around it will try to "feed" energy to the one that is unbalanced. This creates a tap that will pull upon the Lattice indefinitely, as long as

your work matches the properties the Lattice expects to see. Kryon further expands on the specific method to accomplish this...Here's how it works. Two magnetic fields together, postured in the correct way- a way that is very three-dimensional in your thinking process- will create a "designed magnetic field" that is very specific.

...your math told you that there might be a possibility of invisibility and that was your goal. This was again because you did not understand that because the distance between the parts change, it doesn't necessarily mean that the overall size will dramatically change or that it might vanish...

It's one you have never seen, and does not exist naturally. Start with trying several magnetic fields postured against one another- of unequal force and pattern, and at right angles. Don't make any assumptions. Think freely. Done in the right fashion, these two fields will create a third pattern which is unique and is the product of the original two. This third custom-created pattern is the one that you want to deal with, and is the one that has the potential of manipulating the Lattice. Once you have created it, you will know of its special qualities by how dramatically it changes the physics around it. And this important admonishment is given: Here is a caution. Keep this experiment away from your body. Keep the experiment in check with your scientific methods. Go slowly. Understand what you're seeing before you go on to the next step. Do not expose yourself to any magnetic fields. Remotely conduct all energy experiments. Remember that magnetics also plays an important part within your body (DNA components).

*Here is another. Understand that if you unbalance the Lattice too grandly and too greatly, you will have a **time displacement**,*

*for the process also involves the property of **time**... One of the actual physical players in the creative process of unbalancing the Lattice is the manipulation of the time-frame of matter. **This is not time travel, but time displacement.** It is where you are actually addressing tiny parts of matter, and changing the time-frame they are in. When the inequity of time-frames meet one another (matter mixed up with differing time attributes), the result is a displacement of distance (reality of location). Although there is no horrendous danger for Earth within this time displacement, it can and will affect the local situation within the experiment. In other words, it can create a matter-distorting effect, completely stopping the experiment, and actually dislocating the parts. We are not going to say any more about this at the moment, but the more astute scientific minds reading this will go to the next obvious step... and the answer is "yes", the Lattice is also the key to quick travel of large physical objects... even of very short distances.*

Possible Documented Demonstrations of Time-Space Warping

Such fantastic transformations were possibly evident in the Hutchison experiments [11], in which metal samples were catastrophically fractured when exposed to radiation from the unique electromagnetic field effect. It was also noticed that many physical objects of different composition which were separate in space before the electromagnetic field was applied, became inexplicably embedded in each other once these objects were radiated by the field effect. For instance, **pieces of wood contained metal knives**, etc. Other metal samples were catastrophically fractured in their molecular-atomic crystal arrangement, producing a substance which was uniform and geometrically symmetrical at one end but appeared to have the resemblance of corrugated cardboard at the other.

Also, similar to Kryon's assertion of the inevitability of time-shift with mass altering

phenomena, in Hutchison's work anomalous inertial impulses were recorded on film, sometimes resulting in the complete lift/levitation of various substances of different mass. We notice also anomalous inertial impulses were a feature of the Zinsser "kinetobaric" effect [12], in which due to excitation by **sawtooth microwave impulses with very fast rise time**, a sample attached to a torsion balance, deflected the balance for days and weeks after the original excitation was extinguished. Notice the similarity between these results and those of the Kozyrev experiments, some of which reportedly featured a memorizing preservation effect on a torsion balance, etc.

We also find additional confirmation from the basically anecdotal evidence from the alleged legendary Philadelphia Experiment in 1943, which apparently caused either large time- or space (teleportation) shifts in a Navy ship. In fact, in another piece Kryon himself possibly speaks directly about the Philadelphia Experiment, providing us with further insight into important possible new paradigms for time, mass and energy: *In all your questions regarding magnetics and the massless condition, you have never asked about what happened in your year 1943. You tried to create a massless condition with coarse equipment and little understanding of what you were doing. In the process you actually did create an unstable massless condition for a moment. Its instability created a situation where, instead of a true massless condition, you received one where the time-frame changed but the parts within the sphere of the time change did not have the fine-tuned synchronicity needed for a massless object. The result was an actual distance displacement of the object instead of a true massless condition. Indeed, humans were involved on the large object and their biology was damaged greatly. Your experiment was done in an atmosphere of desperation, and your goal was flawed. For your math told you that there might be a possibility of invisibility and that was your goal. This was again because you did not understand that because the distance between the parts change, it doesn't necessarily mean that the overall size will dramatically change (or that it might vanish).*

*Although this may seem like a paradox to you, the internal mechanics of small particle behavior supports this. The change is measurable but very small, much like what happens with heat and chill... Many of you have guessed correctly that **magnetics and electricity play a critical role in the determination of the real attributes of mass...** and the magnetic variables that determine the mass product, are often working within very small particles to create the density of an object and also its time-frame. The time frame of a massless object is slightly different than your own, making you to appear slightly slower than the massless object. Its reaction to more traditional mass molecules around it is also predictable: because of the very slight time displacement, it tends to change the number of electrons within the atoms directly in contact with it. This is a clue on how to detect a massless object even if you can't see it.*

The reason you felt the object (ship) would vanish was that you were able to simulate a "vanishing" in the laboratory with smaller objects. This observation was not consistent however, so you again were in desperation to try this experiment on a larger object. The "vanishing" was an illusion and was due to a distance displacement rather than an "in place" vanishing... does this give you a clue to long distance travel using magnetics and the vibratory rate of matter?... Only one human on the planet has ever captured a true massless condition, and even this was a coarse one and lasted for only for a few moments that were uncontrollable in scope. This massless condition was created in the primitive workshop of a great electrical scientist in your culture on the American continent not too long ago. If you were able to visit his workshop, you would note the holes in the ceiling and the patched glass-covered light port where his massless objects took off and wildly flew everywhere. If he had been born 50 years later he would have been able to control the attributes of the experiment. As it was, he did not have the precision tools you have now to direct and control such an experiment. It was his great passion to understand this phenomena, but because it was so uncontrollable and sporadic, he was

never able to bring others to see it work, for he could not accurately create it consistently. This depressed him in his later years, for his was a great three-dimensional mind... When asked the identity of this scientist Kryon replied: The inventor of your multi-phase current, born in the land you now call Yugoslavia.

From the above information, there emerges a remarkably consistent picture suggesting that atomic structure may not be as rigid or immutable as formerly thought. Changing the fundamental frequency of vibration of atomic structure can perhaps apparently not only change the density of matter by altering the distance of electron shells from the nucleus, but in so doing alter the time-frame of that object, its mass and also the reality of location of that substance. Certainly, the implications of the Kozyrev research, among others, can possibly form the basis for the eventual technological implementation of these futuristic principles. Perhaps those experimenting with the relatively detailed data provided by Kryon on APD can actually realize this coveted goal.

Maverick New Theories in Physics Suggest Fluid Nature for Time, Space, Energy

The Dirac theory is to be understood as a theory of the electron with electromagnetic interactions. It consists of the Dirac wave function and its properties, including the Dirac equation and relations to physical variables such as energy-momentum, spin and position probability current. In spite of its indisputable mathematical successes, the Dirac theory is still without a completely satisfactory physical interpretation. In particular, the so-called *zitterbewegung* ("jitter motion") is a distinctive feature of the Dirac theory which continues to be the subject of conflicting interpretations in the standard scientific literature. The concept of *zitterbewegung* was introduced by Schrodinger to interpret high frequency oscillations in free-particle wave packets of the Dirac theory. These oscillations with angular frequency $2mc^2/\hbar$ arise from

interference between positive and negative energy components of a wave packet. Schrodinger interpreted the oscillations as fluctuations in position of the electron about an average motion. However, this concept has not been interpreted in the bulk of the literature as having an objective significance, but has erroneously been viewed by standard theory as a mathematical artifact of the one-particle Dirac theory which does not appear in a correctly formulated quantum field theory.

However, as noted theoretical physicist David Hestenes suggests in the first of his recent article series in the journal, **Foundations of Physics** [13], it is only by interpreting the zitterbewegung literally and objectively as point particle motion, that a complete and coherent interpretation of the Dirac theory can be achieved. Moreover, this model has implications that have not yet been previously considered by established physics that relate directly to some of the key features of sub-atomic behavior enumerated in the tachion energy theory and also in the microscopic dynamics of elementary particles revealed by the selected esoteric channelings that we have previously considered in the present exposition.

In particular, it implies that the electron is the seat of a fluctuating electromagnetic field which oscillates with the DeBroglie frequency of the electron (1.6×10^{21} cycles/sec).

Thus, it tells us that a kind of electromagnetic wave-particle duality is implicit in the Dirac theory. Of course, this contradicts the conventional view that wave-particle duality is a property of matter which is completely independent of the nature of its interactions. If the zitterbewegung is an objective phenomenon, then it originates from electron self-interaction, since it persists in the absence of external fields. In this new theory which considers the zitterbewegung as an objective physical phenomenon, the electron mass and spin can be identified with the energy and angular momentum of electromagnetic interaction. It suggests that the self-interaction is such that there exist certain stable, non-radiating but accelerated states of motion; in particular, for a free

particle, this implies motion in a circle with the radius of a Compton wavelength- the zitterbewegung. The zitterbewegung implies that some of the mass, at least, is kinetic self-energy associated with a spin, and it reconciles the mass with a zero mass of the bare electron. Thus, according to this bold new theory, the electron spin arises from a helical world-line in spacetime. To be sure, some researchers have previously postulated such a helical electron dynamics. Unfortunately, such models have failed to explain why a helical motion for spin should depend on interference between positive and negative energy states or why the zitterbewegung should depend on the way a wave packet is constructed, or even how the zitterbewegung can be the origin for electron spin despite the fact that it vanishes for plane wave states that certainly describe a particle with spin.

The Hestenes model does offer an explanation for such effects and accounts for the ubiquitous feature of spin angular momentum as a function of the zitterbewegung. The essential unprecedented feature of the Hestenes' zitterbewegung idea is the association of the spin with a local circulatory-helical motion characterized by the phase factor of the electron wave function.

Thus, we reach the conclusion that the complex phase factor of the electron wave function can be associated directly with an objective helical motion of the electron, which is, in turn, a derivative of the zitterbewegung. Although the idea of helical motion connected with the electron has been considered before, it has not previously been related to electron phase to produce a complete interpretation of the Dirac theory.

Moreover, in the next installment of his dissertation [14], Hestenes argues that the zitterbewegung is not only an objective dynamical phenomenon associated with the electron, but is a ubiquitous phenomenon, with manifestation in every area of quantum mechanics, even in the non-relativistic domain. For instance, by showing that spin angular momentum can

be regarded as angular momentum of the zitterbewegung fluctuations, the zitterbewegung interpretation of the Dirac theory begun by Hestenes in reference 13 provides an explanation for the electron spin and magnetic moment in the physical circulation of momentum and charge. It also explains the mass as the energy of this circulation. Thus, the origin of the zitterbewegung is attributed to self-interaction of the electron with its own electromagnetic field. The relations derived by Hestenes in this article suggests that the interaction is of magnetic origin, since it has the form of a Larmor precession energy if spin angular momentum is proportional to a self-generated magnetic field. The so-called "rest mass" of the electron is thus a kinetic energy of self-interaction. It is this that gives the electron its inertial properties, and the flywheel-like nature of this inertia may be the ultimate origin of spin dependence in electron scattering. And the Heisenberg Uncertainty relations can now be attributed to the "zitterbewegung fact" that an electron cannot be confined to a region smaller than a Compton wavelength. Also, the stationary states of a bound electron exhibit a resonance of the orbital frequency with harmonics of the zitterbewegung frequency, which is imposed formally in the standard theory by requiring single-valuedness of the wave-function. Evidently, such resonances, so prominent in quantum mechanics, can be interpreted as zitterbewegung resonances. This leads to a new explanation of penetration of a potential barrier by sub-atomic particles as due to zitterbewegung fluctuations in momentum, and the Aharonov-Bohm effect as a shift in zitterbewegung phase. The zitterbewegung phase factor literally represents a physical rotation. The rotation rates of this phase in time and space directions are the source of the electron's energy, mass and momentum.

In his third paper [15], Hestenes draws a closer relation of the zitterbewegung dynamics to the Dirac theory by suggesting that the latter actually describes a statistical ensemble of possible electron motions, which are actually governed by the zitterbewegung sub-

structure. Since the energy-momentum of the electron can now be interpreted in terms of a rotation rate in the spin-plane, Hestenes then derives a corresponding relation which defines a variable mass for the electron—another unprecedented idea which is in agreement with the information given by Kryon in his dissertations and Ken Killick's tachion theory. The mass m , the scalar radius of curvature r and the zitterbewegung frequency all covary with changes in the rotation rate in the electron spin-plane. Hestenes obtains a relation demonstrating that the electron mass is inversely proportional to the zitterbewegung frequency. This conforms to the relativistic concept of mass as a measure of energy content. But here, mass is concluded to be primarily a **frequency** measure. This also conforms to DeBroglie's original idea that the electron contains an internal clock with frequency determined by its mass, though for a free particle, the zitterbewegung frequency differs from the DeBroglie frequency by a factor of 2. Moreover, the new key relation derived by Hestenes: $m \cdot r = 1/2h$ (h , Planck's constant), says that this frequency measures the radius of curvature of the electron world-line, so it is a thoroughly geometrical quantity. Thus, as mass increases the radius of curvature decreases, in concert with the tachion dynamics as well. All this suggests that the electron mass relates our externally imposed time scale to a time scale intrinsic to the electron.

The reader can see that the information transmitted by J.R. is also remarkably similar in this connection. It should be evident that there is introduced a new concept of mass here, though, to a certain extent, it was already implicit in the Dirac theory. The formerly vague concept of mass as some kind of material stuff is completely gone. Also, no longer is vanishing mass a distinguishing feature of particles moving with the speed of light.

Corroborating Research on Oscillatory-Fluid Nature for Time

In his recent thought-provoking dissertation [16], Tom Bearden relates of

the dynamic influence of time on a material system: "But we can also legitimately state that 'time is energy' and be rigorously accurate...Time is extremely compressed EM spatial energy...Without further elaboration, we speak of a 'mass' in which a small portion exists as 'masstime' rather than mass, as having been 'time-charged' or 'time-excited'.

The t-polarization wave in the time dimension is quite unique: The *spatial* energy of the wave is in equilibrium and not vibrating at all; instead, the photons comprising the wave are vibrating in their **time**-components... In short, mass m is changed into masstime mt by photon absorption... Rigorously, a mass does not really 'travel through time' continuously, per se, but proceeds with an overall serial change mechanism, driven by its total virtual and observable photon interactions, as $m \rightarrow mt \rightarrow m \rightarrow mt \rightarrow \dots$ We propose that this may account for the duality of particle and wave...The particle actually oscillates at a high rate between the m and mt states... Mass 'travels through time' by an extremely high oscillation between corpuscle-like state and wave-like state". Notice how Bearden's description of the macroscopic operation of time on a physical system closely parallels Hestenes' proposed model for of the zitterbewegung dynamics at the sub-atomic level which provides the electron (and possibly photons, etc.), with a time-substructure (its internal "clock").

We can see many other places in Bearden's treatise where the unique terminology chosen can now be put into direct reference with equivalent concepts and unique phraseology employed by many of the researchers examined in the current exposition. This cross-referencing certainly provides much needed clarification about key ideas for researchers currently involved with the development of this fledgling discipline that we shall term causal mechanics, after Kozyrev's designation.

All such efforts will help to place investigative endeavors currently scoffed at by

establishment science on a firm rational foundation, as well as assist in synthesizing seemingly disparate but surprisingly related "anomalous" phenomena. For instance, to implement the science he has termed "vacuum engineering", Bearden often speaks of the necessity of establishing a "local time-stress of the **vacuum potential**". This process, which as we hope to have shown here is completely legitimate, is identical to what Smith calls creating a "tempic field gradient", Kozyrev's "alteration of time-density", or Alexander Frolov's "change in the local time-rate".

It can clearly be seen that such ideas can only be perceived as science fiction fantasy, if we observe strict adherence to all current received paradigms (even in superstring theory), which consider space and time purely from their relational standpoints. These theories must of necessity involve models employing scalable metrics for their proper description. However, once we embrace the novel view posited here that vacuum energy is primary and both local space and time are derivatives of this mass-free non-scalable dynamic non-local oscillating substratum, then we can conceive of space and time properly as complementary aspects of non-local conscious reality, neither fixed in a scalable manner or subservient to the other, but fluid and mutually interdependent features of energy in constant flux (see the related ideas voiced by A. Correa and P. Correa in I).

With this approach we will then come to acknowledge the technological feasibility of many of the "futuristic" claims made in the channeled transcripts. For instance, we can see that it will no longer be necessary to propel elementary particles to relativistic velocities, or to probe astrophysical systems possessing large gravitational fields, to recognize alterations in space, time and mass parameters, since these phenomena can equally as well be accomplished in the laboratory by modifying atomic structure of stationary matter through electromagnetic means. Once again, peruse the Kryon dissertations on this process, for it may be key to future technology.

For those who wish to further investigate these theoretical possibilities, the papers of **A. A. Nassikas** are recommended. Nassikas has postulated what very few researchers before him have theorized: the existence of a ground-form probability density function for energy, as a necessary precursor to the malleable (deformable) characteristics of time and space [18]. One of Nassikas' conclusions is significant in light of ideas articulated in the present exposition concerning the hypothetical tachion-pair model for reality (see I). Here we refer to the key push-pull oscillatory ("breathing") operation between space and time, which may be responsible for the structural integrity of matter as we know it (again re-read the Hestenes zitterbewegung model).

Researcher **Alexander Frolov** has taken Nassikas' theory even further to suggest an explanation for the **anomalous over-unity effect** that has continually been demonstrated in low-energy nuclear reactions (LENR) over the past decade [19]. In such so-called "cold fusion" cells the Palladium cathode is over-saturated with protons, producing a local imbalance in the vacuum engine, causing a local alteration in the time-frame of the experiment to compensate the local change in energy density. **Subsequently, as Frolov claims, this time-frame change converts non-local time-energy directly into heat energy, similar to Kozyrev's description of energy production by stars.** Perhaps this observation might provide the hitherto missing key in our understanding of fusion by electrolytic action.

Conclusions and Prospects

In the preceding paper it is sincerely hoped that the author has demonstrated ample evidence that will spur on researchers of a kindred spirit towards the development of new paradigms for space, energy, mass and especially time. All these concepts, as well as the foundations of current classical electromagnetic theory, are in need of a drastic overhaul before we can fully appreciate and understand the operations of

nature as it interrelates the metaphysical-mental realms with the physical level of reality.

At any rate, the continual appearance of research results, such as the Kozyrev effect, which up to present apparently resists explication in terms of conventional scientific paradigms, certainly offers clear evidence of the incompleteness of our knowledge of nature, even in this enlightened era since the dawn of the new millennium.

Accordingly, hints as to how the Kozyrev effect arises in association with the postulated active properties of time, and how the latter interacts with known physical forces, can assist us towards the development of a more comprehensive paradigm which embraces a wider spectrum of human knowledge - one in which the current conundrums rampant in the foundations of theoretical physics, and biological science disciplines as well, which have hitherto prevented the establishment of a unified model of all physical interaction, can find satisfactory solution. Also, such empirical evidence which generally flies in the face of current scientific wisdom, presents the greatest challenge to our ongoing search for new sustainable energy sources which will be of absolute necessity in the future.

In this light, if formally integrated into scientific thought, the tenets of tachion energy theory, which is based on an altruistic modus operandi, also may hold profound implications for the status of our very social, political and religious structures as well. Indeed, unlike the impersonally motivated interactions believed to be the basis for force interactions in modern sub-atomic physics, which help sustain our illusory belief in the supremacy of the ego, the philosophical basis of tachion dynamics is an able reminder of the humility of purpose which should be the guiding force whatever our walk of life. Like tachion-pairs, in the ideal social structure individuals will work side-by-side, yet achieving a common accord. United in the circle of their activity they will work together joyfully in freedom, each with his own task, yet always conscious of the common bond.

With the full import of these simple truths appreciated, tachions may afford a rational justification of the formerly "unprovable" mystical doctrine of the omnipresent intelligent plan behind the working of the universe at all levels of conscious reality. We will come to realize the profound truth of Einstein's vision of ultimate reality couched in his heretofore cryptic statement, *"God is subtle, never malicious"*.

REFERENCES:

- 1 J. Roberts, unpublished remarks as transcribed by W.H. Kautz.
- 2 J. Roberts, **The Seth Material**, Prentice-Hall, Inc. 1970. Pp. 292-298.
- The "Unknown" Reality**, Prentice-Hall, Inc., 1986.
- 3 L. Carroll, **Alchemy of the Human Spirit**, (Kryon Book III), The Kryon Writings, 1995.
- Letters from Home** (Kryon Book VI), The Kryon Writings, 1998.
- Passing the Marker** (Kryon Book VIII), The Kryon Writings, 2000.
- 4 W. Smith, **The New Science**, Fern-Graphic Pub., 1964.
- 5 D. Reed & K. Killick, "Tachion Energy Theory" (Parts I-IV), **Energy Unlimited**, 1978-1983.
- 6 A. Correa & P. Correa, "Consequences of the Null Result of the Michelson-Morley Experiment: The Demise of the Stationary Aether, the Rise of Special Relativity and the Heuristic Concept of the Photon", **Infinite Energy**, no. 38, July-Aug 2001, pp. 47-64.
- "The Sagnac and Michelson-Gale Experiments", **Infinite Energy**, no. 39, Sept.-Oct. 2001, pp. 32-49.
- 7 N. Kozyrev, "On the Possibility for the Experimental Investigation of the Properties of Time", **Time in Science and Philosophy**, Prague, 1971, pp. 111-132.
- "An Unexplored World", **Soviet Life**, 1965.
- A.P. Levich (ed), **On the Way to Understanding the Time Phenomenon (Part II: The Active Properties of Time According to N.A. Kozyrev)**, WorldScientific, Singapore, 1996 (rare English language excellent critical review of Kozyrev research and theories).
- 8 M. Lavrentiev, "Detection of the Reaction of Matter to an External Irreversible Process", **Sov. Phys. Dokl.**, Mar 1991, vol. 36, no. 3, p. 243.
- 9 M. Lavrentiev et al., "Remote Effects of Stars on a Resistor", **Sov. Phys. Dokl.**, Sept 1990, vol. 35. No. 9, p.818.
- "Detection of the True Position of the Sun", **Sov. Phys. Dokl.**, Nov 1990, vol. 35, no. 11, p. 957.
- "Scanning the Celestial Sphere with a Kozyrev Detector", **Sov. Phys. Dokl.**, Apr. 1992, vol. 37, no. 4, p. 163.
- 10 D. Reed, "Torsion Field Research and Implications for New Physics and Energy Technologies" **Jour. New Energy**, vol. 4, no. 2, Fall 1999, pp. 151-164 (and references therein).
- 11 J. Hutchison, "The Hutchison Effect Apparatus", **Proc. Of the 1st Symp on New Energy**, Denver, May 1994, p. 199.
- "Inside View of the Hutchison Effect", **Extraordinary Science**, vol. III, issue 4, Oct-Dec 1991, pp. 23-26.
- 12 T. Valone(ed), **Mechanical Energy from Gravitational Anisotropy**, Integrity Research Institute, Washington, DC, 1996.
- W. Peshka, "Kinetobaric Effect as Basis for a New Propulsion Principle", **Raumfahrt-Forschung**, Feb 1974 (in German); trans. By D.Reed, **Infinite Energy**, vol. 4, issue 22, 1998, pp. 52-56.
- D. Reed, "Translator's Analysis and Comments on the Zinsser-Effect Device", **Infinite Energy**, vol. 4, issue 22, 1998, pp. 57-59.
- 13 D. Hestenes, "Quantum Mechanics from Self-Interaction", **Found. Phys.**, vol. 15, no. 1, 1985, pp. 63-87.
- 14 D. Hestenes, "The Zitterbewegung Interpretation of Quantum Mechanics", **Found. Phys.**, vol. 20, no. 10, 1990, pp. 1213-1232.
- 15 D. Hestenes, "Zitterbewegung Modeling", **Found. Phys.**, vol. 23, no. 3, 1992, pp. 365-387.
- 16 T. Bearden, **Extracting and Using Electromagnetic Energy From the Active Vacuum**, Association of Distinguished American Scientists, Huntsville, Alabama, 2000.
- "Giant Negentropy in the Common Dipole", **Proc IC-2000**, St. Petersburg, Russia, 2000 (in press).
- 17 A.A. Nassikas, **The Hypothesis and the Equations of the Unified Matter Field**, in New Ideas in Natural Sciences (Part I: Physics), St. Petersburg, Russia, 1996.
- 18 A. Frolov, **Work Created By Means of the Potential Field**, in New Ideas in Natural Sciences (Part I: Physics), St. Petersburg, Russia, 1996.



an online and published magazine about Electric, Hybrid, Fuel Cell Vehicles, advanced batteries, ultra capacitors, fuel cells, microturbines, free energy systems, events and exhibitions worldwide

63600 Deschutes Mkt Rd,
Bend Oregon, 97701
541-388-1908 fax 541-388-2750
etimes@teleport.com
www.electrifyingtimes.com
Subscription \$13/3 issues

On the Rotating Permanent Magnet System

Alexander V. Frolov, Russia

7 Lev Tolstoy Str., St. Petersburg, 197376, Faraday Laboratory Ltd.

In one of our issues we published an article about the results of the experiment conducted by S.M. Godin and V.V. Roschin. They started in 1990 at Moscow Aviation Institute (MAI) when a technical physics laboratory was created in Machine Industry Projects Institute at the "Aeropromservice" Association. Their research work was financed by private investors and was continued in close cooperation with Chair 310 of MAI, especially with Prof. PhD. L.K. Kovalev, Prof. PhD. V.V. Rybakov and PhD. K.V. Ilyushin. By 1991 "a device for inner energy of matter conversion" had been designed and tested (according to the Technical Design Assignment). The prototype was finished in the middle of 1993 (Fig.1).

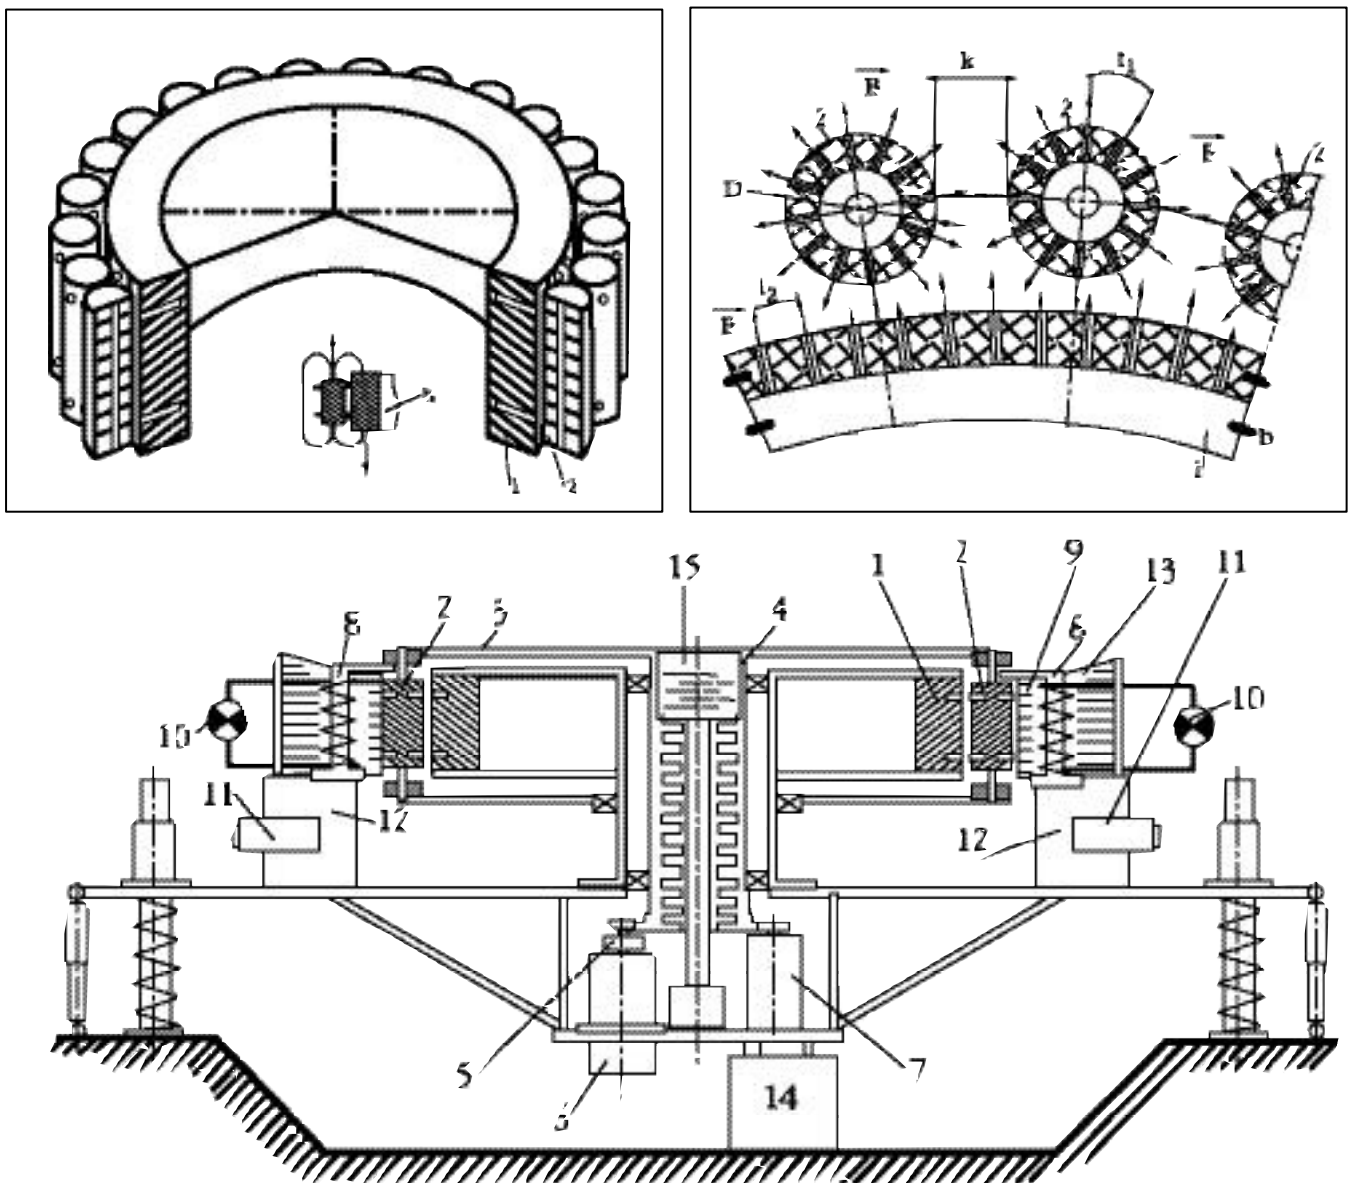


Fig.1

The experiments resulted in the possibility of creating a 7 kW output power in load after the rotor was sped up to 10 rps, but in the autumn of 1993 the laboratory was closed due to the investors' financial problems. Now their research work is continuing in Moscow and we hope the scientists will obtain new experimental results.

You can email S.M. Godin for more information at: smgodin@online.ru

Considering the theoretical basis of the functioning of these systems I should suggest a number of interesting details for prospective researchers.

S.M. Godin, V.V. Roschin et. al. (Physics of Negative Viscosity Phenomena. Prof. Victor P. Starr. Massachusetts Institute of Technology) spoke of vacuum (quantum medium) as **a physical medium possessing negative viscosity**. At that rate, it is worth making assumptions that can be useful to the developers of this topic. I think that standard (positive) viscosity of matter, from the physical point of view presupposes the presence of positive friction and a "work-to-heat" entropy transformation. Consequently, **negative viscosity** should correspond to the **negentropy cycle** "heat is converted to work". This is exactly the stray heat conversion once described by Tsyolkovsky in 1914. Apparently, **the medium of the kind supports self-sustained vortices** characterized by the surrounding medium heat absorption, which was mentioned yet not explained by S.M. Godin and V.V. Roschin.

It is possible that all the elements of matter are the self-sustainable vortex structures. To mathematically describe these physical mechanisms, the notions "heat-work-heat" transformation and "time" or "gravitation" should be interrelated. Russian philosopher Pavel D. Uspenskiy had been making related research since the year 1910.

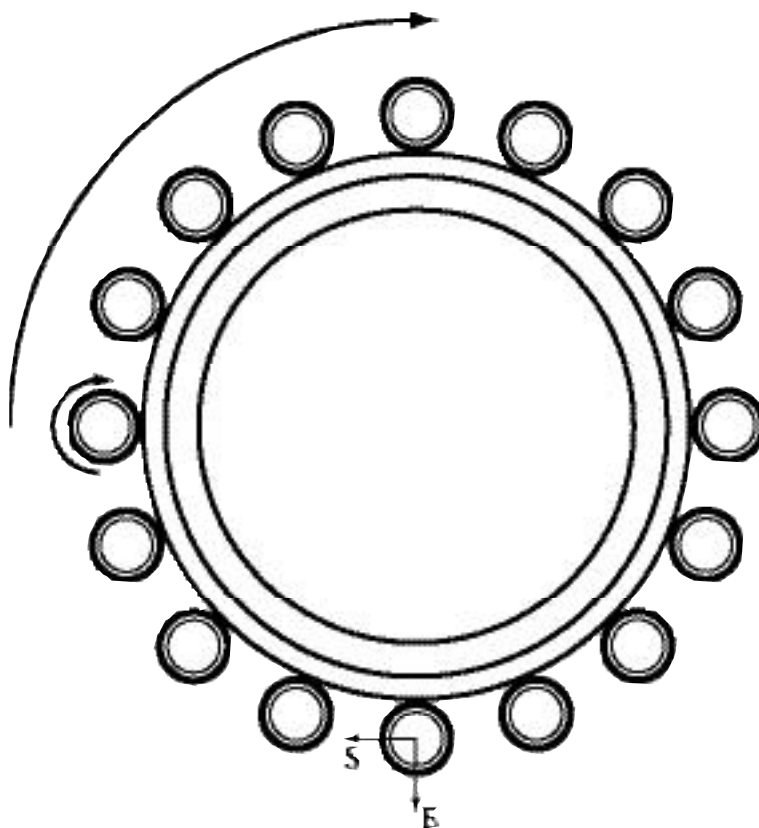


Fig.2

From the conventional point of view, this device (Fig.1) creates a circulating energy flux described by the Umov-Pointing vector (toroidal vortex) as the roller magnet field vector is vertical and the electric field is radial.



S.M. Godin (on the left) and A.V. Frolov (on the right), St. Petersburg, June 2001.

Inventor's Week Conference 2003, USA

Review is prepared by Editor Tatiana Ezhova

This year the annual Inventor's Week-end Conference was held on September 19-20 in Seattle, Washington. The conference featured several interesting inventions, including MEG.



Bill Alek demonstrated a device that he believed could let him detect Vortex-Energy. It was attached to a meter, and his belief was that if he walked into a naturally-occurring energy vortex carrying the device it would show him changes in gravitational and other energies. He cited the Vortices in Santa Cruz and Oregon as examples that might be good for experimentation.



Bill Alek

In his report "Introduction to Parametric Mass Fluctuation - a breakthrough in Energy and Inertialess Field Propulsion" Bill Alek presented the Z-Pod, developed to test a theory of solid-state parametric mass fluctuation. Here is the URL for a good overview of the device that he published online at www.intalek.com:

http://www.intalek.com/Index/Projects/SmartPAK/Projects/ZPOD/ZPOD_System03.pdf

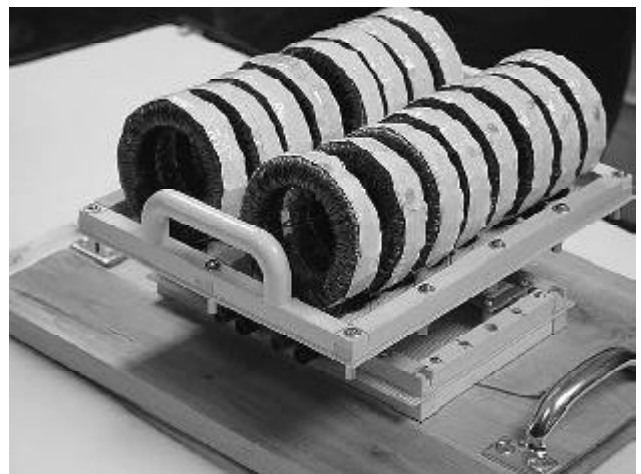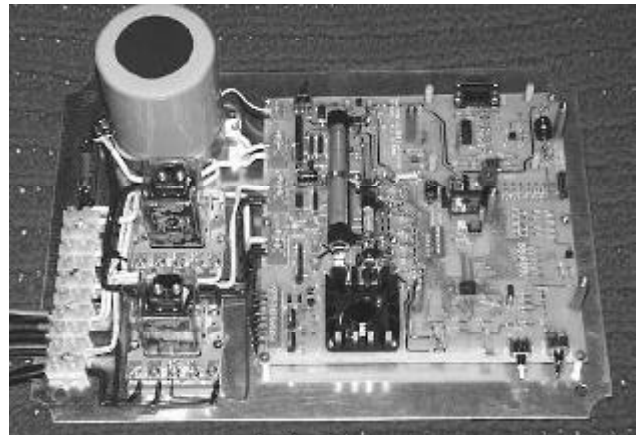


Z-Pod, Bill Alek



Rio Von Sternberg

Rio Von Sternberg was presented as the original inventor of the MEG. He apparently has a patent on the device; however, from his presentation I understand that his configuration is somewhat different than the model that J.L.Naudin and T.E.Bearden have been experimenting with.

Alexander Peterson had a very interesting presentation on optical-mirror magnetic field systems. The crux of his presentation involved cutting precise notches into magnetic coils to separate them into identical optical-isomeric shapes. Apparently, by cutting a thin line directly down the center of the transformer-core is believed by Peterson to increase the efficiency of electric motors by up to 50%.

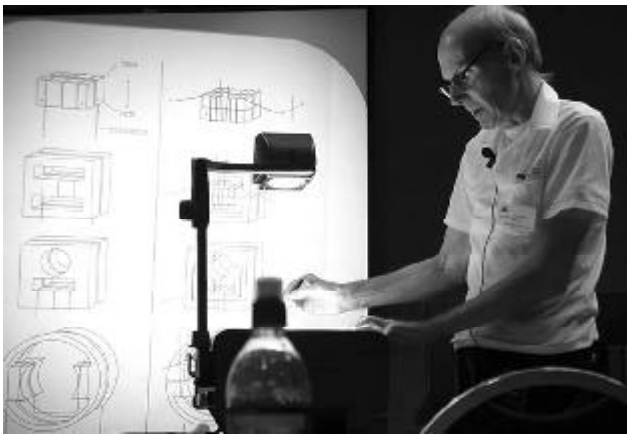


Alexander Peterson

Mark Plotkin, a well-known Washington DC attorney also took part in the conference. He is interested in new energy technologies and works with new technologies in collaboration with Mark Whitford at www.awetec.info. The photo of Mark shows him rotating a steel coil apparatus that was passed around the conference by Slim Spurling.



Mark Plotkin

Slim Spurling is an inventor from the Southwest, shown holding a helical-wound coil that he claims provides health benefits through an interface with zero-point energy. Spurling's belief is that this specific circumference of the coils provides a "Casimir-like Effect" that concentrates the energy.

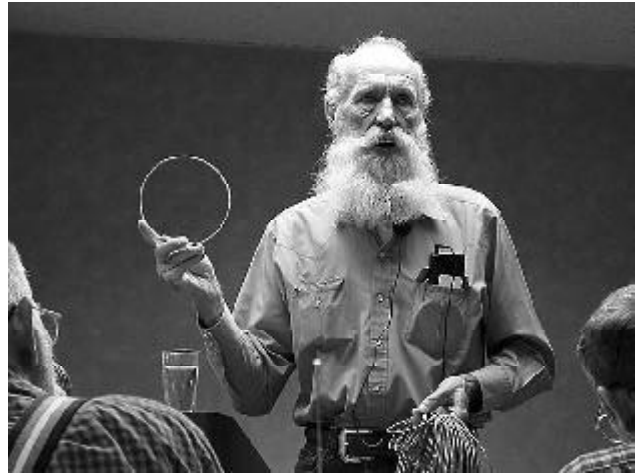

Slim Spurling




Donald Smith

Note: Donald Smith, a well-known inventor, also took part in this year's conference. His work is described in more detail in a separate article of this issue.


Full information on the conference and reports is presented at <http://ionvalve.com/iw/2003/conference2003.htm>.

USA "Inertia" Patents


Information from www.rexresearch.com/inertial/

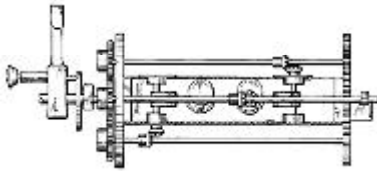


№ 6,290,622 (7/18/01)
Mechanical Force Generator
Murray, Lawrence D.

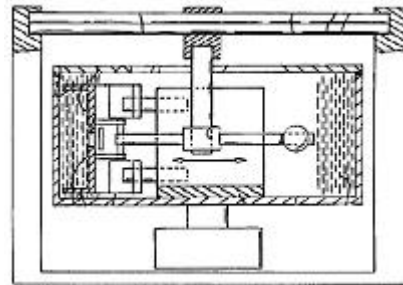


№ 6,259,177 (7/10/01)
Motion Imparting System
Deschamplain, Daviv

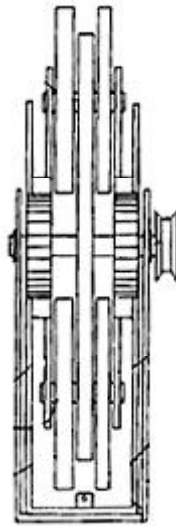


№ 5,890,400 (4/06/99)
**Apparatus for Generating
a Propulsion Force**
Oades, Ross A.









№ 5,937,698 (8/17/99)
**Centrifugal Propulsi
on System**
Kunz, William T.

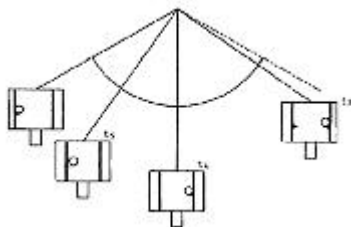


№ 6,089,511 (7/18/00)
**Method & Apparatus
for Propulsion**
Rasmussen, James K.




№ 5,966,986 (10/19/99)
Propulsion System
Laul, Virgil R.

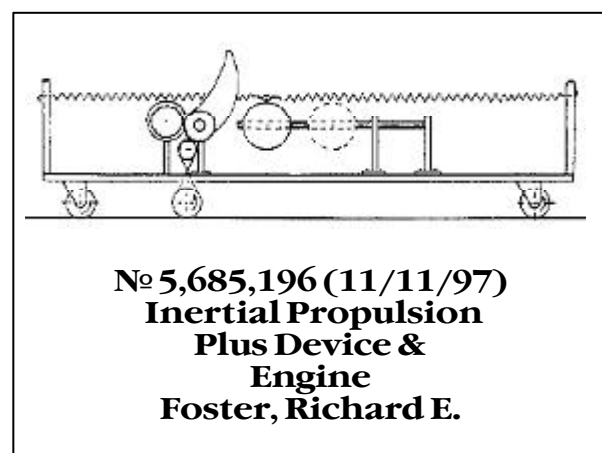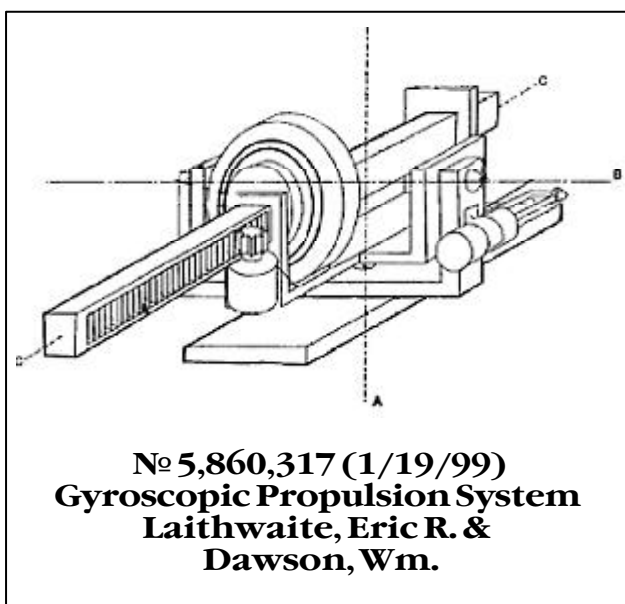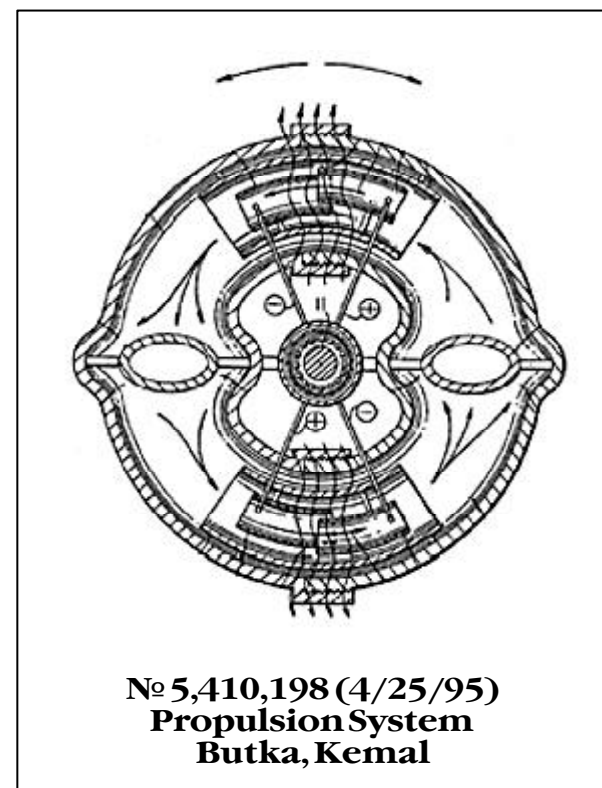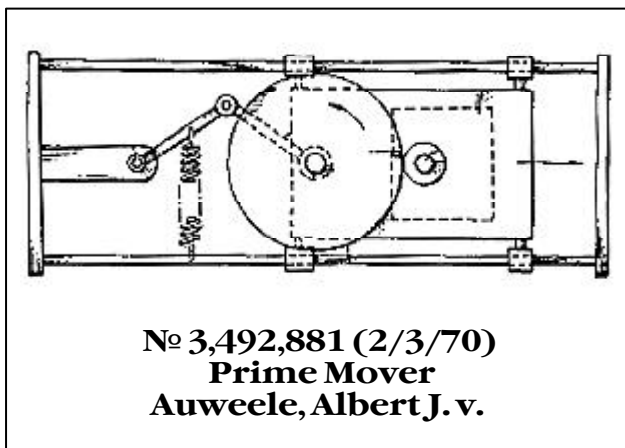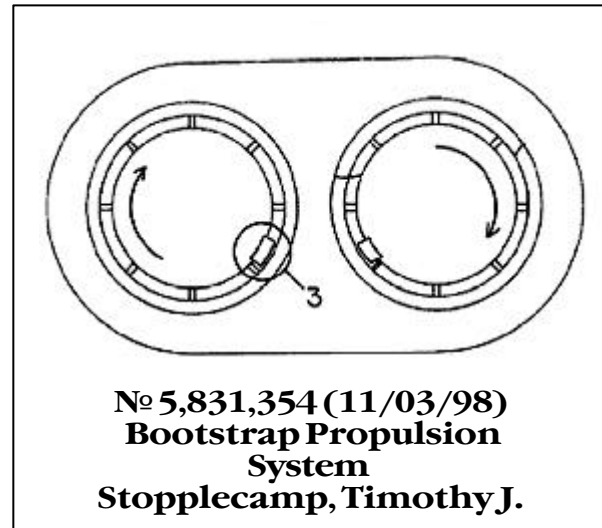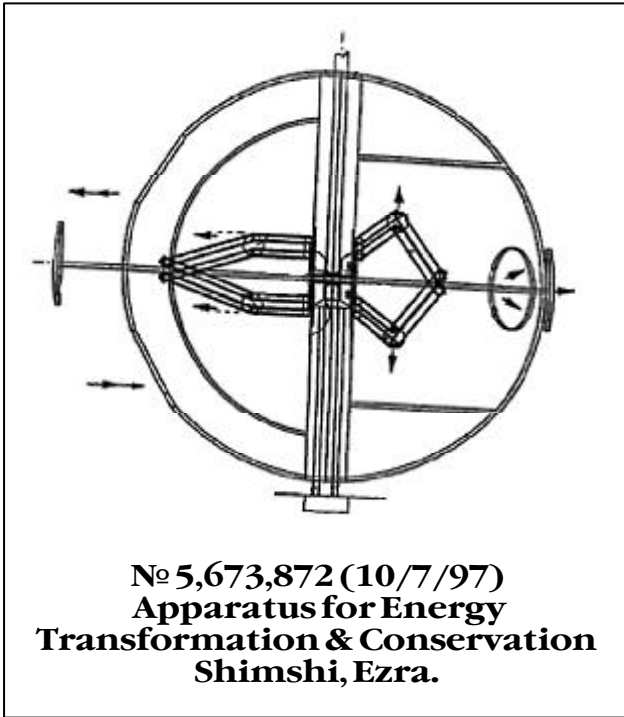


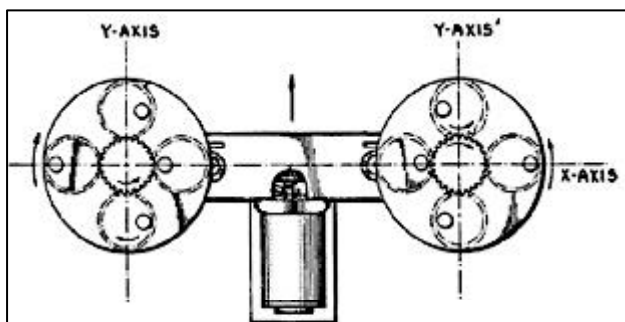


№ 5,167,163 (12/1/92)
Energy Transfer Device
McMahon, John C.

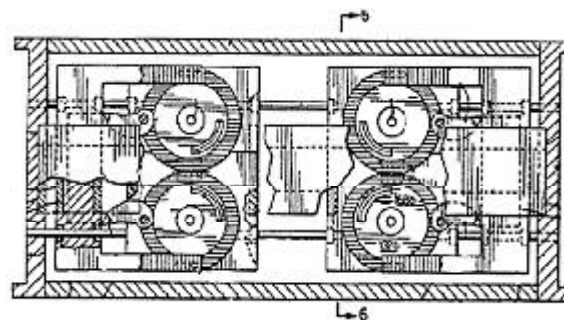


№ 5,182,958 (2/2/93)
**Non-Linear Propulsion &
 Energy
 Conversion System**
Black, James W.

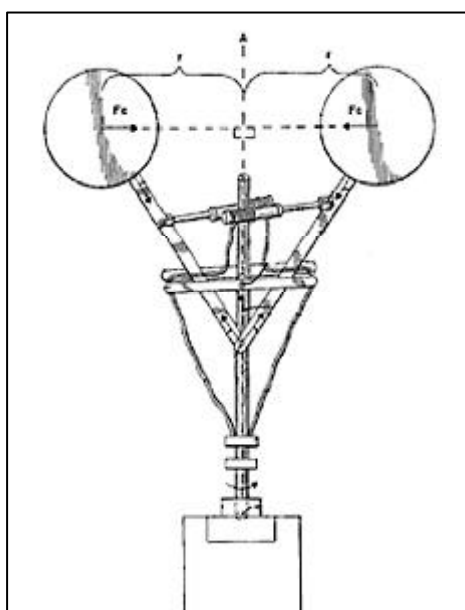


№ 5,557,988 (9/24/96)
**Centripetally Impelled
 Vehicle**
Claxton, John C.

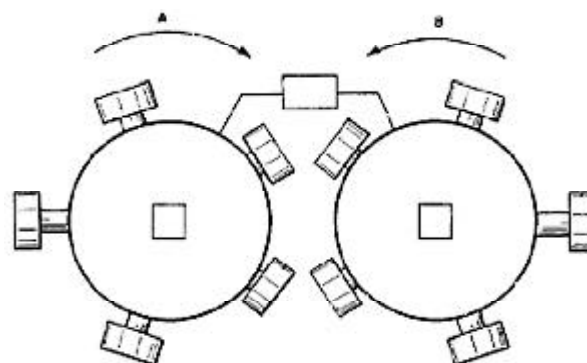


№ 5,782,134 (7/21/98)
**Electromagnetically Actuated
 Thrust Generator**
Bouden, James D.

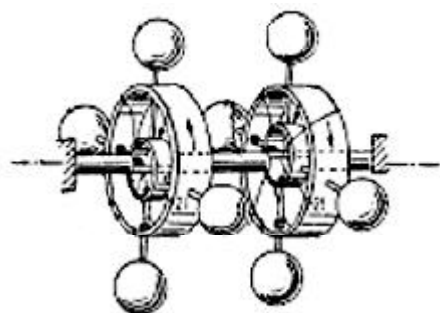


№ 5,156,058
**Converting Rotary Motion
 to
 Lineal Motion**
Bristow, Theodore R., Jr.

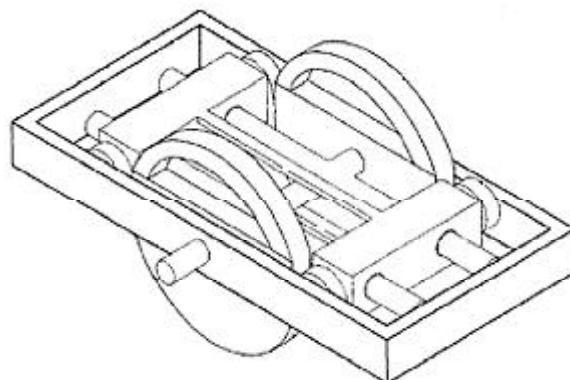


№ 5,488,877 (2/6/96)
**Centrifugal
 Inertia Drive**
Lieurance, Richard L.




**№ 5,024,112(6/18/91)
Gyroscopic Apparatus
Kidd, Alexander D.**

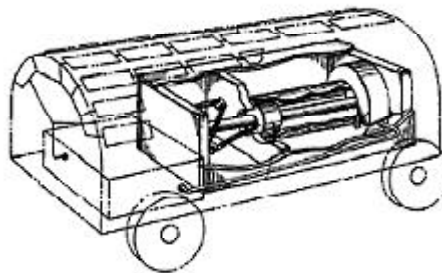


**№ 4,801,111(1/31/89)
System for Propulsion &
Positioning
Rogers, Charles E., et al.**

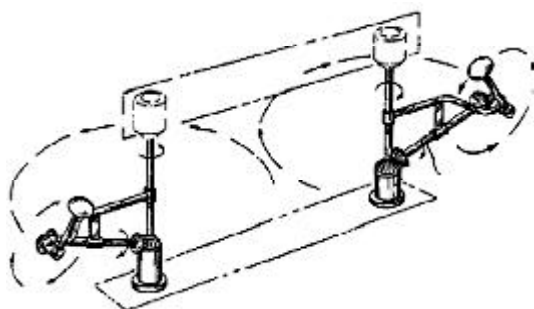


**№ 4,991,453(2/12/91)
Centripetal Device for
Concentrating
Centrifugal Force
Mason, Lyle M.**

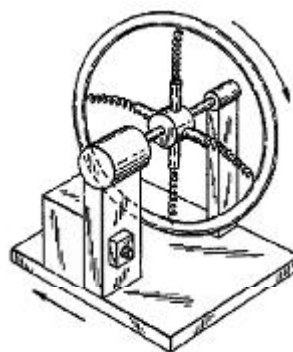


**№ 4,784,006(11/15/88)
Gyroscopic Propulsion
Device
Kethley, Lancelot I.**

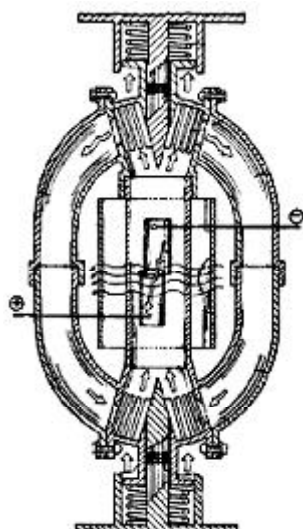


**№ 5,111,087(5/5/92)
Propulsion System
Butka, Kemal.**

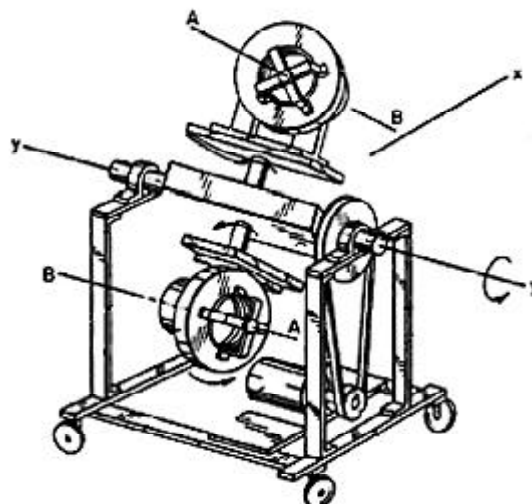


**№ 5,090,260(2/25/92)
Gyrostat Propulsion
System
Derloy, M.S. & Derloy M.**

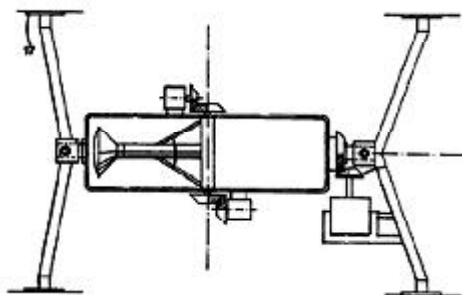


**№ 4,884,456(12/5/99)
Centripetal Device for
Concentrating
Centrifugal Force
Zachystal, George J.**

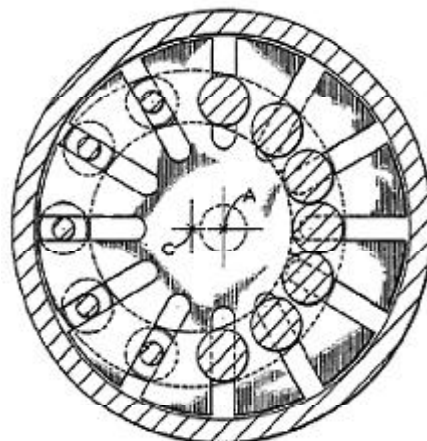


**№ 4,788,882(12/6/88)
Flywheel
Fulop, Charles.**

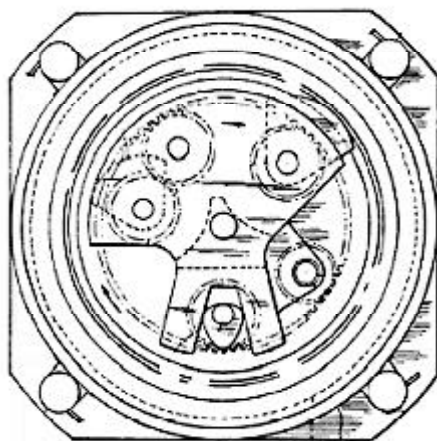


**№ 5,042,313(8/27/91)
Conversion of
Rotational Output
to Linear Force
Montalbano, Paul J.**

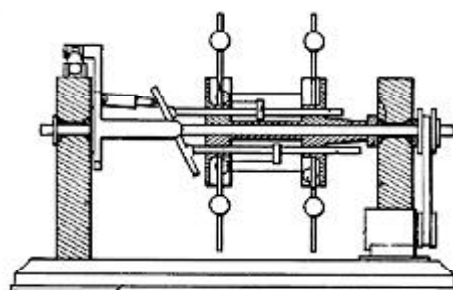


**№ 5,054,331(10/8/91)
Controllable
Gyroscopic Propulsion
Apparatus
Rodgers, A.T.**

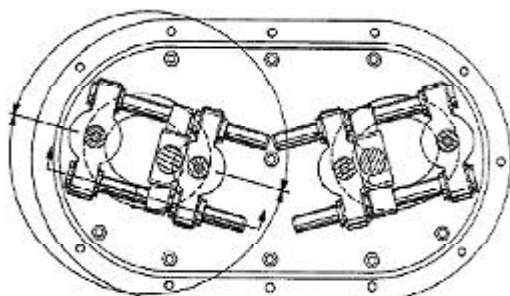


**№ 4,770,063(9/13/88)
Universal Propulsion Powerplant &
Impulse Drive Unit
Mundo, James D.**

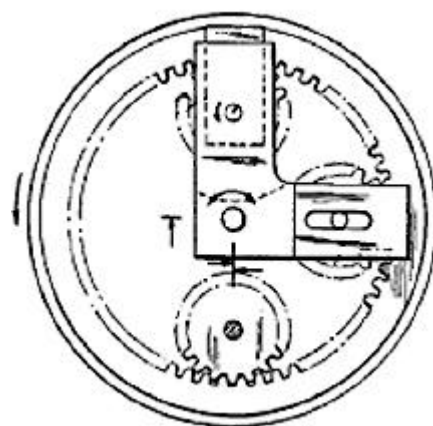


**№ 4,856,358(8/15/89)
Conversion of
Rotational Output
to Linear Force
Montalbano, Paul J.**

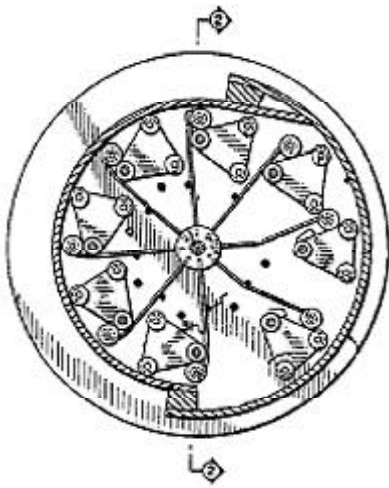


**№4,744,259(7/17/88)
Apparatus for
Producing a Directional
Unit Force
Peterson, Oscar F.A.**

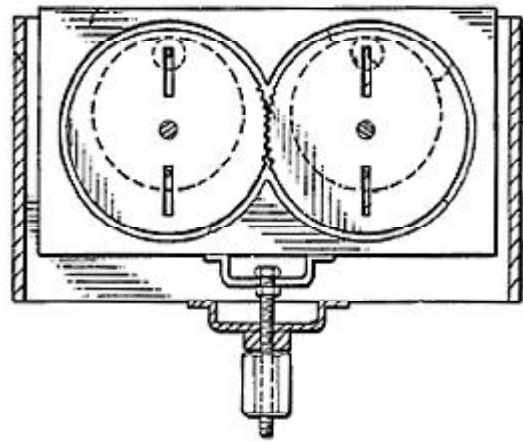


**№4,712,439(12/15/87)
Apparatus for Producing a Force
North, Henry.**

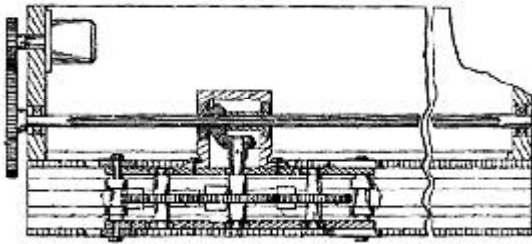


**№4,242,918(1/6/81)
Mechanical Propulsion System
Srogi, Ladislaw G.**

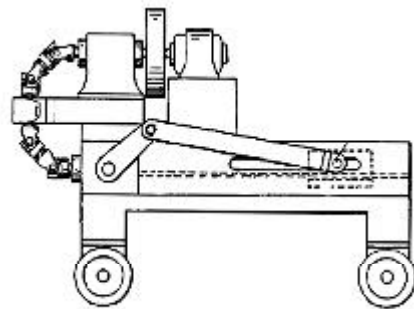


**№4,674,583(6/23/87)
Impulse Drive
Peppiatt, Alvin C., et al**

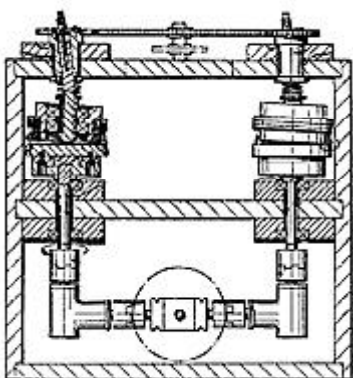


**№4,409,856(10/18/83)
Propulsion System
de Weaver, Fred, III.**

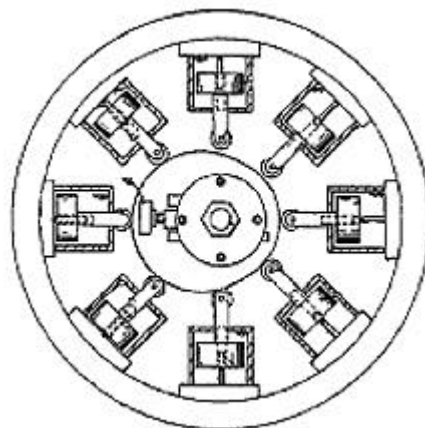


**№4,579,011(3/1/86)
Propulsion Apparatus
Dobos, Elmer M.**

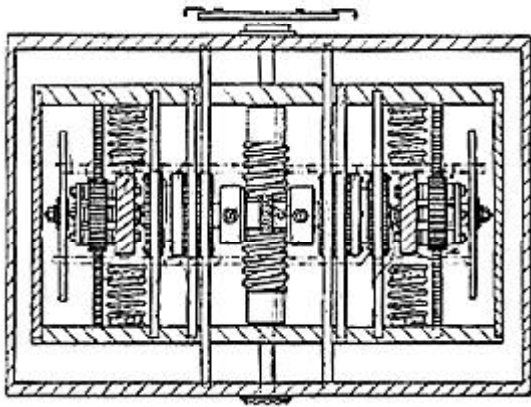


№4,577,520(3/25/86)
Mechanical Propulsion System
Colla, Joseph.

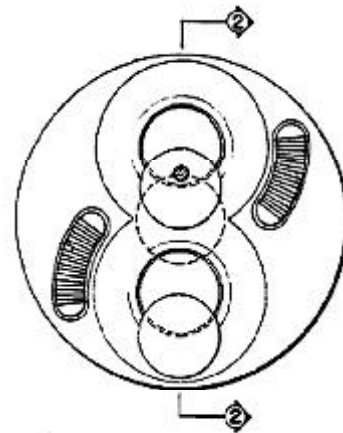


№4,631,971(12/30/86)
Apparatus for
Developing a Propulsive
Force
Thornson, Brandson R.

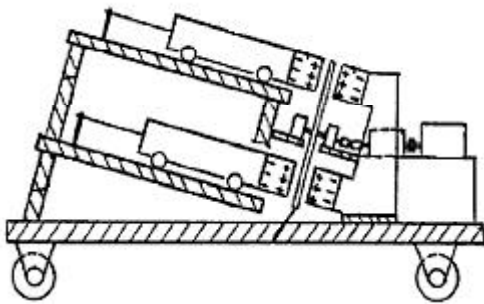


№3,889,453(6/17/75)
Propulsion System
Mast, Oscar.

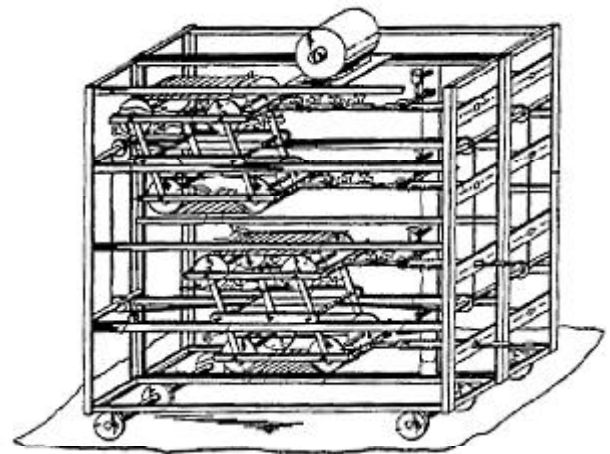


№4,726,241(2/23/88)
Continuous Force & Impact
Generator
Melnick, Harry S.

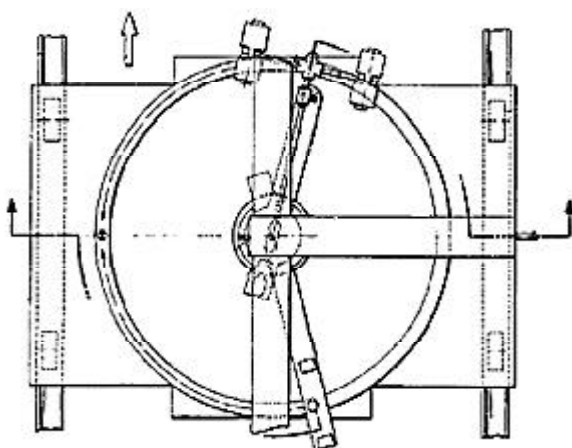


№4,238,968(12/16/80)
Conversion of Centrifugal Force
to Linear Force &
Motion
Cook, Robert L.

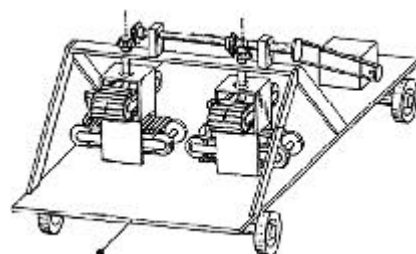


№4,261,212(4/14/81)
Unidirectional
Force Generator
Melnick, Harry S.

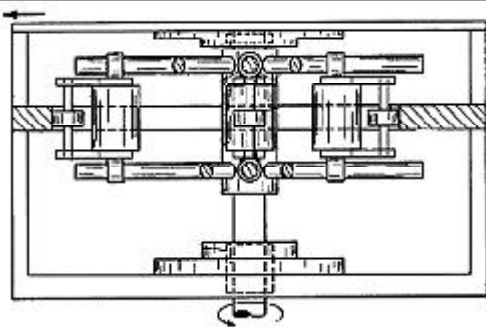


№ 3,968,700(7/13/76)
Converting Rotary Motion
into a
Unidirectional Linear Motion
Cuff, Calvin I.

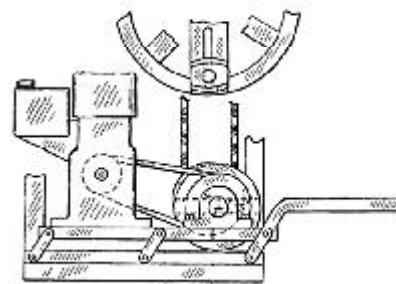


№ 4,347,752(9/7/82)
Converting Rotary Motion
to
a Rectilinear Force
Dehen, Frederick L.

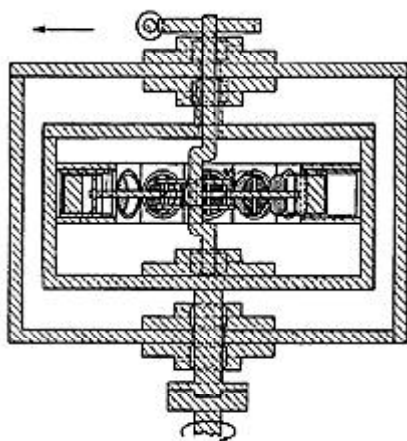


№ 3,998,107(12/21/76)
Converting Rotary Motion
into
a Unidirectional Linear
Motion
Cuff, Calvin I.

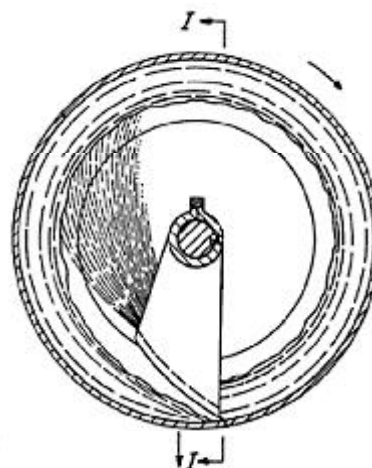


№ 3,979,961(9/14/76)
Propelling an Object by an
Unbalanced Centrifugal
Force...
Schnur, Nicolas J.

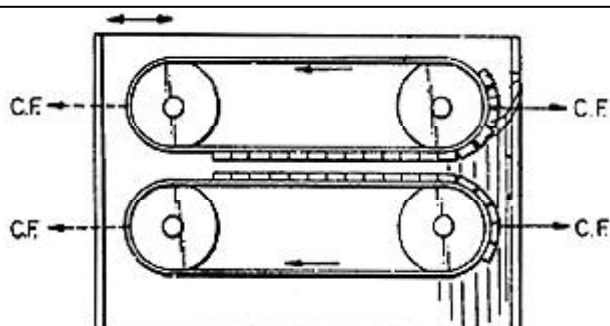


№ 4,398,431(8/16/83)
Mechanical Power Transmitting
System
Melnick, Harry S.

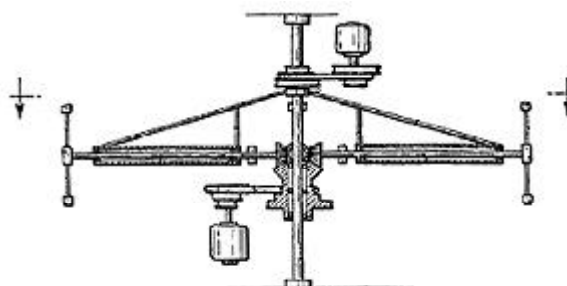


№ 3,555,915(1/19/71)
Directional Force Generator
Young, Hersey W., Jr.

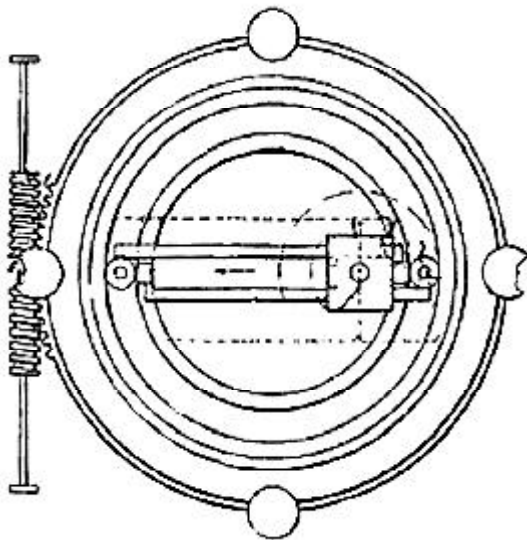


№ 3,750,484(8/7/73)
Centrifugal
Thrust Motor
Benjamin, Paul M.

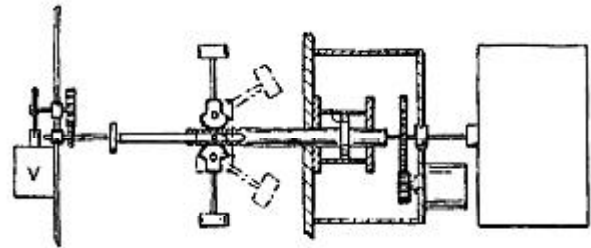


№ 3,863,510(2/4/75)
Inertia Engine
Benson, Everett H.

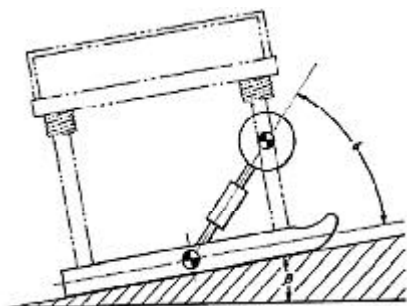


№ 3,916,704(11/4/75)
Vibratory Motion
Gaberson, Howard A.

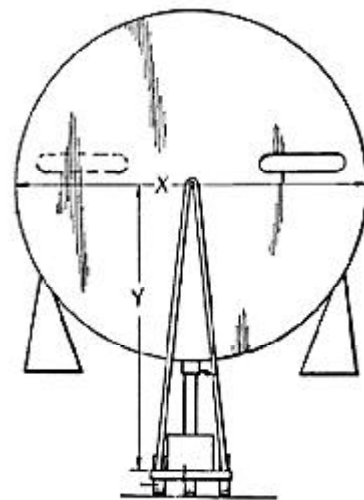


№ 3,756,086(9/4/73)
Propulsion System
McAlister, Roy E., et al.

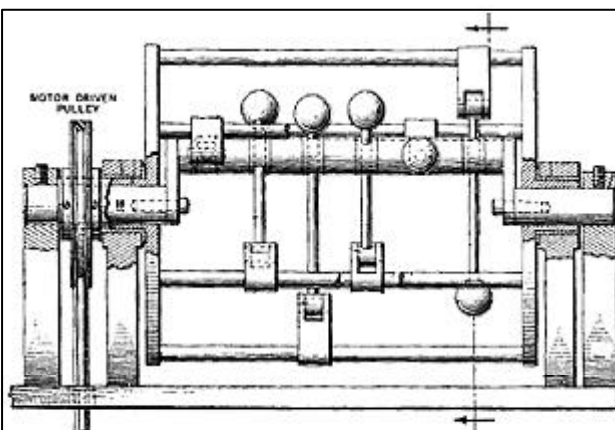


№ 3,810,394(5/14/74)
Centrifugal
Mechanical Device
Novak, Leo J.

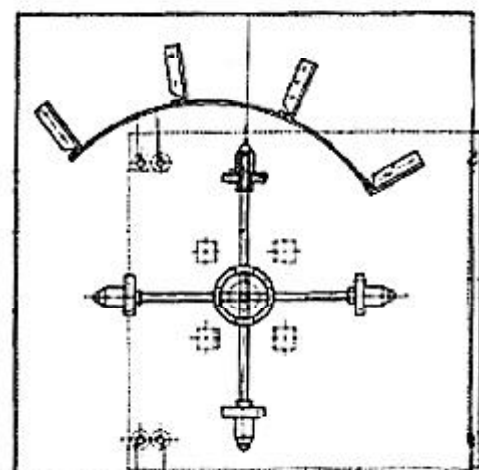


№ 3,807,244(4/30/74)
Device for Transforming Kinetic
Energy
Estrade, Fernand.

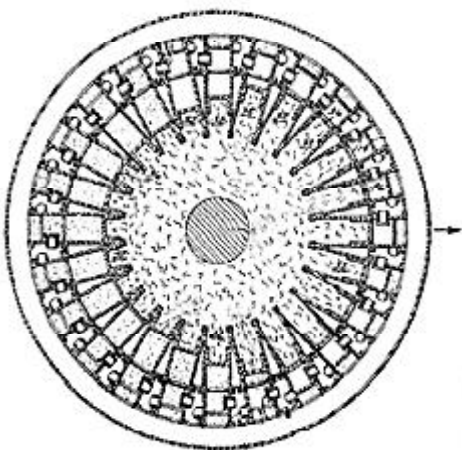


№ 3,584,515(6/15/71)
Propulsion Apparatus
Matyas, Laszlo B.

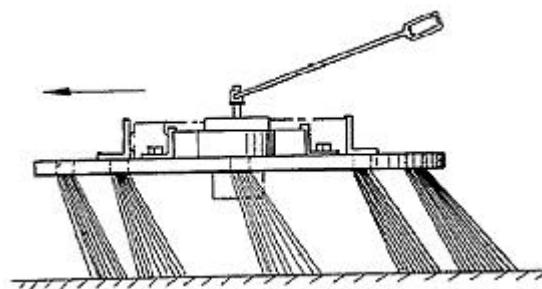


№ 3,196,580(7/27/65)
Toy Vehicle Having...Self-Contained
Drive Means
Rakestraw, Robert G.

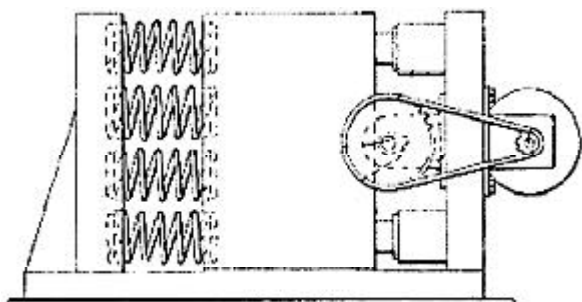


№ 3,266,233(8/16/66)
Inertia Propulsion
Device
Farrall, Arthur W.

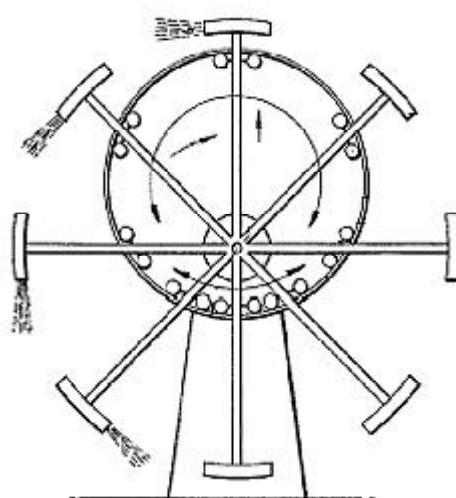


№ 3,177,660(4/13/65)
Propulsion
Apparatus
Haller, Paul.

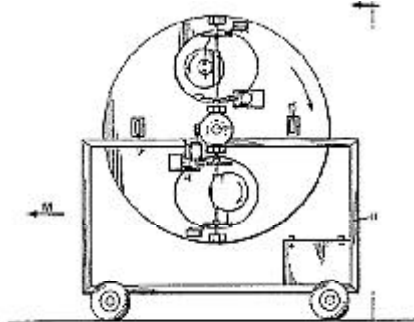


№ 3,653,269(4/4/72)
Converting
Rotary Motion
into
Unidirectional Motion
Foster, Richard E.

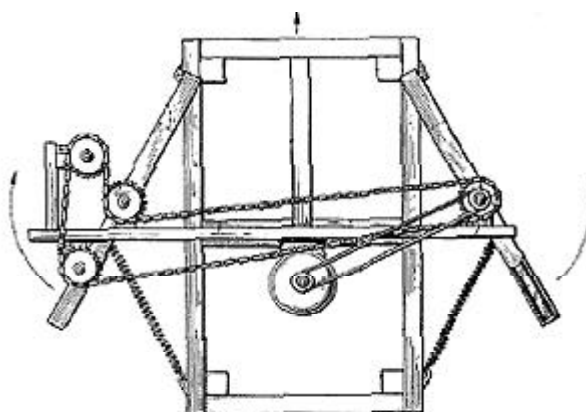


№ 3,683,707(8/15/72)
Propulsion
System
Cook, Robert L.

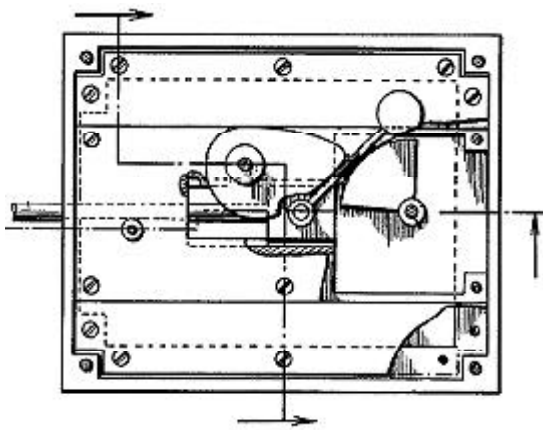


№ 3,182,517(5/11/65)
Variable
Oscillation System
Dean, Norman L.

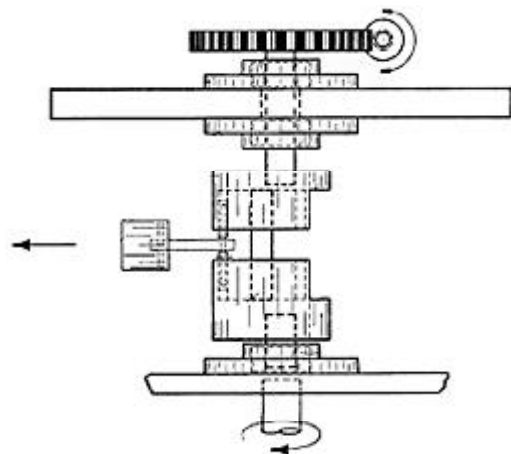


№ 4,095,460(6/20/78)
Converting
Rotary Motion into
Unidirectional Motion
Cuff, Calvin I.




№ 4,087,064(5/2/78)
Orbital
Propulsion
Apparatus
Knap, George.

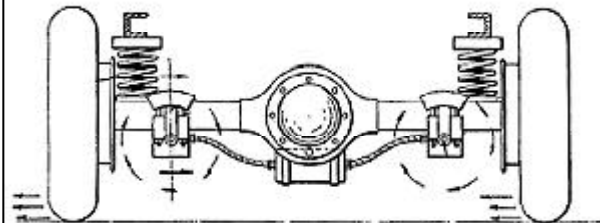


№ 2,639,777(5/26/53)
Method & Device for Imparting
Lateral Movement
Dull, Marshall L.

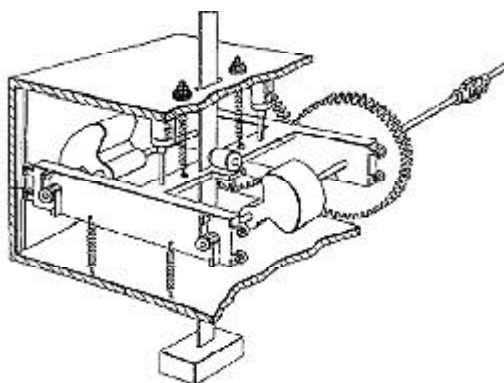


№ 2,886,976(5/19/59)
System for
Converting Rotary Motion into
Unidirectional Motion
Dean, Norman L.

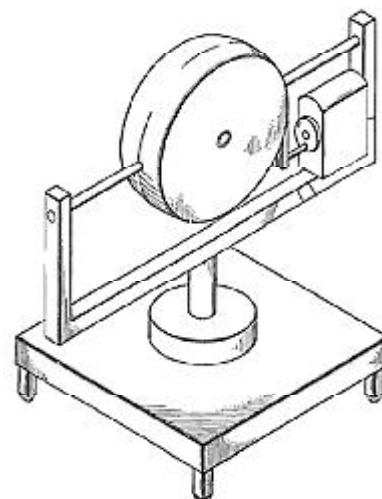


№ 3,203,644(8/31/65)
Gyroscopic
Inertial Space Drive
Kellogg, H. Dudley

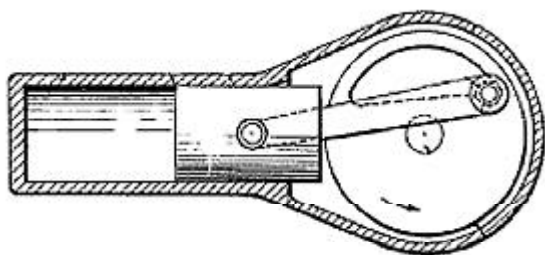


Nº 2,636,340(4/28/53)
Direct Push
Propulsion Unit
Llamozas, Juan D. M.




Nº 5,150,626(9/29/92)
Translational Force
Generator
Navarro, T. L.

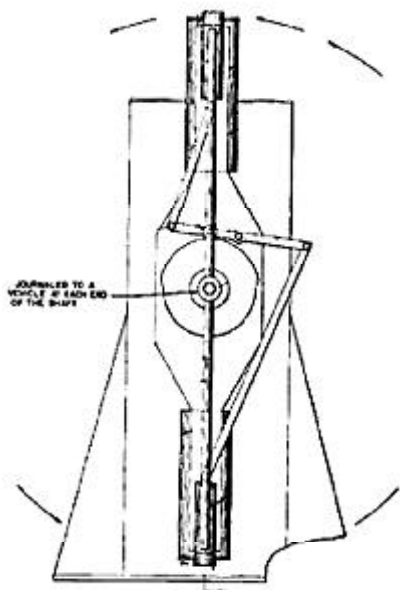


Nº 3,238,714(3/8/66)
Thrust Motor
Schur, George O.

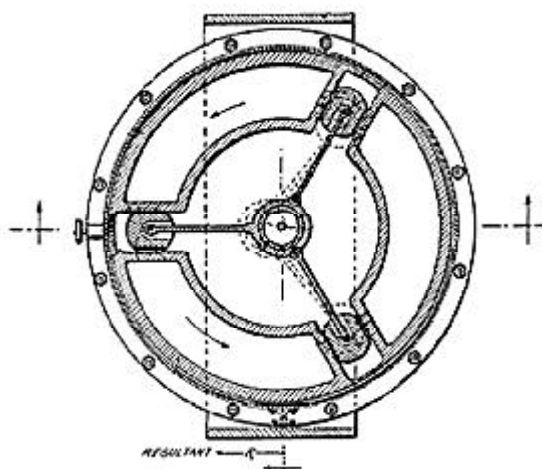

Nº 2,009,780(7/30/35)
Centrifugal Variable Thrust
Mechanism
Laskowitz, Isidor B.

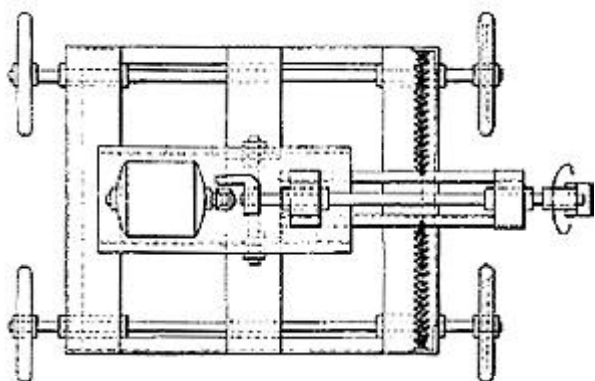

Nº 2,088,115(7/27/37)
Reaction Motor
Neff, Tom.



Nº 3,404,854(10/8/68)
Apparatus for
Imparting Motion to a
Body
di Bella, Alfio.

The Free Energy Centrifugal Force Experiment

This experiment is conducted by Faraday Lab Ltd
in cooperation with V. I. Bogomolov

In the previous issue we wrote about the invention of Bogomolov V. I. The device shown in Fig.1 (and also on the cover) was constructed and tested in our laboratory.



Fig. 1
The Device

The simplified diagram is known as "Maxwell's Pendulum" (Fig.2). This is a disk set onto the horizontal axis with two attached strings. The upper ends of the strings are fixed to the crossbar.

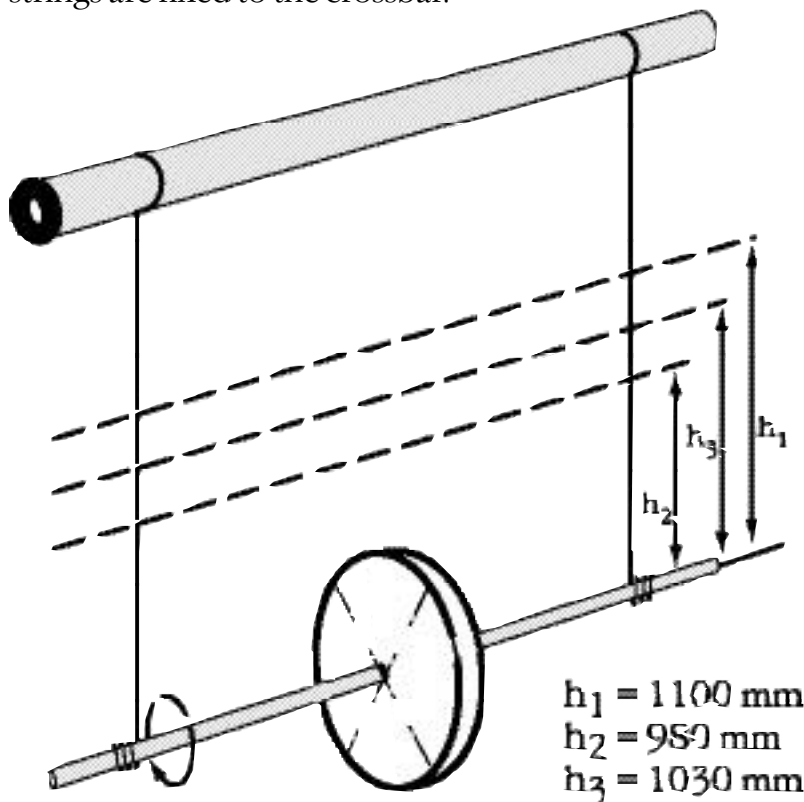


Fig. 2

If we wind the strings about the axis, the disk will lift (the height h) and store the potential energy of the Earth's gravitational field $E = mgh$ (m - mass of the flywheel; g - free fall acceleration; h - the height of the mass fall). If we let the pendulum go, we can observe periodic "up-and-down" damped oscillations: first, the string spins and potential energy converts into rotation kinetic energy; upon reaching the lowest point the disk, still rotating, goes up using rotation kinetic energy and then converts it again into potential energy. This device is interesting: due to the energy conservation law we can observe the usage of rotation kinetic energy of the flywheel, measuring only the h -parameter, the lift height of the flywheel strings in the second semi-oscillation compared to the height with which the pendulum started falling in the first semi-oscillation, the difference $h_1 - h_2$ of the two semi-oscillations is directly proportional to the losses of rotation kinetic energy for air resistance work and friction.

We have made "Maxwell's Pendulum" more complicated by substituting the flywheel disk for the Watt centrifugal governor in accordance with its description in the article (1). The main difference of the device from Maxwell's flywheel is that the flywheel inertia momentum changes by the centrifugal force operation at the lever transferring of weights (the total weight - 1200 g) from the minimum radius position (40 mm) to the maximum radius position

(90 mm). At that, the levers compress the string with the force of about 16 N.

There have been three stages of the experiments. During the first stage we define the necessary lift height of 1100 mm at moment when the string winds around the axle. When the flywheel falls from this height, the rotation speed and centrifugal force are achieved, which move apart the loads to the maximum radius (90 mm) and which **completely compress the string**. During the second stage the loads are fixed at the minimum radius position (40 mm), thus the compress string centrifugal forces are not involved any more and we can measure the air resistance and friction **losses of kinetic energy**. At this stage the flywheel lifts up to 980 mm losing 120 mm. During the third final stage the load fixing rods are taken away and **centrifugal forces are applied**. Just like during the second stage the Watt governor starts spin-falling from the height of 1100 mm. It compresses the string and lifts up to the height of 1030 mm thus **exceeding the second stage height by 50 mm!**

The experiment conclusions of the author:

1. At the third stage the flywheel exceeds the "loss height" $h=980$ mm. This means that the compression of the string was performed "for free".

2. At the third stage the flywheel converted kinetic energy into potential energy and lifted up 50 mm more. This means that in accordance with the principle of conservation of moment of momentum, the **outer compressed string energy force** has caused the moment of momentum change of the rotating masses, thus giving the additional acceleration to the flywheel and **increasing its kinetic energy "for free"**!

3. For the practical application of the Bogomolov generator in order to generate free energy it is necessary to achieve a high rotation speed (more than 10 000 rpm) and involve centrifugal forces to transfer the rotating mass to the less possible inertia radius difference.

The described centrifugal regulator diagram is not sufficient for larger experiments. For the industrial generator the author has a hydraulic-principle pneumatic string device drawing (know-how).

Editor: Also in this issue: the article on "Glen Gates Motor" by A. Akau. The principle is almost the same. The further implementation of this ideamay soon design purely mechanical power-generating systems, which use inertia and centrifugal forces.

References:

1. Bogomolov V.I. "The Bogomolov Generator", New Energy Technologies, Issue # 4, 2003.

Magnetic Power Inc. (MPI) is developing Self-Powered Generators. Together with its subsidiary, Room Temperature Superconductors Inc., (see the website www.ultraconductors.com), MPI has raised a total of more than \$7 million from Angel investors to date.

Due to a pleasant surprise, solid-state electric power generators might be fabricated by modifying off-the-shelf utility hardware. If confirmed in coming weeks, this could result in serial fabrication by this time next year, since large devices of the type needed for conversion are presently manufactured worldwide.

Multiple modules may prove able to replace power plants. Smaller units appear practical for powering homes. Later, optimized designs might replace engines in every variety of vehicle. These generators may make possible very rapid utilization of fuel and pollution free electric power --a revolutionary, new, renewable energy alternative.

Accredited Angel investors can help speed the work needed to bridge into major capital, and accelerate this remarkable alternative. Multi-million dollar funding is on the horizon. Additional information is available privately. We welcome due diligence by qualified parties.

History of Perpetual Motion and Free Energy Machines

Web site <http://www.phact.org/e/dennis4.html>

Hundreds of people for centuries have attempted to solve the holy grail of energy production - **Perpetual Motion Machines**. Still to this day Eric Kreig gets weekly emails from people who feel they are about to get one working. Eric is very skeptical about free energy. But his collection of information is very interesting. Eric offered a special prize for those who will agree to publicly test their over-unity devices.

- ♦ **Villard de Honnecourt** 13th century had a drawing of one.
- ♦ **Leonardo da vinci** made a number of drawings of things he hoped would make energy for free.
- ♦ Jesuit priest, **Johanes Taisnerius** worked on a magnetic based perpetual motion machine.
- ♦ **Mimara** in 1518 designed a "self-blowing windmill".
- ♦ **John Dee** of 16th century reported seeing one - but wasn't allowed a closer look.
- ♦ **Cornelis Drebbel**, 1610, was an alchemist and magician supposedly made one.
- ♦ **Robert Fludd** 1630 proposed many machines - people were trying to patent variations of Fludd's device in the 1870's.
- ♦ **Edward Somerset** 1638 demonstrated many free energy water wheels to the king of France.
- ♦ **1635** - first of many English perpetual motion machine patents granted. - By 1903, 600 such patents had been granted. Free energy claimants love impressing people with patents.
- ♦ **Ulrich von Carnach** in 1664 in Germany designed a perpetual ball-moving machine.
- ♦ Scientist **Jean Bernoulli** (1667 - 1748) proposed a fluid energy machine.
- ♦ **Bockler** in 1686 made designs for self powered water mills.
- ♦ In 1712 **Johann Bessler aka Orffyreus** investigated 300 different perpetual motion models and claimed he had the secret of perpetual motion and got much investment money.
- ♦ **Dr Conradus Schiviers** in 1790 made a belt driven wheel.
- ♦ **Sir William Congreve** in 1827 tried a machine running on capillary action.
- ♦ Britisher **Henry Prince** 1866 described the first partially submerged perpetual motion machine.
- ♦ **Mark Zimara** of Italy had a huge air powered machine that never worked.
- ♦ **Horace Wickmam** of the USA got a patent to a machine with many balls that just rotate around.
- ♦ Austrian, **Alois Drasch** patented a machine in the US in 1868.
- ♦ German, **George Andreas Bockler** proposed 'self operating mills' using variants of Archimedes screws.
- ♦ **E. P. Willis** of Connecticut made money off a perpetual motion machine in 1870 - people eventually found out a secret source of power to it.

♦ **Charles Redheffer** in 1812 in **Philadelphia** made much money on a perpetual motion machine, tried to restrict scientific evaluation, but was eventually debunked.

♦ Scottish shoemaker **Spence** designed a magnetic based machine, which was debunked.

♦ **John Worrel Keely** of Philadelphia in 1872 (he also had a traveling show of exhibitions). He fooled many scientists with a machine, which appeared to run on water.

♦ **John Gamgee** in 1881 got considerable support for a machine very similar to Dennis Lee's, which used liquid ammonia - it got vaporized from heat readily available, thus expanding it would drive a piston. Gamgee thought the vapor would condense to liquid to start the cycle over again. The Navy appeared to have been fooled and showed it to president Garfield - it never went anywhere. Tom Napier agrees that Dennis Lee may have resurrected Gamgee's engine.

♦ **J. M. Aldrich** was arrested for getting investors for his free energy machine in 1899 - he somehow was able to avoid conviction and conned many investors. One of whom was finally able to inspect the machine found a hidden spring.

♦ **T.H. Moray** in the 20's demonstrated a "radiant energy device" to many people who were unable to find a hidden power source. Somehow, the secret was said to have been forgotten.

♦ **Lester Hendershot** in 1928 got an Army commandant to endorse his free energy machine - but it was later found to have a hidden power source in the motor. His sons believe Lester lost his notes and that maybe they can rediscover how to get it to work.

♦ **Viktor Schauberger** claimed to have discovered some special vortex energy in water. Since he died in 1958, I don't know if his claims have been replicated, but people are still studying his works.

♦ **Mr Papf** in 1966 was a conspiracy believer. An alternative car engine got a few investors but killed someone during a demo. He tried to blame the problem on an investigating skeptic. He disappeared and became part of urban legend of scores of people, which the big conspiracy has been silencing for generations.

♦ **Guido Franch** was convicted of fraud in 1954 and 1973 of selling rights to distribute little green pills that would convert water into gas. He hid behind conspiracy theory and secrecy to avoid fair testing. A number of people have run this scam and many people still believe there are pills repressed by the oil companies.

♦ **Garabed T.K. Giragossian** in 1917 claimed to have a free energy machine. He was one of the early frauds to hide behind conspiracy theory. Woodrow Wilson signed a resolution offering him protection from some kind of conspiracy. After much fanfare, and delaying tactics his machine turned out to be a giant flywheel, which was charged up with energy slowly and put out a lot of energy for just a second. In spite of lack of proof of anything significant his followers still bothered the US congress for recognition.

♦ **Otis Carr** in 1958 sold stock for a company to manufacture UFO's and free energy machines from Oklahoma. He claimed inspiration from Tesla.

♦ **Edgar Cayce** even babbles about "Motor's with no Fuel".

♦ **McClintock** was claimed to use air as a fuel and had a patent.

♦ The **Evgray** machine scammed many investors (who didn't know how to test 'depleted' batteries).

♦ **Arnold Burke** in 1977 collected \$800,000 of investor money (again, mostly from bible believing farmers) for a 'self acting pump'. He tried to hide behind religion. He called his device Jeremiah 33:3. Finally, an open test was done in 1979 and found a hidden source of electricity. His believers (with

an infinite supply of denial) still raised \$250,000 to get out of a fraud conviction. He still went on making lots of claims with no evidence.

♦ **Robert Adams** in 1977 made all kinds of conspiracy and OU claims in New Zealand. Many still believe in the Adams Motor. - He had the obligatory battles over patents, debates over theory, debates over power measurement and dabbling in other areas of alt physics. He's 80 years old and said to have a scientific education. He has a lot of theories about Aether. Skeptical information.

♦ **Robert Stewart** in 1978 got over \$3,000,000 of investment money (much from farmers) for a closed cycle engine using freon rather than water. This 'engine' used the same scheme John Gamgee tried to sell the navy in 1882. -Eric Krieg thinks this is the same approach Dennis Lee's free energy machine works on. I think he just faded away (people claim he was silenced).

♦ **Rory Johnson** of Elgin Illinois, claimed to have invented a cold fusion, laser activated, magnetic motor that produced 525 HP, weighed 475 lbs, and would propel a large truck or bus 100,000 miles. After signing a number of dealers, he moved all his equipment out of his labs, moved to CA and died. (To this day, folks say he was silenced by OPEC).

♦ **RJeseph Maglich** was a physicist and claimed to have a device in 1978, which harnessed fusion power from seawater. They say they put power in and get more power out. I've never heard of them since.

♦ **Howard Johnson** got a patent for a device that claimed to make free energy from a motor like device. As of 11/02, Stephen was claiming he would soon mail out samples of working ones. By 12/12/02, Stephen dropped out of contact.

♦ **Keith Kenyon** had a device claimed to produce more energy than consumed. Calculations seemed to not take power factor (also known as phase angle) into account. It never openly had its output

hooked up to its input. Even Dennis Lee tells his followers that all the *over unity motors* (claim to make more electricity than consumed) usually just fool people who can't measure power factor.

♦ **Muller:** Bill Muller and Carmen Muller of Germany raised money on an over unity motor and got a few followers, but never actually demonstrated one working.

♦ **Dennis Lee** Since 1988 has been promising to demonstrate free electricity "in a month or two". He is much like Newman in his mixture of religion & extremist politics, evasion of qualified investigators, endless promises, threatening detractors, etc. He had a Fischer engine, a CRD device and now, and OU motor device. Dennis has invested in Searle and Stanley Meyer and joined Pantone in 2001 in a 50 state tour.

♦ **Stanley Meyer** 1996 claimed to have a water powered car and was also big on mixing Christianity and patriot politics in with fringe science. Meyer was found guilty of fraud after his Water Fuel Cell was tested before an Ohio judge. It is rare for an inventor to be prosecuted for an invention that does not work, but Meyer's problem was that he had been selling "dealerships", offering investors the "right to do business" in Water Fuel Cell technology. Meyer refused to allow anyone else to measure his device. Dennis Lee invested in him. He died in early 1998.

♦ **Joseph Newman** in 1984 claimed to have a free energy machine based on alternative physics. Like many perpetual motion inventors, he sued the US patent office. Many people wrongly measured the true power output of this machine, (they didn't realize you must specially calculate power for non sinusoidal current consumption). He now refuses to ship a unit for testing. Ten years ago, inventor Joseph Newman gave an open week-long demonstration in the Super dome in New Orleans. Over 9,000 people attended from across the country (including Dennis Lee who reportedly wanted to join his ideas with Newman). Newman is suing some former

investors he claims are trying to steal his invention. I give more information. Evan Soule of Newman's organization offers a rebuttal.

♦ **Bruce De Palma** had a machine in 1986, which appeared to one Electrical Engineering professor to put out 4 times more power than consumed. Turned out it was just a measurement error. (We could go on and on with such examples).

♦ **Dr. Potapov** sold a device that was claimed to produce more energy than consumed.

Editor: Eric's skeptical remarks can be tolerated but sometimes he writes about the things he does not know. Potapov and his team have created a technology, which have been replicated and sold by dozens of companies in Russia (see the cover picture of the Susorov heat generator). There are several devices in St. Petersburg to be tested. The efficiency is 200 % and more. The operation principle: electric motor rotates in water and causes the heating of water. We have also received the information about another Russian invention, namely the close cycle vortex generator: "water rotation – vapour – turbine – electric power " (the power is from 100 kW).

Alexander V. Frolov

♦ **John Bedini** claims to have a free energy device.

♦ **Mr. Finsrud** is a Norwegian artist who made a sculpture where a metal ball moves for weeks apparently with no outside influence.

♦ **Don Watts** of Las Vegas in around 1990 had a patented **CEACU**, which stands for Centrifugal Energy Amplification and Conversion Unit - it turned out to be one more investment fraud.

♦ **Stephan Marinov** claimed to have proven much alternative physics and to have contacted a Methernitha that claims to have a Free Energy Machine. He committed suicide on July 15, 1997 but he left behind some intense rants.

♦ **Greg Watson** sold kits for a rolling ball and track that were thought to have overunity in 1997. Attempts of replication I know of have failed.

♦ **CETI** These people have claimed to have a device that puts out anomalous yet small amounts of heat - maybe cold fusion. They raised millions. As of 10/97, they have not been willing to have me come over and see for myself. They have said, *we want people to think it doesn't work so we won't have competition*. I've wondered if the energy may have come from not accounting for friction effects from the cooling flow through the pellets. (**Jed Rothwell**, a rational editor of Infinite Energy Magazine says "*however, tests with CETI cells at Motorola, SRI and the French Atomic Energy Commission show no measurable friction*"). Milton Rothman has a response: "I openly admit that I have not followed all the history of cold fusion claims and am generally ignorant on the subject".

♦ In January 1998 **Barbara Hickox** allegedly has a patent dating from 1981 for a fusion powered free energy system.

♦ **Paramahansa Tewari** of India claims to have a device that is 200% efficient.

♦ **RQM** is a Swiss company selling FE machines found at www.rqm.ch.

♦ **Ted King** is looking for people to buy stock for a car he plans to drive across the country using just 2 12-volt batteries. You can contact Ted if you want to buy shares.

♦ **Bruce Perreault** has claimed to have discovered a new element, the plasmatron, ion pump, radiant energy device, etc.

♦ **Daniel Pomerleau** of Canada claims to have something that works, but he isn't interested in releasing it (as 12/97).

♦ **Entropy Systems** of Ohio 1999 Sanjay Amin got 1.6 million investment dollars for a device that would violate the 2nd law of thermodynamics. I've asked them to apply for my prize for proof. - They seem to have folded. See a rational review of Amin's claims.

- ♦ **Brian Collin** of Australia claims revelation from God (*like most of these people*) to make a free energy device. A Stephen Mark claimed he invented it.
- ♦ **Kawai** and **Takahashi** - both of Japan claimed in the 90's to have overunity devices.
- ♦ **Carl Cella** claimed to have one of the many cars said to run on water.
- ♦ **Robert LeBreton** in 1999 claimed to be making a 600 hp free energy machine.
- ♦ **Renzo Boscolio** in 1999 in Italy claimed to have low-energy nuclear reactions but refused to supply real proof that he promised to people who came out from Infinite Energy Magazine.
- ♦ **Doug Konzen** of Seattle says he has an overunity motor in Jan of 2000 that anyone can see.
- ♦ **Troy Reed** of Oklahoma was ready to issue licenses for manufacturing his permanent magnet motor etc. He's taking investment money for a device he claims puts out more heat energy than input energy. He says he's dumped a few million into his designs over the last 10 years and had little interest in my prize offer when I contacted him in 2001.
- ♦ **Kipper Motor.** In 10/00, Steve Elswick thought it was overunity. But David Sligar who paid \$175 for plans could not get it working.
- ♦ **Ludwig Brits and Victor Christie** in 2001, claim the **Lutec** free electricity over unity motor/generator will soon be in Australia.
- ♦ **Jasker** in 2002, an Irish company has claimed to have free electricity. (Some have said it is just a joke).
- ♦ **Confidential Technology -Wayne Cochran** died 12/29/02 Crazy Jack Carey took over. They have been promising FE soon for about 20 years now.
- ♦ **Tom Bearden's MEG device:** many articles on the Internet.
- ♦ **Gurbakhsh Singh Mann of India** claims to have invented gravity and buoyancy perpetual motion machines.
- ♦ **Michael J. Marshall** in Las Vegas has a device called QSFG, which stands for quick start fuel-less generator he says 64 nations have asked him to build factories.
- ♦ **Carl Tilley and Robert Kibbey** in 6/2001 in Tennessee have claimed some over unity device and other stuff. Their demonstration failed in 9/02 and as of 11/02, they have been evading proper demonstrations.
- ♦ **Stephen Walker** in 9/2002 promised to send me and several others a free energy machine in mail.
- ♦ **PerEnDev** promised to make some kind of free energy by means of magnets.
- ♦ **Bill Muller** of Canada in 2003 claimed to have some kind of OU device. Independent tests found it under unity.
- ♦ **Energie:** In 2003 this Greek company promised a homopolar magnet (De Palma design) FE design by June of 2003. They actively seek investors.
- ♦ **GWE Genesis World Energy** In 2002 this group claimed to have 400 people who developed some device that sounds like it separates water into H2 and O2 using less energy than mainstream science says is possible. As of 2003, they have evaded independent confirmation. More information is available.
- ♦ **Steven Greer (Disclosure Project)** In 02.2003, Steven announced he had discovered some real sources of Free energy, which he promised to make sure get proven to the general public.

Tesla Energy Science Conference and Exposition

1220 L Street NW, Suite 100-232 Washington DC 20005

Tel: 800-295-7674

Fax: 301-513-5728

www.IntegrityResearchInstitute.org

Email: iri@erols.com

Saturday, November 8, 2003
Wireless Electricity Seminar

9:30 AM 10:15 AM

Opening Address: "Space Solar Power" – Dr. **Paul Werbos** Program Director, National Science Foundation

10:15 AM 12:15 PM

Special 2-Hour Presentation: "Nicola Tesla and the development of RF Power Systems" - Dr. **James Corum**, Physics Professor, research Scientist and Inventor and **Kenneth Corum**, Physicist, teacher, consultant.

2:00 PM 3:00 PM

"Power Engineering Scalar Field Theory: Faraday vs. Maxwell and Longitudinal Wave Demonstration" – Professor **Konstantin Meyl**, Engineer, Author, Inventor of the Demo-Set, Professor at the University of Berlin

3:15 PM 4:15 PM

"Wireless Energy Through the Earth-Ionosphere Cavity" – Dr. **Elizabeth Rauscher**, Nuclear and Astrophysicist, Inventor of the ELF Earthquake Predictor and Triangulator.

4:15 PM 5:15 PM

"Masters of the Ionosphere HAARP Modifies the Polar Electrojet" – **BBC Video on Tesla Technology**, with William Terbo, demonstrating ionospheric excitation by radio waves.

6:30 PM 7:15 PM

Masters of the Ionosphere – BBC Video Presentation **repeated** for the Special Tesla Evening Event attendees

7:30 PM 8:30 PM

"The Wardenclyffe Dream: Tesla's Plan for Wireless Worldwide Distribution" – **Dr. Marc Seifer** Professor, Author of the best-selling book *Wizard, The Life and Times of Nikola Tesla*, presents an illustrated historical account.

8:30 PM 9:00 PM

High Voltage Tesla Coil Demo – **High Voltage Device** with **Music**: The Tesla Tower wind ensemble composition by Prof. **Holland**, Skidmore College

Sunday November 9, 2003
Electrotherapeutic and Tesla History Day

9:30 AM – 10:30 AM

"A Family Perspective on the Personality of Nikola Tesla. Review of the Popular Interest in this Scientific Icon" with Q and A Session – **William Terbo**, Engineer, Closest living relative of Tesla (Grand-nephew). Founder and Director of the Tesla Memorial Society.

10:30 AM 11:30 AM

“The Search for Free Energy: Genius, Vision and Psychology of Invention” – **Keith Tutt**, British Writer and Author of the book *The Scientist, The Madman, The Thief and their Lightbulb* that includes Tesla.

11:30 AM 12:15 PM

“Electrotherapy with Tesla Coil Design: Intorduction to Bioelectromagnetics” – Dr. **Thomas Valone** Physicist, Professional Engineer, Author of the new book, Bioeletromagnetic Healing: A rational for its Use.

12:15 PM 1:00 PM

Exhibitors Presentations – **Brief Presentations by exhibitors** (5-10 minutes each)

2:00 PM-3:00 PM

“Emerging Opportunity: cancer Electromagnetic Frequency Therapy” – Dr. **Mark Neveu** President, the National Foundation for Alternative medicine.

3:00 PM 4:00 PM

“Turn of the Century Electrotherapy Discoveries” – **Jefrey Behay** Director, The Turn of the Century Electrotherapy Museum.

4:00 PM 5:00 PM

“How a Crushed Leg Helped Me Discover High Voltage Electromagnetic Healing Device” – **Ralph Suddath**, Third generation Tesla Electrotherapy Inventor, radio Host, Entrepreneur.

5:00 PM 5:15 PM

Closing Remarks – **Thomas Valone** Program Coordinator

**The Conference Report Compilation can be purchased from T. Valone,
Integrity Research Institute.**

“Nornikel” and Alternative Energy

“Norilsky Nikel”, the largest Russian non-ferrous metal producing company has announced the beginning of the cooperation with the Russian Academy of Science. Metallurgists are planning to invest into the development of the hydrogen energy and fuel cell R&D projects of the Russian Academy of Sciences. Accordingly, last week an agreement was signed. **Mikhail Prohorov**, the General Director of “Nornikel” said that they are ready to invest 20-40 million dollars annually into R&D projects of the Academy in this field.

“Expert” magazine, # 43, November 17-23, 2003

PERENDEV Magnetic Motor

Review

www.perendev.co.za/products/magnetic_motor/index.html

Shown below is a Magnetic Motor with Alternator (Patent Pending):



Fig.1

This is the "PerEnDev" (Perpetuum Energy Devices) company latest motor predicted to deliver some 60 kW. Motors can be built up to 4mW.

Background of the Magnetic Motor

The Company started in 1969 with the development of a magnetic motor to drive an alternator to produce electricity. The concept was sound but the problem they faced was that the magnets that were available at the time (ferrite magnets) were not very powerful. The unit ran but had very little power and the project was abandoned.

In 1996 the "Perendev" company started to investigate the possibility of reviving the

original idea, magnets had now come a long way and were very powerful (rare earth).



Fig. 2
Rare earth magnets

After the engineers successfully designed a new model, the company developed a 3 rotor system producing 6 kW, coupling this to an alternator through an 11:1 gearbox to produce electricity in 220volt and 380volt, single or 3 phase.



Fig.3

The units will be ideal for the small and large user, such as emergency, military, farms, plots,

industrial and large users... in fact any application requiring power.

Key Benefits Foreseen:

- ◆ No fuel costs
- ◆ Constant running
- ◆ Reliable
- ◆ Cost Effective
- ◆ Portable (6kw-120Kw)

Editor: In 2002 "Faraday Lab" got an offer from the company to buy their 6 kW generator for testing at the price of about \$6,000. However, no contract was signed. The company is currently engaged in redesign of their motors and is looking for regional partners but they are not yet ready to produce on the line. In our issues we will try to inform the readers on their activities.

Alexander V. Frolov

Internet Pages



Jasker Power System



Lutec 1000



Electric Radial Motor

industrial and large users... in fact any application requiring power.

Key Benefits Foreseen:

- ◆ No fuel costs
- ◆ Constant running
- ◆ Reliable
- ◆ Cost Effective
- ◆ Portable (6kw-120Kw)

Editor: In 2002 "Faraday Lab" got an offer from the company to buy their 6 kW generator for testing at the price of about \$6,000. However, no contract was signed. The company is currently engaged in redesign of their motors and is looking for regional partners but they are not yet ready to produce on the line. In our issues we will try to inform the readers on their activities.

Alexander V. Frolov

Internet Pages



Jasker Power System




Lutec 1000




Electric Radial Motor




18 Meter Perpetual Wheel

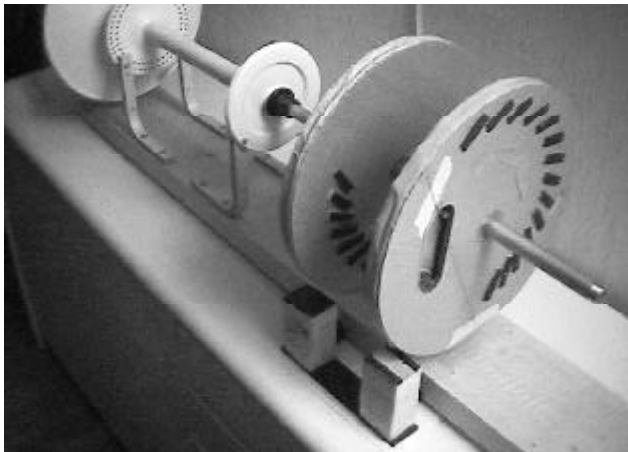


Minato Wheel, E. Vogel, Sweden

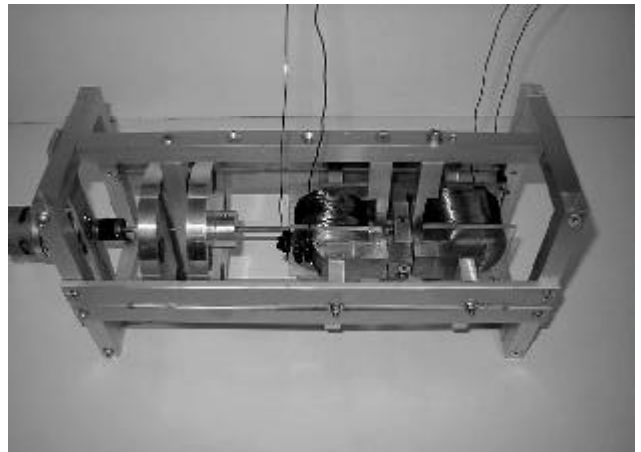


Generator from James W. German

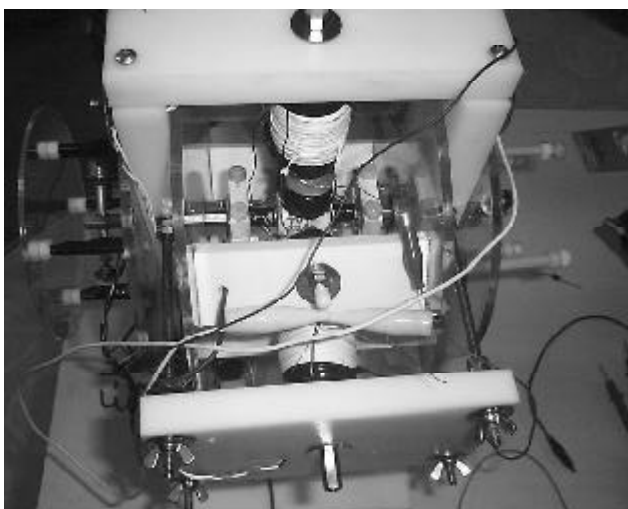

Konzen
Pluse Motor

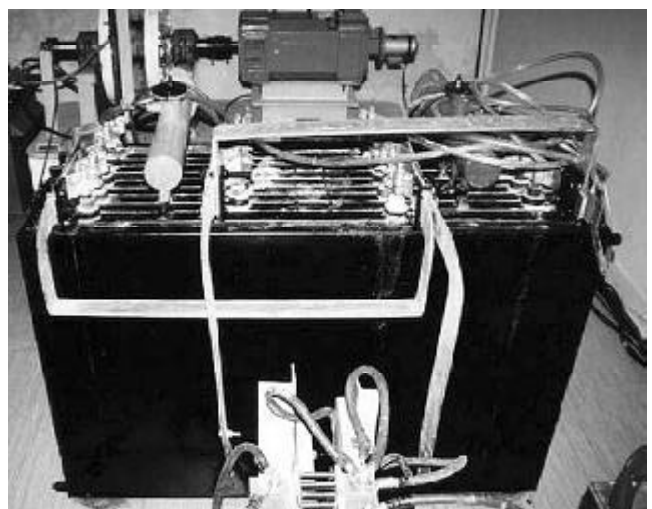

200-300 percent over-unity energy Space
Power Generator

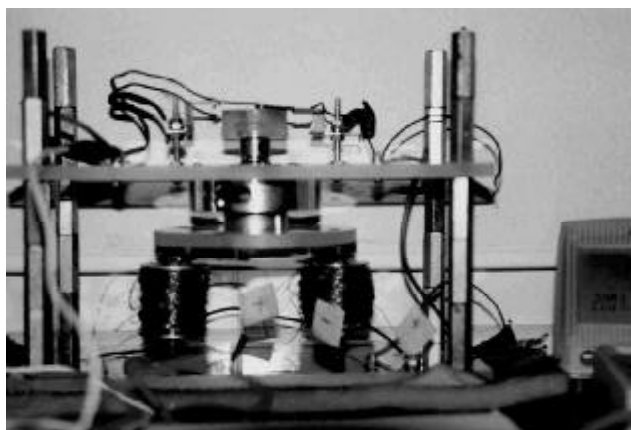


Adams Motor, Robert Adams




The RotoVerter




Bendini Pulse Motor

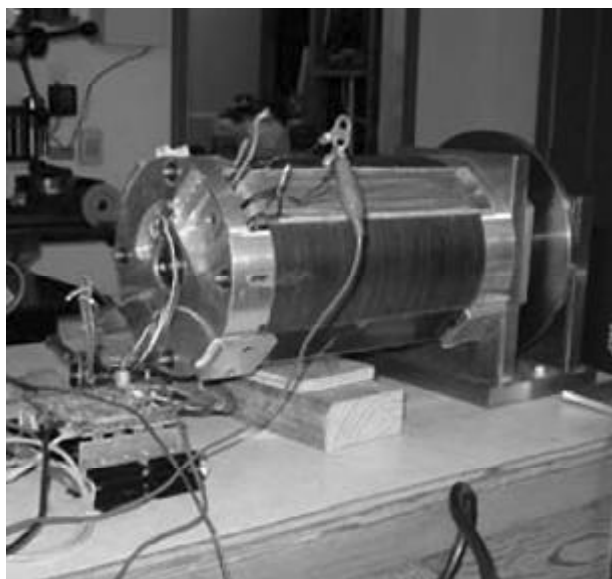


Motor based on Flynn Technology

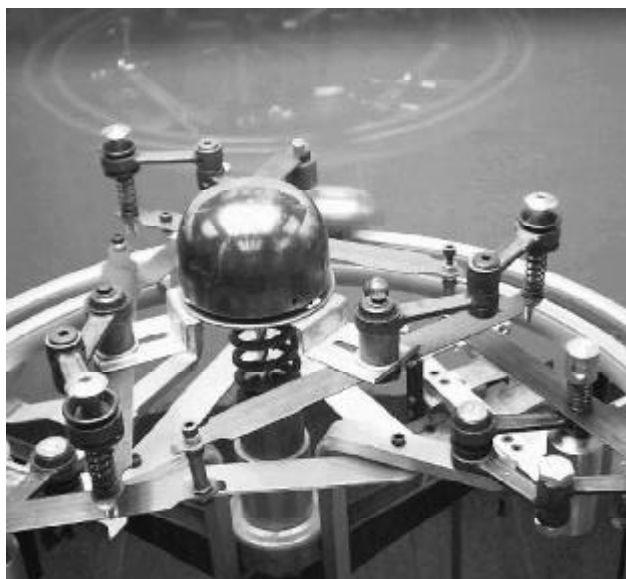

Finsrud Device

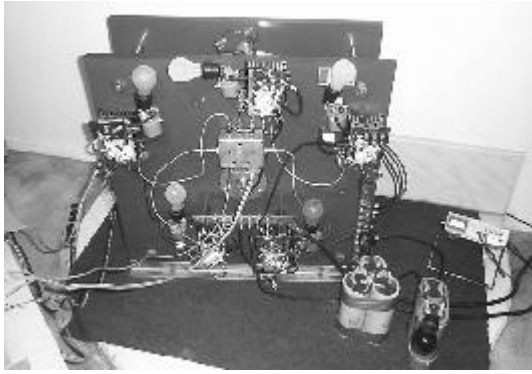

The Muller Unit

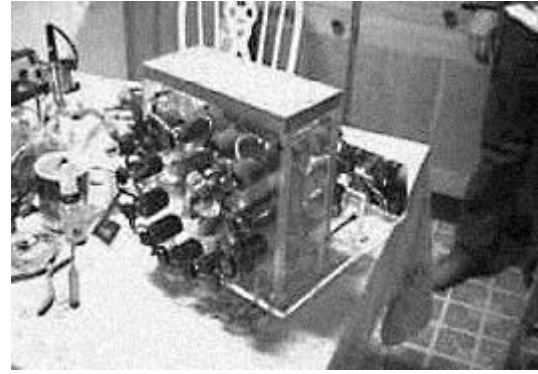

Alte Olsen Generator

Vladimir Matveev's Electrical Generator

Entirely New Kind Of Generator Invented!

(1-26-2003) TASHKENT, Uzbekistan (UPI) – An Uzbek inventor said he has created a type of electrical generator that does not rely on the principle of electromagnetic induction – on which all existing generators are based.

The new generator employs a concept called **magnetic conductivity modulation** and it has potential applications in industry, communications, households and even the military, explained Vladimir Matveev, the inventor, a specialist in electronics.

Matveev said he is convinced he has created a fundamentally different machine.

"All electrical machines I know are based on the principle of interaction between the magnetic fluxes (lines of force) of their rotor (rotating member) and stator (portion that remains fixed)," he explained.


Such machines, Matveev said, are based on electromagnetic induction, a property of energy discovered by Michael Faraday, an English physicist and chemist, in the 19th century. The machines produce electrical current either by moving a conductor across a magnetic field or by regulating the flux of that field.

"My machine has a principal difference," Matveev told United Press International. "The magnetic field of its stator does not interact with the magnetic field of the rotor (because) its rotor is not a magnet – the rotor only changes the magnetic resistance of the stator," he said.


The stator in Matveev's generator contains a magnetic core with a permanent magnet and a detachable winding. A rotor with changeable magnetic resistance is placed at a cutoff point in the core's magnetic field. It is composed of alternating magnetic and air parts and can operate in either linear or rotary form.

When the rotor is set in motion, its alternating components pass through the magnetic core's cutoff point. When the magnetic part passes through the cutoff point its magnetic resistance decreases. When the air part passes through, its resistance increases.

This pulsing of resistance results in changing the magnetic conductivity of the magnetic core, which in turn produces an alternating electrical current in the core's winding. The frequency of the winding's current can be controlled by regulating the rotor's speed or by changing certain qualities of its magnetic or air parts. Also, the generator's electrical

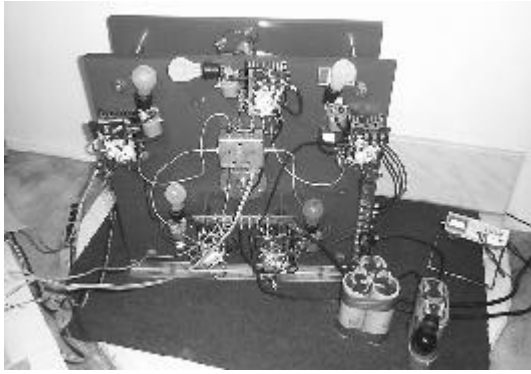

The Muller Unit

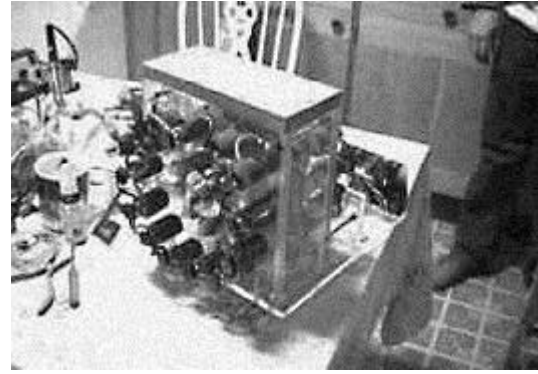

Alte Olsen Generator

Vladimir Matveev's Electrical Generator

Entirely New Kind Of Generator Invented!

(1-26-2003) TASHKENT, Uzbekistan (UPI) – An Uzbek inventor said he has created a type of electrical generator that does not rely on the principle of electromagnetic induction – on which all existing generators are based.

The new generator employs a concept called **magnetic conductivity modulation** and it has potential applications in industry, communications, households and even the military, explained Vladimir Matveev, the inventor, a specialist in electronics.

Matveev said he is convinced he has created a fundamentally different machine.

"All electrical machines I know are based on the principle of interaction between the magnetic fluxes (lines of force) of their rotor (rotating member) and stator (portion that remains fixed)," he explained.

Such machines, Matveev said, are based on electromagnetic induction, a property of energy discovered by Michael Faraday, an English physicist and chemist, in the 19th century. The machines produce electrical current either by moving a conductor across a magnetic field or by regulating the flux of that field.


"My machine has a principal difference," Matveev told United Press International. "The magnetic field of its stator does not interact with the magnetic field of the rotor (because) its rotor is not a magnet – the rotor only changes the magnetic resistance of the stator," he said.

The stator in Matveev's generator contains a magnetic core with a permanent magnet and a detachable winding. A rotor with changeable magnetic resistance is placed at a cutoff point in the core's magnetic field. It is composed of alternating magnetic and air parts and can operate in either linear or rotary form.

When the rotor is set in motion, its alternating components pass through the magnetic core's cutoff point. When the magnetic part passes through the cutoff point its magnetic resistance decreases. When the air part passes through, its resistance increases.

This pulsing of resistance results in changing the magnetic conductivity of the magnetic core, which in turn produces an alternating electrical current in the core's winding. The frequency of the winding's current can be controlled by regulating the rotor's speed or by changing certain qualities of its magnetic or air parts. Also, the generator's electrical

output – its voltage – can be controlled by changing the configuration of the rotor's components, Matveev explained.

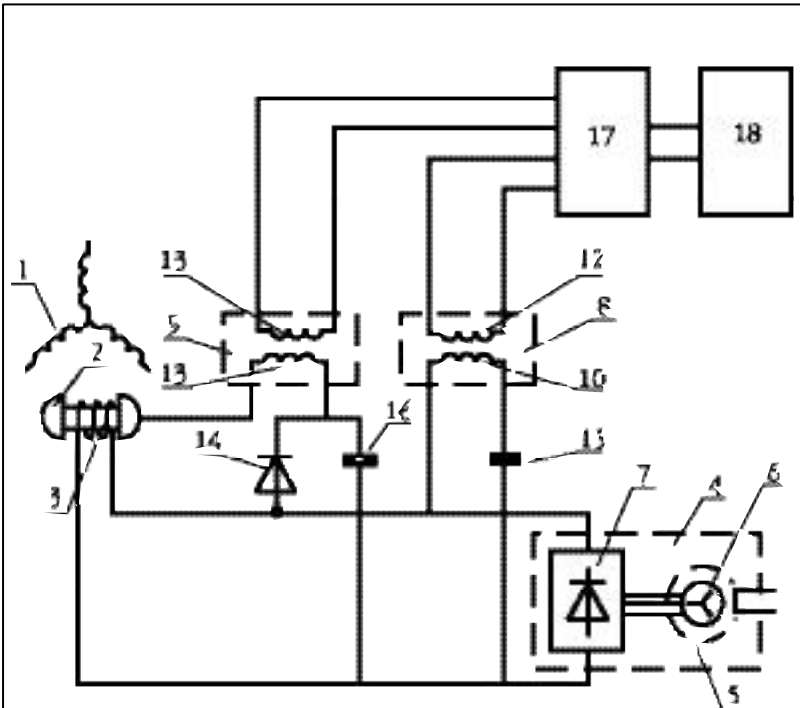

**Electrical machine assembly -
FEDORO V F 1996.10.10 1996RU-119822
(1998.09.27) G01R 31/34, 31/02**

Addnl.Data: VOROBEE V K MATVEEV V A

NOVELTY - Device has electrical machine, non-brush field exciter with diode rectifier, two dynamics double-winding transformers, which primary windings are located on rotor and secondary windings on stator. One end of primary winding of second transformer is connected to rotor housing; another end is connected to common point of conductor which is connected between capacitor and cathode of semiconductor diode, which other terminals are connected to direct current terminals of diode rectifier. Semiconductor diode is connected to cathode group of rectifier; capacitor is connected to anode group. Secondary windings of transformers are connected to actuating member through generator of signal, which is proportional to resistance of insulation in excitation winding circuit.

USE - Electric power production

Matveev said his generator is different from an invention by Howard Johnson of the United States. Johnson discovered how to build motors that can run without input of electricity or any other kind of external energy. He obtained a patent in 1973 for describing electrical generation using only the energy contained in the atoms of permanent magnets.

Matveev also said some Russian inventors have experimented with a generator similar to his. Their generator changes its magnetic conductivity by changing temperature. However, the machine requires a lot of time to be heated and cooled alternately and results in a current frequency much lower than what generally is used in industry. Moreover, the Russian generator requires high steel density and greater mass.






Matveev's machine generates electric energy of industrial frequency. Furthermore, he said his machine is simple, reliable and requires less steel and mass than conventional generators. It also can be adapted to flows of low speeds, such as weak water or wind streams. Matveev tested the generator in his former household in Kazakhstan before he patented it in Uzbekistan.

"I want to pass the invention on to all mankind," he said.

Boris Abdurakhmanov, director of the Uzbek Koinot (Cosmos) design office and head of the laboratory of semiconductors and photoelectricity of the Institute of Electronics of the Uzbek Academy of Sciences, told UPI: "Matveev has offered a fundamentally new approach to a problem of the creation of electric power generators."

Utilization of the Gravity Force in Power Engineering

Editor: In the previous issue we made a review of Mikhail Smeretchanski's invention "Perpetual motor with magnetic control elements" (# 4, 2003). This invention was patented; shown below are some pages from the patent itself. You can contact the author by e-mail: smeretchanski.mikhail@wanadoo.fr, or the postal address: 13 av. Rochambeau 3800 GRENOBLE FRANCE

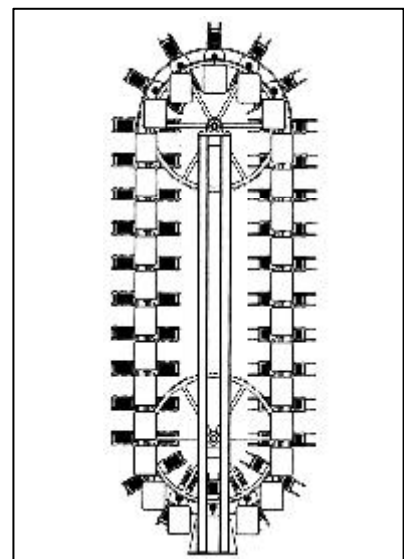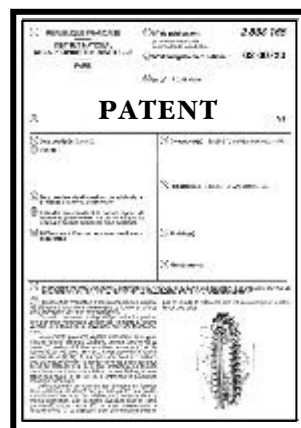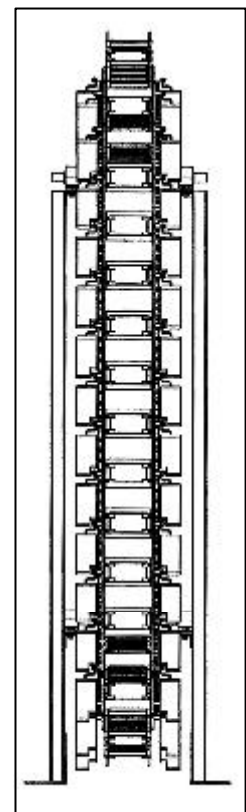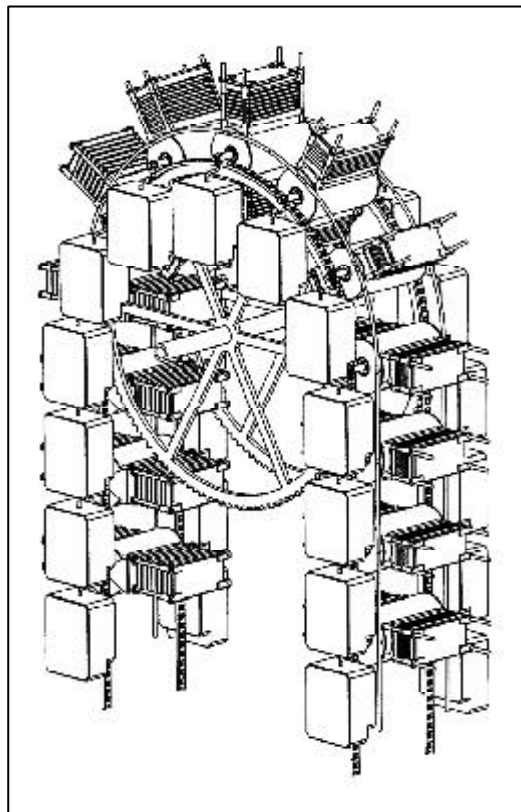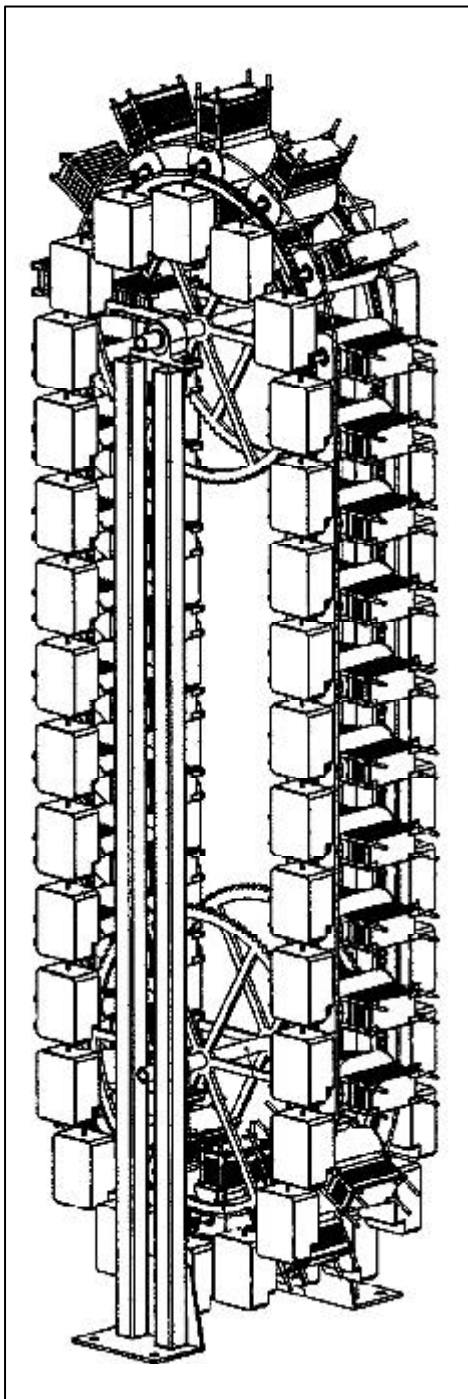

The Most Interesting Articles - 2003

In the year 2003 we have published more than 120 articles, mainly on the alternative energy, new propulsion principles and the development of ether dynamics.

"Cold fusion", low energy nuclear reactions (LENR) and highly-efficient electrolysis were represented by the works of Professor Kanarev, E. Storms, P. Hagelstein, T. Chubb and E. Cartlidge.

Almost every "New Energy" issue features articles on highly-efficient permanent magnet motor or generator experiments or patents of the kind. The articles by T. Valone, E. Vogel, A. Akau, T. Hardwood, A. Francouer and S. Abramov are of great value for engineers and researchers in this field.

The interesting articles by M. Filo, R. Koontz and V. Bogomolov reveal several principles of designing and building purely mechanical energy generating systems. All these systems possess one common feature: namely, the fact that a substance (a solid or fluid working mass) is accelerated in the gravitational field or in the centrifugal force field. The design characteristics of the system make it possible to obtain free energy.

We have published several articles by S. Gerasimov and his colleagues on the reaction-less propulsion

device experiments. We hope that in the future we will keep in touch with these researchers.

The article by D. Reed on the new physics development concepts is worth mentioning too. The article by E. Sorokodum on new energy sources and the article by V. Chernobrov on the research into the active properties of time are of no less importance.

A. Egorov's article on the ball lightning makes it possible to form a number of experimental approaches to the problem of creation multi-purpose stable plasma objects.

Electrogravity questions, water-powered vehicles, longitudinal electromagnetic wave technologies, the Searl effect commercialization, capillary engines, resonance high-efficiency power-engineering, single-wire power lines, heat pumps and other similar research works were presented to our readers in the year 2003. We have minimized theoretical articles and we hope that the magazine has become more interesting and useful for the new energy practice development.

Alexander Frolov
St. Petersburg, Russia

**There is interesting newsgroup of the site: <http://www.overunity.com>,
Stefan Hartmann, email: harti@harti.com**

Stefan Hartmann writes: This is the answer I got from Finsrud; it seems that the film they have done about him will be shown [on Discovery Channel] in 2004 when [if] I interpret this norwegian text right...

Subject: Documentary Film

Reidar Finsrud,

Dear Sir,

The Australian Broadcasting Company together with The Discovery Channel, have funded my company to make a documentary film entitled 'A Machine To Die For', the story of Perpetual Motion and the search for 'Free Energy'.

I have read extensively about your Perpetual Motion sculpture and we would be interested in traveling from Australia to Norway in order to film this now famous piece of work. At the same time we would request an interview with yourself.

If you are in agreement with this it is our intention to be in Norway on the 10th and 11th of July 2003. This documentary will be released worldwide and should produce considerable interest in your Gallery.

Mark Eliot
Catherine Jarvis and Mark Eliot
Romany Mill Studios

Hydrogenic Power Engineering

Hydrogenics Secures \$3 Million from Japan Auto Makers

Letter from RemyC remyc@prodigy.net

Contacts: investors@hydrogenics.com

Hydrogenics Secures \$3 Million in Test Equipment Orders Japanese Auto Makers Select Greenlight Power for Fuel Cell Testing Equipment

TORONTO, Sept. 30 – Hydrogenics Corporation (Nasdaq: HYGS; TSX: HYG), a developer and manufacturer of fuel cell products, announced today that its wholly owned subsidiary, Greenlight Power Technologies (Greenlight) has received orders totaling US \$3 million for fuel cell test stations from two leading Asian automotive customers. Both are repeat orders for multiple machines.

Cumulatively, Greenlight is providing seven Fuel Cell Advanced Test Stations (FCATS) to two major customers. The first order is for three 3 kW PEM FCATS L-Series test systems. The second is for three 12 kW PEM FCATS H-Series test systems and one 60 kW PEM FCATS HX-Series testing station. The stations are expected to be delivered over the next two quarters.

"Our decision to open an office in Tokyo, Japan over three years ago continues to pay dividends," said Pierre Rivard, President and CEO of Hydrogenics. "The Japanese market is advancing quite aggressively towards the commercialization of fuel cell technology, as evidenced by our growth in test equipment sales to the region over the past three years. We are delighted to secure these major contracts with customers who are clearly setting the pace in fuel cell development."

Greenlight fuel cell testing systems provide high precision instrumentation, combined with full-featured software. They deliver fuel cell testing results that prove the reliability,

repeatability and versatility required for world-leading fuel cell development programs.

About Hydrogenics Corporation

Hydrogenics Corporation (Nasdaq: HYGS; TSX: HYG) is a leading clean power generation company, engaged in the commercialization of fuel cell technology and test stations for fuel cells. The company is building a sustainable business, in a potentially "game changing technology" for transportation, stationary and portable power. Hydrogenics, based in Mississauga, Ontario, Canada, has operations in British Columbia, Canada, Japan, the United States and Germany. For more information, please visit www.hydrogenics.com.

About Greenlight Power Technologies, Inc.

Greenlight Power Technologies Inc. (<http://www.greenlightpower.com>), a wholly-owned subsidiary of Hydrogenics Corporation, is a leading global supplier of testing and diagnostic equipment to the fuel cell industry. It has supplied fuel cell test equipment to the world's premier fuel cell stack manufacturers, component manufacturers, system integrators and research organizations. Greenlight provides a full suite of test equipment for fuel cell stack, stack component, reformer and system testing for companies focused on portable, stationary, and transportation fuel cell applications.

Hydrogen Fuel Cells

Anuvu Incorporated

3980 Research Drive
Sacramento, CA 95838
USA




Tel: (916) 921-7040

Fax: (916) 921-7044

Email: anuvu@anuvu.com

www.anuvu.com/home.html

Now our readers can get familiar with some hydrogen fuel cell development photos. It is worth of a note that the prices are high for the majority of people. For example, a hydrogen fuel cell car costs 100 000 dollars FOB Sacramento, CA. The next picture features a fuel cell van, which costs 150 000 dollars.

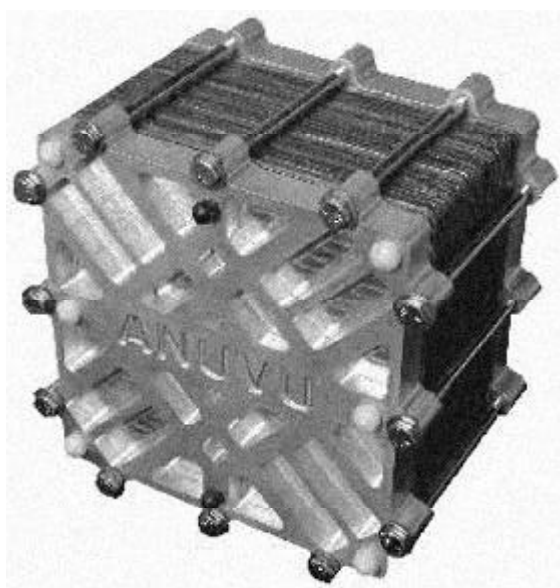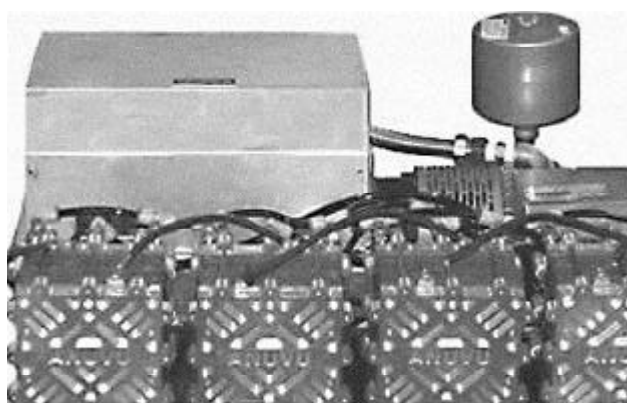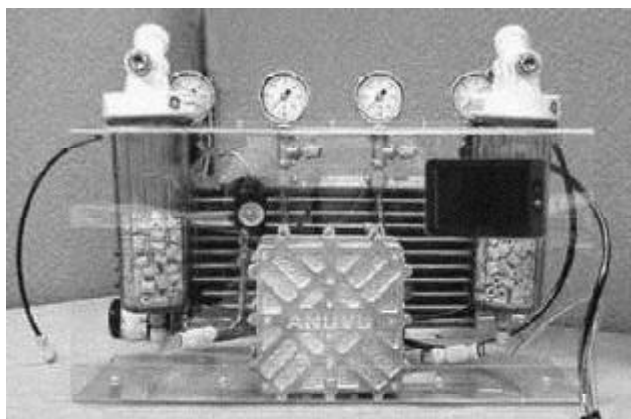

EXCESSIVE OUTPUT BY MEANS OF AIR IONIZATION

We have received an interesting article from California. Here is the short version of the article.

The Mechanism of The Electric Spark

Review of the research

by Leonard B. Loeb

Professor of Physics, University of California at Berkeley
and

John M. Meek, Research Engineer
Stanford University Press, Stanford University, California

Dedicated to Professor J. S. Townsend whose pioneer research and theory laid the whole foundation for the study of the mechanism of the electrical spark discharge.

Although the electric spark has been known to mankind in its various manifestations from time immemorial, its mechanism has to date been little understood. The initial clarification of the mechanisms involved is due to J.S. Townsend as a result of his brilliant researches in the early nineteen hundreds. On the basis of his theory of ionization by collision by electrons and positive ions, the fundamental mechanisms active and especially the coefficients required in their application were made available.

In 1936 the present senior author was forced to describe the mechanism of spark discharge in terms of a modified but distinctly unsatisfactory Townsend theory. In 1935 the discovery of photo-ionization in air by corona discharge indicated a solution was not far off. The turning point of a more successful theory came in the discovery of streamers in positive point to plane corona in 1936. The quantitative analysis of the self-propagating positive streamer in all breakdown phenomena became clearly evident as a result of the data concerning electron avalanches. As a result a qualitative mechanism of sparking by streamer propagation from anode to

cathode functioning by means of photo-ionization in the gas was established.

The Townsend Sparking Criteria

It will not be necessary here to derive the famous equation of Townsend for the current $[i]$ in a gap between electrodes as a function of the photoelectric current $[i_0]$ from the cathode, the gap length $[x]$ and the coefficients $[a]$ and $[B]$. For this the reader can go to any standard text. (*Editor: the equation is omitted*)

In this equation the first Townsend coefficient $[a]$ represents the number of new electrons created in the gas by an initial electron in its advance of 1 cm along the field axis from the cathode.

The second Townsend coefficient $[B]$ in Townsend's original theory was the number of new electrons created by a single positive ion in its advance of 1 cm along the field from the anode.

The quantity $[a]$ has been extensively studied in various gases. It varies with the ratio of field strength to pressure, X/p , where $[X]$ is in volts per centimeter and $[p]$ is in millimeters of Hg.

Note: the reason we are going through this is to determine the actual increase in current provided by the spark gap, and thus be able to design the circuit to avoid blowing out semiconductor components. It also provides a

sound and already proven scientific theory to work from giving us a good foundation and the confidence to proceed with technical design work.

The quantity [B] has been evaluated, albeit rather inaccurately, from the variations of [i] with [x] at various higher values of X/p, by many observers in different gases. Inasmuch as it has now been shown that there are numerous other mechanisms other than impact with positive ions, which can liberate the secondary electron, needed in discharge.

There has been an inclination to give up the mechanism of impact ionizations by positive ions in gas. The discovery of measurable photoelectric ionization in gas has now made it possible to explain such cases. The exact way in which photo-ionization in the gas could operate to cause a spark, was not clear until the development of the present **streamer theory**.

The Streamer Theory of Spark Discharge Anode Space-Charge Field Due to an Avalanche

Assume a spark gap of 1 cm in length. Assume that in air at atmospheric pressure the potential across the plates is 31,600 volts, which is the conventionally observed sparking potential [Vs].

Let us then calculate what happens in the field to one of those electrons. It starts across the gap, quickly acquiring an average random energy of some $E = 1/2 m C^2 = 3.6$ electron volts and a drift velocity [v] in the field direction of about 1.5 to 2 times 10^7 centimeters per second. As it moves it creates new electrons at a rate of [a] per centimeters in the field direction so that in a distance [x] it and its progeny amount to $e(ax)$ electrons, forming what is called an **electron avalanche**.

Therefore, $e(ax)$ positive ions have been left behind by the electron group, virtually where they were formed in the 10^{-7} second of advance for the electrons in the distance $x=q$ across the plates. As the electron avalanche advances, its tip is spreading laterally by the random diffusive movement of the electrons. From these data it is possible to

compute the density of positive-ion space charge left behind at any point [x]. The value of [a] under these conditions is about 17, making $e(aq)=e(17)$. The first ion pair is created at 0.0407 cm from the cathode. At 0.5 cm from the cathode there are 4914 ions, at 0.75 cm there are 3.66 times 10^5 ions, and within 0.0407 cm from the anode there are 1.2 times 10^7 ions. **Most electrons will be drawn to the anode except for some few that are bound by the positive ions, making a sort of a conducting discharge plasma in the avalanche.**

Such a distribution of ions does not make a conducting filament of charges across the gap, and hence in itself an avalanche that has crossed does not constitute a breakdown of the gap. Thus one must look further for the mechanism of the spark.

If Loeb and Meek are correct then if we assume a spark gap of 3 mm and a voltage of 5,000 volts there are roughly 2,000 electrons created by avalanche for every one electron leaving the cathode. They state that most of these 'free electrons' are absorbed by the anode. [This would certainly explain why the semiconductor components cannot handle the current gain.]

NOTE: Loeb and Meek make little reference to initial amperage. There are only two values they refer to 10^{-5} ampere and 10^{-12} ampere.

In conclusion: Sparks and Arcs are two different beasts. My initial research into the amperage necessary to form an arc does not apply to spark and the process of avalanche where this huge gain mechanism is possible.

Photoelectric Ionization in Gas as a Secondary Mechanism

Accompanying the cumulative ionization there is produced by electrons from four to ten times as many excited atoms and molecules. Some are excited to an energy exceeding the ionizing potential of some of the atoms and molecules present, either by excitation of an inner shell, by ionization and excitation, or in a **mixed gas like air by the excitation of molecules of higher ionizing potential, e.g., N₂**. These excited atoms or molecules emit radiations of very short wave

length in some 10^{-8} second. This short ultraviolet radiation is **highly absorbed** in the gas and leads to ionization of the gas. In fact, the whole gas and the cathode as well are subjected to a shower of photons of all energies traveling from the region of dense ionization with the velocity of light. Thus nearly instantaneously in the whole gap and from the cathode new photoelectrons are liberated which almost at once begin to ionize cumulatively.

The Mechanism of Positive Streamer Formation

The photoelectrons created at points in the gas and at the cathode at any great radial distance from the avalanche axis will merely create other avalanches. Those in the gas will be short and those coming from the cathode region will be long and like that of the initial avalanche. Being smaller and, in any case, later in creation than the parent avalanche, such avalanches will be of no interest in breakdown. However, those photoelectrons created near the space-charge channel of positive ions, and especially near the anode, will be in an enhanced field, which exerts a directive action drawing them into itself. If the space-charge field [X1] is in the order of magnitude of the imposed field [X], this action will be very effective. In addition the values of [a] will be much enhanced.

The electrons from the intense cumulative ionization of such photoelectron avalanches in the combined fields [X] and [X1] which are drawn into the positive space charge feed into it, making it a conducting PLASMA which starts at the anode. The added fields will be most effective along [X] and so will the ionization. The positive ions they leave behind will therefore extend the space charge towards the cathode. These electrons also create photons, which produce electrons to continue this process. **In this fashion the positive space charge develops toward the cathode from the anode as a self-propagating positive space-charge streamer.**

As the streamer advances towards the cathode it produces a filamentary region of intense space-charge distortion along a line parallel to

the field. The conducting streamer of a plasma consisting of electrons and ions extending to the anode thus makes a very steep gradient at the cathode end of the streamer tip. As this advances toward the cathode the photoelectron avalanches produced by radiation at the cathode, especially at the intercept of the extended streamer axis at the cathode, it begins to produce an intense ionization near the cathode. Hence the positive ions created there may increase the secondary emission. Thus, as the space-charge streamer approaches the cathode a cathode spot is forming which may become a source of visible light.

When the streamer reaches the cathode there is a conducting filament bridging the gap. As the streamer tip reaches the cathode the high field produces a rush of electrons towards the end of the streamer. This is followed by a current of electrons, gives a high-potential wave, which passes up the preionized conducting channel to the anode, **multiplying the electrons present by a large factor.** The channel is thus rendered highly conducting. If the metal can emit a copious supply of electrons because of the formation of an efficient cathode spot, the current of electrons continues the channel maintaining its high conductivity and **ever increasing in it.** This current, unless limited by external resistance, will then develop into **an arc.** It is, however, the intense increase in ionization by the potential wave, which gives the highly conducting channel characterizing the spark.

Conclusion: According to Loeb and Meek there are three means by which a spark in open air will provide a very large current gain. If this is true, it should be fairly easy to prove with inexpensive and unsophisticated equipment. Once the actual amount of current gain has been determined for the design parameters of the spark gap, then the rest of the circuit can be designed for the increased current value.

Editor: It is worth of a note that the current gain by means of ionization was patented by Pavel N. Yablatchkov (the patent of France # 120684, October 11th 1887). Some two years ago one of our issues featured an article about him. We think it is worth being published again.

PATENT of 1877 by Pavel N. Yablotchkov

Alexander V. Frolov

Faraday Lab Ltd,
Lev Tolstoy St., 7 St. Petersburg, 197376 Russia
Tel: 7-812-380-3844

Pavel N. Yablotchkov was born in 1847 near Saratov, Russia. He graduated as a Military Engineer in 1866 and spent several years in the Russian Army.

In 1872 he came to Moscow and started his activities in electrotechnical field. Since 1875 he had been working in Paris with the famous Louis Breget and his first French patent # 110479 of November 29th, 1875 was dedicated to an electromagnetic transformer. Then he developed and patented a lighting system (the well-known Yablotchkov electrical candle). In 1876 he patented a new electromagnetic transformer for industrial purposes, France # 115793 of November 30th, 1876.

The most interesting patent claim on over-unity devices by Pavel N. Yablotchkov is known as France patent # 120684, October 11th, 1877, "The system of distribution and amplification of electrical currents by means of atmosphere electricity..." The patent describes special capacitors connected in series with the load to increase the output current by means of ionization. Experiments were conducted together with the well-known physicists such as Dr. Maskar, Dr. Varren-Delaru and others and **they confirmed the 200 % efficiency of the circuit**. Now we will try to explain the method.

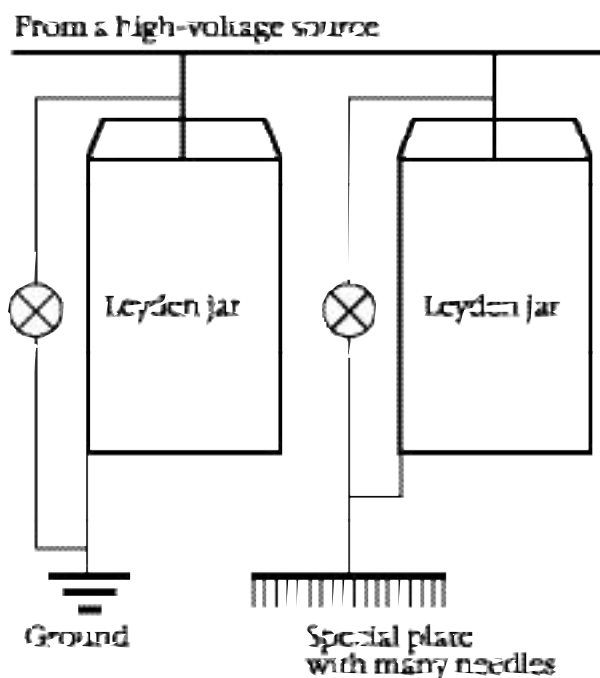


Fig.1 features a schematic drawing taken from Yablotchkov's patent. The Leyden jar is an asymmetrical capacitor, i.e. it is

different in principle from a two-plate flat capacitor. The inner electrode of the jar should be connected to a high-voltage source and in this case the changes of the potential have an effect on the potential changes on the external electrode. It does not work in the opposite case and if you connect a high-voltage source to the external electrode no potential changes will be detected on the inner electrode. Connection to the ground or to a special plate (which is covered with many needles to increase air ionization) is necessary to attract the maximum number of electrons to the plate surface or to return the maximum electrons from the plate surface when potential changes on the external electrode are produced by means of electrical induction in the Leyden jar.

In conclusion I should mention one more supposition of the secrets of the well-known Swiss M-L converter (Methernitha). The main elements of the design are Leyden jar capacitors, which have the external surface made of perforated metal.

The other known fact is that great ionization of air is observed when the converter is in operation. So, the electrostatic machine can produce pulses of a very high voltage (potential difference) but it cannot be used as a source of a powerful current. In order to increase the current in the circuit we should apply a certain method and Yablotchkov's technology seems to be appropriate. A large surface of the external electrode of the Leyden jar can be a good solution to the problem. Maximum strong ionization allows us to obtain the output current several times stronger than the weak current generated by the electrostatic machine.

SUBSCRIPTION 2004!

To subscribe for
New Energy Technologies
please visit our web site:

<http://www.faraday.ru/net.htm>

One-year subscription
price for 2004 is \$46.00

World-wide airmail delivery
included.

In 2004 we will publish
5,000 copies, 4 times per year.
Each printed issue will include
100 pages of printed information.
Alongside the English version
there is the Russian version
available.



CD "New Energy Technologies"



Back issues of 2001 - 2003 are
available on a CD with PDF files.

The price is \$26.00.

You can order a CD from the same
web page:

<http://www.faraday.ru/net.htm>

Contact information for additional requests:

Faraday Lab Ltd,
New Energy Technologies magazine,
Lev Tolstoy Str. 7 -601,
St. Petersburg,
197376, Russia.
Tel/fax 7-812-3803844



TeslaTech, Inc.

296 E Donna Dr, Queen Valley, AZ 85218


Visit our site!... <http://www.teslatech.info>

Benefits

- 1 yr *ExtraOrdinary Technology* (qtlly)
- Mail Order Discounts
- Conference Fee Discounts

ExtraOrdinary Technology...
our magazine containing news
about *the leading edge of our
Scientific Revolution.*

**...an invaluable resource to
track leading edge research!!!**

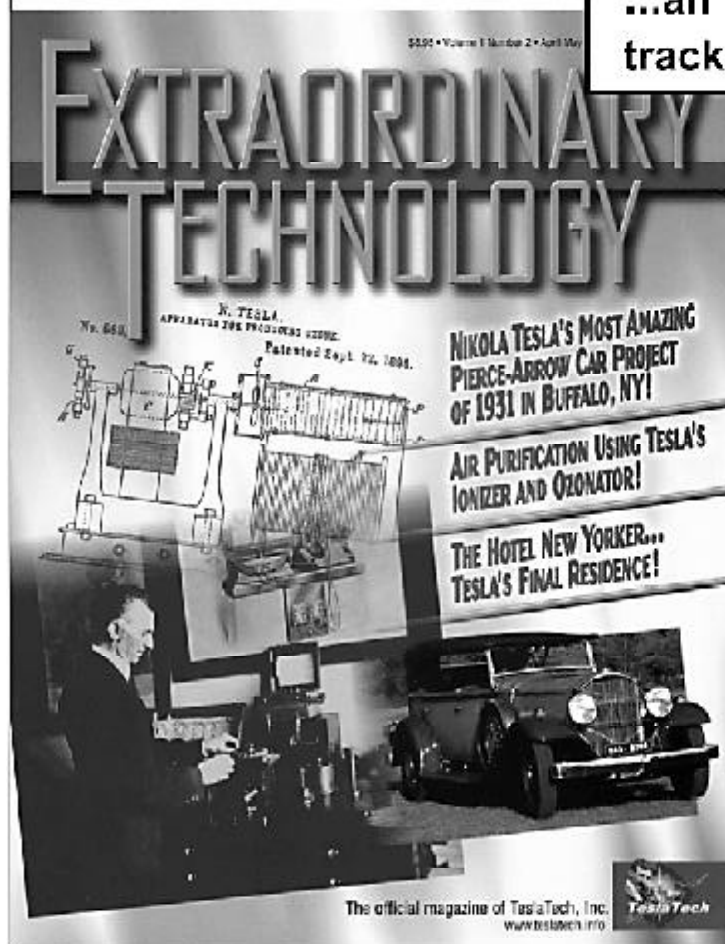

ExtraOrdinary Technology
focuses on:

Tesla Technology
Low temperature plasma
Electrogravitation
Electrified water
Magnetic healing
Electromedicine
New Health Supplements
...and much, much more!

JOIN TODAY!
(520) 463-1994

Annual Membership Rates: \$30 - United States • \$35-Can/Mex • \$55-Else

Advanced Energy • Alternative Medicine • Future Technology

